



PRCTI20230388

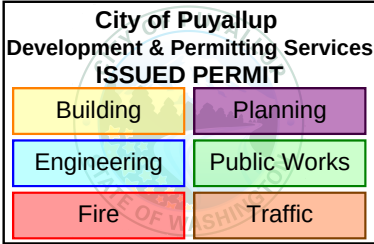

THE APPROVED CONSTRUCTION PLANS AND ALL
ENGINEERING MUST BE POSTED ON THE JOB AT ALL
INSPECTIONS IN A VISIBLE AND READILY
ACCESSIBLE LOCATION.

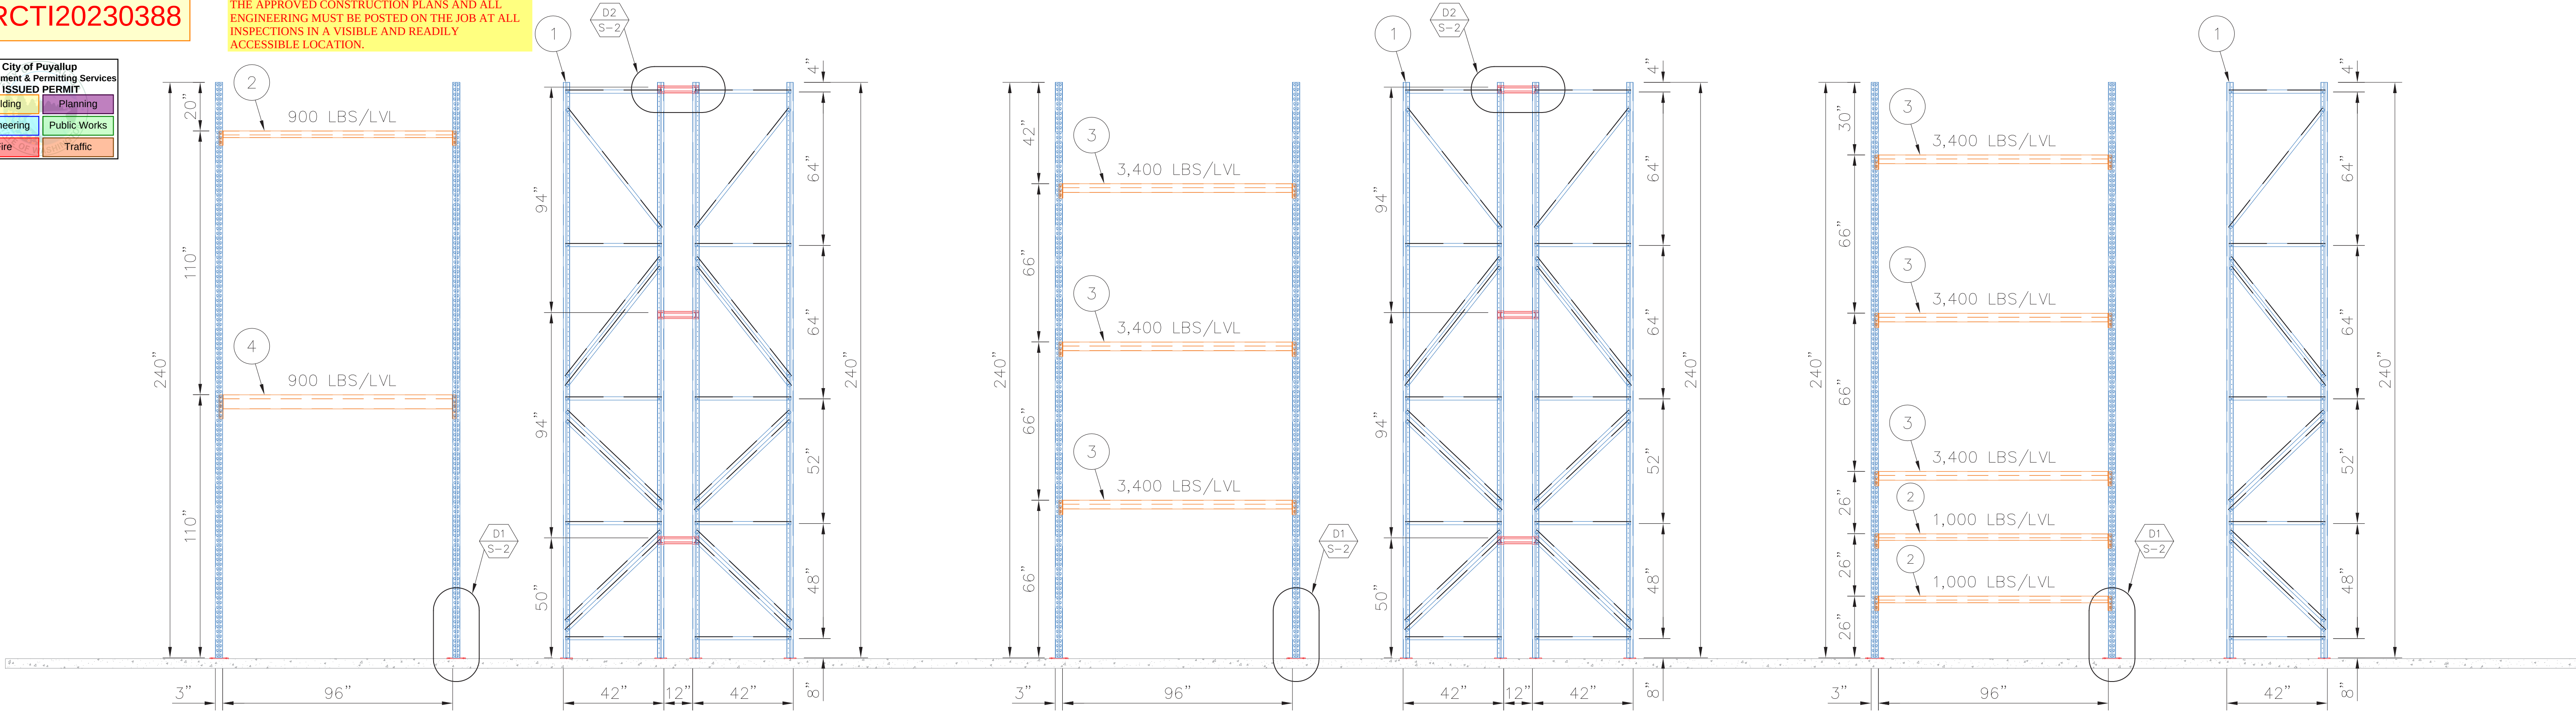

GREEN

SIDE VIEW:
GREEN


BLUE

SIDE VIEW:
BLUE


RED

SIDE VIEW:
RED


ITEM CODE	DESCRIPTION	QUANTITY
1 TS031224	KI-FR.2.313 G PP 20' X 42" SPST DD1-3	132
2 U0200316	BEAM IK27E F3M- 96"	152
3 U0200338	BEAM IK36E F3M- 96"	578
4 U0200424	BEAM IK59E F5M- 96"	28
5 T0032363	ROW SPACER U96 12"	186

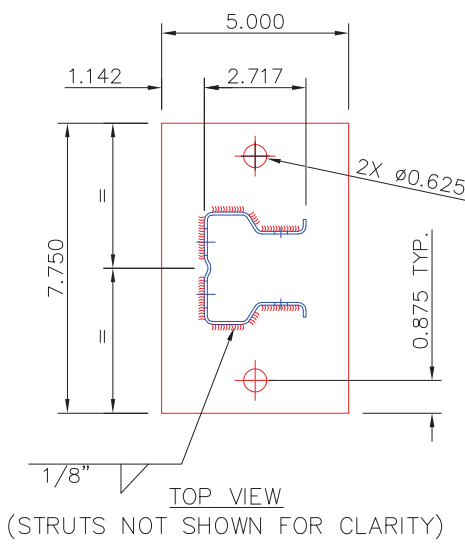


U313 COLUMN

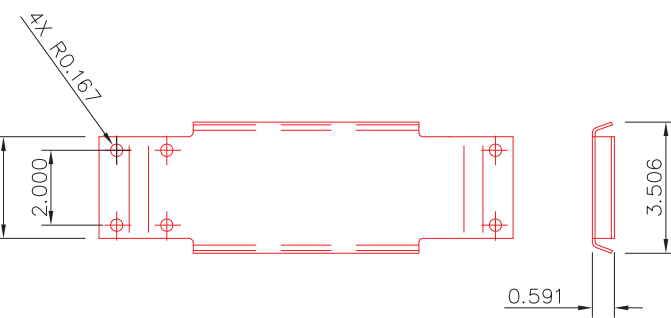


TYPICAL ROW SPACER U96

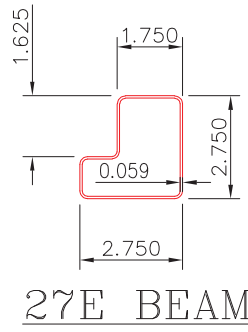


27E BEAM

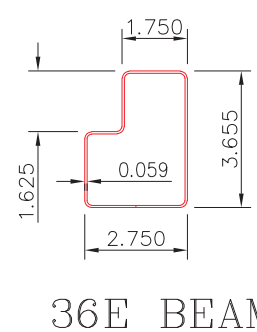


36E BEAM

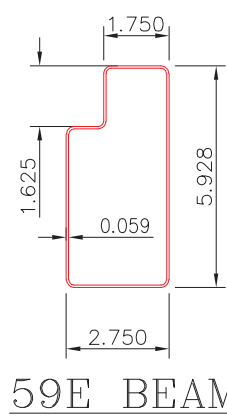


59E BEAM

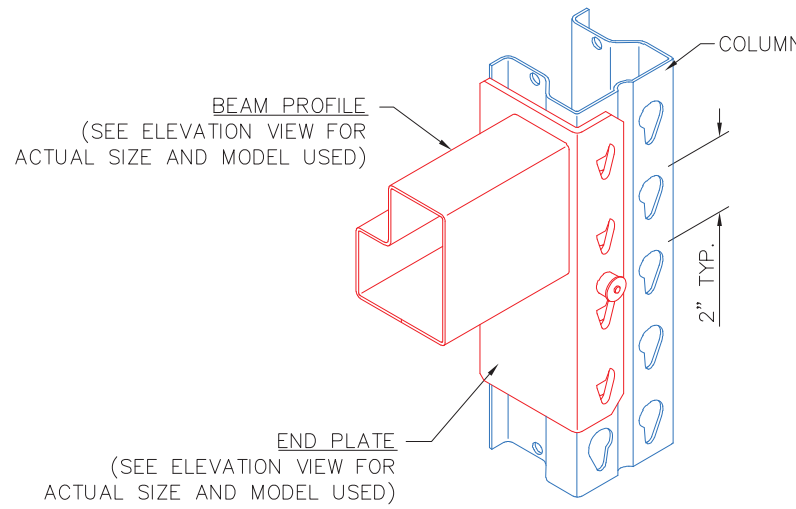


TYPICAL BEAM TO COLUMN DETAIL

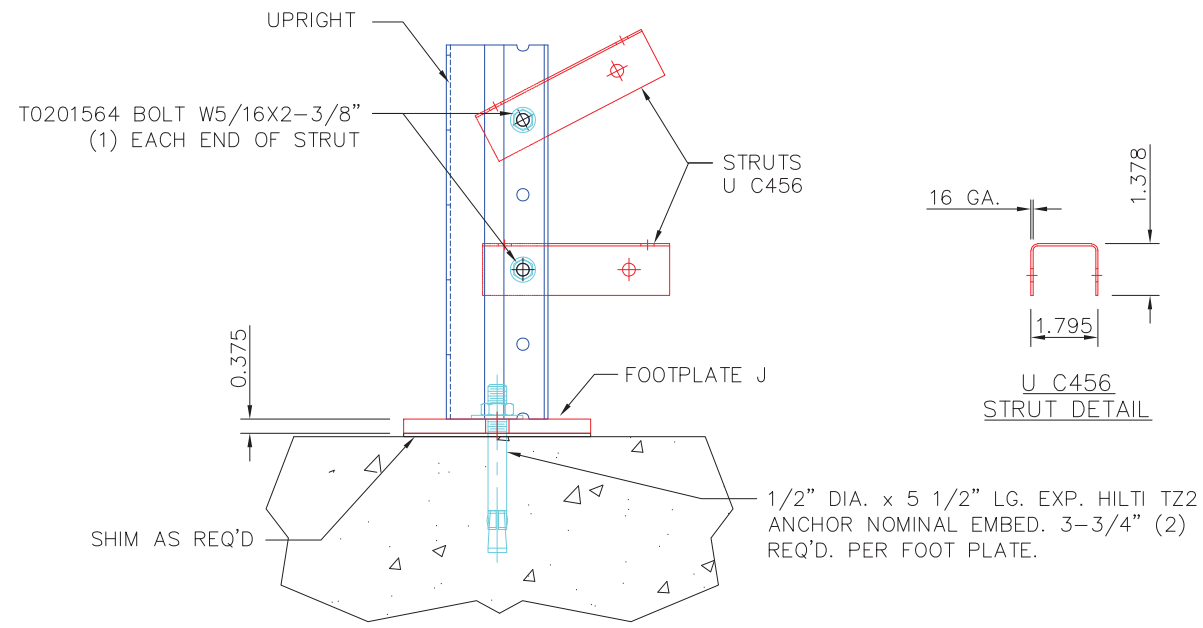


WELDED FOOTPLATE PP (J U3P)
UPRIGHT 313 TYP.

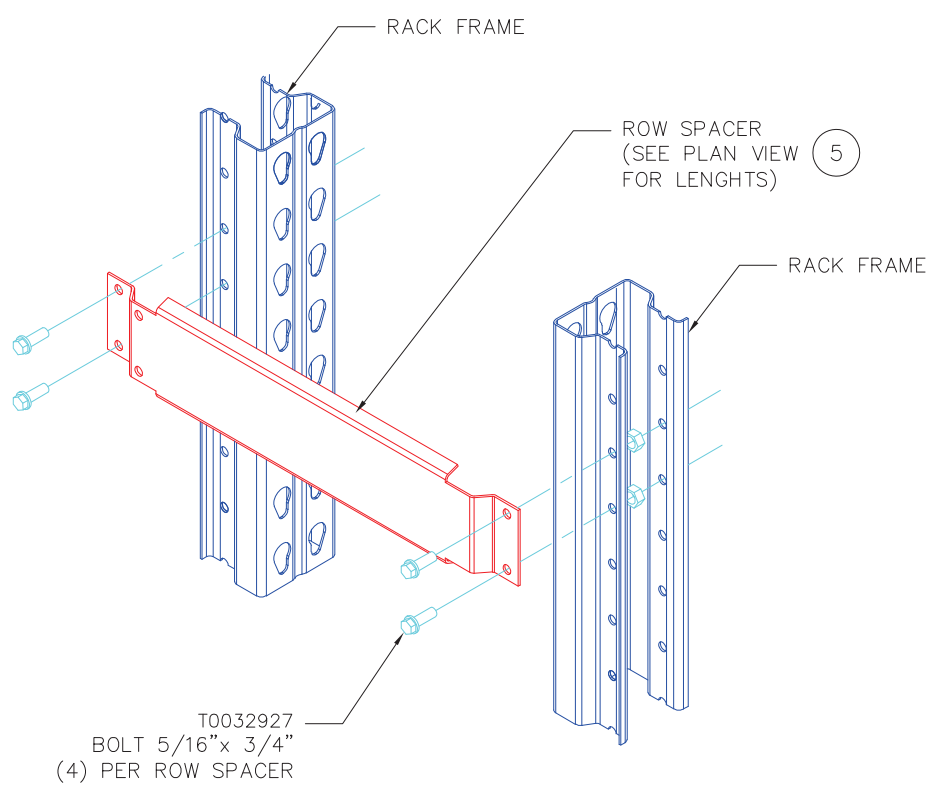


ROW SPACERS
SEE SIDE VIEW FOR
VERTICAL SPACING

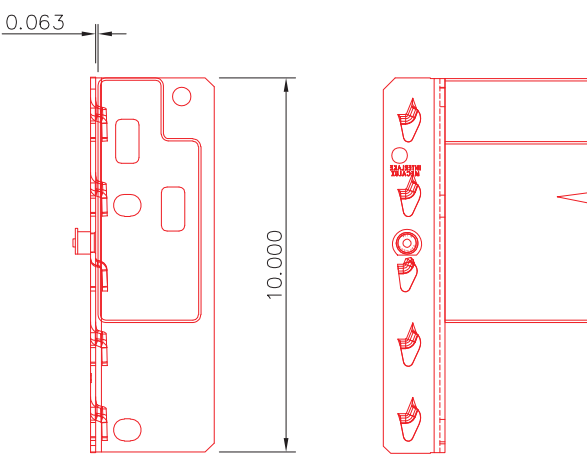

TYPICAL 10" WITH 5 TAB
F5M CONNECTOR

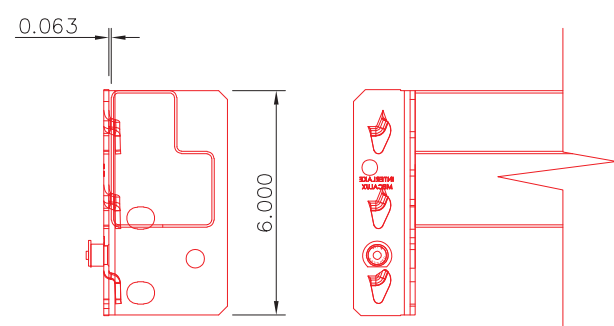

TYPICAL 6" WITH 3 TAB
F3M CONNECTOR

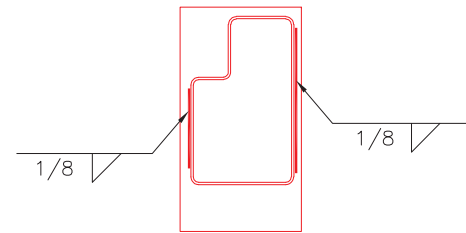

"A" WELD
(STANDARD)

- NOTES:
- DESIGNED PER SECTION 2209 OF THE 208 IBC.
 $F_a = 1.2$ & $S_s = 1.28$.
SEISMIC DESIGN CATEGORY: D.
 - STORAGE CAPACITY: SEE ELEVATIONS.
 - STEEL: ASTM A1011 FOR SHAPE $F_y = 55,000$ PSI GRADE 55.
 - ALL BOLTS: A307 (UNLESS OTHERWISE NOTED).
 - ANCHORS: HILTI KWIK BOLT TZ 2, ICC #ESR-4266.
 - PERIODIC SPECIAL INSPECTION IS REQUIRED DURING ANCHOR INSTALLATION.
 - CONCRETE: 6" THICK x 4,000 PSI.
 - MODULUS OF SUB-GRADE REACTION: 50 PCI.

REVISIONS				DRAWN	CHECKED	DATE	REV
				PROJECT: ABATIX 410 VALLEY AVE, SUITE 102, PUYALLUP, WA, 98371			
TITLE		SEIZMIC DETAILS & ELEVATIONS					
DATE	01/09/2023	QUOTATION	1661772				
DRAWN BY	EB	DRAWING	2	OF	2	CUSTOMER'S APPROVAL TO SYSTEM AND MEASURES IN THE DRAWING	
CHECKED BY	EM	PERMITTED	VARIES				
SCALE	NTS	LOAD					
This document is the property of MECALUX S.A. and it is therefore prohibited to reproduce it fully or partially, or deliver it to third parties, under the penalties prescribed by law.							

