



### 1 VICINITY MAP

NOT TO SCALE

ELECTRIC UNIT HEATER SCHEDULE								
MARK	MANF.	MODEL	FAN	HEATING	ELECTRICAL		WEIGHT (lb)	NOTES
			AIRFLOW (CFM)	OUTPUT (KW)	V	Ø		
EH-1	INDEECO	926U05000UA-R2	700	5	208	1	45	1,2
EH-2	INDEECO	926U05000UA-R2	700	5	208	1	45	1,2

NOTES:  
 1. WIRING BY ELECTRICAL CONTRACTOR  
 2. WITH INTEGRAL THERMOSTAT

SEMI-HEATED SPACE CALCULATION PER WSEC C402.1.4

MAXIMUM HEATING SYSTEM OUTPUT CAPACITY PER DEFINITION WSEC SECTION C202.19 = 8 BTU/H/FT<sup>2</sup>  
 WAREHOUSE AREA = 4,782 FT<sup>2</sup>  
 MAXIMUM OUTPUT ALLOWED = 8 BTU/H/FT<sup>2</sup> \* 4,782 FT<sup>2</sup> = 38,256 BTU/H / 3,414 KW/BTU = 11.2 KW > 10 KW (2 UNIT HEATERS \* 5 KW)

RADIANT HEATER SCHEDULE							
MARK	MANF.	MODEL	HEATING (WATTS)	ELECTRICAL		WEIGHT (lb)	NOTES
				V	Ø		
RH-1	INDEECO	AS2448-750-208-PT	750	208	1	30	1

NOTES:  
 1. WITH COMFORT CONTROLLER WIRED BY ELECTRICIAN.

EXHAUST FAN SCHEDULE												
MARK	MANF.	MODEL	AIRFLOW (CFM)	ESP (IN-WC)	RPM	MOTOR HP	ELECTRICAL			WEIGHT (lb)	NOTES	
							V	Ø	MCA (A)			
EF-1	GREENHECK	SQ-80-VG	300	.25	1438	0.04	115	1	2	15	61	1,2

NOTES:  
 1. INTERLOCK WITH MOTORIZED DAMPERS. SEE SCHEDULE THIS SHEET.  
 2. SWITCHED TO RUN CONTINUOUSLY BY ELECTRICAL CONTRACTOR.


PER IMC TABLE 403.3 WAREHOUSE FANS TO EXHAUST MINIMUM OF 0.06 CFM/FT<sup>2</sup>  
 WAREHOUSE AREA = 4,782 FT<sup>2</sup>  
 MINIMUM EXHAUST ALLOWED = 4,782 FT<sup>2</sup> \* 0.06 CFM/FT<sup>2</sup> = 287 CFM < 300 CFM = (1 FAN \* 300 CFM)

DESTRATIFICATION FAN SCHEDULE									
MARK	MANF.	MODEL	FAN DIA. (IN.)	AIRFLOW (CFM)	MOTOR (W)	V	Ø	WEIGHT (lb)	NOTES
DF-2	BIG ASS FANS	HAIKU	84	17,369	42.3	240	1	26	1,2
DF-3	BIG ASS FANS	HAIKU	84	17,369	42.3	240	1	26	1,2
DF-4	BIG ASS FANS	HAIKU	84	17,369	42.3	240	1	26	1,2

NOTES:  
 1. FANS CONTROLLED BY TOUCH SCREEN INTERFACE  
 2. FAN SHALL BE MOUNTED 4" BELOW THE BEAM

LOUVER SCHEDULE					
MARK	MANF.	MODEL	SIZE	FREE AREA FT <sup>2</sup>	LOCATION
L-1	GREENHECK	ESD-403	14"x14"	.42	---
L-2	GREENHECK	ESD-403	18"x18"	.83	---

MOTORIZED DAMPER VOLTAGE	
EQUIPMENT	VOLTAGE
L-1	120
L-2	120

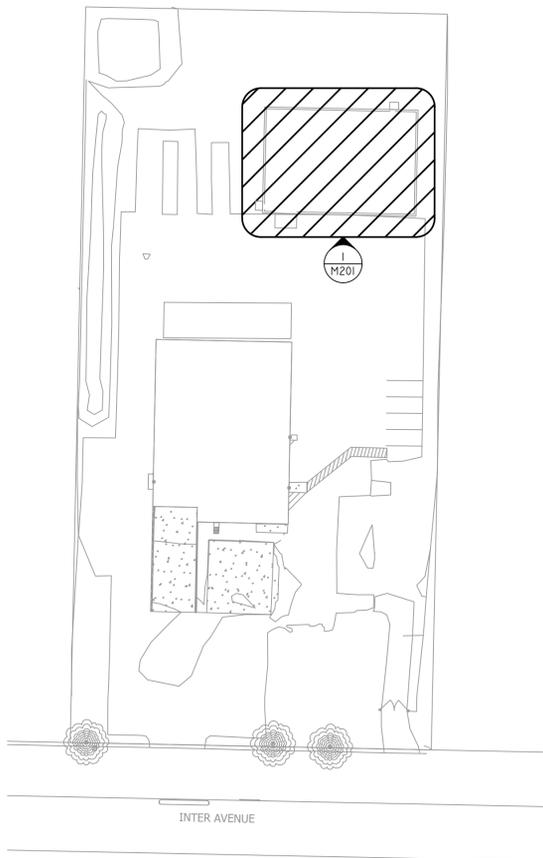

### 2 SITE PLAN

NOT TO SCALE

### GOVERNING CODE INFORMATION

2018 INTERNATIONAL BUILDING CODE WITH STATEWIDE AMENDMENTS  
 2018 INTERNATIONAL MECHANICAL CODE WITH STATEWIDE AMENDMENTS  
 2018 INTERNATIONAL FIRE CODE WITH STATEWIDE AMENDMENTS  
 2018 INTERNATIONAL ENERGY CONSERVATION CODE/WASHINGTON STATE ENERGY CODE  
 2018 INTERNATIONAL EXISTING BUILDING CODE WITH STATEWIDE AMENDMENTS FOUND IN THE IBC

### COMMISSIONING PLAN

ALL COMMISSIONING OF HEATING, VENTILATION AND AIR CONDITIONING SYSTEMS AS REQUIRED BY SECTION C408 "SYSTEM COMMISSIONING" OF THE 2018 WASHINGTON STATE ENERGY CODE (WSEC) SHALL BE PERFORMED BY EVERGREEN REFRIGERATION, LLC. THE ACTIVITIES TO BE ACCOMPLISHED ARE PER THE SECTIONS LISTED IN THE "COMMISSIONING COMPLIANCE CHECKLIST" SHOWN BELOW. AT THE COMPLETION OF THE ACTIVITIES REQUIRED FOR COMMISSIONING AS DEFINED BY SECTION C408 OF WSEC THE "COMMISSIONING COMPLIANCE CHECKLIST" WILL BE REVIEWED WITH THE BUILDING OWNER OR THE OWNER'S REPRESENTATIVE AND THIS CERTIFICATION WILL BE SIGNED AND DATED. THIS WILL SATISFY TO THE CODE OFFICIAL THAT THE REPORT HAS BEEN ACCEPTED AS REQUIRED BY SECTION C408.1.3 OF WSEC.

COMMISSIONING COMPLIANCE CHECKLIST	
PROJECT INFORMATION	<b>Project Name:</b> _____ <b>Project Address:</b> _____ <b>Certified Commissioning Professional:</b> _____ <b>Type of ISO Certification and Number:</b> _____
SUPPORTING DOCUMENTS	<input checked="" type="checkbox"/> Manuals, record documents and training have been completed or are scheduled (SECTION C103.6.1) • BUILDING OPERATOR AND MAINTENANCE STAFF TRAINING (C103.6.2) HAS BEEN SUBMITTED TO THE OWNER OR SCHEDULED DATE: _____ • MANUALS (C103.6.2.1) HAVE BEEN SUBMITTED TO THE OWNER OR SCHEDULED DATE: _____ • CAPABILITY REQUIREMENT (C103.6.3) HAS BEEN SUBMITTED TO THE OWNER OR SCHEDULED DATE: _____ • SYSTEM OPERATOR TRAINING (C103.6.4) HAS BEEN PROVIDED TO THE OWNER OR SCHEDULED DATE: _____
COMMISSIONING PLAN	<input checked="" type="checkbox"/> Commissioning Plan was used during construction (Section C408.1.2)
COMMISSIONING REPORT	<input checked="" type="checkbox"/> Commissioning Report has been submitted (Section C408.1.3)
COMMISSIONING SYSTEMS	<input checked="" type="checkbox"/> Mechanical Systems were included in the commissioning process (Section C408.2) <input checked="" type="checkbox"/> Testing, adjusting and balancing is complete (Section C408.2.2) <input checked="" type="checkbox"/> There are unreserved deficiencies with the mechanical system. These are described in the attached Commissioning Report submitted to the owner.
	<input checked="" type="checkbox"/> Service Water Heating Systems were included in the commissioning process (Section C408.3) <input checked="" type="checkbox"/> There are unreserved deficiencies with the service water heating system. These are described in the attached Commissioning Report submitted to the owner.
	<input checked="" type="checkbox"/> Controlled Receptacles and Lighting Control Systems were included in the commissioning process (Section C408.4) <input checked="" type="checkbox"/> There are unreserved deficiencies with the electrical power and/or automatic lighting controls. These are described in the attached Commissioning Report submitted to the owner.
	<input checked="" type="checkbox"/> Additional Systems were included in the commissioning process (Section C408.5) <input checked="" type="checkbox"/> There are unreserved deficiencies with systems required by C406 or C407. These are described in the attached Commissioning Report submitted to the owner.
	<input checked="" type="checkbox"/> Metering Systems were included in the commissioning process (Section C408.6) <input checked="" type="checkbox"/> There are unreserved deficiencies with the metering system. These are described in the attached Commissioning Report submitted to the owner.
CERTIFICATION	<input checked="" type="checkbox"/> I HEREBY CERTIFY THAT ALL REQUIREMENTS FOR SECTION C408 SYSTEM COMMISSIONING HAVE BEEN COMPLETED IN ACCORDANCE WITH THE WASHINGTON STATE ENERGY CODE, INCLUDING ALL THE ITEMS ABOVE. CERTIFIED COMMISSIONING PROFESSIONAL: _____ DATE: _____
	<input checked="" type="checkbox"/> I HEREBY CERTIFY THAT ALL REQUIREMENTS FOR SECTION C408 SYSTEM COMMISSIONING HAVE BEEN COMPLETED IN ACCORDANCE WITH THE WASHINGTON STATE ENERGY CODE, INCLUDING ALL THE ITEMS ABOVE. BUILDING OWNER OR OWNER'S REPRESENTATIVE: _____ DATE: _____

### GENERAL NOTES

- DUCTWORK**
- ALL DUCT DIMENSIONS ON PLAN ARE CLEAR INSIDE DIMENSIONS, ADD 2" TO EACH DIMENSION TO OBTAIN OUTSIDE DIMENSION. ADD 4" TO EACH DIMENSION IF THE DUCTWORK IS ON THE INTERIOR OF THE BUILDING.
  - THE FIRST NUMBER ON ALL DUCT DIMENSIONS IS THE WIDTH AND THE SECOND IS THE HEIGHT.
  - MATERIALS WITHIN DUCTS OR PLENUMS SHALL HAVE A FLAME SPREAD RATING LESS THAN 25 AND A FLAME SMOKE DEVELOPMENT LESS THAN 50, PER IMC 602.2.1.
  - SEAL ALL TRANSVERSE JOINTS FOR DUCTWORK WITH STATIC PRESSURE BETWEEN 1/2 INCHES AND 2 INCHES. DUCTWORK WHICH IS DESIGNED TO OPERATE AT PRESSURES ABOVE 1/2 WATER COLUMN SHALL BE SEALED IN ACCORDANCE WITH STANDARD RS-7.
  - ALL DUCT GAUGES PER SMACNA, IMC 603-4.
  - ALL DUCT SUPPORTS PER SMACNA, IMC 603-10.
  - ATTACH DIFFUSERS AND GRILLES TO T-BAR PER WA STATE & LOCAL CODES.
  - BALANCING DAMPERS ARE TO BE INSTALLED ON ALL BRANCH DUCTS OR DIFFUSERS.
- INSULATION**
- WHEN PRESENT, INSULATE OR LINE DUCTWORK PER WA. STATE ENERGY AND MECHANICAL CODES.
  - WHEN PRESENT, INSULATE REFRIGERANT & CONDENSATE PIPING PER STATE & LOCAL ENERGY CODES.
- GENERAL CONTRACTOR**
- GENERAL CONTRACTOR TO PROVIDE AND CUT OPENINGS FOR ALL ROOFTOP, CEILING, FLOOR, AND WALL PENETRATIONS, INCLUDING WEATHERPROOF SEALING AND FIRE PROOF LININGS PER IMC & IBC.
  - GENERAL CONTRACTOR TO VERIFY PENETRATION LOCATION AND DIMENSIONS WITH ERL BEFORE FRAMING OPENINGS.
  - GENERAL CONTRACTOR TO PROVIDE ALL DEMOLITION, PATCHING, AND PAINTING AS REQUIRED FOR MECHANICAL WORK.
  - GENERAL CONTRACTOR TO PROVIDE ADEQUATE STRUCTURAL SUPPORT AS REQUIRED FOR MECHANICAL WORK.
  - GENERAL CONTRACTOR TO PROVIDE SERVICE ACCESS PER CODE TO ALL MECHANICAL EQUIPMENT.
  - GENERAL CONTRACTOR TO LEVEL ALL FACTORY CURBS PROVIDED BY ERL PROVIDE ALL CANT STRIPS AND CURB INSULATION, AND SEAL AGAINST LEAKS.
  - GENERAL CONTRACTOR TO PROVIDE ALL CUTTING AND PATCHING OR T-BAR CEILING AS REQUIRED FOR HVAC INSTALLATION.
  - GENERAL CONTRACTOR TO PROTECT ALL OPENINGS THROUGH FLOORS PROVIDED FOR DUCTWORK INSTALLATION IN ACCORDANCE WITH TABLE 601 OF INTERNATIONAL BUILDING CODE, WHERE REQUIRED BY SECTION 707 OF IBC.
- ELECTRICAL**
- ERL TO INSTALL ALL LOW VOLTAGE CONTROL WIRING, CONDUIT WILL BE PROVIDED BY ELECTRICAL CONTRACTOR.
  - ELECTRICAL CONTRACTOR TO PROVIDE ALL ELECTRICAL CONNECTIONS, DISCONNECTS, AND STARTERS FOR MECHANICAL EQUIPMENT.
  - ELECTRICAL CONTRACTOR TO VERIFY EQUIPMENT SIZES, LOADS AND LOCATIONS, WITH ERL MECHANICAL PLAN AND WITH FIELD LOCATIONS.
  - ERL TO VERIFY FINAL LOCATION OF THERMOSTAT WITH CUSTOMER, IF APPLICABLE.
  - ELECTRICIAN TO PROVIDE APPROPRIATEANCES IN ACCORDANCE WITH NEC 210.63, AND ALL OTHER APPLICABLE SECTIONS.
- PLUMBING**
- PLUMBING CONTRACTOR OFFSETS VENTS 10 FEET MINIMUM FROM ALL HVAC FRESH AIR INTAKES OR 3' ABOVE HIGHEST POINT OF INTAKE, IMC 401.4.1.
  - CONDENSATE DRAINS FOR AIR HANDLERS BY PLUMBER.
- ENERGY CODE COMPLIANCE**
- THE SUPPLY HEATING AND COOLING ENERGY TO EACH ZONE SHALL BE CONTROLLED BY INDIVIDUAL THERMOSTATIC CONTROLS CAPABLE OF RESPONDING TO TEMPERATURE WITHIN THE ZONE. AT MINIMUM EACH FLOOR SHALL BE CONSIDERED A ZONE.
  - OUTDOOR AIR SUPPLY, EXHAUST OPENINGS AND RELIEF OUTLETS SHALL BE PROVIDED WITH CLASS IA MOTORIZED DAMPERS WHICH CLOSE AUTOMATICALLY WHEN THE SYSTEM IS OFF PER WSEC SECTION C403.7.8.
- MECHANICAL CODE COMPLIANCE**
- WHERE REQUIRED PROVIDE AUTOMATIC SHUTOFF ACTIVATED BY SMOKE DETECTORS IN EACH SYSTEM DELIVERING HEATING OR COOLING AIR IN EXCESS OF 2000 CFM. DETECTORS SHALL BE LOCATED IN THE MAIN RETURN AIR PER IMC 606.



### SYMBOL LEGEND

NOTE: NOT ALL SYMBOLS SHOWN ON THIS LEGEND MAY PERTAIN TO THIS PROJECT.

	RECTANGULAR DUCT
	ROUND DUCT
	ROUND SPIRAL DUCT
	FLEXIBLE DUCT
	SUPPLY DUCT SECTION
	RETURN DUCT SECTION
	EXHAUST DUCT SECTION
	SUPPLY DIFFUSER
	RETURN/EXHAUST GRILLE
	SIDEWALL DIFFUSER
	CEILING MOUNTED EXHAUST FAN
	INLINE FAN
	MANUAL VOLUME DAMPER
	ZONE DAMPER
	MOTORIZED DAMPER
	BACKDRAFT DAMPER
	FIRE SMOKE DAMPER (120V POWER REQ.)
	FIRE DAMPER
	THERMOSTAT
	SMOKE DETECTOR
	SENSOR
	LINE VOLTAGE THERMOSTAT
	TIME CLOCK
	EQUIPMENT TAG
	DIFFUSER/GRILLE TAG
	UNDER CUT DOOR

THE APPROVED CONSTRUCTION PLANS, DOCUMENTS AND ALL ENGINEERING MUST BE POSTED ON THE JOB AT ALL INSPECTIONS IN A VISIBLE AND READILY ACCESSIBLE LOCATION.

FULL SIZED LEDGIBLE COLOR PLANS ARE REQUIRED TO BE PROVIDED BY THE PERMITEE ON SITE FOR INSPECTION

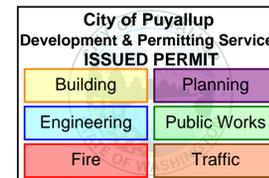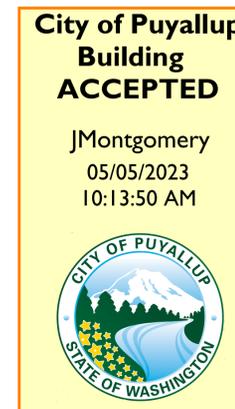

PRMH20230349

NOT PUBLISHED. ALL RIGHTS RESERVED. THE DRAWING AND SPECIFICATIONS, TERMS, CONDITIONS AND ASSUMPTIONS GOVERN OVER ANY AND ALL PREVIOUS DRAWINGS, SPECIFICATIONS, CONTRACTS, ORDERS, AGREEMENTS, AND AGREEMENTS. THE DRAWING IS THE PROPERTY OF EVERGREEN REFRIGERATION, LLC. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. VISUAL CONTACT WITH THE ABOVE DRAWINGS OR SPECIFICATIONS SHALL CONSTITUTE CONCLUSIVE EVIDENCE OF ACCEPTANCE OF THESE RESTRICTIONS.



COVER SHEET

CIMCO WAREHOUSE

2315 INTER AVE.

PUYALLUP, WA 98372

REV.	DATE	DESCRIPTION
1	5.2.23	PERMIT CORRECTIONS

PERMIT SET  
 DATE: 05.2.23

ISSUED FOR CONSTRUCTION

AS BUILT

CIMCO WAREHOUSE  
 COVER SHEET

DWG BY: JC  
 CKD BY: KT/AF  
 JOB NO.: 523109  
 SHEET:

# M001

NOT FOR CONSTRUCTION. ALL RIGHTS RESERVED. THE DRAWING AND SPECIFICATIONS, INCLUDING ANY ADDENDUMS OR MODIFICATIONS, ARE THE PROPERTY OF EVERGREEN REFRIGERATION & HVAC. NO PART OF THIS DRAWING OR SPECIFICATIONS SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF EVERGREEN REFRIGERATION & HVAC. VISUAL CONTACT WITH THE ABOVE DRAWINGS OR SPECIFICATIONS SHALL CONSTITUTE CONCLUSIVE EVIDENCE OF ACCEPTANCE OF THESE RESTRICTIONS.



OVERALL FLOOR PLAN


CIMCO WAREHOUSE  
2315 INTER AVE.  
PUYALLUP, WA 98372

REV.	DATE	DESCRIPTION
1	5.2.23	PERMIT CORRECTIONS


PERMIT SET   
DATE: 05.2.23  
ISSUED FOR CONSTRUCTION   
DATE: ----  
AS BUILT   
DATE: ----

CIMCO WAREHOUSE  
OVERALL FLOOR PLAN  
DWG BY: JC  
CKD BY: KT/AF  
JOB NO.: 523109  
SHEET:

M201

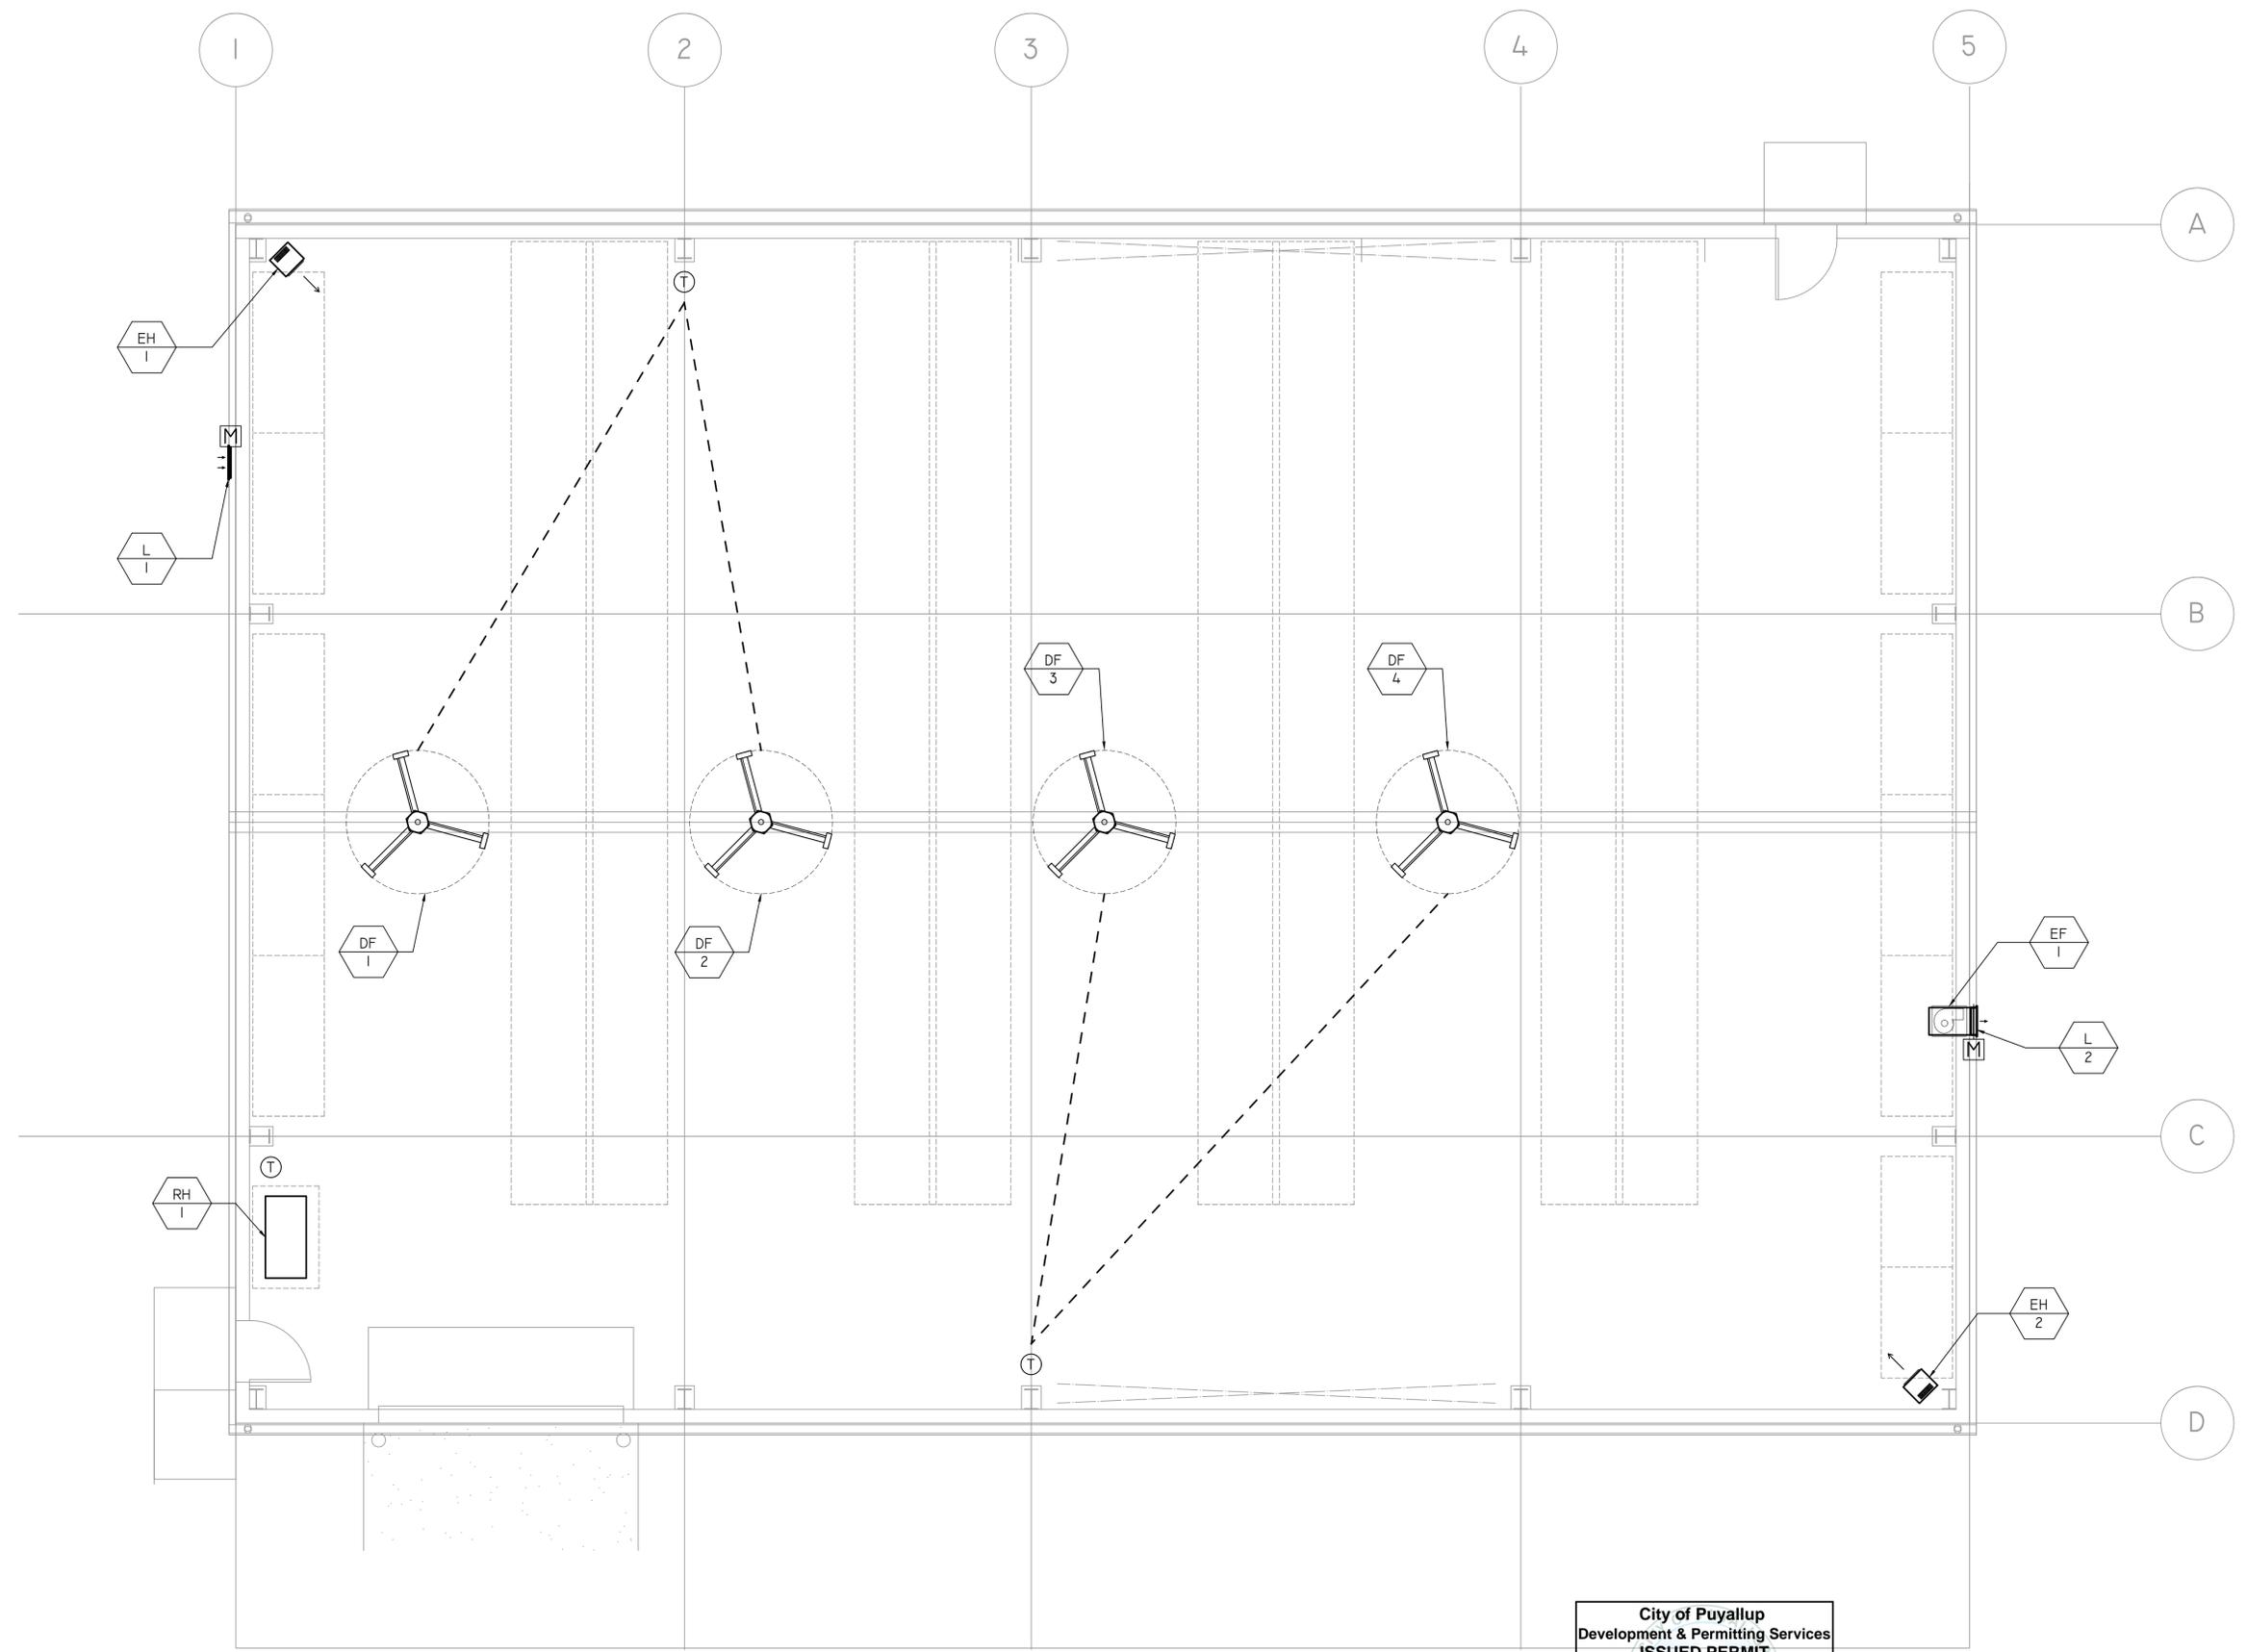

1 HVAC PLAN  
SCALE: 1/4"=1'



City of Puyallup  
Development & Permitting Services  
ISSUED PERMIT

Building	Planning
Engineering	Public Works
Fire	Traffic

PRMH20230349

NOT PUBLISHED. ALL RIGHTS RESERVED. THE DRAWING AND SPECIFICATIONS, BEING SOCIAL AND ASSOCIATED TO PROTECTIVE, PROPERTY AND ASSOCIATED TO THE DISTRIBUTION TO OTHERS, SHALL BE KEPT IN CONFIDENCE AND NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF EVERGREEN REFRIGERATION & HVAC. VISUAL CONTACT WITH THE ABOVE DRAWINGS OR SPECIFICATIONS SHALL CONSTITUTE CONCLUSIVE EVIDENCE OF ACCEPTANCE OF THESE RESTRICTIONS.



EVERGRU954R2  
 727 SOUTH KENYON STREET  
 SEATTLE, WASHINGTON 98108  
 PHONE: (206)-763-1744  
 www.evergreenhvac.com



**DETAILS**  
 CIMCO WAREHOUSE  
 2315 INTER AVE.  
 PUYALLUP, WA 98372

REV.	DATE	DESCRIPTION
1	5.2.23	PERMIT CORRECTIONS

**PERMIT SET**  
 DATE: 05.2.23

**ISSUED FOR CONSTRUCTION**

DATE: ----

**AS BUILT**

DATE: ----


CIMCO WAREHOUSE  
 DETAILS

DWG BY: JC  
 CKD BY: KT/AF  
 JOB NO.: 523109  
 SHEET:

**M301**


**SECURE LOWER SAFETY CABLE**

THREAD THE SAFETY CABLE THROUGH THE EXTENSION TUBE. MAKE SURE THE END WITH THE CAPTIVE SCREW IS AT THE BOTTOM OF THE EXTENSION TUBE. SECURE THE CAPTIVE SCREW ON THE SAFETY CABLE TO THE MOTOR SHAFT AS SHOWN.

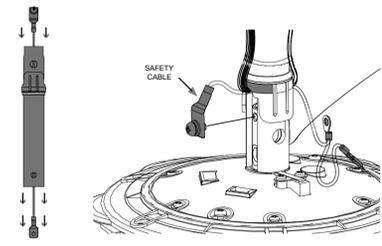


**SECURE UPPER SAFETY CABLE**

WRAP THE UPPER END OF THE SAFETY CABLE AROUND AN EXISTING PART OF THE BUILDING STRUCTURE OR AN ANCHOR HOOK. SECURE IT WITH THE PROVIDED SHACKLE AS SHOWN. ACCEPTABLE BUILDING STRUCTURES INCLUDE WOODEN BEAMS OR METAL MOUNTING BRACES SECURED BETWEEN TWO BEAMS. IN SOME CASES IT MAY BE NECESSARY TO INSTALL ADDITIONAL STRUCTURAL MATERIAL TO PROVIDE ATTACHMENT POINTS.

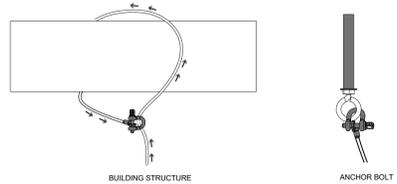

**SAFETY CABLE INSTRUCTIONS**

NOT TO SCALE

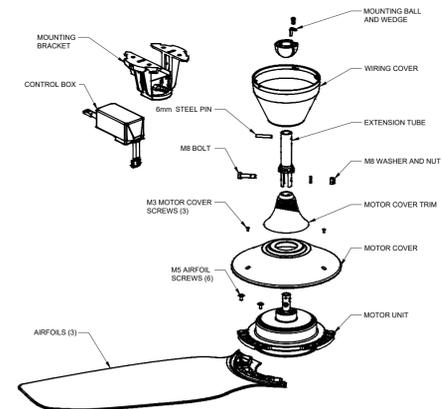


**FAN MOUNTING DETAILS**

NOT TO SCALE

ROUTE POWER WIRING TO FAN LOCATION. USE MOUNTING BRACKET AS DRILLING TEMPLATE AND DRILL FOUR HOLES. ATTACH MOUNTING BRACKET TO CEILING USING FOUR M8 ANCHOR BOLTS. IF REQUIRED BY LOCAL CODE, INSTALL AN M6 ANCHOR HOOK FOR SAFETY CABLE.

**SEISMIC BRACING DETAIL**

NOT TO SCALE

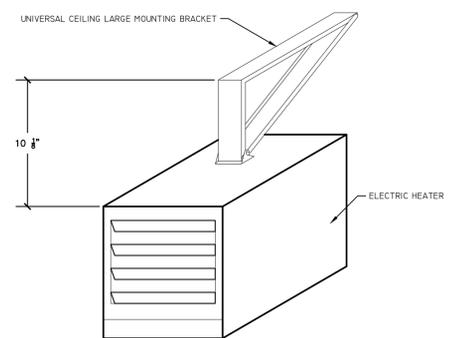

**ELECTRIC HEATER MOUNTING DETAIL**


NOT TO SCALE

City of Puyallup  
 Development & Permitting Services  
**ISSUED PERMIT**

Building	Planning
Engineering	Public Works
Fire	Traffic

PRMH20230349

MATERIAL LIST		SEQUENCE OF OPERATIONS
1	UNITED ENERTECH RI	- EXHAUST FAN RUNS CONTINUOUSLY. - MOTORIZED DAMPER IS OPEN.
1	BELIMO FSTF120 ACTUATOR	

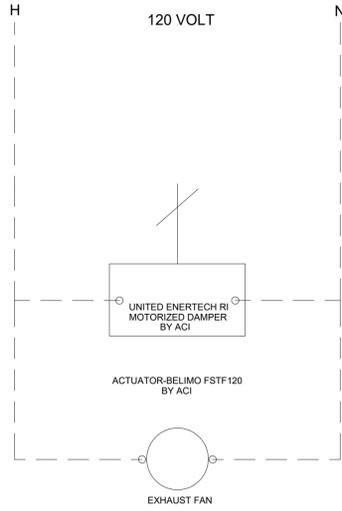

-ALL 120V EQUIPMENT AND CONTROLS PROVIDED BY ERL AND INSTALLED BY ELECTRICAL CONTRACTOR.

**EXHAUST FAN/ MOTORIZED DAMPER DETAIL**  
SCALE: NONE

NOT PUBLISHED: ALL RIGHTS RESERVED. THE DRAWING AND SPECIFICATIONS, BEING SOCIAL AND ENVIRONMENTAL RESPONSIBILITY, ARE THE PROPERTY OF EVERGREEN REFRIGERATION & HVAC. NO PART OF THIS DRAWING OR SPECIFICATION IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF EVERGREEN REFRIGERATION & HVAC. VISUAL CONTACT WITH THE ABOVE DRAWINGS OR SPECIFICATIONS SHALL CONSTITUTE CONCLUSIVE EVIDENCE OF ACCEPTANCE OF THESE RESTRICTIONS.



EVERGRU954R2  
727 SOUTH KENYON STREET  
SEATTLE, WASHINGTON 98108  
PHONE: (206)-763-1744  
www.evergreenhvac.com



**WIRING DIAGRAM**  
CIMCO WAREHOUSE  
2315 INTER AVE.  
PUYALLUP, WA 98372

REV.	DATE	DESCRIPTION
1	5.2.23	PERMIT CORRECTIONS

**PERMIT SET**  
DATE: 05.2.23

**ISSUED FOR CONSTRUCTION**   
DATE: ----

**AS BUILT**   
DATE: ----

CIMCO WAREHOUSE  
WIRING DIAGRAMS  
DWG BY: JC  
CKD BY: KT/AF  
JOB NO.: 523109  
SHEET:

**M401**

City of Puyallup  
Development & Permitting Services  
**ISSUED PERMIT**

Building	Planning
Engineering	Public Works
Fire	Traffic

PRMH20230349