

Cheers T.I.  
Fire Alarm Submittal



SAFE consulting services  
1800 Bickford Ave. Suite #214  
Snohomish, WA 98290  
Voice (800) 742-8960  
Fax (206) 363 -3291  
E-Mail [spokaneoffice@safeconsulting.biz](mailto:spokaneoffice@safeconsulting.biz)

# Bookmark Summary

---

COVER PAGE	Page 1
POTTER IPA-4000	Page 3
AES 7707P-88-ULP-M	Page 8
SPACE AGE ELECTRONICS SSU00689	Page 12
POTTER PAD100-PSDA	Page 14
POTTER PAD100-DIM	Page 16
POTTER PAD300-HD	Page 18
POTTER PAD300-PD	Page 20
POTTER PAD300-6DB	Page 22
POTTER S-24 & HS-24 SERIES	Page 28
POTTER S/HS-WP SERIES	Page 32
POTTER CS/CHS SERIES	Page 24

## Features

- 4,064 addresses available on this analog addressable system
- Additional system capacity achieved via multi-point SLC modules
- 1500 software zones
- NFPA 72 Compliant Smoke Sensitivity Test Built-In
- System Operates as Class A or Class B for SLC, P-Link and NACs
- 10 Amp Power Supply, Expandable to 315 amps
- 6 NACS, Regulated, Rated at 3 Amps each, expandable to 192
- 4 Input/Output (I/O) Circuits for system flexibility rated at 1 Amp each, ideal for manual release and abort
- Strobe Synchronization and System Wide Sync for Potter/AMSECO®, Gentex®, Cooper Wheelock® and System Sensor® strobes
- Dedicated Alarm, Supervisory and Trouble Relays
- 4,000 Event History Buffer
- Cabinet will house up to 18 AH batteries
- Optional two line DACT with UD-2000 that can report General, Zone or Point Information
- Built in IP communicator
- Ethernet Port for Programming and Network Connectivity
- E-Mail System Status, Reports and Event Information
- Product includes 5 year warranty
- UUKL Listed for Smoke Control



NYC Fire Dept.  
Certificate of Approval  
6266



## Description

The IPA-4000 is an expandable analog/addressable releasing fire alarm system with a total system capacity of 4,064 addresses. Additional capacity on the system is achieved using multi-point SLC modules. The control panel utilizes the exclusive Potter protocol that includes a complete line of sensors and modules. The system is expandable with a total of thirty-one additional addressable Signaling Line Circuits (SLC) each with a maximum of 127 devices. Each SLC may be comprised of any combination of smoke sensor, heat detectors or modules and allows for a total of 50 ohms of impedance and may use any wire compliant with the National Electrical Code (NEC).

The IPA-4000 has a 10 Amp power supply with six Notification Appliance Circuits (NACs) and four Input/Output (I/O) circuits. The NACs are rated at 3 Amps each and the I/Os are rated at 1 Amp each. Each output is regulated and power limited. In addition, each output is uniquely programmable and may be configured for steady signal, strobe synchronization, constant power, door holder power, or releasing. The strobe synchronization includes Potter/AMSECO, Gentex, System Sensor and Cooper/Wheelock and with the exclusive Quadrasync each output may have a unique brand and all strobes will flash together. The I/Os are designed for inputs such as manual release stations and abort switches that will not require polling and react nearly instantaneously.

The IPA-4000 is listed for releasing of fire suppression systems. The software allows cross zones, counting zones, and timers for suppression. The system is capable of multiple release outputs across multiple hazards. In addition, the PSN-1000 may be used to extend releasing capability. The NACs may be expanded using the PSN-1000 series intelligent power supplies. Each PSN-1000 adds another 10 Amps of power, 2 additional input circuits and the IPA-4000 will support up to 31 power supplies. The system will synchronize the strobes system wide. In addition, the PSN-1000E has space to allow the installation of up to six PAD100-SLCE SLC loop expansion cards. The cards mount on a stacker bracket that allows access to all SLC circuit connections.

## Technical Specifications

Dimensions	18 1/8"W x 27 1/8"H x 4 1/8"D
AC Mains	5.0 Amps @ 120 VAC 50/60 HZ 3.0 Amps @ 240 VAC 50/60 HZ
Enclosure	16 gauge cold rolled steel with removable locked door with Lexan viewing window
Battery	Standby Current-130 mA Alarm Current-220 mA <ul style="list-style-type: none"> <li>• 10 Amps power for NACs, I/O, and P-Link</li> <li>• 3 Amps per NAC, regulated</li> <li>• 1 Amp per I/O circuit, regulated</li> <li>• Battery Charger range 8-55 Ah</li> <li>• Battery Charger voltage 27.3 VDC</li> <li>• P-Link maximum current of 1 Amp</li> </ul>
Temperature and Humidity Range	32° to 120° (0°C to 49°C) with a maximum humidity of 93% non-condensing.
Standards	<ul style="list-style-type: none"> <li>• NFPA 12, 12A, 13, 15, 16, 17, 17A, 70, 72, 92, 750, and 2001</li> <li>• ANSI/UL 864 - Local (L), Remote Station (RS), Central Station (CS), Proprietary (PPU), Auxiliary (AUX). Type of Service: Automatic (A), Manual (M), Water flow (WF) Sprinkler Supervisory (SS) Type of Signaling: Digital Alarm Communicator (DAC), March Time (March), Non Coded (NC), Reverse Polarity (Rev Pol), Other Technologies (OT)</li> <li>• IBC (International Building Code)</li> </ul>

## SLC Loop Accessories

The control panel may be connected with up to 4,064 addressable devices or modules in any combination. The SLC is not restricted by any special wire requirements and may be wired with any wire that complies with the NEC.

## SLC Loop Devices

Device	Description
PAD Series-PD	Analog Photoelectric Smoke Detector is a smoke detector with a listed obscuration of 1.1 to 3.5%/foot. UL 268 7th Edition.
PAD Series-PHD	Combination Analog Photoelectric Smoke/Heat Detector – a smoke detector with a listed obscuration of 1.1 to 3.5 %/foot obscuration and a fixed temperature range of 135° to 185° F heat detector. Smoke detection compliant with UL 268 7th Edition.
PAD Series-PCD	Combination Photoelectric Smoke/Carbon Monoxide Detector. Smoke detection compliant with UL 268 7th Edition. Carbon Monoxide detection compliant with UL 2075.
PAD200-PCHD	Combination Photoelectric Smoke/Heat/Carbon Monoxide Detector. Smoke detection compliant with UL 268 7th Edition. Heat detection with a fixed temperature range of 135° to 185° F and UL 521 7th Edition compliant. Carbon Monoxide detection compliant with UL 2075.
PAD Series-HD	Analog Fixed Temperature (135° - 185°F) or Rate-of-Rise Heat Detector (software selectable).
PAD Series-DUCTR	Addressable Duct Smoke Detector with Form C Relay rate at 10Amps @ 250/120VAC or 8 Amps at 30VDC.
PAD Series-DUCT	Addressable Duct Smoke Detector.
PAD100-6DB	6” round base that is mountable to an electrical box and wired for connection to the PAD100/200 devices.
PAD100-4DB	4” round base that may be mounted to an electrical box and wired for connection to the PAD100/200 devices.
PAD100-IB	Isolator base that interrupts a short in a SLC and prevents the short from affecting protected devices on the loop and used for connection to the PAD100/200 devices.
PAD100-RB	Addressable Relay Base that contains one relay controlled by the SLC. Relay at rated at 2 amps at 30 VDC or 0.5A at 125VAC. For PAD100/200 devices only.
PAD100-SB	Addressable Sounder Base that contains an addressable sounder module which allows for configuration of local, group, and/or all call. For PAD100/200 devices only.
PAD Series-CD	Addressable CO gas detector.
PAD200-DD	Addressable photoelectric smoke detector for use in DUCT/DUCTR enclosure.
PAD300-DD	Addressable photoelectric smoke detector for use in DUCT/DUCTR enclosure or pendant mount applications.
PAD100-LFSB	Addressable Low Frequency Sounder Base that contains an addressable sounder module which allows for configuration of local, group, and/or all call. The LFSB complies with the Low Frequency Signal Requirements (520 Hz) and used for connection to the PAD100/200 devices.
PAD100-SPKB	Speaker base is a wall or ceiling mount speaker capable of 25 or 70.7 VRMS and is field selectable from 1/8W to 4W and used for connection with the PAD100/200 devices.
PAD300-6DB	6” round base which is mountable to an electrical box and wired for connection to the PAD300 devices.
PAD300-4DB	4” round base which is mountable to an electrical box and wired for connection to the to the PAD300 devices.
PAD300-IB	Isolator base that interrupts a short in a SLC and prevents the short from affecting protected devices on the loop. Used for connection to the PAD300 devices.
PAD300-RB	Addressable Relay Base that contains one relay controlled by the SLC. The Relay is rated 2 amps at 30 VDC or 0.5A at 125VAC and used for connection to the PAD300 devices
PAD300-SB	Addressable Sounder Base that contains an addressable sounder module which allows for configuration of local, group, and/or all call; and used for connection to the PAD300 devices.
PAD300-LFSB	Addressable Low Frequency Sounder Base that contains an addressable sounder module which allows for configuration of local, group, and/or all call. The LFSB complies with the Low Frequency Signal Requirements (520 Hz) and used for a connection to the PAD300 devices.

## Modules

Device	Description
PAD100-MIM	Micro Input Module provides a small foot print contact module for mounting inside an enclosure.
PAD100-PSSA	Single Action Addressable Pull Station.
PAD100-PSDA	Dual Action Addressable Pull Station.
PAD100-SIM	Single Input Module is a standard contact module with an LED that mounts into a 4" square electrical box.
PAD100-DIM	Dual Input Module is a device that can monitor two distinct inputs with a single device or in a Class A mode.
PAD100-TRTI	Two Relay Two Input module provides two form C relays that are individually controlled by the control panel. Each relay is rated for 2 amps at 30VDC or 0.5 amps at 125VAC. Also provides two contact inputs.
PAD100-NAC	Notification Appliance Circuit module is an addressable remote appliance circuit controlled by the panel.
PAD100-ZM	Zone Module is used to connect conventional 2-wire smoke detectors to the system.
PAD100-IM	Module interrupts a short on the SLC and prevents the short from affecting protected devices on the loop.
PAD100-RM	Relay Module that provides one form C relay controlled by the control panel. Relay is rated for 2 amps at 30VDC or 0.5 amps at 125VAC.
PAD100-LED	Module provides a single addressable LED that is controlled by the control panel.
PAD100-SM	Speaker Module provides switching for two audio channels.
PAD100-LEDK	Addressable LED and key switch that mounts in a single gang box.
PAD100-DRTS	DUCTR Remote Test Switch that mounts in a single gang box and optionally supervised.
PAD100-OROI	One Relay One Input Module provides one form C relay and one input. The relay is rated at 2 amps at 30VDC or 0.5 amps at 125VAC.

## SLC Features

The Potter protocol is a digital protocol with a proven design for reliability and noise immunity. The system does not require special cable or conductors for connection of the Signaling Line Circuit as long as the cable is compliant with NFPA 70 and NFPA 72. The system allows for Class A or Class B installations as well as "T-Taps." Each loop is capable of 127 points, with a max wiring distance of 10,000 ft.

## Sensor Features

The sensors through the fire alarm control panel provide a real time status as to the condition of the system. The smoke detector sensitivity, heat detector temperature level and drift compensation are all programmable options. The system also allows for a day/night mode where the panel automatically adjusts the sensitivity depending on the time of day. To assist in the reduction of false alarms, the smoke detectors also have a maintenance warning that sends a trouble signal when a detector is dirty to the point that it can no longer maintain the programmed sensitivity.

## User Interface

The fire alarm control panel has a 4 x 40 LCD display to provide information to the system status. The keypad has navigation keys to allow manipulation of the Menu on board the panel. The panel is shipped standard with the following LEDs:

- AC Power - Green
- Alarm - Red
- Earth Fault - Amber
- Supervisory - Amber
- Silenced - Amber
- Trouble - Amber
- Pre-Release - Amber
- Release - Red

The common buttons include a Silence, Reset, Acknowledge, and Drill. All of the buttons are accessible once the locked door is opened.

## P-Link

The IPA-4000 has a proprietary communication protocol that communicates through a RS-485 connection to field devices. Up to 64 devices may be connected to a single P-Link connection. The P-Link includes the communication terminals and regulated 24 VDC connection for the field devices. The field devices may be any of the following:

**PAD100-SLCE**-Analog/Addressable loop expansion module (maximum of 31 per IPA-4000)

**RA-6075R** – 2 x 16 LCD annunciator with a key pad in a locked metal enclosure.

**RA-6500R(F)** – 4 x 40 LCD annunciator with a key pad in a locked metal enclosure. Flush mount version available.

**LED-16(F)** – 16 LED annunciator with common indicators in a locked metal enclosure. Flush mount version available.

**PSN-1000(E)** – 10 amp, remote intelligent power supply with 6 NACs, 2 Inputs and a P-Link repeater. This panel is listed in conjunction with the IPA-4000 as releasing circuits.

**CA-6500** – Class A convertor that converts the SLC, NACs and P-Link connection

**UD-2000** – UL listed, Dual line telephone alarm communicator

**DRV-50** – LED driver expander, used to connect up to 50 LEDs in a graphic display

**FCB-1000** – Fire communication bridge, provides remote mounting of the Ethernet connection

**FIB-1000** – Fiber interface module, used to extend P-Link to multi-mode fiber (2 required)

**RLY-5** – Relay module, provides 5 form C relay contacts rated at 3.0 amps 24VDC/125AC

**SPG-1000** – Serial parallel gateway, allows for the connection to a serial or parallel printer

The **FIB-1000**, **FCB-1000** and the **SPG-1000** may be installed in the stacker bracket or ordered with the optional rack mount enclosure.

**MC-1000** Multi-Connect allows up to sixty-three IPA series panels to share a single reporting technology.

**IDC-6** – Initiating device circuit provides 6 programmable inputs

**AE-2** – Two card expansion cabinet

**AE-8** – Eight card expansion cabinet


**AE-14** – Fourteen card expansion cabinet

## Ethernet/I.P. Connection

The IPA-4000 is shipped standard with an Ethernet connection. This connection is the programming port and may be connected to a building Wide Area Network (WAN) or Local Area Network (LAN). Once connected to the Internet, the panel may be selectively programmed to e-mail alarm conditions, trouble conditions, supervisory conditions, test, Event History and detector status. An e-mail may be sent to the panel and the panel will e-mail the event history, detector status, configuration file or server status to an authorized E-mail account. In addition, reminders may be set to send an e-mail for service, testing or other conditions.

In addition, the Ethernet connection is UL listed as an IP communicator. The IP communicator is listed to report to the UL listed Sur-Gard III IP receiver. The IP communicator replaces the traditional less reliable alarm communicator transmitter that utilized telephone lines. The IP communicator is an active method of connection and communication to the monitoring station.

## Dimensions

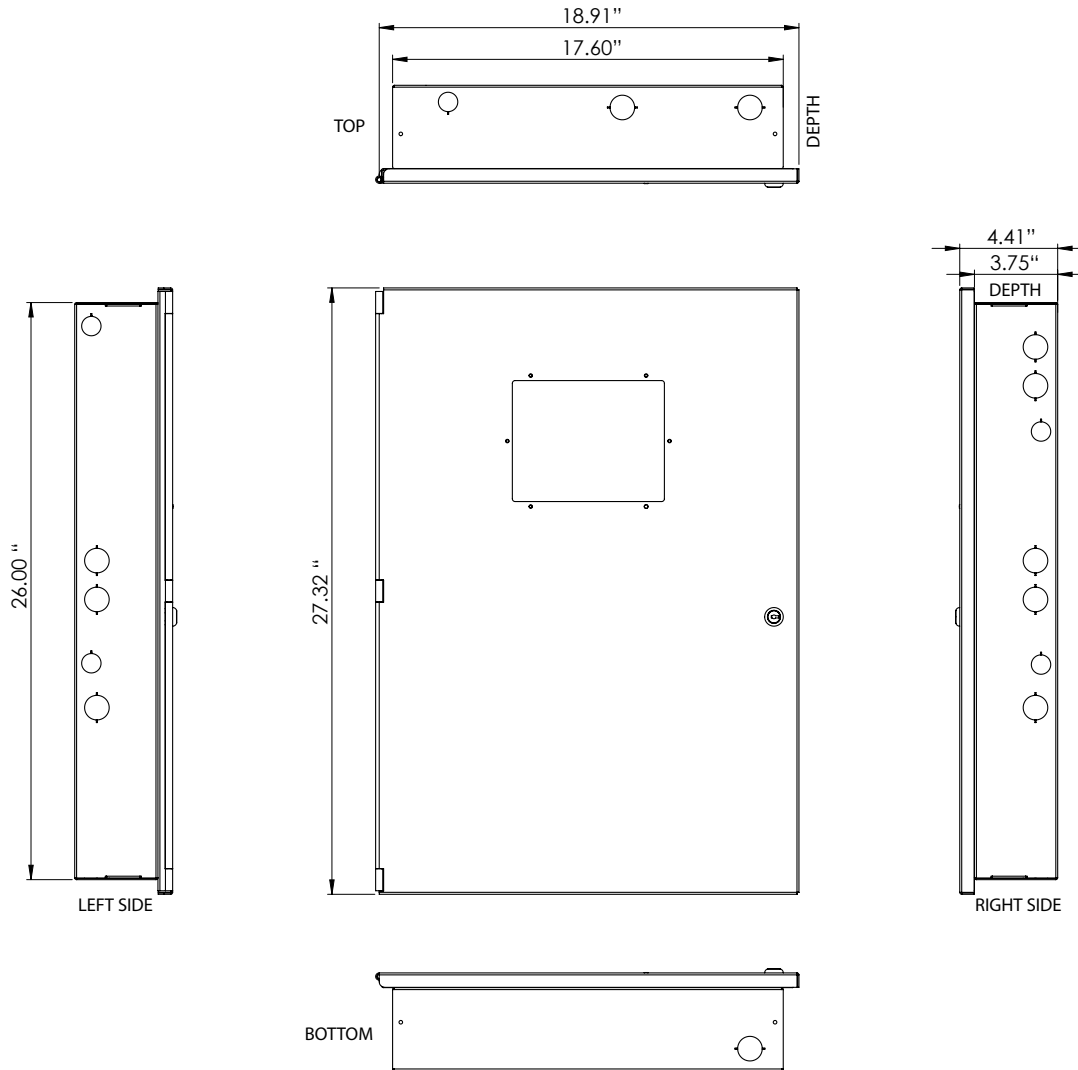

## Compatible Releasing Devices

**Note:** For releasing applications please order the Potter EOLD (3005012) for circuits connected to a releasing solenoid or actuator.

Brand	Description
Skinner	73218BN4UNLVN0C112CZ 73212BN4TNLVN0C322C2
Victaulic	753-E Series
Mini Max	MX123 & MX200 w/ 8876677 & 889323
Viking	11591, 11601, 11602, 13843, & 13844
TLX	PA0036

## Ordering Information

Model	Description	Stock No.
IPA-4000	Fire Alarm Releasing Control Panel	3992717
	Replacement Board IPA-4000	3992740



7707 Fire Subscribers

**IntelliNet 2.0**

## A Newer, Smarter Alarm Communications Platform

### Feature Highlights

- Leverages state of the art technology
- Applies advanced security protection
- Offers flexible power and configuration options
- Engineered for backward compatibility with legacy systems
- Enables future ready capabilities
- Provides instant subscriber status through front panel with Power and Trouble LEDs, a backlit LCD display, and Menu/Silence button
- Includes dual communication/multiple communication technology (reporting over RF and IP).
- Improves functionality with an adaptive Graphic User Interface (GUI) for programming via smartphones, tablets and PCs
- Plus many more...



### Key Benefits

- Built upon the solid foundation of AES-IntelliNet patented mesh radio technology for use in private licensed wireless networks
- Protects subscriber units against unauthorized access and rogue activity with a password-protected Dealer Code
- Makes programming and streamlined troubleshooting easy with user friendly interface
- Adds integrated supervision of AES-IntelliPro full data module
- Provides versatile power options:
  - (1) Direct from the Fire Alarm Control Panel (FACP) without requiring an electrician onsite and without Subscriber backup battery;
  - (2) Directly from the FACP with Subscriber backup battery; or
  - (3) Traditional installation with plug in Class 2 low power transformer
- Allows for enhancement upgrades and an expanded number of new features to be added easily with highly flexible and scalable alarm communications infrastructure
- Rigorously tested to the highest industry standards and future ready to meet emerging NFPA code and UL standards




# Enhanced Wireless Fire Alarm Monitoring

Powered by AES enhanced mesh radio technology, *IntelliNet* 2.0 7707 Fire Subscribers are next generation universal wireless communicators that provide advanced security protection for any new or existing alarm monitoring network. The AES Model 7707 is ideal for commercial fire applications. With the AES-*IntelliPro* full data module option, they are the ideal drop-in replacement for Plain Old Telephone Service (POTS) lines.

The red metal enclosure comes with a key lock and front panel LCD backlit display with intuitive view that provides an instant visual of the subscriber status. The user friendly GUI makes it easy to program AES subscriber units via a smartphone, laptop, tablet, or integrated Universal Serial Bus (USB)—without the need for special cables or having to use a handheld programmer. Additional knockouts make it easier to mount for faster installation.

## IntelliNet 2.0 Private Wireless Mesh Radio Network

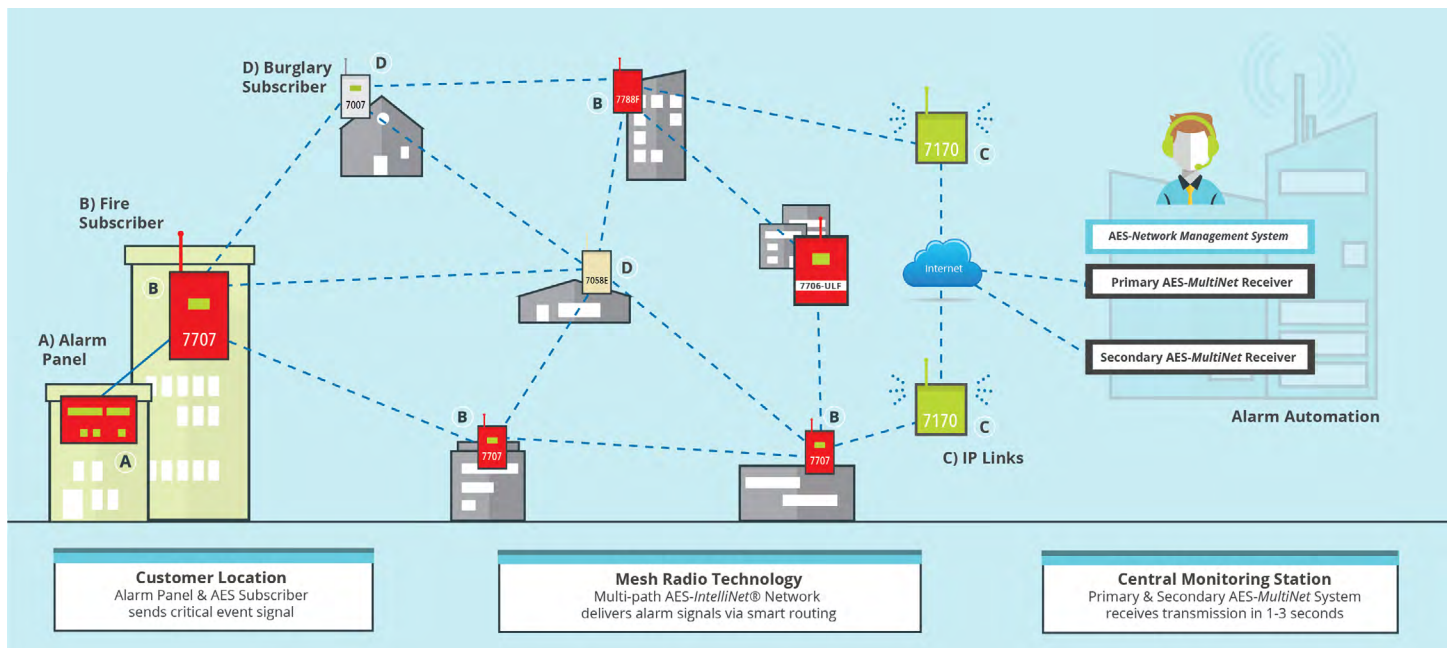

The *IntelliNet* 2.0 Fire Subscriber has an 8 Zone modular design for expansion with normal and reverse polarity, POTS and DACT interfaces with an option for the 7794A AES-*IntelliPro* full data module add-on accessory board. AES subscribers' intelligent software automatically detects new hardware and devices to reduce installation time.

An AES certified WiFi accessory allows seamless wireless connectivity for configuration and programming. A laptop, Ethernet cable, or a Wi-Fi USB dongle is required for *IntelliNet* 2.0 programming, handheld programmers will not work with 2.0 units. A FACP Power Supply Adapter is required for certain configurations when using flexible power options. The forward compatible design allows for feature add-ons, engineered to adapt seamlessly with future software upgrades as technology advances. *IntelliNet* 2.0 allows configuration cloning for faster installation time.

The AES 7707 was designed with quick configuration and installation in mind to make it easier for field technicians to get in, out, and on to the next install.

Visit our Fire Marshal Resources web page for official NFPA and UL Listings:

[aes-corp.com/products/fire/fire-marshal-resources](https://aes-corp.com/products/fire/fire-marshal-resources)

<b><i>IntelliNet 2.0 Fire Subscribers</i></b>	
<b>2.0 PREMIUM (UL &amp; ULC Listed)</b>	
7707P-88-M	<i>IntelliNet 2.0 Fire Subscriber, 8 Zone with Multiple Communication Technologies (MCT), Red Enclosure</i>
7707P-88-ULP-M	<i>IntelliNet 2.0 Fire Subscriber, 8 Zone with 7794A AES-IntelliPro, and integrated onboard Local Annunciator plus MCT, Red Enclosure</i>
7707P-44-M	<i>IntelliNet 2.0 Fire Subscriber, 4x4 Zone (4 Reversing Polarity, 4 Supervised) with Multiple Communication Technologies (MCT), Red Enclosure</i>
7707P-44-ULP-M	<i>IntelliNet 2.0 Fire Subscriber, 4x4 Zone (4 Reversing Polarity, 4 Supervised) with 7794A AES-IntelliPro, and integrated onboard Local Annunciator plus MCT, Red Enclosure</i>
<b>2.0 ACCESSORIES</b>	
7794A	Standalone AES- <i>IntelliPro</i> Fire full data module add-on accessory board with firmware for new <i>IntelliNet 2.0</i> units only, cannot be used in legacy units
77-WiFi	AES certified WiFi adapter
77-FACPA	FACP Power Supply Adapter for internal mount
77-FACPA-KIT	External installation hardware for 2-way Junction Box
<b><i>Legacy Fire Subscribers</i></b>	
7706-ULF	Integrated Fire Monitoring System, Red Enclosure
7788F-ULP-P	Legacy Fire Subscriber, 8 Zone with 7795 AES- <i>IntelliPro</i> (7794 full data module, 7762 hardware supervisory module, and 7740 Local Annunciator), Red Enclosure
7788F-ULP	Legacy Fire Subscriber, 8 Zone, 8 Supervised Zones with 7794 AES- <i>IntelliPro</i> , Red Enclosure
7788F	Legacy Fire Subscriber, 8 Zone, 8 Supervised Zones, Red Enclosure
7744F-ULP-P	Legacy Fire Subscriber, 4 Zone with 7795 AES- <i>IntelliPro</i> (7794 full data module, 7762 hardware supervisory module, and 7740 Local Annunciator), Red Enclosure
7744F-ULP	Legacy Fire Subscriber, 4x4 Zone, 4 Supervised Zones with 7794 AES- <i>IntelliPro</i> , Red Enclosure
7744F	Legacy Fire Subscriber, 4x4 Zone, 4 Reversing Polarity, 4 Supervised Zones, Red Enclosure
<b>LEGACY ACCESSORIES</b>	
7794	Standalone AES- <i>IntelliPro</i> Fire full data module add-on accessory board for legacy units only, please see 7794A above for <i>IntelliNet 2.0</i> version

## DIMENSIONS

13"H x 8.5"W x 4.5"D  
(33cmH x 21.5cmW x 11.4cmD)

## WEIGHT

5.8 lbs (2.6 kilograms)  
excluding battery  
13 lbs (5.9 kilograms) with  
10 Ah battery

## RADIO FREQUENCY

Standard Frequency Range:  
450-470 MHz  
Contact AES for other UHF  
and VHF frequencies

## ANTENNA

2.5 dB tamper resistant antenna  
included, mounts on enclosure  
Optional remote mounting  
antenna available

## POWER INPUT

AC SOURCES  
Transformer: Class 2  
16.5V AC nominal output  
1.9 A max current (40 VA MIN)  
ELK ELK-TRG1640,  
MG ELECTRONIC SALES MGT1640,  
or AES 1640 (not included)  
DC SOURCES (includes FACP)  
24V DC Regulated Power Supply  
with Subscriber  
Rechargeable Battery  
1.9 A max current

## BACKUP BATTERY

10-12 Ah, UL recognized lead acid  
gel cell, size based on subscriber  
configuration

## ALARM SIGNAL INPUTS/ZONES

- 8 individually programmable  
E.O.L. type zone inputs
- 4+4: 4 reverse polarity input and  
4 individually programmable  
E.O.L. type zone inputs
- Optional 7794A AES-*IntelliPro* for  
full data via Contact ID, Pulse,  
Modem IIe and Modem IIIa2

## UL LISTINGS

UL 864 10<sup>th</sup> Edition  
Standard for Control Units and  
Accessories for Fire Alarm Systems  
ULC S559-04 1<sup>st</sup> Edition  
Equipment for Fire Signal  
Receiving Centres and Systems

## TROUBLE OUTPUT—ACK DELAY/ANTENNA CUT

Form C relay, fail secure, rated 24V  
DC 1A resistive, unsupervised

## RESET BUTTON

Located on main circuit board

## OPERATING TEMPERATURE

32 to 120°F (0 to 49°C)

## STORAGE TEMPERATURE

14 to 140°F (-10 to 60°C)

## RELATIVE HUMIDITY

0 to 93%, non-condensing

## RECHARGE CAPABILITY

Will charge 12V battery size  
from 10-12 Ah

## PORTS

Ethernet for configuration  
and message communication  
USB access for software upgrade

## REMOTE ANNUNCIATOR

AES Model 7740  
Remote Annunciator, supervised

## COMPATIBLE RECEIVERS

7705i AES-MultiNet Receiver

## CONFIGURATION INTERFACE

Web browser capable device  
accessible via smartphone, tablet,  
laptop, or PC

## CURRENT CONSUMPTION

Standby w/ charged backup battery:  
200 mA (1.2 A Transmitting)  
Standby + charging backup battery:  
900 mA (1.9 A Transmitting - MAX)

## POWER OUTPUT

2 or 5 Watts  
Factory set

## ENCLOSURE MATERIAL

Steel with paint finish

## FINISH COLOR

Red

## VISUAL INDICATORS

Front panel LCD  
(2 x 20 alphanumeric character  
backlit display)  
Power and Trouble LEDs  
(ALM, Trouble, Tx, Rx, WA)

## Contact Us

For pricing and availability or to learn more about *IntelliNet* 2.0, please call your local  
AES Sales Representative at [\(800\) 237-6387](tel:8002376387) or email [sales@aes-corp.com](mailto:sales@aes-corp.com).



[aes-corp.com](http://aes-corp.com)

AES Corporation | 285 Newbury Street | Peabody, MA 01960 United States

© Copyright 2022 AES Corporation and AES-*IntelliNet*® are registered trademarks of AES Corporation

7707\_10052022



BY SPACE AGE ELECTRONICS



## FEATURES

- 18 gauge cold rolled steel construction with red powder coat and white lettering
- Dimensions are 12" wide x 13" tall and 2 1/4" deep
- Stainless steel piano hinge
- Two key ring hooks to hold system keys
- Business card holder for key contacts
- Slide tab allows user to select USB-C or Micro USB connector to download from 8GB digital flash memory



# SRD

## System Record Documents

Store important system documents in a secure location with a cabinet built specifically to meet the requirements of NFPA 72 7.7.2.4.

The number one goal at Space Age is to manufacture code compliant solutions, and the SRD is just that. NFPA 72 7.7.2.1 states, "With every new system, a documentation cabinet shall be installed at the system control unit or other approved location at the protected premises."

The SRD includes our innovative 8GB flash drive slide tab that allows the user to select a USB-C or Micro USB connector to access records electronically (See NFPA 72 7.5.6.7).

## SPECIFICATIONS


The SRD System Record Documents Box shall be UL Listed, constructed of 18 gauge cold rolled steel. It shall have a powder coat finish. The cover shall be permanently screed with 1" high lettering "SYSTEM RECORD DOCUMENTS" with white indelible ink. The access door shall be locked with a 3/4" barrel lock and there will be a 12" stainless steel piano hinge. The SRD will have a minimum of 8 gigabyte digital flash memory drive with a slide tab that allows user to select USB-C or Micro USB connector for uploading and downloading information. The enclosure will supply 4 mounting holes. Inside will accommodate standard 8 1/2" x 11" manuals and document records. A legend sheet will be attached to the door for system required documentation, key contacts and system information. The enclosure shall also provide 2 key ring holders with a location to mount standard business cards for key contact personnel.

## CUSTOM COLORS AND BRANDING AVAILABLE





## DIMENSIONS

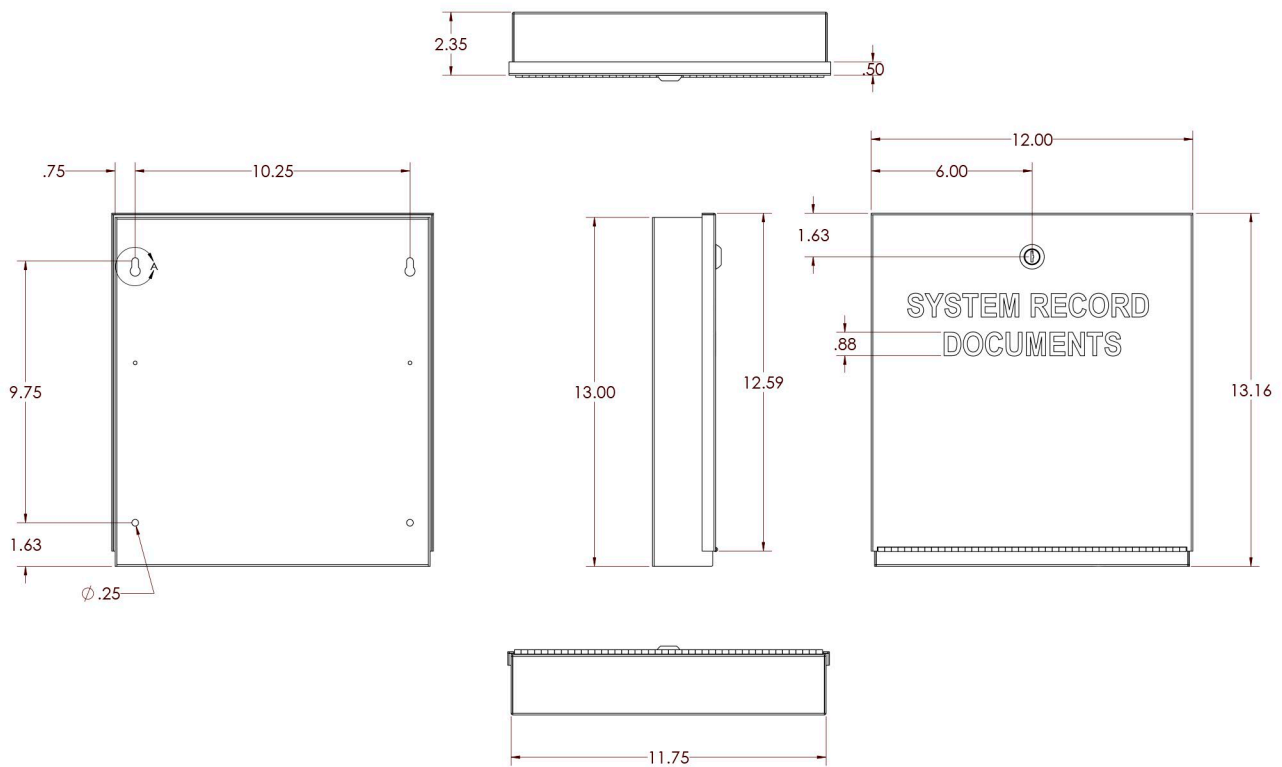

## ORDERING INFORMATION

**P/N# SSU00689**

System Record Documents Cabinet - Red

**P/N# SSU00690**

System Record Documents Cabinet - Red with your custom screened logo

**P/N# SSU01689**

System Record Documents Cabinet - Black

**P/N# SSU01690**

System Record Documents Cabinet - Black with your custom screened logo

## Features

- Single or Dual Action versions
- Durable die-cast construction
- Reset key matches the fire alarm control panels
- Compatible with IPA Series panels
- SLC Class A, Class X & Class B
- Product includes a 5 year warranty
- UUKL Listed for Smoke Control



## Description

The PAD100-PSSA (Single Action) is activated by simply pulling the white “T” bar handle down. The PAD100-PSDA (Dual Action) is activated by lifting the front cover and then pulling the white “T” bar handle down. Once activated, the “T” bar cannot be reset without opening the front cover. Opening the front cover will also activate the pull station. To reset the PAD100-PS Series, use the Potter WS-93 key to unlock and open the front cover. Once the cover is open, push the “T” bar back into the normal position and re-secure the front cover.

## Application

The PAD100-PSSA/PSDA is compatible with Potter’s IPA and AFC/ARC series addressable fire alarm control panels. It is a non-coded addressable pull station available in either a single or dual action model and installs on a single gang box or surface mounts using the P32-BB or P32-DBB (deep) back box.

## Technical Specifications

Operating Voltage	24.0 VDC
Max SLC Standby Current	200uA
Max SLC Alarm Current	200uA
Environmental Limitations	32°F - 120°F (0° - 49°C) Indoor Only
Dimensions	4.75” H x 3.25” W x 1.75” D
Relative Humidity Range	0 - 93% (non-condensing)
Mounting Options	Single gang box or Potter P32-BB/DBB
Shipping Weight	APS-SA - 1.22 lbs. APS-DA - 1.46 lbs.




## Setting the Address

The PAD100-PS Series uses one SLC address assigned to the device. The address is set using the DIP switch located on the back of the PAD100-PS device.


### Pull Station Front View

Fig 1

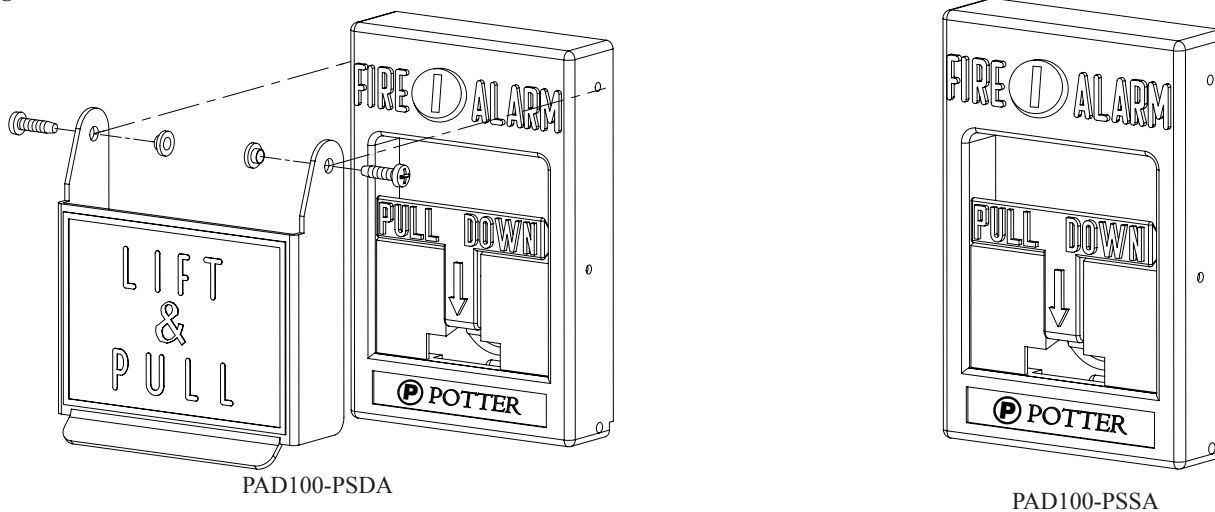

### Pull Station Back View and Wiring

Fig 2

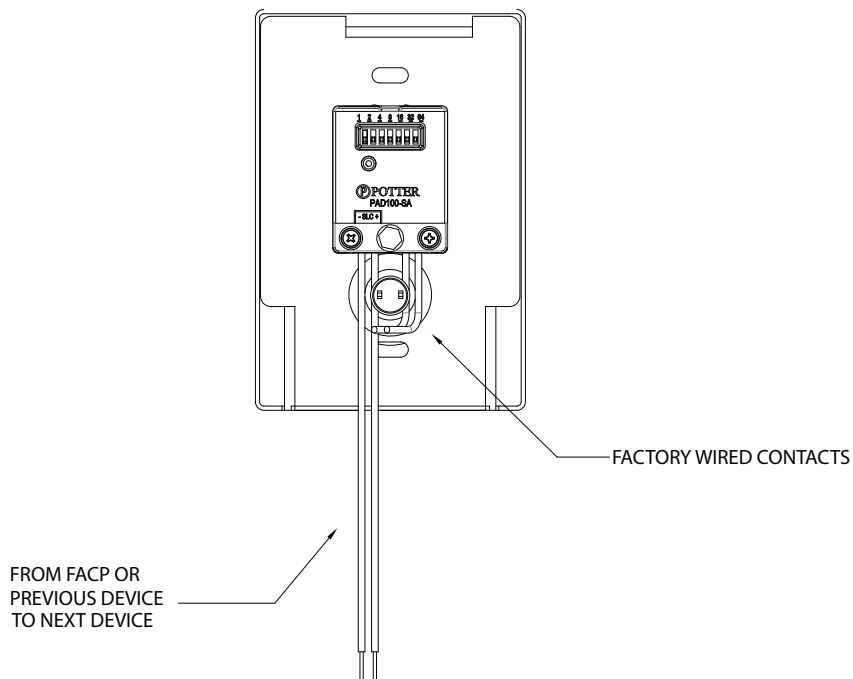

## Ordering Information

Model	Description	Stock No.
PAD100-PSSA	Addressable Pull Station, Single Action	3992721
PAD100-PSDA	Addressable Pull Station, Dual Action	3992720



## Features

- Single module with dual contact monitoring inputs
- Two (2) Class B or one (1) Class A monitoring inputs
- SLC Class A, Class X & Class B
- Mounts in a standard 4" or double gang box
- Wiring terminals accessible when mounted in box
- All wiring terminals accept 22 to 12 AWG
- Product includes a 5 year warranty
- UUKL Listed for Smoke Control

**NOTE:** This addressable module does not support 2-wire smoke detectors.



## Description

The PAD100-DIM uses one (1) SLC loop address when monitoring two (2) Class B circuits or one (1) Class A circuit. The module mounts on either a 4" square or double gang box. The module is capable of monitoring two (2) separate class B circuits making it ideal for monitoring sprinkler waterflow and valve tamper switches when they are located in the same proximity. The PAD100-DIM includes one red LED to indicate the module's status. In normal condition, the LED flashes when the device is being polled by the control panel. When an input is activated, the LED will flash at a fast rate.

## Application

The PAD100-DIM is compatible with Potter's IPA and AFC/ARC series addressable fire alarm control panels. The PAD100-DIM is an interface module used to monitor dry contact devices such as sprinkler waterflow, valve tamper switches, or conventional pull stations. The module is capable of monitoring two separate Class B or one Class A circuits.

## Setting the Address

Each addressable SLC device must be assigned an address. The address is set using the DIP switch located on the PAD100-DIM. When the PAD100-DIM is used to monitor two individual Class B circuits a single device address is assigned, each input is then identified as a sub-point of the module address. For example, if the address number is assigned as "8", the first input will be "8.1" and the second input will be "8.2".

Before connecting a device to the SLC loop, take the following precautions to prevent potential damage to the panel or device:


1. Power to the device is removed.
2. Field wiring is correctly installed.
3. Field wiring has no open or short circuits.

## Technical Specifications

Operating Voltage	24.0V
Max SLC Standby Current	240μA
Max SLC Alarm Current	240μA
Max Wiring Resistance of IDC	100 Ω
Max Wiring Capacitance of IDC	1μF
EOL Resistor	5.1K Ω
Operating Temperature Range	32 to 120°F (0 to 49°C)
Operating Humidity Range	0 to 93% (non-condensing)
Max no. of Module Per Loop	127 units
Dimensions	4.17" (106mm)L × 4.17" (106mm)W × 1.14" (29mm)D
Mounting Options	Standard 4" Square or Double Gang Box
Shipping Weight	0.6 lbs

## Installation Using Compatible Electrical Box


Fig 1

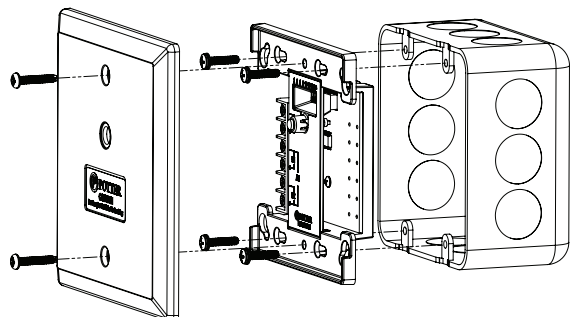

## Wiring Diagrams


### PAD100-DIM With One Class A Circuit

Fig 2

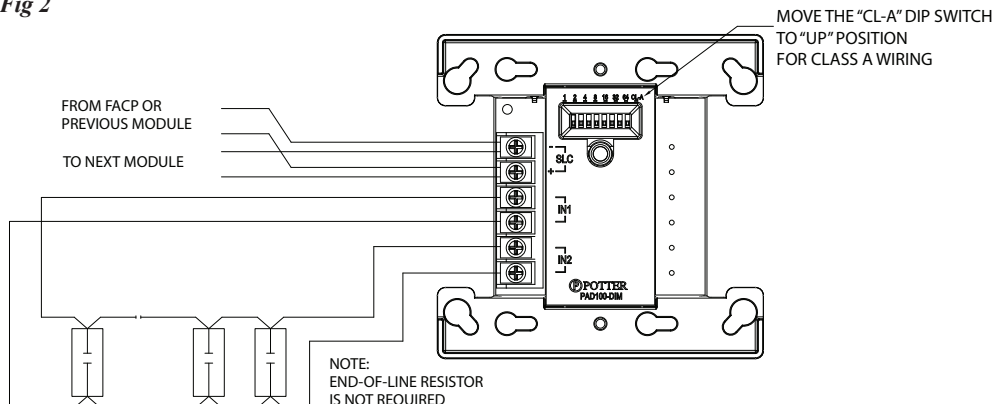

### PAD100-DIM With Two Class B Circuits

Fig 3

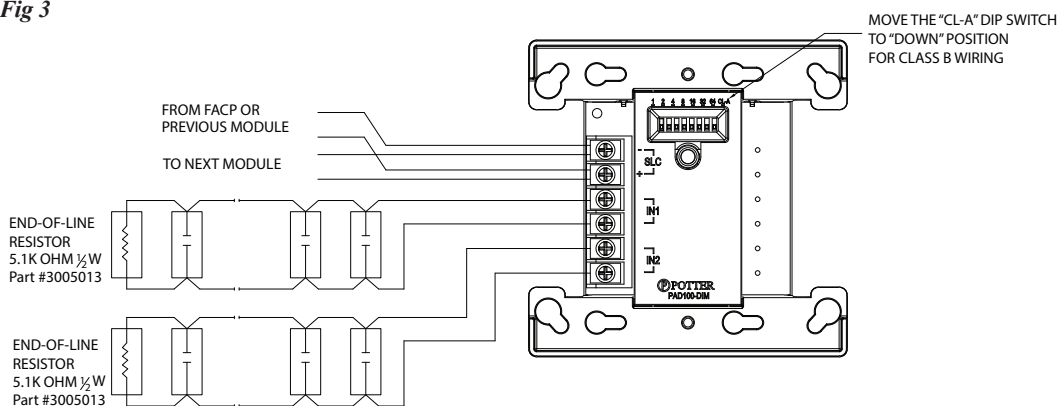


## Ordering Information

Model	Description	Stock No.
PAD100-DIM	Dual Input Module	3992703

## Features

- Selectable Rate of Rise and/or Fixed Heat Detector
- Low Profile
- Reliable Detection Technology
- LED Alarm Indicator
- Ambient Temperature Listing of 32°F to 150°F
- Simple DIP Switch Address Setting, No Programming Tool Required
- Magnetic Test Switch
- Product includes 5-year warranty
- UUKL Listed for Smoke Control

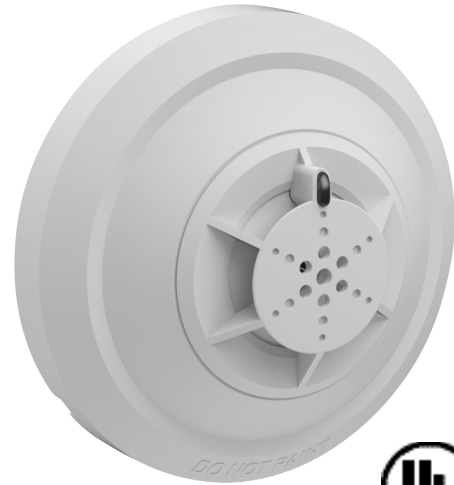

## Description

The PAD300-HD is a listed analog addressable rate of rise and/or fixed temperature heat detector compatible with any fire alarm control panel that has the Potter Addressable Device (PAD) protocol. The heat sensing portion utilizes a proven thermistor for accurate and reliable heat detection. The detector and base (not included) are made of a durable plastic in an off-white to blend in with the ceiling.

The PAD300-HD is UL listed with a selectable fixed temperature point from 135° to 185° Fahrenheit and can be used for rate of rise applications. See detector spacing limitations below. This flexibility allows the installer to cover a wide variety of applications with a single unit.

The PAD300-HD and the control panel communicate over a proven and robust digital communication path and the system analyzes the information at the particular device. The total polling speed is less than five (5) seconds, well under the UL requirements.

The detector is compatible with any of the PAD300 series detector bases and simply twists on. The PAD300-HD is addressed using DIP switches in the rear of the detector and can be easily programmed in the field without special tools.

## Setting the Address

Each addressable device on the SLC loop must have a unique address from 1 to 127 to function properly. The address is set using DIP switches.

Before connecting a device to the SLC loop, take the following precautions to prevent potential damage to SLC or device. Verify the following:

1. Power to the device is removed.
2. Field wiring is correctly installed.
3. Field wiring has no open or short circuits.

## Technical Specifications

Operating Voltage	24 VDC
Detector Current Draw	300 $\mu$ A
Alarm Indicator	1 LED
Alarm Set-point Range	135°F to 185°F (57°C to 85°C)
Rate of Rise Detection (Selectable Option)	15°F/min. (8.3°C/min.)
Installation Temperature Range	32°F to 150°F (0°C to 66°C)
Operating Relative Humidity Range	0% to 93% (Non-condensing)
Start-up Time	Max. 1 sec.
Maximum Number of Addresses Per Loop	127
Maximum Number of Lighted Indicators in Alarm Per Loop	30
Color	Eggshell White
Weight (Without Base)	68 g (2.4 oz)
Dimensions (Without Base)	Height: 1.5 in (38 mm) Diameter 3.93 in (100mm)

## Operation

The PAD300-HD is an analog addressable detector that uses one address on the Signaling Line Circuit (SLC) of a compatible fire alarm control panel. The unit communicates with the control panel as it is polled. The LED flashes every time the unit is polled and it will flash at a fast rate if the unit is in an active status. The polling LED can be turned off if desired for less conspicuous operation.

The PAD300-HD with the PAD300-4DB or PAD300-6DB has a low profile to blend into the surrounding environment. The system has a maximum of 30 LEDs that can be turned on simultaneously. If the system already has 30 LEDs on, the PAD300-HD will operate even though the LED will not illuminate.

## Spacing

The ANSI/UL listed spacing limitations of PAD300-HD smooth ceiling are dependent on alarm set point.

Alarm Set-Point	Rate of Rise Spacing	Fixed Temperature Spacing
135°F to 185°F (57°C to 85°C)	Max. 70 ft.	Max. 70 ft.

## Compatible Bases

All bases will mount on a single gang, 3-1/2" octagon, 3-1/2" square, double gang, 4" octagon, 4" square, 50mm c/c, 60mm c/c and 70mm c/c boxes.

Device	Description	Stock No.
PAD300-4DB	4" Detector Base	3992781
PAD300-6DB	6" Detector Base	3992782
PAD300-IB	6" Base with an Isolator Module Included	3992783
PAD300-RB	6" Base with One Form-C Relay Contact 2A @ 30VDC, 0.5A @ 125VAC	3992784
PAD300-SB	6" Base with sounder module included. Sound pattern is provided from external source	3992785
PAD300-LFSB	6" Base with 520Hz sounder module included. Sound pattern is provided from external source	3992786

## Ordering Information

Model	Description	Stock No.
PAD300-HD	Heat Detector	3992776

## Features

- Low profile, less than 2 inches with the base
- Wide selectable sensitivity range of 1.1 to 3.5%/foot
- Detector communicates sensitivity to control panel
- UL listed smoke calibration and sensitivity
- Optional locking tab to prevent unwanted removal
- Simple DIP switch address setting, no programming tool required
- Magnetic test switch
- LED alarm indicator
- Product includes 5-year warranty
- UUKL Listed for Smoke Control
- UL268 7th edition compliant



## Description

The Photoelectric Smoke Detector is a listed Analog Addressable smoke detector compatible with fire alarm control panels that utilize the Potter Addressable Device (PAD) protocol. The PAD300-PD is a low profile smoke detector with a wide sensitivity range. The detector and base are made of a durable plastic in an off-white color to blend in with the ceiling.

The PAD300-PD has a sensitivity range of 1.1 to 3.5 % per foot and is UL listed. The PAD300-PD features drift compensation and has built in dirty detector warning as well. The PAD300-PD and the control panel communicate over a proven and robust digital communication path and the system analyzes the information at the particular device. The total polling speed is less than five (5) seconds, well under the UL requirements.

The detector is compatible with any of the PAD300 series detector bases and simply twists on. The PAD300-PD is addressed using DIP switches in the rear of the detector and can be easily programmed in the field without special tools.

## Setting the Address

Each addressable device on the SLC loop must have a unique address from 1 to 127 to function properly. The address is set using DIP switches.

Before connecting a device to the SLC loop, take the following precautions to prevent potential damage to SLC or device. Verify the following:

1. Power to the device is removed.
2. Field wiring is correctly installed.
3. Field wiring has no open or short circuits.

## Technical Specifications

Operating Voltage	24 VDC
Detector Current Draw	300 $\mu$ A
Alarm Indicator	1 LED
Alarm Set-point Range	1.1 to 3.5%/ft (3.6 to 11%/m)
Installation Temperature Range	32 to 120 ° F (0 to 49 ° C)
Operating Relative Humidity range	0% to 93% (Non-condensing)
Start-up Time	Max. 1 sec.
Maximum Number of Addresses Per Loop	127
Maximum Number of Lighted Indicators in Alarm Per Loop	30
Color	Eggshell White
Weight (without base)	91g (3.2oz)
Dimensions (without base)	Height: 1.42 in (36mm) Diameter: 3.93 in (100 mm)

## Air Velocity Ratings

The PAD300-PD has an Open Area of Protection air velocity rating of 0 to 300 feet per minute.

The system has a maximum of 30 LEDs that can be turned on simultaneously. If the system already has 30 LEDs on, the PAD300-PD will operate even though the LED may not illuminate.

## Operation

The PAD300-PD is an analog addressable detector that uses one address on the Signaling Line Circuit (SLC) of a compatible fire alarm control panel. The unit communicates with the control panel as it is polled. The LEDs flash every time the unit is polled and they will flash at a fast rate if the unit is in an active status. The polling LED can be turned off if desired for less conspicuous operation.

The PAD300-PD with the PAD300-4DB or PAD300-6DB has a low profile of less than two (2) inches to blend into the surrounding environment. The detector includes an insect screen to prevent foreign objects from reaching the chamber and can be cleaned to restore operation of a dirty detector.

## Detector Sensitivity

The PAD300-PD and the compatible control panel work in tandem to keep the sensitivity consistent. As the detector is installed over time, the detector compensates for the dirt in the unit until it is out of range. At that time, the panel will indicate a dirty detector. The detector will then have to be cleaned or replaced.

The PAD300-PD can be programmed to provide a maintenance alert prior to reaching the dirty detector level which will allow for intervention prior to the detector going into trouble. This allows for detector replacement or cleaning prior to a nuisance trouble occurs.

**NOTE:** As required by NFPA, do not install the detectors until all construction is complete and the work area has been thoroughly cleaned. If the detectors have been installed in a construction environment, they should be cleaned or replaced before the system is placed into service.

## Spacing

The PAD300-PD is UL listed with a recommended maximum spacing of 30 feet. Refer to NFPA 72 for specific information regarding detector spacing, placement and special applications.

## Compatible Bases

All bases will mount on a single gang, 3-1/2" octagon, 3-1/2" square, double gang, 4" octagon, 4" square, 50mm c/c, 60mm c/c and 70mm c/c boxes.

Device	Description	Stock No.
PAD300-4DB	4" Detector Base	3992781
PAD300-6DB	6" Detector Base	3992782
PAD300-IB	6" base with an isolator module included	3992783
PAD300-RB	6" base with one Form-C relay contact. 2A @ 30VDC, 0.5A @ 125VAC	3992784
PAD300-SB	6" base with sounder module included. Sound pattern is provided from external source	3992785
PAD300-LFSB	6" base with 520Hz sounder module included. Sound pattern is provided from external source	3992786

## Ordering Information

Model	Description	Stock No.
PAD300-PD	Photoelectric Smoke Detector	3992775

## Features

- Terminals marked with polarity to assist with installation
- Duplicate Terminals for In-and-out SLC Wiring
- Terminals accept 22 to 12 AWG wire sizes
- Installs on Single Gang, Double Gang, Octagon or 4" Square Box
- Locking tab prevents unauthorized detector removal
- Product includes 5-year warranty
- 6" mounting base comes with trim plate cover



## Application

The Potter PAD300-6DB and PAD300-4DB detector bases are used to install PAD300 series detectors. The PAD300-6DB will mount on a single gang, double gang, octagon, 4" square, 50mm, 60mm, and 70mm electrical box.

## Description

The PAD300-6DB and PAD300-4DB are low-profile, surface-mount bases used with Potter's addressable detectors. The base uses screw clamp terminals that accept wire ranging from 22 to 12 AWG. When installed on recessed electrical boxes, the PAD300-6DB is wide enough to completely cover the back box and the immediate surrounding area. The base is equipped with a locking tab to deter unauthorized removal of the attached detector.

## Technical Specifications

Installation Temp Range	32°F to 150°F (0°C to 66°C)
Operating Humidity Range	0% to 93% (Non-condensing)
Dimension	PAD300-4DB: 3.93 in / 100 mm PAD300-6DB: 6.3 in / 160 mm
Weight	PAD300-4DB: 1.34 oz / 38 g PAD300-6DB: 3.03 oz / 86 g
Height	0.76 in / 20 mm
Acceptable Wire Gauge	22 to 12AWG
Mounting Options	<ul style="list-style-type: none"> <li>• Single Gang</li> <li>• Double Gang</li> <li>• 3-1/2" Octagon Box</li> <li>• 4" Octagon Box</li> <li>• 4" Square with Plaster Ring</li> <li>• 50mm c/c Box</li> <li>• 60mm c/c Box</li> <li>• 70mm c/c Box</li> </ul>




## Locking Feature

The PAD300-6DB and PAD300-4DB include a locking feature that prevents removal of the detector without using a tool.

1. To enable this feature, break off the locking tab (See Figure 1), and then install the detector.


Fig. 1

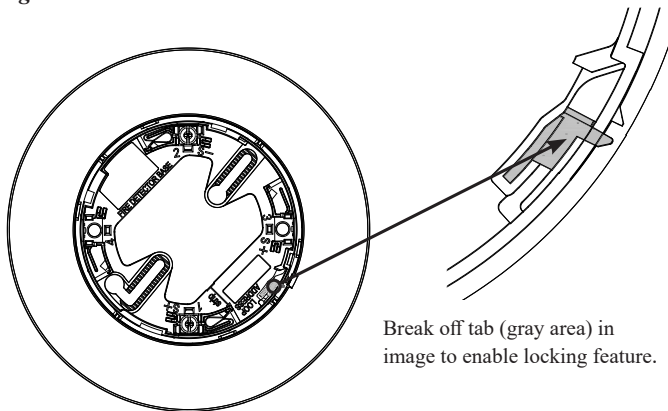

2. To remove the detector from the base when the locking feature has been enabled, insert a small screwdriver into the slot on the base to push the plastic tab while simultaneously turning the detector head counter-clockwise.

Fig. 2

Insert small screwdriver into slot to remove detector from base.

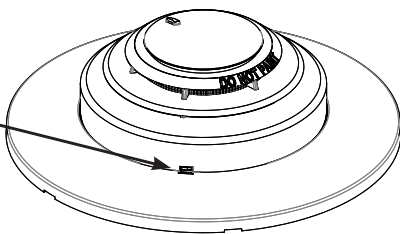


## Ordering Information

Model	Description	Stock No.
PAD300-4DB	4" Detector Base	3992781
PAD300-6DB	6" Detector Base	3992782


## Wiring Diagrams

Fig. 3


### 1) Class B Wiring:

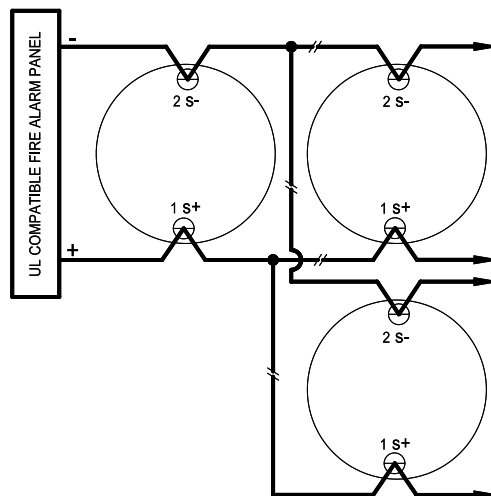

### 2) Class A Wiring:

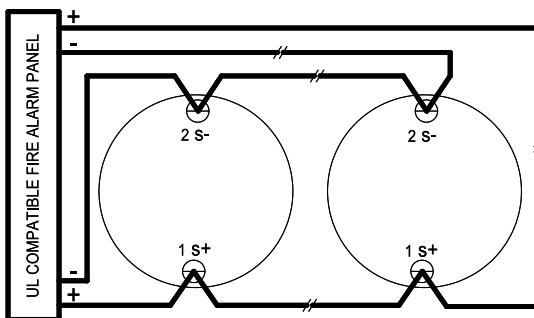

### 3) Class X Wiring:

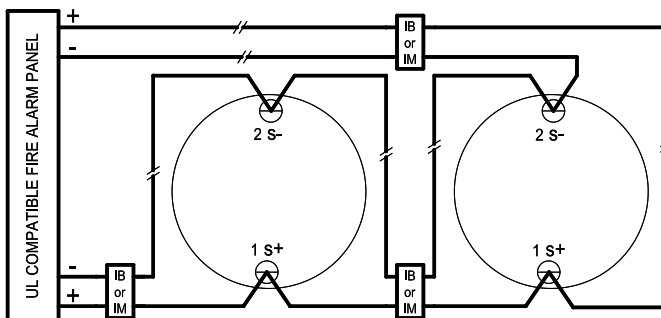



**LISTED**

**S3247**

*Product includes a 5 year warranty*

#### Features

- Nominal voltage 24 VDC
- Tamperproof field selectable candela options 15, 30, 75, 95, 115, & 150
- Super-Slide® Bracket - Ease of Supervision Testing
- Checkmate® - Instant Voltage Verification
- Synchronize strobe and/or horn with Gentex AVSM Control Module
- Prewire entire system, install mounting bracket, then install signals
- Documented lower installation and operating costs
- Input Terminals 12 to 18 AWG
- Switch Selection for High or Low dBA
- Switch Selection for 2400Hz or mechanical Tone
- Switch Selection for Continuous or Temporal 3
- Tamperproof re-entrant grill
- Surface mount with the CLNGBB (Ceiling Surface Mount Back Box)
- Silence audible while visual appliance will remain flashing (for use in accepted jurisdictions)
- Faceplate available in red or off-white

#### Operating Temperature:

- 32°F to 120°F (0°C to 49°C). The CS Series is not listed for outdoor use.

#### Unit Dimensions

- 6" (15.24 cm) x 2.6" (6.604 cm)

#### Description

The Potter CS/CHS Series is a ceiling mount strobe or horn/strobe combination that offers dependable audible and visual alarms and the lowest current consumption.

The CS/CHS offers tamperproof field selectable candela options of 15, 30, 75, 95, 115 and 150 candela.

The CHS horn offers a continuous or synchable temporal three in 2400Hz and mechanical tone. All tones are easy for the professional to change in the field by using switches. The models are shipped from the factory in the temporal three alarm mode.


The CS Series has a very minimal operating current and has a minimum flash rate of 1Hz regardless of input voltage.

The Ceiling Mount Series comes standard with the 4" mounting plate which incorporates the popular Super-Slide® feature that allows the installer to easily test for supervision. The product also features a locking mechanism which secures the product to the bracket without any screws showing.


The CS/CHS also features the patented Checkmate® - Instant Voltage Verification feature which allows the installer to check the voltage drop draw without removing the signal.

The CS Series appliances are ANSI/UL 464 and ANSI/UL 1971 listed for use with fire protective systems.

**Mounting Super-Slide®**

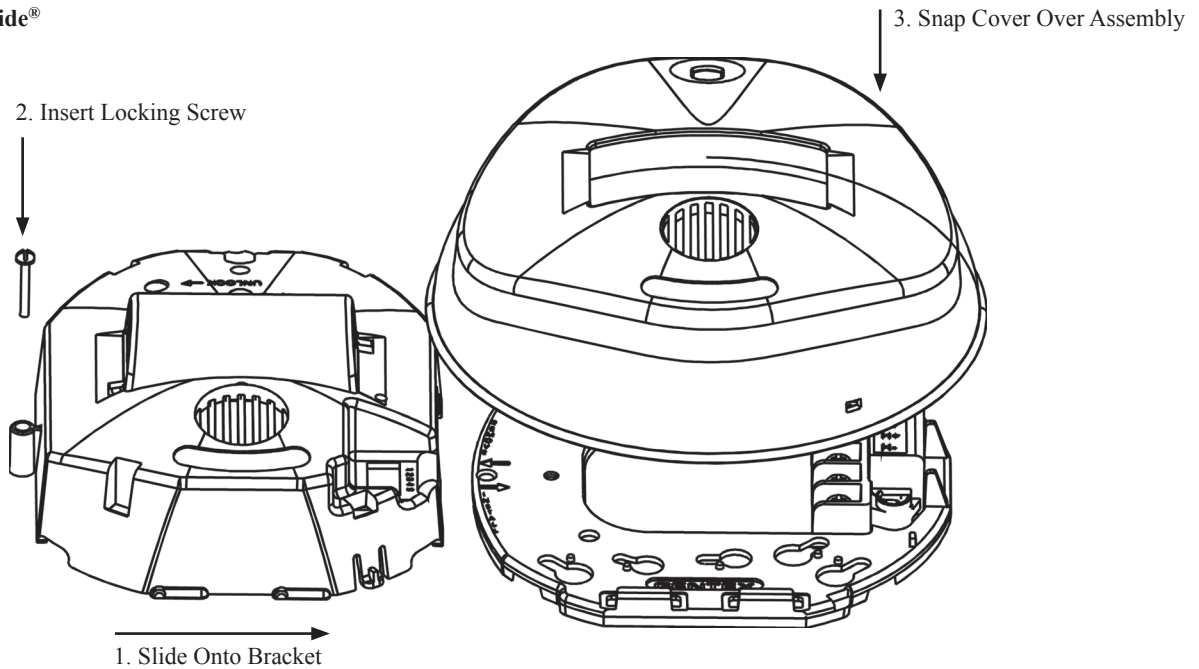


**Checkmate® Instant Voltage Verification**

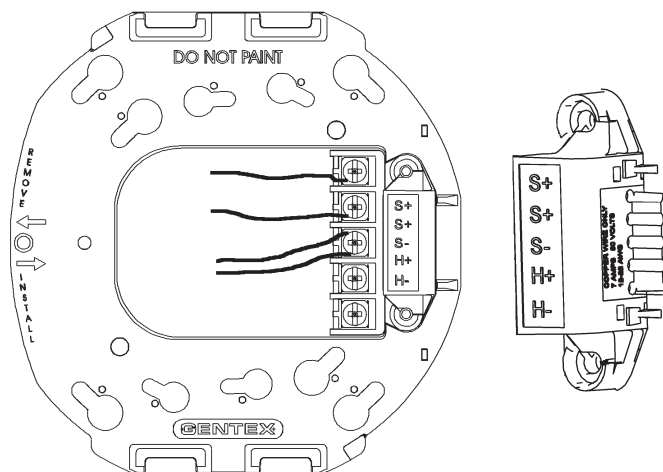

The access holes are provided in the back of the terminal block to allow the voltage to be measured directly without removing the device. Typically this would be done at the end of the line to confirm design criteria. Most measurements will be taken using the S+ and S- locations although access is provided to other locations. NOTICE: CARE SHOULD BE TAKEN TO NOT SHORT THE TEST PROBES.

**Switch Locations**

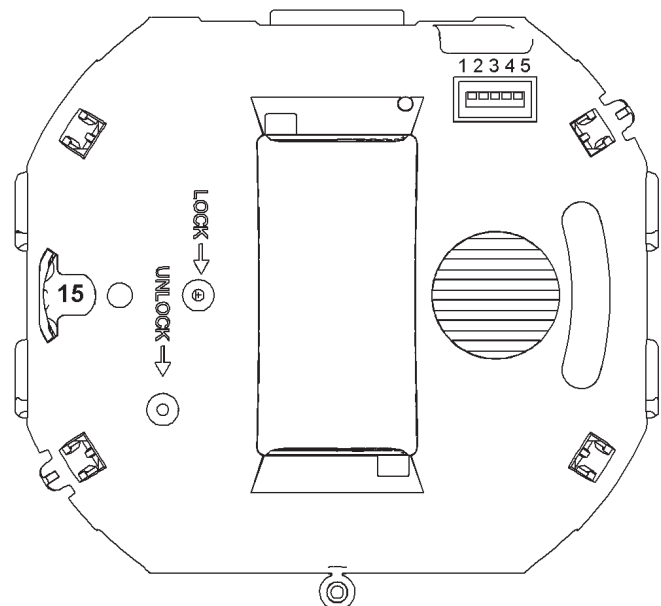

Switch positions 1 and 2 in the down position to select isolated horn and strobe power inputs. Switch 3 selects between temporal or non-temporal tone. Up is temporal. Switch 4 selects between mechanical or high frequency tone. Up is mechanical. Switch 5 selects between high or low dBA. Up is high dBA.

**CS Series 24 Volt Ceiling Mount Selectable Strobe**

Model Number	Part Number	Nominal Voltage	Candela
CS-24R	4890020	24 VDC	15, 30, 75, 95, 115, 150
CS-24W	4890021	24 VDC	15, 30, 75, 95, 115, 150
CS-24PR	4890022	24 VDC	15, 30, 75, 95, 115, 150
CS-24PW	4890023	24 VDC	15, 30, 75, 95, 115, 150

**CHS Series 24 Volt Ceiling Mount Selectable Horn/Strobe**

Model Number	Part Number	Nominal Voltage	Candela	Reverberant dBA @ 10 ft. per ANSI/UL 464	In Anechoic Room dBA @ 10 ft.
CHS-24R	4890040	24 VDC	15, 30, 75, 95, 115, 150	81-86	90
CHS-24W	4890041	24 VDC	15, 30, 75, 95, 115, 150	81-86	90
CHS-24PR	4890042	24 VDC	15, 30, 75, 95, 115, 150	81-86	90
CHS-24PW	4890043	24 VDC	15, 30, 75, 95, 115, 150	81-86	90

**Model Designations:**

C = Ceiling Mount      S = Strobe      HS = Horn/Strobe  
R = Red Faceplate      W = White Faceplate

All units are available in plain (no lettering).

**Plain units are non-returnable.**

**CS24 Product Strobe Current Ratings (mA)**

	Candela	15 cd	30 cd	75 cd	95 cd	115 cd	150 cd
24 VDC (16-33 Volts)	24 VDC	72 mA	101 mA	167 mA	200 mA	214 mA	286 mA
	UL Max <sup>1</sup>	120 mA	120 mA	200 mA	220 mA	290 mA	321 mA

**CHS24 Product Horn Decibel and Current Ratings (mA)**

Horn Mode	Minimum dBA @ 10 ft. per ANSI/UL 464 (HIGH)	Minimum dBA @ 10 ft. per ANSI/UL 464 (LOW)	Regulated 24 VDC Max. Operating @ High Setting (mA)
Temp 3 2400Hz	83	75	23
Temp 3 Mechanical	81	73*	22
Continuous 2400Hz	86	78	23
Continuous Mechanical	84	76	22

**NOTES:**

- The sound output for the temporal 3 tone is rated lower since the time the horn is off is averaged into the sound output rating. While the horn is producing a tone in the temporal 3 mode its sound pressure is the same as the continuous mode.
- For nominal and peak current across UL regulated voltage range for filtered DC power and unfiltered (FWR [Full Wave Rectified]) power, see installation manual.
- Potter does not recommend using a coded or pulsing signaling circuit with any of our strobe products.
- Operating the horn in this mode at this voltage will result in not meeting the minimum ANSI/UL 464 reverberant sound level required for public mode fire protection service. These settings are acceptable only for private mode fire alarm use. Use the high dBA setting for public mode application (not applicable when using the chime tone. The chime tone is always private mode).
- RMS current ratings are per UL average RMS method. UL max current rating is the maximum RMS current within the listed voltage range (16-33VDC for 24VDC units). For strobes the UL max current is usually at the minimum listed voltage (16VDC for 24VDC units). For audibles the max current is usually at the maximum listed voltage. For unfiltered FWR ratings, see installation manual.

### Architect & Engineering Specifications

The visible and audible/visible signal shall be Gentex model GCS or GCC or approved equal and shall be listed by Underwriters Laboratories Inc. per ANSI/UL 1971 for the GCS and ANSI/UL 464 for the GCC. The notification appliance shall also be listed with the California State Fire Marshal (CSFM).


The notification appliance (combination audible/visible units and audible units only) shall produce a peak sound output of 90dBA or greater as measured at 24VDC in an anechoic chamber. The signaling appliance shall also have the capability to silence the audible signal while leaving the visible signal energized with the use of a single pair of power wires. Additionally, the user shall be able to select either continuous or temporal tone output with the temporal signal having the ability to be synchronized.

The audible/visible and visible signaling appliance shall also maintain a minimum flash rate of 1Hz or up to 2Hz regardless of power input voltage. The appliance shall have an operating current of 72mA or less at 24VDC for the 15 candela strobe circuit.

The appliance shall be polarized to allow for electrical supervision of the system wiring. The unit shall be provided with a mounting bracket with terminals with barriers for input/output wiring and be able to mount to a single gang or double gang box or double workbox with the use of an adapter plate. The unit shall have an input voltage range of 16-33 volts with either direct current or full wave rectified power.

The appliance shall be capable of test supervision without disconnecting wires, verify voltage without removing unit and be capable of mounting to a surface back box.

### Conventional CS/CHS Series Wiring Diagrams

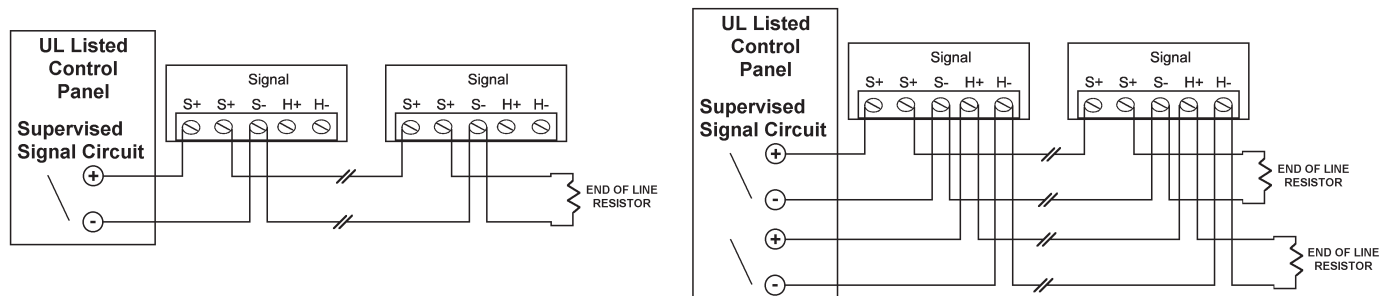

### NOTES:

- All strobes are designed to flash as specified with continuous applied voltage. Strobes should not be used on coded or pulsing signaling circuits. However, use of the Gentex AVSM control module or Gentex synchronization protocol is permitted to synchronize the strobe, horn and/or mute the horn.
- FOR SYNCHRONIZATION WIRING INFORMATION, REFERENCE AVSM CONTROL MODULE DATA SHEET (8830050) AND/OR AVSM CONTROL MODULE MANUAL FOR SYNCHRONIZATION MODULE WIRING DIAGRAMS. AVSM CONTROL MODULE DATA SHEET AND MANUAL CAN BE OBTAINED AT <http://www.pottersignal.com> OR CALL POTTER ELECTRIC AT 1-800-325-3936.**

## Features

- 24VDC units have field selectable candela options of 15, 30, 60, 75 & 110
- Super-Slide® Bracket - Ease of Supervision Testing
- Checkmate® - Instant Voltage Verification
- Synchronize strobe and/or horn with AVSM Control Module
- Prewire entire system, install mounting bracket, then install signals
- Documented lower installation and operating costs
- Switch selection for high or low dBA
- Switch for chime, whoop, mechanical and 2400Hz tone
- Tamperproof re-entrant style grill
- Switch for continuous or temporal 3 tone (not available on whoop tone)
- Silence audible while visual appliance will remain flashing (for use in accepted jurisdictions)
- Faceplate available in red or off-white



## Description

The S-24/HS-24 Series is a low profile strobe and horn/strobe combination that offers dependable audible and visual alarms and the absolute lowest current available. The S-24 & HS-24 Series 24VDC offers tamperproof field selectable candela options of 15, 30, 60, 75, and 110 candela. The Strobe and Horn/Strobe offers a continuous or sync temporal three in 2400Hz and mechanical tone, a chime and whoop tone. All tones are easy for the professional to change in the field by the use of switches. The S-24 & HS-24 Series has a minimal operating current and has a minimum flash rate of 1Hz regardless of input voltage.

This Series is shipped with a standard 4" metal mounting plate which incorporates the popular Super-Slide® feature that allows the installer to easily test for supervision. The product also features a locking mechanism which secures the product to the bracket without any screws showing.

The S-24/HS-24 also features the patented Checkmate® - Instant Voltage Verification feature which allows the installer to check the voltage drop draw and match it to the blueprint.

The S-24 & HS-24 Series appliances are ANSI/UL 464 and ANSI/UL 1971, listed for use with fire protective systems and are warranted for three years from date of purchase.

## Technical Specifications

Mounting Options	Single or Double gang, 4" square box, and AVBB surface mount back box
Terminals	Screw-Clamp Type
Wire Gauge	18 – 12 AWG
Operating Temp	32°F – 120°F (0° – 49°C)
Dimensions	Height – 5" Width – 4.5" Depth – 2.5"
Shipping Weight	1.05 lbs




TONE	SWITCH POSITION		
	3	4	5
Mechanical Temporal 3	ON	ON	ON
Mechanical Continuous	OFF	ON	ON
2400 Hz Temporal 3	ON	OFF	ON
2400 Hz Continuous	OFF	OFF	ON
Chime Temporal 3	ON	ON	OFF
Chime Continuous	OFF	ON	OFF
Whoop	ON	OFF	OFF
Whoop	OFF	OFF	OFF

**NOTE:**


- Switch Positions 1 The and 2 in the OFF position to select isolated horn and strobe power inputs
- Switch Position 6 ON = HIGH dBA
- Switch Position 6 OFF = LOW dBA

**Candela Selection**


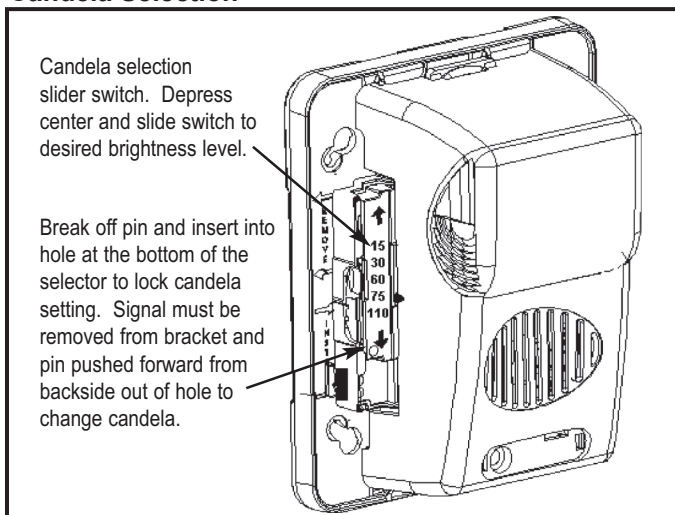


**Super Slide® Mounting Bracket**  
Allows the installer to pre-wire the system, test for system supervision, remove the signal head until occupancy, switch out signals without changing mounting brackets and has locking edge connector for snap-in-place installation.

**Switch Locations**

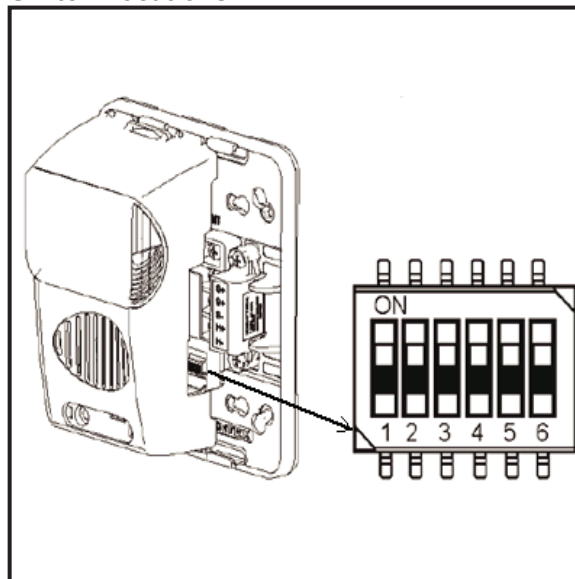

**Checkmate™ - Instant Voltage Verification**

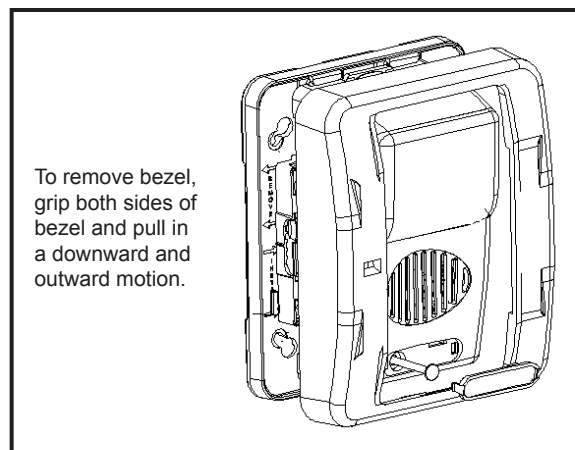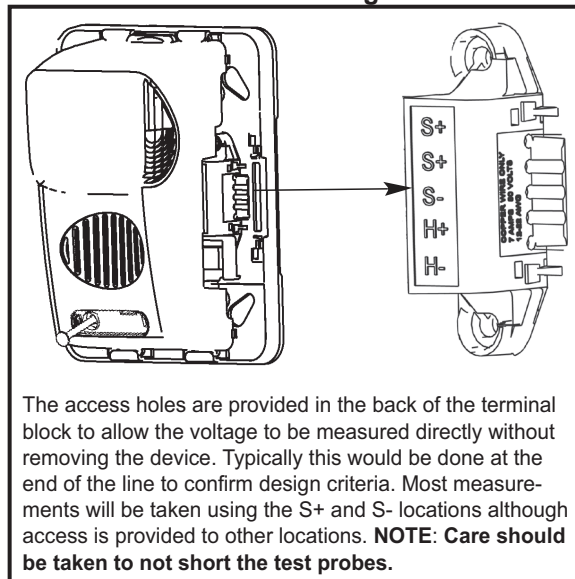



## S-24 24 VDC Selectable Candela, Low Profile Evacuation Strobe

Model Number	Part Number	Nominal Voltage	Candela (ANSI/UL 1971)
S-24WR	4890010	24 VDC	15, 30, 60, 75, 110
S-24WW	4890011	24 VDC	15, 30, 60, 75, 110

## HS-24 24 VDC Selectable Candela, Low Profile Evacuation Strobe

Model Number	Part Number	Nominal Voltage	Candela (ANSI/UL 1971)	Reverberant dBA at 10 ft, per ANSI/UL 464	In Anechoic Room at 10 ft
HS-24WR	4890030	24 VDC	15, 30, 60, 75, 110	62-82	100
HS-24WW	4890031	24 VDC	15, 30, 60, 75, 110	62-82	100

## S-24 & HS 24 Strobe Current Ratings

24 VDC (16 - 33 Volts)		
Candela	24 VDC	UL Max
15 cd	30 mA	42 mA
30 cd	35 mA	58 mA
60 cd	66 mA	97 mA
75 cd	80 mA	116 mA
110 cd	103 mA	161 mA

### Model Designations:

W = Wall mount

R = Red Faceplate

W=White Faceplate

All units are available in plain (no lettering)

Plain units are non-returnable.

“ALERT” bezel available for order.

“AGENT” bezel available for order.



## S-24 & HS-24 Horn Ratings

Horn Mode	Horn Decibel Levels		Horn Current Ratings
	Minimum SPL at 10 ft, per ANSI/UL 464 (HIGH)	Minimum SPL at 10 ft, per ANSI/UL 464 (LOW)	Regulated 24 VDC Max Operating @ High Setting (mA)
Temp 3 (2400 Hz)	78 dBA	71* dBA	28 mA
Temp 3 (Mechanical)	76 dBA	70* dBA	25 mA
Temp 3 (Chime)	70* dBA	66* dBA	15 mA
Continuous (2400 Hz)	81 dBA	74* dBA	28 mA
Continuous (Mechanical)	80 dBA	72* dBA	25 mA
Continuous (Chime)	70* dBA	66* dBA	15 mA
Whoop	82 dBA	69* dBA	56 mA

### NOTES:

- For nominal and peak current across ANSI/UL regulated voltage range for filtered DC power and unfiltered (FWR [Full Wave Rectified]) power see installation manual.
- Potter does not recommend using a coded or pulsing signaling circuit with any of our strobe products.
- The sound output for the temporal 3 tone is rated lower since the time the horn is off is averaged into the sound output rating. While the horn is producing a tone in the temporal 3 mode its sound pressure is the same as the continuous mode.
- \* Operating the horn in this mode at this voltage will result in not meeting the minimum ANSI/UL 464 reverberant sound level required for public mode fire protection service. These settings are acceptable only for private mode fire alarm use. Use the high dBA setting for public mode application (not applicable when using the chime tone. The chime tone is always private mode).

## S-24 & HS-24 Series Wiring Diagram

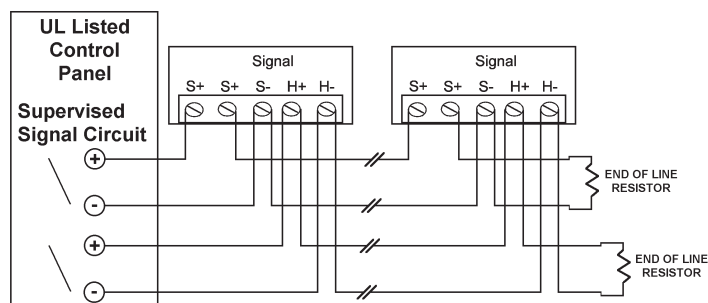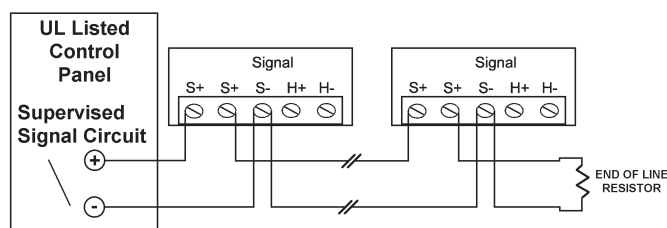

### Notes:

All strobes are designed to flash as specified with continuous applied voltage. Strobes should not be used on coded or pulsing signaling circuits. However, use of the Potter AVSM control module or Gentex synchronization protocol is permitted to synchronize the strobe, horn, and/or mute the horn.

• FOR SYNCHRONIZATION WIRING INFORMATION, REFERENCE AVSM CONTROL MODULE DATA SHEET (8830050) AND/OR AVSM CONTROL MODULE MANUAL FOR SYNCHRONIZATION MODULE WIRING DIAGRAMS. AVSM CONTROL MODULE DATA SHEET AND MANUAL CAN BE OBTAINED AT <http://pottersignal.com> OR CALL POTTER ELECTRIC TECHNICAL SUPPORT AT 1-866-956-1211

## Architect & Engineering Specifications

The audible and/or visible signal shall be Potter S-24 strobe and Potter HS-24 horn/strobe Series or approved equal and shall be listed by Underwriters Laboratories, Inc. per ANSI/UL 1971 and/or ANSI/UL 464. The notification appliance shall also be listed with Factory Mutual Listing Service (FM) and the California State Fire Marshal (CSFM).

The notification appliance (combination audible/visible) shall produce a peak sound output of 100dBA or greater at 24VDC as measured in an anechoic chamber. The signaling appliance shall also have the capability to silence the audible signal while leaving the visible signal energized with the use of a single pair of power wires. Additionally, the user shall be able to select either continuous or temporal tone output with the temporal signal having the ability to be synchronized.

Unit shall be capable of being installed so that any unauthorized attempt to change the candela setting will result in a trouble signal at the fire alarm control panel.

The audible/visible and visible signaling appliance shall also maintain a minimum flash rate of 1Hz or up to 2Hz regardless of power input voltage. The strobe appliance shall have an operating current of 42mA or less at 24VDC for the 15Cd strobe circuit.

The appliance shall be polarized to allow for electrical supervision of the system wiring. The unit shall be provided with a mounting bracket with terminals and barriers for input/output wiring and be able to mount to a single gang or double gang box or double workbox without the use of an adapter plate. The unit shall have an input voltage range of 16-33 volts with either direct current or full wave rectified power for 24VDC models.

The appliance shall be capable of testing supervision without disconnecting wires, verify voltage without removing unit and be capable of mounting to a surface back box.

## Features

- Fixed 75cd strobe
- Includes the WPBB surface-mount (standard) or WPLPBB Low Profile (LP) enclosure
- WPBB/LP made of clear Lexan® - provides maximum visibility and reliability, allowing full 75cd output
- Super-Slide® Bracket – Ease of supervision testing
- Checkmate® - Instant voltage verification
- Synchronize strobe and/or horn with AVSM module
- Switch selection for high/low dBA
- Switch for chime, whoop, mechanical, and 2400Hz tone
- Input terminals accept 18 to 12 AWG
- Switch for continuous or temporal 3 tone (not available on whoop)
- Tamperproof re-entrant grill
- 5 year warranty



LP Version

Standard



## Application

The S/HS-WP Series Outdoor Signals are wall mount, low profile strobes and horn/strobes that offer dependable audible and visual alarms for warning and emergency notification in outdoor locations.

## Description

The S/HS-WP Series Outdoor Signals are 24VDC strobes and horn/strobes equipped with a fixed 75 candela strobe.

This series of outdoor signals are available in two different versions. The standard version includes a surface-mount back box (WPBB) to install directly on a wall. The Low Profile (LP) versions includes a low profile back box (WPLPBB) designed to be installed on a flush-mounted electrical box. The weatherproof enclosure is made of clear Lexan® which provides maximum visibility and reliability for effective visible signaling, allowing full 75cd output.

The S/HS-WP series strobe has a minimal operating current and a minimum flash rate of 1Hz regardless of input voltage. The strobe is synchronized using Gentex sync. protocol or the AVSM Sync. Module.

The S/HS-WP Series is equipped with a universal 4" mounting bracket which incorporates the popular Super-Slide® feature that allows the installer to easily pre-wire the system and test for supervision. The product also features a locking mechanism that secures the signal to the bracket without showing any screws and the Checkmate® - Instant Voltage Verification Feature which allows the installer to check the voltage drop, current draw, and match against the blue print.

## Product Listings

- ANSI/UL 464 and 1638
- Complies with American with Disabilities Act (ADA)
- Complies with IBC / IFC / IRC

## Technical Specifications

Operating Voltage	Nominal 24VDC (16-33VDC)
Operating Temperature	-31°F - 150°F (-35° - 66°C)
Dimensions	LP Version - 5.75" H x 4.75" W x 3.25" D Standard - 5.75" H x 4.75" W x 4.18"D
Wiring Connections	Terminals accept 18 - 12 AWG
Mounting	LP Version – Single gang, double gang, or 4" square back box Standard Version - Surface mount back box included
Shipping Weight	2.05 lbs.

S-24-WP, 75 Candela, Outdoor Strobe Includes Standard or LP Enclosure			
Model Number	Stock Number	Body Color	WP Enclosure
S-24WR-WP	4890050	Red	Standard
S-24WW-WP	4890051	Off-White	Standard
S-24PWR-WP	4890052	Red-Plain	Standard
S-24PWW-WP	4890053	Off-White-Plain	Standard
SLP-24WR-WP	4890054	Red	Low Profile
SLP-24WW-WP	4890055	Off-White	Low Profile
SLP-24PWR-WP	4890056	Red-Plain	Low Profile
SLP-24PWW-WP	4890057	Off-White-Plain	Low Profile

## Model Designations

“W” = Wall Mount

“R” = Red Face Plate

“W”=Off - White Face Plate

“P”= Plain (Note: Plain units are non-returnable)

“LP”= Low Profile (WPLPBB Enclosure)

Strobe Current Ratings	
Candela	75 cd
24 VDC	112 mA
UL Max	170 mA

**NOTE:** For unfiltered FWR ratings, see installation manual.

HS-24-WP Series, 75 Candela, Outdoor Horn /Strobe Includes Standard or LP Enclosure					
Model Number	Stock Number	Body Color	Reverberant dBA at 10', per ANSI/UL 464	In Anechoic Room dBA at 10'	WP Enclosure
HS-24WR-WP	4890060	Red	70-82	100	Standard
HS-24WW-WP	4890061	Off-White	70-82	100	Standard
HS-24PWR-WP	4890062	Red-Plain	70-82	100	Standard
HS-24PWW-WP	4890063	Off-White-Plain	70-82	100	Standard
HSLP-24WR	4890064	Red	70-82	100	Low Profile
HSLP-24WW	4890065	Off-White	70-82	100	Low Profile
HSLP-24PWR	4890066	Red-Plain	70-82	100	Low Profile
HSLP-24PWW	4890067	Off-White-Plain	70-82	100	Low Profile

Horn Decibel and Current Ratings			
Horn Setting	Minimum dBA at 10', Per UL 464 (HIGH)	Minimum dBA at 10', Per UL 464 (LOW)	Regulated 24VDC Max. Operating Current, at High Setting (mA)
Temporal 3 2400Hz	78	71*	28
Temporal 3 Mechanical	76	70*	25
Temporal 3 Chime	70*	66*	15
Continuous 2400Hz	81	74*	28
Continuous Mechanical	80	72*	25
Continuous Chime	70*	66*	15
Whoop	82	69*	56

\*Operating the horn in this mode at this voltage will result in not meeting the minimum ANSI/UL 464 reverberant sound level required for public mode fire protection service. These settings are acceptable only for private mode fire alarm use. Use the high dBA setting for public mode application (not applicable when using the chime tone. The chime tone is always private mode).

## Tone Switch Locations


Tone	Switch Position		
	3	4	5
Mechanical Temporal 3	ON	ON	ON
Mechanical - Continuous	OFF	ON	ON
2400Hz - Temporal 3	ON	OFF	ON
2400Hz - Continuous	OFF	OFF	ON
Chime - Temporal 3	ON	ON	OFF
Chime - Continuous	OFF	ON	OFF
Whoop	ON	OFF	OFF
Whoop	OFF	OFF	OFF

### NOTES:

- Switch Positions 1 and 2 in the OFF position to select isolated horn and strobe power inputs
- Switch Position 6 ON = HIGH dBA
- Switch Position 6 OFF = LOW dBA

### Super Slide® Mounting Bracket

Allows the installer to pre-wire the system, test for system supervision, remove the signal head until occupancy, switch out signals without changing mounting brackets and has locking edge connector for snap-in-place installation.

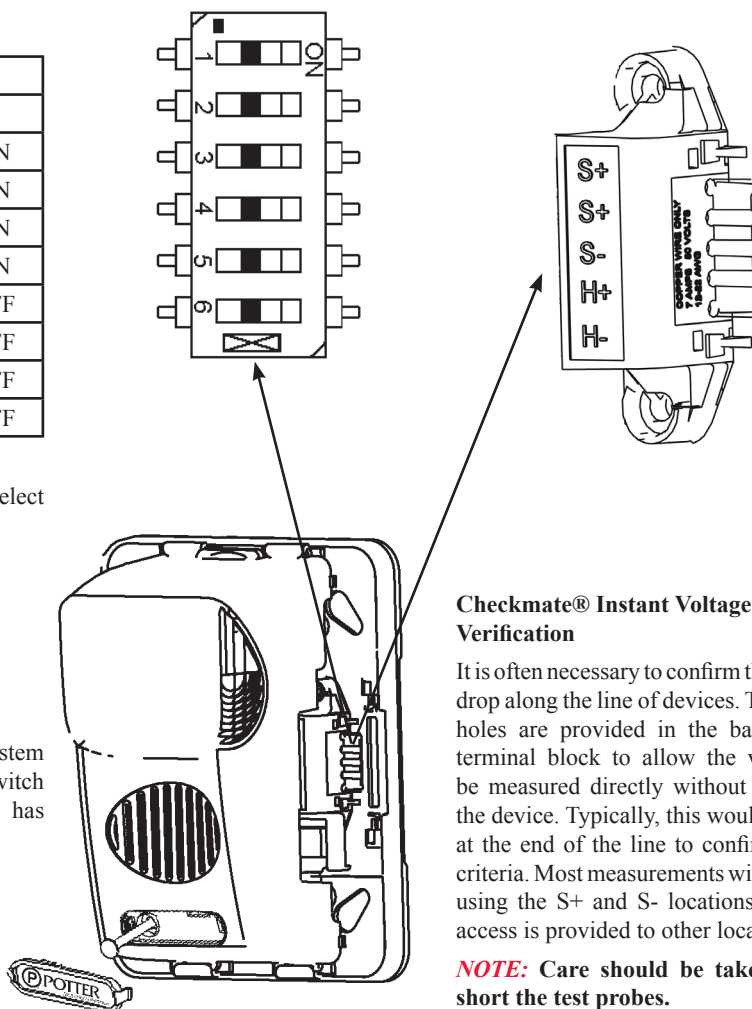

### Checkmate® Instant Voltage Verification


It is often necessary to confirm the voltage drop along the line of devices. The access holes are provided in the back of the terminal block to allow the voltage to be measured directly without removing the device. Typically, this would be done at the end of the line to confirm design criteria. Most measurements will be taken using the S+ and S- locations although access is provided to other locations.

**NOTE:** Care should be taken to not short the test probes.

## Mounting Outdoor Enclosure


Super Slide® Mounting Plate:

Mounts to WPBB Outdoor Enclosure


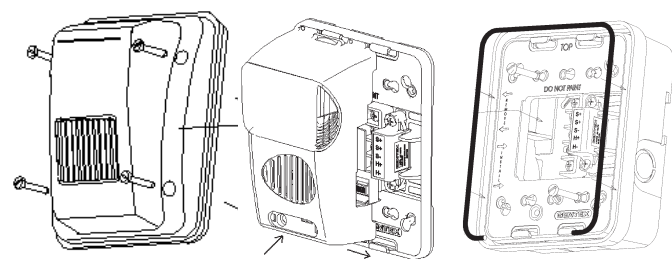


Super Slide® Mounting Plate:

Mounts to WLPBB Outdoor Enclosure

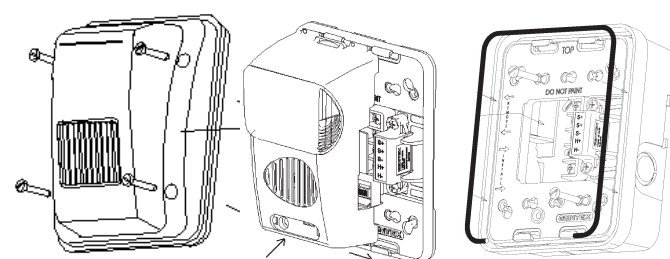

## Wiring Diagrams

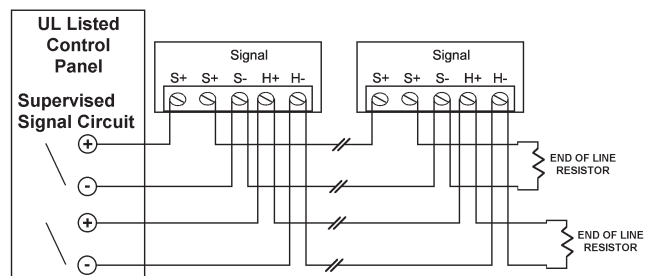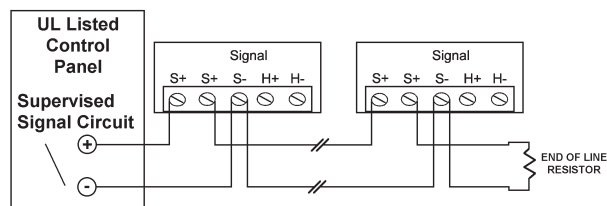

### NOTES:

- All strobes are designed to flash as specified with continuous applied voltage. Strobes should not be used on coded or pulsing signaling circuits. However, use of the AVSM control module or Gentex synchronization protocol is permitted to synchronize the strobe, horn and/or mute the horn.
- FOR SYNCHRONIZATION WIRING INFORMATION, REFERENCE AVSM CONTROL MODULE DATA SHEET (8830050) AND/OR AVSM CONTROL MODULE MANUAL FOR SYNCHRONIZATION MODULE WIRING DIAGRAMS. AVSM CONTROL MODULE DATA SHEET AND MANUAL CAN BE OBTAINED AT <http://pottersignal.com> OR CALL POTTER ELECTRIC AT 1-800-325-3936.**

## Architect and Engineering Specifications

The audible and/or visible signal shall be Potter S/HS-WP Outdoor Series or approved equal and shall be listed by Underwriters Laboratories Inc. per ANSI/UL 1638 and/or ANSI/UL 464.

The notification appliance (combination audible/visible) shall produce a peak sound output of 100dBA or greater at as measured in an anechoic chamber. The signaling appliance shall also have the capability to silence the audible signal while leaving the visible signal energized with the use of a single pair of power wires. Additionally, the user shall be able to select either continuous or temporal tone output with the temporal signal having the ability to be synchronized.

The audible/visible and visible signaling appliance shall also maintain a minimum flash rate of 1Hz or up to 2 Hz regardless of power input voltage. The appliance shall have an operating current of 112mA or less for the 75Cd strobe circuit. The appliance shall also be capable of meeting the candela requirements of the ADA (75cd).

The appliance shall be polarized to allow for electrical supervision of the system wiring. The unit shall be provided with a mounting bracket with terminals with barriers for input/output wiring and be able to mount to a single gang or double gang box or double workbox without the use of an adapter plate. The unit shall have an input voltage range of 16-33 volts with either direct current or full wave rectified power for 24 volt models.

The appliance shall be capable of testing supervision without disconnecting wires. Also the appliance shall be capable of mounting to a surface back box. The unit shall also be able to verify voltage at the unit without removing unit.

The appliance has extended temperature range of -31° to 150°F (-35° to 66° C). The appliance shall satisfy virtually all outdoor and severe environment applications. The WPBB enclosure includes a gasket that must be inserted between the box and mounting bracket. There are drain holes in the back box to allow for drainage, the seal on the WPBB enclosure is not water tight. The WPLPBB enclosure includes a weather seal for mounting to wall and intended for use with universal electrical box. To allow for drainage, bottom edge of enclosure is not water tight.