



1023 39TH AVE SE, PUYALLUP, WA 98374

# SCOPE OF WORK

EXISTING EST3 SYSTEM MONITORS VESDA AND PROVIDES DETECTION AND PRE-ACTION RELEASING FOR TENANT SPACES. EXISTING NOTIFIER SYSTEM PROVIDES ELEVATOR RECALL, DETECTION AND NOTIFICATION AND CENTRAL STATION MONITORING. THIS SCOPE OF WORK TO COVER WORK ASSOCIATED WITH THE EST3 SYSTEM. CHANGES IN NOTIFICATION UNDER SEPARATE PERMIT.

THIS SCOPE OF WORK INCLUDES:

- ADDITION AND RELOCATION OF VESDA ASPIRATION SMOKE DETECTION TO SUPPORT ADDED SERVER ROOM IN SECOND FLOOR DATA ROOM. EXISTING VESDA PIPE NETWORK TO BE REVISED AND RECONNECTED AS NEEDED TO MAINTAIN COVERAGE ON EITHER SIDE OF NEW DEMISING WALLS.

NEW PRE-ACTION RELEASING ZONE ADDED TO COVER NEW SERVER ROOM. VESDA TO SERVE AS REQUIRED DETECTION. A NEW RELEASING MODULE IS PROVIDED TO SUPPORT RELEASING.

DESIGN CRITERIA, APPLICABLE STANDARDS AND GUIDANCE:

- NFPA 72, 2019 EDITION
- 2021 INTERNATIONAL BUILDING CODES
- 2023 NATIONAL ELECTRICAL CODE

OCCUPANCY/USE CLASSIFICATIONS:

- B - BUSINESS
- S-2 - STORAGE

DOCUMENTATION AVAILABLE TO CONVERGENT TECHNOLOGIES

- LEVEL 2 FLOOR PLAN DATED 12/27/24
- 3D COORDINATION MODEL ACCESS

# GENERAL NOTES

THE FOLLOWING NOTES ARE INTENDED TO BE GENERAL IN NATURE AND ARE NOT SPECIFIC TO EACH PROJECT. THESE NOTES ARE TO BE FOLLOWED WHERE APPLICABLE TO INDIVIDUAL PROJECTS AND SHOULD NOT BE TAKEN AS SCOPE OR DIRECTION WHERE THEY CONFLICT WITH INFORMATION FOUND ELSEWHERE IN THIS DRAWING SET.

1. ALL WIRE AND CONDUIT SHALL BE INSTALLED IN ACCORDANCE WITH PLANS AND SPECIFICATIONS AND SHALL MEET ALL APPLICABLE CODES.
2. ALL WIRE AND CABLE SHALL BE RATED FOR FIRE ALARM USE PER THE LATEST REVISIONS OF THE NATIONAL ELECTRICAL CODE (NEC) SECTION 760. THIS IS A POWER LIMITED FIRE ALARM SYSTEM. ALL CABLE MUST BE MARKED FPL, FPLP, FPLR or CI. FURTHER NEC, REQUIRES ALL WIRE BE RATED. FOR THE ENVIRONMENT FOR WHICH IT IS INSTALLED. ANY REFERENCES TO WIRE DESIGNATIONS ASSUME ELECTRICAL CONTRACTOR WILL SUBSTITUTE APPROPRIATE WIRE TO MEET CODE.
3. ALL CONDUCTORS SHALL TEST FREE OF GROUNDS AND SHORTS BEFORE MAKING ANY CONNECTION TO THE FIRE ALARM CONTROL PANEL.
4. TO RETAIN WARRANTY, THE FIRE ALARM EQUIPMENT MUST BE POWERED UP UNDER THE SUPERVISION OF A QUALIFIED MANUFACTURERS TECHNICIAN.
5. THE INSTALLING ELECTRICAL CONTRACTOR SHALL COORDINATE ALL FIELD CHANGES WITH THE FIRE ALARM CONTRACTOR. THIS INCLUDES CHANGES IN DEVICES, WIRE, CONDUIT RUNS AND OPERATION OF THE SYSTEM. FIRE ALARM CONTRACTOR SHALL NOT BE HELD RESPONSIBLE FOR UNDOCUMENTED CHANGES OR THE RESULTS OF THOSE CHANGES.
6. FIRE ALARM NOTIFICATION DEVICES SHALL BE AUDIBLE THROUGHOUT THE SPACE AND SHALL HAVE A SOUND PRESSURE LEVEL NOT LESS THAN 15db ABOVE THE AVERAGE AMBIENT SOUND LEVEL OR 5db ABOVE THE MAXIMUM SOUND LEVEL, MEASURED AT 5'0" ABOVE THE FINISHED FLOOR.
7. MAIN BUILDING FIRE ALARM & SUPPRESSION SYSTEMS SHALL BE CLASS "B" WIRING. PRE-ACTION & DELUGE ALARM SYSTEMS SHALL BE CLASS "A" WIRING. CLASS "A" APPLICATIONS SHALL MAINTAIN A MINIMUM SEPARATION OF 48 INCHES HORIZONTALLY & 12 INCHES VERTICALLY BETWEEN OUTGOING AND RETURN CIRCUITS.
8. ALL PULL STATIONS AND NOTIFICATION DEVICES SHALL BE MOUNTED AT HEIGHTS SPECIFIED PER NFPA 72 AND ADA REQUIREMENTS.
9. ALL DETECTOR SPACING SHALL BE PER NFPA 72 & LOCAL CODES.
10. ELECTRICAL CONTRACTOR SHALL COORDINATE ALL ROUGH-IN LOCATIONS WITH OTHER TRADES.
11. FIRE ALARM DEVICES SHALL BE SECURELY FASTENED TO WALLS OR CEILINGS.
12. SMOKE DETECTORS SHALL NOT BE LOCATED CLOSER THAN 36" TO ANY AIR REGISTER OR DIFFUSER.
13. HEAT DETECTORS SHALL NOT BE LOCATED CLOSER THAN 36" TO ANY AIR REGISTER OR DIFFUSER.
14. PER NFPA 72, CHAPTER 17: SMOKE DETECTORS INSTALLED PRIOR TO FINAL CLEAN MUST BE CLEANED AND VERIFIED TO BE OPERATING IN ACCORDANCE WITH THE LISTED SENSITIVITY, OR THEY SHALL BE REPLACED PRIOR TO THE FINAL COMMISSIONING OF THE SYSTEM. CONVERTING BEARS NO RESPONSIBILITY FOR LABOR OR MATERIAL ASSOCIATED WITH MAINTAINING SENSITIVITY TESTING OR REPLACEMENT OF SMOKE DETECTORS INSTALLED PRIOR TO FINAL CLEANING.
15. HEAT DETECTORS SHALL NOT BE LOCATED CLOSER THAN 36" TO ANY HEAT GENERATING DEVICE (FUSES, BOILERS, WATER HEATERS, ETC.) IN MECHANICAL ROOMS.
16. HEAT DETECTORS SHALL NOT BE LOCATED CLOSER THAN 18" TO ANY PART OF ANY LIGHT FIXTURE.
17. HEAT DETECTORS SHALL BE MOUNTED WITHIN 24" OF A SPRINKLER HEAD WHEN USED FOR ELEVATOR SHUNT TRIP IN ELEVATOR MACHINE ROOMS & SHAFTS.
18. INITIATING AND SIGNALING CIRCUITS MAY BE RUN IN SAME CONDUIT.
19. ALL CONDUCTORS SHALL BE LABELED BY ZONE OR SLC LOOP NUMBER.

CEILING MOUNTED SMOKE/HEAT DETECTOR TYP.

CEILING

3' (MIN)

A/C SUPPLY DIFFUSER

FLUORESCENT LIGHT

NOTE: DIMENSIONS SHOWN ARE TO THE CLOSEST EDGE OF THE DETECTOR

3'

12" MAX

AUDIO/VISUAL & VISUAL ONLY DEVICES

5'

80" MIN. TO BOTTOM OF LENS OR 96" MAX. TO TOP OF LENS

72" AFF

FIRE ALARM CONTROL PANEL

FIRE ALARM REMOTE ANNUNCIATOR

MANUAL PULL STATION

60" AFF

48" MAX (ADA)  
42" MIN/54" MAX (NFPA)

FINISHED WALL

FINISHED FLOOR

\* DEVICES SHOWN DEPICT DEVICE TYPES ONLY.



**DEVICE ADDRESS KEY**

The symbol is a hexagon containing the letter 'S'. It is connected by lines to the following labels:

- FIRE ALARM PANEL #
- DEVICE ADDRESS
- DATA CARD LOGICAL ADDRESS
- ISOLATED BRANCH LETTER (A-Z)

**DETAIL BUBBLE KEY**

The symbol is a circle containing the letter 'X'. It is connected by lines to the following labels:

- DETAIL NUMBER
- DETAIL LOCATION (- = SAME SHEET)

**NOTIFICATION DEVICE CIRCUIT KEY**

The symbol is a square containing a bell icon. It is connected by lines to the following labels:

- SPEAKER CIRCUIT
- CIRCUIT NUMBER
- CIRCUIT NUMBER POWER SUPPLY SUPPLY
- LOGICAL DEVICE NUMBER

**DRAWING SHEET INDEX KEY**

The symbol is a circle containing the letter 'X'. It is connected by lines to the following labels:

- FIRE ALARM
- LEVEL/FLOOR/AREA

**Legend for Drawing Sheet Index Key:**

- 0 = COVER SHEET
- 1 = FLOOR PLANS
- 2 = RISER DIAGRAMS
- 3 = FIRE PANEL DETAILS
- 4 = DEVICE DETAILS
- 5 = CALCULATIONS
- 6 = 2-WAY COMMUNICATION

**DESIGNER OF RECORD**

**JACOB USHER**  
**NICET III**  
**FIRE ALARM SYSTEMS**

CERTIFICATION #140150  
EXPIRE DATE: 11-01-2020  
FOR VERIFICATION,  
PLEASE VISIT: [WWW.NICET.ORG](http://WWW.NICET.ORG)




<b>DRAWN BY:</b>	JACOB U.
<b>PROJECT DESIGNER:</b>	JACOB U.
<b>PROJECT MANAGER:</b>	CHARITY P.
<b>JOB NUMBER:</b>	J00253728
<b>SCALE:</b>	AS SHOWN
<b>DATE:</b>	02-16-2025

CENTERIS (SHDC)  
2ND FLOOR REVISIONS  
1023 39TH AVE SE  
PUYALLUP, WA 98374

COVER SHEET

FIRE ALARM SYSTEM

DRAWING: FA-0-1

<p><b>City of Puyallup</b> <b>Fire</b> <b>REVIEWED FOR COMPLIANCE</b></p> <p>D.Drake 03/11/2025 3:01:14 PM</p> 	<p><b>THE APPROVED CONSTRUCTION PLANS AND ALL ENGINEERING MUST BE POSTED ON THE JOB AT ALL INSPECTIONS IN A VISIBLE AND READILY ACCESSIBLE LOCATION.</b></p>	
	<p>Approval of submitted plans is not an approval of omissions or oversight by this office or noncompliance with any applicable regulations of local government. The contractor is responsible for making sure that the building complies with all applicable building codes and regulations of the local government.</p>	



IF DRAWING IS NOT 30" x 42" IT IS A SCALED COPY

## INITIATING WIRING

### SIGNATURE LOOP WIRING LIMITATIONS:

SIGNATURE DUAL DRIVER CONTROLLER MODULES SUPPORTS UP TO 250 INTELLIGENT SIGNATURE DETECTORS AND 250 INTELLIGENT SIGNATURE MODULES  
WIRE LENGTH LIMITATIONS:

#### NON-TWISTED, NON-SHIELDED WIRE


16AWG - 20pF/FT & 4.02 OHMS/1000 FEET  
16AWG - 20pF/FT & 6.38 OHMS/1000 FEET  
DETECTORS ONLY 16AWG - 125 DETECTORS - 9.275'  
MODULES ONLY 16AWG - 125 MODULES - 7.921'  
DETECTORS AND MODULES 16AWG - 125 OF EACH - 3.608'  
DETECTORS ONLY 16AWG - 125 DETECTORS - 5.839'  
MODULES ONLY 16AWG - 125 MODULES - 4.986'  
DETECTORS AND MODULES 16AWG - 125 OF EACH - 2.271'

#### TWISTED PAIR, NON-SHIELDED WIRE

16AWG - 36pF/FT & 4.02 OHMS/1000 FEET  
16AWG - 36pF/FT & 6.38 OHMS/1000 FEET  
DETECTORS ONLY 16AWG - 125 DETECTORS - 9.275'  
MODULES ONLY 16AWG - 125 MODULES - 7.921'  
DETECTORS AND MODULES 16AWG - 125 OF EACH - 3.608'  
DETECTORS ONLY 16AWG - 125 DETECTORS - 5.839'  
MODULES ONLY 16AWG - 125 MODULES - 4.986'  
DETECTORS AND MODULES 16AWG - 125 OF EACH - 2.271'

#### TWISTED PAIR, SHIELDED WIRE

16AWG - 82pF/FT & 4.02 OHMS/1000 FEET  
16AWG - 82pF/FT & 6.38 OHMS/1000 FEET  
DETECTORS ONLY 16AWG - 125 DETECTORS - 6.098'  
MODULES ONLY 16AWG - 125 MODULES - 6.098'  
DETECTORS AND MODULES 16AWG - 125 OF EACH - 3.608'  
DETECTORS ONLY 16AWG - 125 DETECTORS - 5.839'  
MODULES ONLY 16AWG - 125 MODULES - 4.986'  
DETECTORS AND MODULES 16AWG - 125 OF EACH - 2.271'

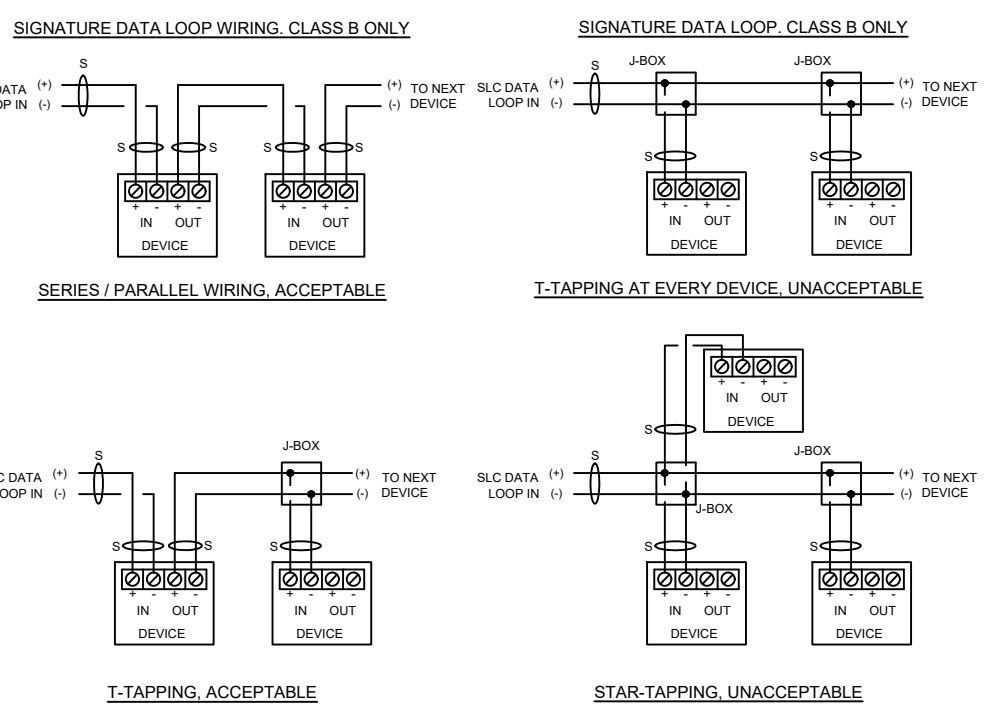

## NOTIFICATION WIRING

### SPEAKER CIRCUIT WIRING LIMITATIONS:

#### WIRE LENGTH LIMITATIONS:

THE MAXIMUM ALLOWABLE WIRE LENGTH IS THE FARTHEST DISTANCE THAT A SPEAKER CIRCUIT CAN EXTEND FROM THE AMPLIFIER TO THE LAST SPEAKER WITHOUT LOSING 0.5 dB OF SIGNAL. THE FOLLOWING ARE MAXIMUM DISTANCE BASED ON APPROXIMATE WATTAGE OF THE SPEAKER CIRCUIT. CIRCUIT LENGTHS ARE FURTHER BASED ON ORIGINATION OF A CIRCUIT FROM EITHER THE AMPLIFIER OR FROM THE CC1 MODULE.

#### ALLOWABLE LENGTH AT 25 Vrms, WITH 0.5 dB LOSS

16AWG - 20 WATTS - 231'  
16AWG - 30 WATTS - 154'  
16AWG - 40 WATTS - 116'

#### ALLOWABLE LENGTH AT 70 Vrms, WITH 0.5 dB LOSS

16AWG - 20 WATTS - 1815'  
16AWG - 30 WATTS - 1210'  
16AWG - 40 WATTS - 907'

### NAC CIRCUIT (HORN, STROBE) WIRING LIMITATIONS:


FOR 24VDC SYSTEMS, MINIMUM DEVICE OPERATING VOLTAGE IS 16VDC. VOLTAGE DROP CALCULATIONS ARE BASED ON 16VDC AND POWER SUPPLY DE-RATED AND ON DEPLETED BATTERY BACKUP PER THE PRESCRIBED PERIOD OF STANDBY AND ALARM TIME. THE VOLTAGE DROP WILL LIMIT THE CIRCUITS CAPACITY IN ALMOST ALL CASES AND CURRENT CANNOT BE USED AS THE ONLY CIRCUIT WIRING LIMITATION. ALTERATIONS TO CIRCUIT LENGTH FROM THOSE CALCULATED MAY CAUSE CIRCUITS TO BE OUT OF THE TOLERANCES GRANTED BY THE FIRE ALARM CODE. CHANGES TO DEVICE LOCATION OR CIRCUIT LENGTH SHALL BE COMMUNICATED TO THE CONVERGINT TEAM.

NAC CIRCUIT WIRING AND ROUTING MUST NOT EXCEED WHAT IS SHOWN ON THE DESIGN DRAWINGS AND CALCULATIONS. A VOLTAGE DROP TEST IS PART OF MOST FIRE FINALS AND IS REQUIRED BY NFPA. A FAILED FIRE FINAL MAY REQUIRE REWIRING OF THE FAILED CIRCUITS.


WIRE RESISTANCE RATINGS USED FOR CALCULATIONS:  
16AWG - 13 OHMS PER 1000'  
16AWG - 8 OHMS PER 1000'  
14AWG - 5.2 OHMS PER 1000'

EXAMPLE: 1.0 AMP CIRCUIT LOAD USING #14 WIRE = 409 FEET MAXIMUM.

## CLASS A OR B NOTIFICATION WIRING

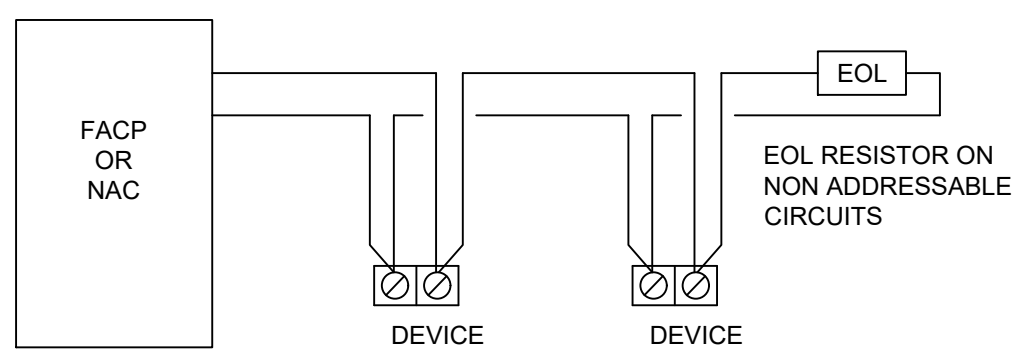

CLASS B, STYLE 4 WIRING

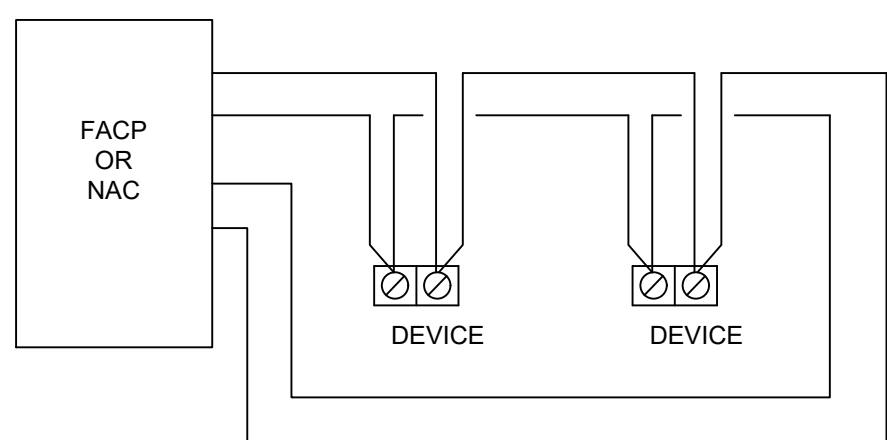

CLASS A, STYLE 6 WIRING

### SEPARATION OF CLASS A CIRCUITS - INSTALLATION EXCEPTIONS:

CLASS A OUTGOING AND RETURN CONDUCTORS, EXITING AND RETURNING TO THE CONTROL PANEL, ARE TO BE ROUTED SEPARATELY. THE MINIMUM RECOMMENDED SEPARATION IS 1 FT. VERTICALLY AND 4 FT. HORIZONTALLY. THE FOLLOWING EXCEPTIONS STILL DO NOT ELIMINATE THE 2ND PAIR OF WIRES. THEY ALLOW YOU TO USE A SINGLE RACEWAY AND ELIMINATE THE SEPARATION FOR THESE CONDITIONS.

1. WHEN MAXIMUM CABLE, ENCLOSURE, OR RACEWAY IS LESS THAN 10 FEET. NO LIMIT TO NUMBER OF DEVICES.
2. UNLIMITED CONDUIT OR RACEWAY DROP TO AN INDIVIDUAL DEVICE.
3. UNLIMITED CONDUIT OR RACEWAY DROP TO A ROOM NOT EXCEEDING 1000 SQ. FT. NO LIMIT TO THE NUMBER OF DEVICES.

## RECORD DRAWINGS

### AS-BUILT / RECORD DRAWING REQUIREMENTS:

THE FOLLOWING INFORMATION SHOULD BE RECORDED ON A SEPARATE SET OF DRAWINGS FOR EACH PROJECT:

1. ANY CHANGES IN THE LOCATION OF ANY ASSOCIATED FIRE ALARM OR INTERFACE EQUIPMENT, CONTROL PANELS, ANNUNCIATORS, DETECTORS, CONTROL, RELAYS, INPUT AND OUTPUT MODULES, TERMINAL CABINETS, ETC.
2. ANY CHANGES TO CIRCUIT WIRING. THIS INCLUDES DELETION OR ADDITIONAL WIRING RUNS, ANY RE-ROUTING OF CIRCUIT WIRING, ANY ADDITIONS OR DELETIONS TO THE NUMBER, LOCATION, AND ORDER OF DEVICE WIRING ON A CIRCUIT.
3. ADDRESSES AND/OR LABELS FOR ALL ADDRESSABLE DEVICES.
4. CANDELA SETTINGS OF ALL VISUAL NOTIFICATION DEVICES.
5. WATTAGE TAP SETTINGS OF ALL SPEAKER NOTIFICATION DEVICES.

ANY CHANGES SHALL BE DISCUSSED WITH CONVERGINT PROJECT MANAGER TO ENSURE SYSTEM AND CODE PARAMETERS ARE MET. CONVERGINT SHALL NOT BE HELD ACCOUNTABLE FOR CHANGES MADE WITHOUT APPROVAL.

THIS INFORMATION SHALL BE NEAT AND LEGIBLE WHEN PRESENTED TO THE TECHNICIAN AT THE CONCLUSION OF THE PROJECT. PLEASE NOTE CONTACT INFORMATION ON DRAWINGS FOR INDIVIDUALS WITH FAMILIARITY OF INSTALLATION IN THE EVENT QUESTIONS ARISE DURING THE CLOSEOUT PROCESS.

## NETWORK WIRING

### DATA NETWORK SPECIFICATIONS:

MAXIMUM ALLOWED VALUES BETWEEN ANY THREE NODES OF A NETWORK.

- RESISTANCE: 90 OHMS
- CAPACITANCE: 0.3 MICROFARADS
- DISTANCE: 5,000 FEET

THE FOLLOWING TABLE LISTS THE MAXIMUM CUMULATIVE CAPACITANCE FOR THE ENTIRE DATA NETWORK GIVEN VARIOUS WIRE SIZES AND TRANSMISSION RATES. MAXIMUM CUMULATIVE CAPACITANCE IS THE TOTAL CAPACITANCE OF ALL INSTALLED COPPER WIRE USED IN THE DATA NETWORK.

#### MAXIMUM CUMULATIVE CAPACITANCE IN MICROFARADS

18AWG - 1.4 @ 38.4K BAUD/2.8 @ 19.2K BAUD  
16AWG - 1.8 @ 38.4K BAUD/2.1 @ 19.2K BAUD  
14AWG - 2.1 @ 38.4K BAUD/4.2 @ 19.2K BAUD

#### CABLE PROPERTIES

DATA AND AUDIO NETWORKS IN AN EST3 SYSTEM DO NOT REQUIRE THE USE OF SHIELDED CABLE, AND NETWORKS DESIGNED WITH TWISTED-PAIR CAN BE ABOUT TWICE AS LONG AS THOSE DESIGNED WITH SHIELDED CABLE. THE MAXIMUM LENGTH OF A DATA NETWORK VARIES WITH THE PROPERTIES OF THE WIRE USED. WIRE MANUFACTURERS TYPICALLY PROVIDE SPECIFICATIONS FOR WIRE RESISTANCE AND CAPACITANCE.

## SURVIVABILITY WIRING

### PATHWAY SURVIVABILITY LEVELS

PATHWAY SURVIVABILITY MUST MEET THE REQUIREMENTS OF NFPA 72, SECTION 12.4 FOR THE CORRESPONDING LEVEL OF SURVIVABILITY REQUIRED BY NFPA 72, CHAPTER 24. THE FOLLOWING IS A CONDENSED DESCRIPTION OF THE SURVIVABILITY LEVELS.

**PATHWAY SURVIVABILITY LEVEL 0.** LEVEL 0 PATHWAY SHALL NOT BE REQUIRED TO HAVE ANY PROVISIONS FOR PATHWAY SURVIVABILITY.

**PATHWAY SURVIVABILITY LEVEL 1.** PATHWAY INSTALLED IN FULLY SPRINKLED BUILDING MEETING THE REQUIREMENTS OF NFPA 13 WITH ANY INTERCONNECTING CONDUCTORS, CABLES OR OTHER PHYSICAL PATHWAYS INSTALLED IN METAL RACEWAYS.

**PATHWAY SURVIVABILITY LEVEL 2.** PATHWAY SURVIVABILITY LEVEL 2 SHALL CONSIST OF ONE OR MORE OF THE FOLLOWING:

- (1) 2-HOUR FIRE-RATED CIRCUIT INTEGRITY (CI) CABLE
- (2) 2-HOUR FIRE-RATED CABLE SYSTEM [ELECTRICAL CIRCUIT PROTECTIVE SYSTEM(S)]
- (3) 2-HOUR FIRE RATED ENCLOSURE OR PROTECTED AREA
- (4) 2-HOUR PERFORMANCE ALTERNATIVES APPROVED BY THE AUTHORITY HAVING JURISDICTION

**PATHWAY SURVIVABILITY LEVEL 3.** SAME AS LEVEL 2 WITH ADDITION OF BEING IN A FULLY SPRINKLED BUILDING MEETING THE REQUIREMENTS OF NFPA 13.

#### CIRCUITS REQUIRING SURVIVABILITY BY NFPA 72

THE FOLLOWING CIRCUIT TYPES, WHEN USED ARE REQUIRED TO BE SURVIVABLE AS DESCRIBED BELOW. REFER TO NFPA 72, CHAPTER 24 FOR ADDITIONAL INFORMATION REGARDING CIRCUIT TYPES. THIS IS NOT A COMPLETE LIST AND IS MEANT TO SUPPLEMENT ANY NOTES PROVIDED ELSEWHERE IN OUR DRAWING PACKAGE. PLEASE CONTACT CONVERGINT ENGINEERING DEPARTMENT WITH ANY QUESTIONS ON THE APPLICATION OF SURVIVABILITY.

- IN-BUILDING FIRE EMERGENCY VOICE/ALARM COMMUNICATIONS SHALL BE SURVIVABLE BASED ON ONE OF TWO CATEGORIES (24.3.6.4)
  - FOR SYSTEMS EMPLOYING RELOCATION OR PARTIAL EVACUATION, A LEVEL 2 OR 3 PATHWAY SURVIVABILITY SHALL BE REQUIRED (24.3.6.4.1).
  - FOR SYSTEMS THAT DO NOT EMPLOY RELOCATION OR PARTIAL EVACUATION, A LEVEL 0, LEVEL 1, LEVEL 2 OR LEVEL 3 PATHWAY SURVIVABILITY SHALL BE REQUIRED (24.3.6.4.2).
- TWO-WAY IN-BUILDING WIRED EMERGENCY COMMUNICATIONS SYSTEMS SHALL HAVE A PATHWAY SURVIVABILITY OF LEVEL 2 OR LEVEL 3 (24.3.6.7). THIS APPLIES TO FIREMAN'S PHONE SYSTEMS, STAIRWELL RE-ENTRY INTERCOM AND ELEVATOR LOBBY TWO-WAY AS REQUIRED BY INTERNATIONAL BUILDING CODE (IBC), SECTIONS, 403 AND 1009.8.
- TWO-WAY RADIO COMMUNICATIONS ENHANCEMENT SYSTEMS (DAS) SHALL COMPLY WITH 24.3.6.8.1 THROUGH 24.3.6.8.4. DAS IS NOT A COMPONENT OF THE FIRE ALARM DESIGN AND IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY.
- AREA OF REFUGE EMERGENCY COMMUNICATIONS SYSTEMS SHALL HAVE A PATHWAY SURVIVABILITY OF LEVEL 2 OR LEVEL 3 (24.3.6.9.1).
- CIRCUITS INTENDED TO TRANSMIT OFF-PREMISES SHALL HAVE A PATHWAY SURVIVABILITY OF LEVEL 0, LEVEL 1, LEVEL 2 OR LEVEL 3 (24.3.6.9.2).

FOR SMOKE CONTROL SPECIFIC SURVIVABILITY REQUIREMENTS, REFER TO THE SMOKE CONTROL SECTION OF OUR NOTES. UPON REQUEST, CONVERGINT WILL PROVIDE EQUIVALENT SUBSTITUTIONS FOR ANY SPECIFIED CABLE. ANY CABLE SUBSTITUTED MUST HAVE EQUAL TO OR BETTER PROPERTIES TO THE CABLE SPECIFIED IN OUR WIRE LEGEND.

## SMOKE CONTROL

AS A FIRE ALARM VENDOR, CONVERGINT TECHNOLOGIES HAS REVIEWED AND PROVIDED A DRAWING PACKAGE THAT REFLECTS THE REQUIRED INTERFACES TO THIRD PARTY EQUIPMENT AND SYSTEMS. CONVERGINT IS NOT THE DESIGNER OF RECORD FOR THE SMOKE CONTROL SYSTEM AND DEFERS TO THE REGISTERED FIRE PROTECTION ENGINEER FOR THIS SPECIFIC PROJECT AS IT RELATES TO THE FIRE ALARMSMOKE CONTROL INITIATION AND CONTROL DESIGN PARAMETERS. ANY PROVIDED SMOKE CONTROL NARRATIVE(S) OR REPORTS HAVE BEEN INCORPORATED INTO OUR DESIGN APPROACH UNLESS INFORMED OTHERWISE. ADDITIONALLY, WE HAVE REVIEWED THE REQUIREMENTS OF 909.12 IN ITS ENTIRETY AS IT RELATES TO THE FIRE ALARM DESIGN AND INCORPORATED THE NECESSARY ELEMENTS. THE INSTALLER OF THIS SYSTEM IS ALSO REQUIRED TO MEET THE APPLICABLE REQUIREMENTS.

WIRING ASSOCIATED WITH SMOKE CONTROL MUST MEET THE REQUIREMENTS OF THE AMENDED CODE FOR THIS PROJECT. THIS VARIES FROM JURISDICTION TO JURISDICTION. AS SUCH, THESE NOTES ARE INTENDED TO COVER THE GENERAL NATURE OF THIS WIRING. IN ADDITION TO THE SURVIVABILITY REQUIREMENTS LISTED BELOW, ALL WIRE REGARDLESS OF VOLTAGE SHALL BE FULLY ENCLOSED IN CONTINUOUS RACEWAY AS INDICATED IN IBC, 909.12.2.

- ANY WIRE ASSOCIATED WITH THE CONTROL OF ANY ASPECT OF SMOKE CONTROL SHALL HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN TWO HOURS. THIS INCLUDES THE ADDRESSABLE DATA (SLO) CIRCUIT(S) USED TO CONNECT ADDRESSABLE RELAYS AND MONITOR MODULES.
- THE CONTROL PORTION OF ANY SMOKE CONTROL COMPONENT THAT FAILS TO THE SMOKE CONTROL STATE, GENERALLY ISN'T REQUIRED TO BE TWO HOUR RATED. ANY REQUIRED PROOFING PORTION OF THESE INTERFACES SHALL HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN TWO HOURS.
- THE INITIATION PORTION OF SMOKE CONTROL, GENERALLY ISN'T REQUIRED TO BE TWO HOUR RATED UNLESS SUPERCEDED BY PROJECT OR LOCAL REQUIREMENTS. HOWEVER CERTAIN JURISDICTIONS DO REQUIRE THESE ELEMENTS TO BE ENCLOSED IN METAL RACEWAY. REFER TO LOCAL AMENDMENTS FOR SPECIFIC REQUIREMENTS.

FOR WIRING METHODS, PLEASE REFER TO THE SURVIVABILITY WIRING SECTION OF OUR NOTES. LEVEL 2 AND LEVEL 3 WIRING GENERALLY MEETS THE REQUIREMENTS OF THE INTERNATIONAL BUILDING CODE, CHAPTER 909.

# SEQUENCE OF OPERATIONS

	ACTIVATION OF LOCAL ALARM SIGNAL AT FACP (LCD DISPLAY & AUDIBLE INDICATION)	ACTIVATION OF LOCAL SUPERVISORY SIGNAL AT FACP (LCD DISPLAY & AUDIBLE INDICATION)	ACTIVATION OF LOCAL TROUBLE SIGNAL AT FACP (LCD DISPLAY & AUDIBLE INDICATION)	ACTIVATION OF LOCAL ALARM SIGNAL AT ANNUNCIATOR (LCD DISPLAY & AUDIBLE INDICATION)	ACTIVATION OF LOCAL SUPERVISORY SIGNAL AT ANNUNCIATOR (LCD DISPLAY & AUDIBLE INDICATION)	ACTIVATION OF LOCAL TROUBLE SIGNAL AT ANNUNCIATOR (LCD DISPLAY & AUDIBLE INDICATION)	ACTIVATE ALARM OUTPUT TO BUILDING FACP	ACTIVATE SUPERVISORY OUTPUT TO BUILDING FACP	ACTIVATE TROUBLE OUTPUT TO BUILDING FACP	ACTIVATE AUDIBLE & VISIBLE DEVICES VIA INTERFACE WITH BUILDING FACP	GENERAL ALARM SIGNAL TO ACCESS/SECURITY SYSTEM	PRE-ACTION SOLENOID ACTIVATION	CLOSE ALL FIRE/SMOKE DAMPERS
SMOKE DETECTOR	X			X			X			X	X		X
VESDA DETECTOR - URGENT FAULT			X			X		X					
VESDA DETECTOR - ACTION		X			X			X					
VESDA DETECTOR - ALERT		X			X			X					
VESDA DETECTOR - FIRE 1	X			X			X			X	X	X	X
VESDA DETECTOR - FIRE 2	X			X			X			X	X	X	X
MANUAL PULL STATION	X			X			X			X	X		X
GENERAL TROUBLE CONDITION			X			X		X					
GENERAL SUPERVISORY CONDITION		X			X			X					
PRE-ACTION WATERFLOW/ALARM SWITCH	X			X			X			X	X		X
PRE-ACTION TAMPER SWITCH		X			X			X					
PRE-ACTION LOW AIR SWITCH		X			X			X					
PRE-ACTION RELEASE CIRCUIT DISCONNECT SWITCH		X			X			X					
FACP - LOSS OF PRIMARY POWER			X			X		X					

## POWER REQUIREMENTS

EACH MAIN FIRE ALARM PANEL REQUIRES (1) 120VAC, 20AMP DEDICATED CIRCUIT.

EACH NAC BOOSTER PANEL REQUIRES (1) 120VAC, 15AMP DEDICATED CIRCUIT.

IN BUILDINGS EMPLOYING EMERGENCY STANDBY POWER SYSTEMS, THE FIRE ALARM SHALL BE SUPPLIED WITH EMERGENCY POWER. THIS IS REQUIRED IN HIGH-RISE AND SMOKE CONTROL APPLICATIONS. ALL OTHER APPLICATIONS ARE SUBJECT TO LOCAL BUILDING AND ELECTRICAL CODES.


WHERE THE FIRE ALARM SYSTEM IS CONNECTED TO EMERGENCY POWER, THE FIRE ALARM SYSTEM MONITORS THE GENERATOR FOR RUNNING, FUEL LOW AND TROUBLE STATES.

FOR ADDITIONAL DETAILS, REFER TO NFPA 72, CHAPTER 10.

convergent

450 Shattuck Avenue South, Renton, Washington 98057  
Phone: 425-272-2250 Fax: 425-251-0949

This document and the information/depictions contained/shown is the exclusive property of Convergent Technologies LLC and shall be handled as proprietary and confidential information and must be returned upon request. This document cannot be reproduced by any means without the written authorization of Convergent Technologies LLC.

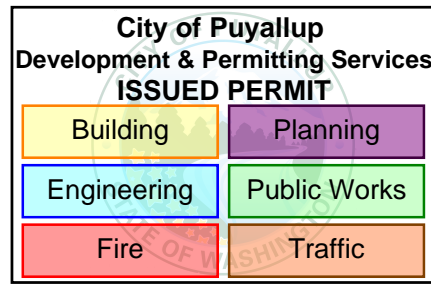



## NOTES

FIRE ALARM SYSTEM


DRAWING:  
FA-0-2





 **SECOND FLOOR - EAST FIRE ALARM PLAN**



0 4' 8' 16'



SCALE: 1/8"=1'-0"

DRAWING: FA-1-2E

This document and the information/depictions contained/shown is the exclusive property of Convergent Technologies LLC and shall be handled as proprietary and confidential information and must be returned upon request. This document cannot be reproduced by any means without the written authorization of Convergent Technologies LLC.

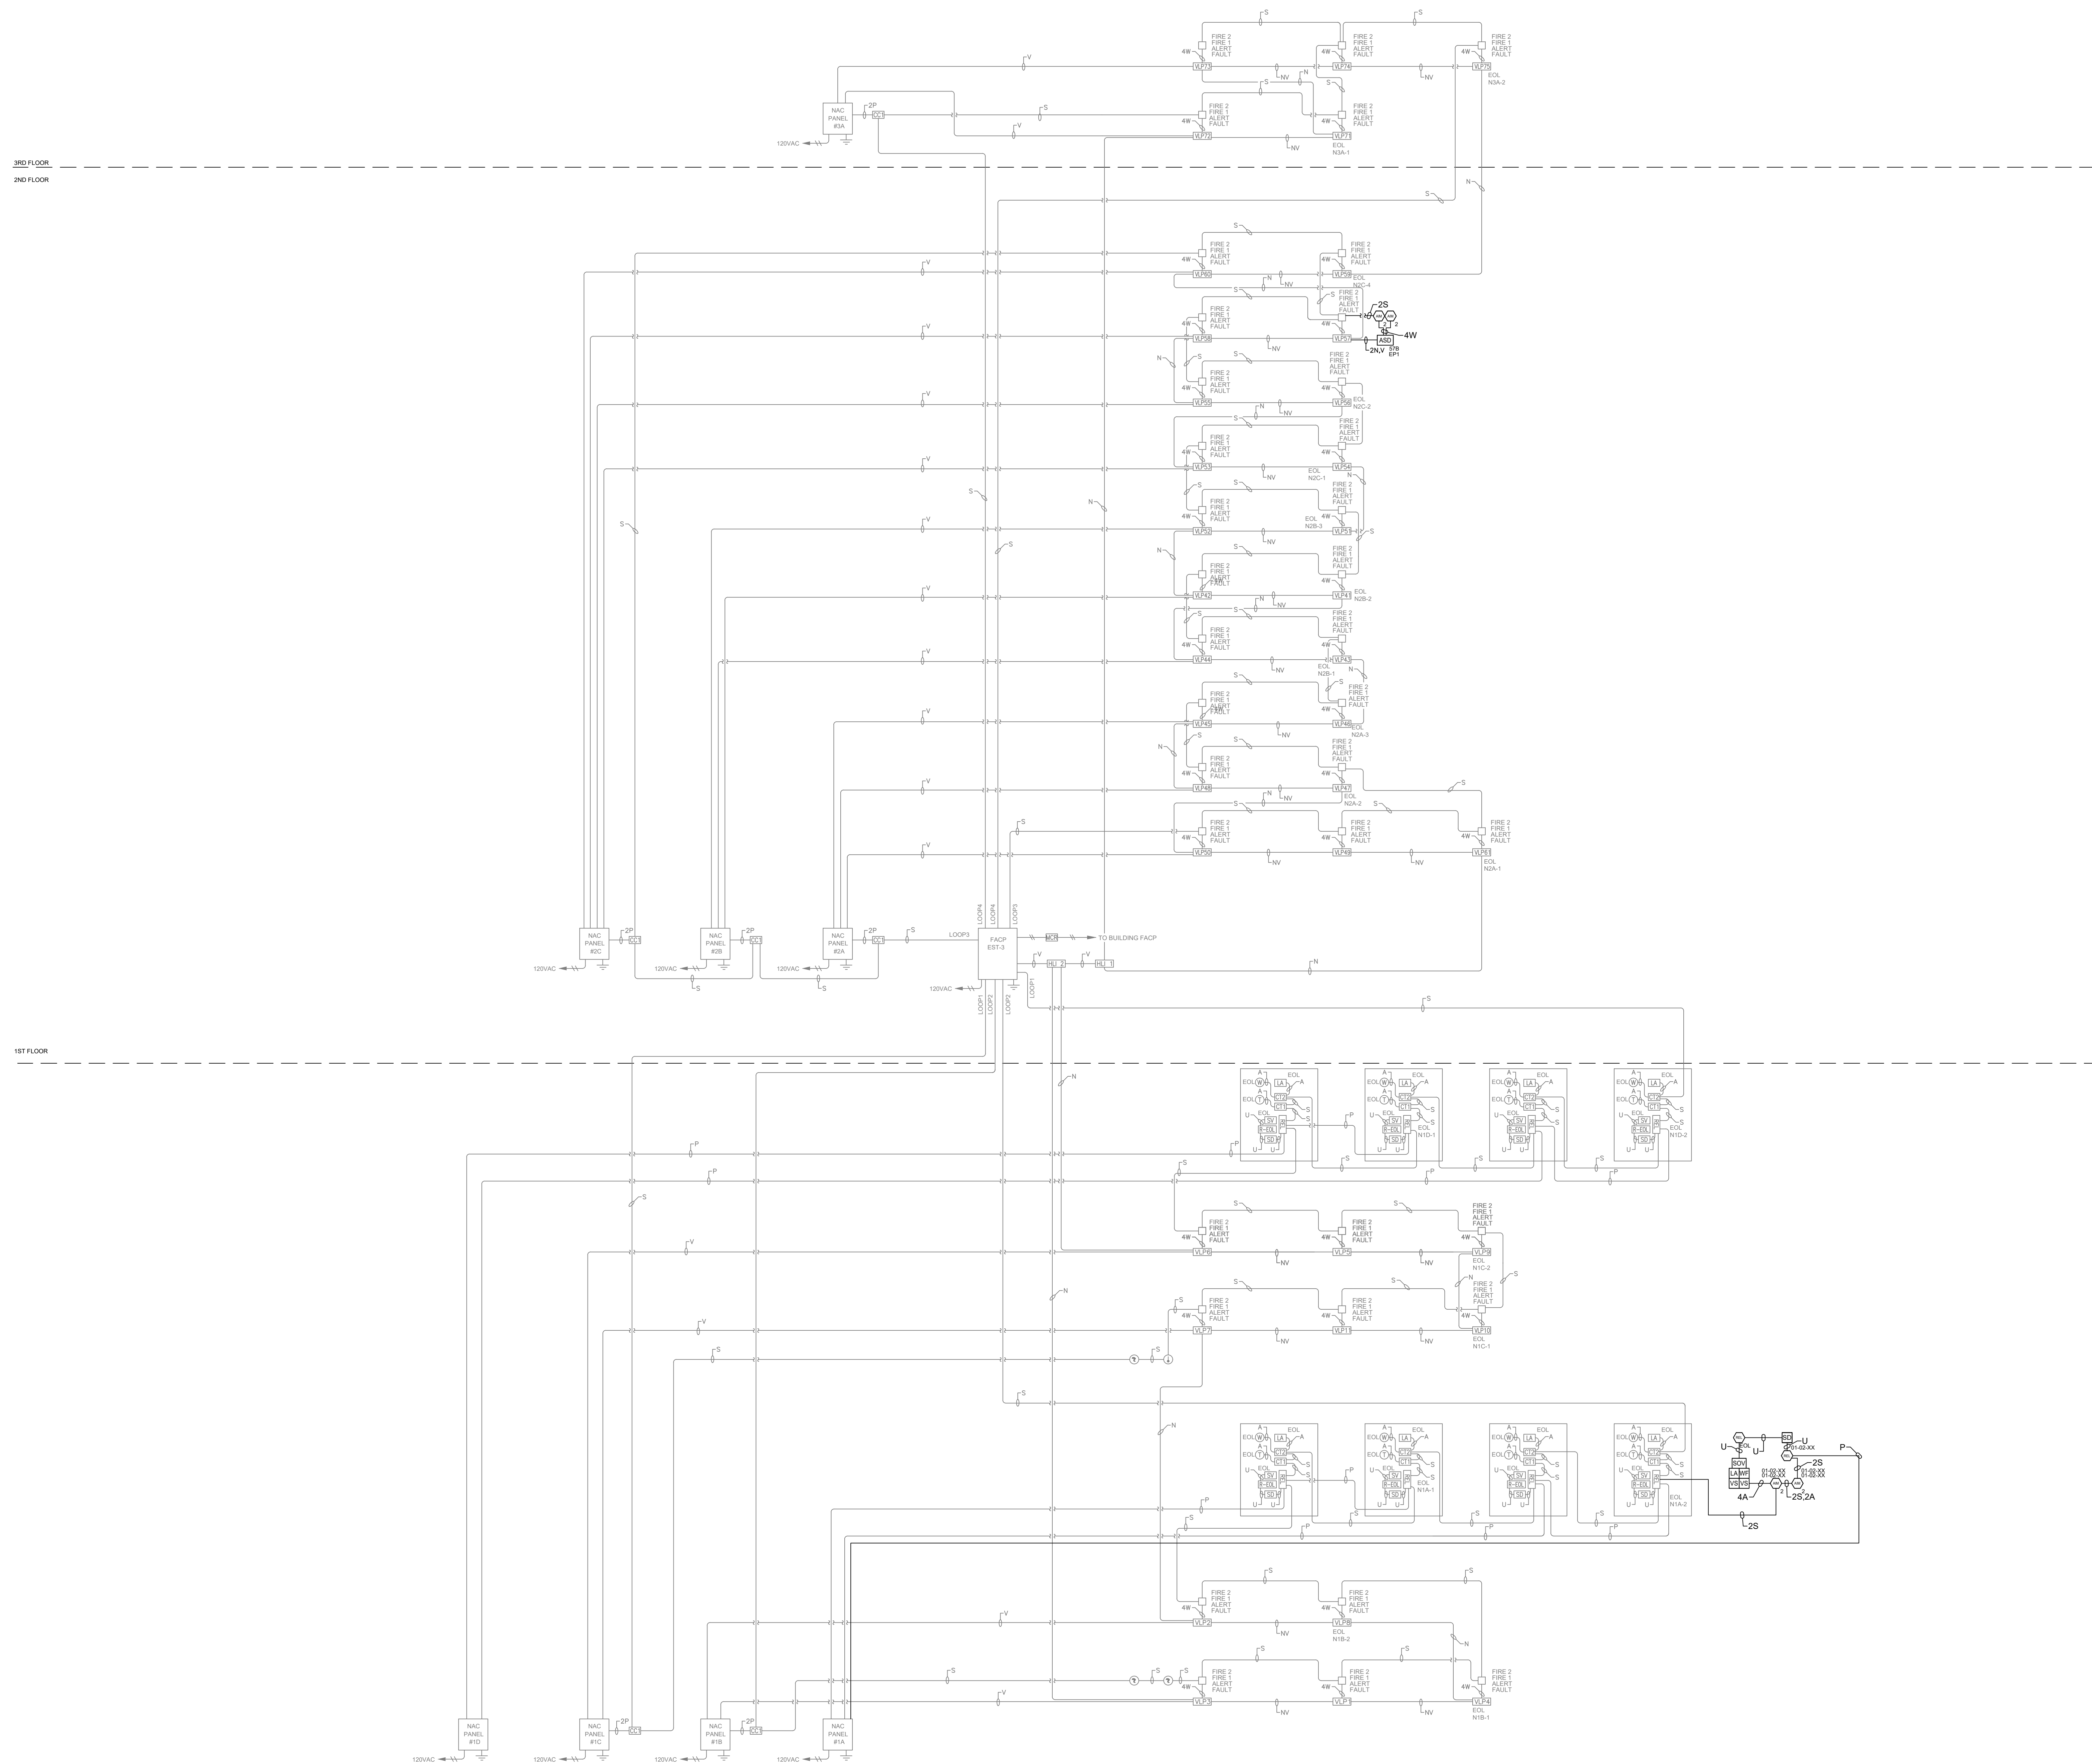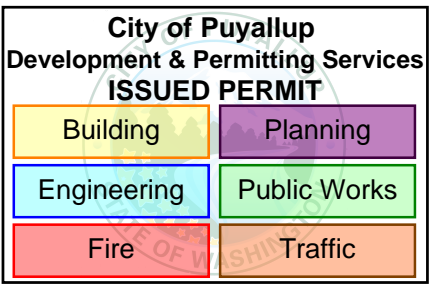[illegible]

<b>DRAWN BY:</b>		JACOB U.
<b>PROJECT DESIGNER:</b>		JACOB U.
<b>PROJECT MANAGER:</b>		CHARITY P.
<b>JOB NUMBER:</b>		J00253728
<b>SCALE:</b>	AS SHOWN	<b>DATE:</b> 02-16-2025

CENTERIS (SHDC)  
2ND FLOOR REVISIONS  
1023 39TH AVE SE  
PUYALLUP, WA 98374


## TYPICAL RISER

### FIRE ALARM SYSTEM

FA-2-1



This document and the information/depictions contained/shown is the exclusive property of Convergent Technologies LLC and shall be handled as proprietary and confidential information and must be returned upon request. This document cannot be reproduced by any means without the written authorization of Convergent Technologies LLC.

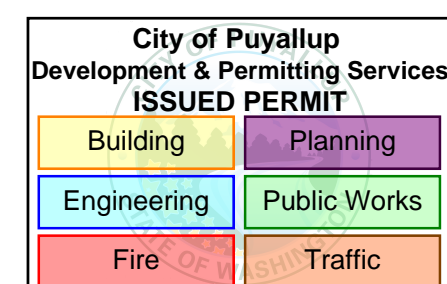[illegible]

DRAWN BY:		JACOB U.
PROJECT DESIGNER:		JACOB U.
PROJECT MANAGER:		CHARITY P.
JOB NUMBER:		J00253728
SCALE:	AS SHOWN	DATE: 02-14-2025

CENTERIS (SHDC)  
2ND FLOOR REVISIONS  
1023 39TH AVE SE  
PUYALLUP, WA 98374

## DEVICE DETAILS


### FIRE ALARM SYSTEM

FA-4-1



IF DRAWING IS NOT 30" x 42" IT IS A SCALED COPY

BPS6A NAC 2C - Battery Calculation								
POWER SUPPLY DESIGNATOR		NAC	POWER SUPPLY PREFIX		2C	STANDBY DURATION REQUIRED (HRS)		4
PANEL LOCATION		DATA ROOM 223				ALARM RING TIME REQUIRED (MIN)		5
AREA SERVED		2ND FLOOR SOUTHEAST VESDA				SPARE CAPACITY (%)		25%
POWER SUPPLY BASE LOAD/AUXILIARY POWER OUTPUT								
PART #	DESCRIPTION	QTY.	SUPV. CURRENT (mA)		ALARM CURRENT (mA)		TOTAL	
			EACH	TOTAL	EACH	TOTAL		
BPS6A	REMOTE BOOSTER POWER SUPPLY	1	70	70	270	270		
BPS AUX	BPS CIRCUITS SET TO AUX OUTPUT	4	35	140	35	140		
NAC/AUX OUTPUTS								
NAC/AUX OUTPUTS		QTY.	SUPV. CURRENT (mA)		ALARM CURRENT (mA)		TOTAL	
CKT. #	TYPE		TOTAL		TOTAL			
1	AUX. POWER	EXISTING VLP POWER	800		900			
2	AUX. POWER	EXISTING VLP POWER	800		900			
3	AUX. POWER	EXISTING VLP POWER (MODIFIED)	1167		1300			
4	AUX. POWER	EXISTING VLP POWER	800		900			
SUBTOTAL SUPERVISORY CURRENT (AMPS):							3.777	
TOTAL SUPERVISORY CURRENT WITH STANDBY (AMPS):							15.108	
SUBTOTAL ALARM CURRENT (AMPS):							4.410	
TOTAL ALARM CURRENT WITH ALARM RING TIME (AMPS):							0.368	
SPARE CAPACITY:							25%	
TOTAL AMP HOUR REQUIRED (AMPS):							19.344	
BATTERY SIZE REQUIRED (AH):							20	
BATTERY CABINET PROVIDED:							YES	



CIRCUIT N2C-3 - AUX. POWER SUMMARY				CIRCUIT TYPE	AUX. POWER	
DESCRIPTION				EXISTING VLP POWER (MODIFIED)		
POWER SUPPLY INFORMATION				CABLE PROPERTIES		
NOMINAL STARTING VOLTAGE (Vdc)		19.7	LOAD FACTOR (LF)	0.59	WIRE GAUGE (AWG)	14
MINIMUM DEVICE VOLTAGE (Vdc)		16	VOLTAGE W/LOAD FACTOR (VDC)	18.933	Ω PER 1K FEET (OHMS)	3.07
TOTAL SUPERVISORY CURRENT (AMPS)		1.167	TOTAL ALARM CURRENT (AMPS)	1.300		
PART #	DEVICE	QTY	STANDBY CURRENT (mA)		ALARM CURRENT (mA)	
			EACH	TOTAL	EACH	TOTAL
VLP-0200 (3.5K)	VESDA LASER PLUS W/DISPLAY, ASPIRATOR @ 3500 RPM	2	400	800	450	900
VEP-A00-P (FS)	VESDA-E, ASPIRATOR @ FAN SETTING 5	1	367	367	400	400


BPS6A NAC 1A - Battery Calculation								
POWER SUPPLY DESIGNATOR		NAC	POWER SUPPLY PREFIX		1A	STANDBY DURATION REQUIRED (HRS)		4
PANEL LOCATION		1ST FLOOR WEST RISER ROOM 112				ALARM RING TIME REQUIRED (MIN)		5
AREA SERVED		WEST RISER ROOM RELEASING MODULES				SPARE CAPACITY (%)		25%
POWER SUPPLY BASE LOAD/AUXILIARY POWER OUTPUT								
PART #	DESCRIPTION	QTY.	SUPV. CURRENT (mA)		ALARM CURRENT (mA)		TOTAL	
			EACH	TOTAL	EACH	TOTAL		
BPS6A	REMOTE BOOSTER POWER SUPPLY	1	70	70	270	270		
BPS AUX	BPS CIRCUITS SET TO AUX OUTPUT	3	35	105	35	105		
NAC/AUX OUTPUTS								
NAC/AUX OUTPUTS		QTY.	SUPV. CURRENT (mA)		ALARM CURRENT (mA)		TOTAL	
CKT. #	TYPE		TOTAL		TOTAL			
1	AUX. POWER	EXISTING RELEASING MODULES/SOLENOIDS	56		1346			
2	AUX. POWER	EXISTING RELEASING MODULES/SOLENOIDS	56		1346			
3	AUX. POWER	NEW RELEASING MODULES/SOLENOIDS	56		1346			
4	SPARE	SPARE	0		0			
SUBTOTAL SUPERVISORY CURRENT (AMPS):							0.343	
TOTAL SUPERVISORY CURRENT WITH STANDBY (AMPS):							1.372	
SUBTOTAL ALARM CURRENT (AMPS):							4.413	
TOTAL ALARM CURRENT WITH ALARM RING TIME (AMPS):							0.368	
SPARE CAPACITY:							25%	
TOTAL AMP HOUR REQUIRED (AMPS):							2.175	
BATTERY SIZE REQUIRED (AH):							7	
BATTERY CABINET PROVIDED:							NO	

CIRCUIT N1A-3 - AUX. POWER SUMMARY				CIRCUIT TYPE	AUX. POWER	
DESCRIPTION				NEW RELEASING MODULES/SOLENOIDS		
POWER SUPPLY INFORMATION				CABLE PROPERTIES		
NOMINAL STARTING VOLTAGE (Vdc)		19.7	LOAD FACTOR (LF)	0.59	WIRE GAUGE (AWG)	14
MINIMUM DEVICE VOLTAGE (Vdc)		16	VOLTAGE W/LOAD FACTOR (VDC)	18.90586	Ω PER 1K FEET (OHMS)	3.07
TOTAL SUPERVISORY CURRENT (AMPS)		0.056	TOTAL ALARM CURRENT (AMPS)	1.346		
PART #	DEVICE	QTY	STANDBY CURRENT (mA)		ALARM CURRENT (mA)	
			EACH	TOTAL	EACH	TOTAL
SIGA-REL	RELEASING MODULE	2	28	56	173	346
SOLENOID	TYPICAL SOLENOID (22W MAX)	2	0	0	500	1000

convergent

450 Shattuck Avenue South, Renton, Washington 98057  
Phone: 425-272-2250 Fax: 425-251-0949

This document and the information/depictions contained/shown is the exclusive property of Convergent Technologies LLC and shall be handled as proprietary and confidential information and must be returned upon request. This document cannot be reproduced by any means without the written authorization of Convergent Technologies LLC.

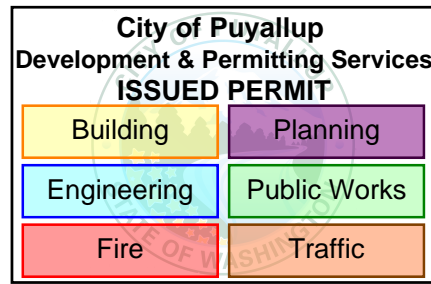

CENTERIS (SHDC)  
2ND FLOOR REVISIONS  
1023 39TH AVE SE  
PUYALLUP, WA 98374

CALCULATIONS  
FIRE ALARM SYSTEM

FA-5-1



City of Puyallup  
Development & Permitting Services  
ISSUED PERMIT

Building	Planning
Engineering	Public Works
Fire	Traffic

AREA OF WORK

2ND FLOOR CEILING VESDA PLAN -OVERALL  
0 4 8 16  
SCALE: 1/8"=1'-0"

REV	JOB - DESCRIPTION	DATE	BY
-	ISSUED FOR PERMIT	02-19-2025	

DRAWN BY: JACOB U.  
PROJECT DESIGNER: JACOB U.  
PROJECT MANAGER: CHARITY P.  
JOB NUMBER: 20250789  
SCALE: AS SHOWN DATE: 02-14-2025




CENTERIS (SHDC)  
2ND FLOOR REVISIONS  
1023 39TH AVE SE  
PUYALLUP, WA 98374

2ND FLOOR CEILING VESDA  
PLAN -OVERALL  
FIRE ALARM SYSTEM


FA-6-2




- VESDA INSTALLATION NOTES:**
- DIMENSIONS PROVIDED ON PLANS ARE PRECISE TO +/- 3"
  - DEVIATIONS FROM PLANS DUE TO FIELD CONDITIONS MUST BE REDLINED AND RETURNED TO CONVERGINT PRIOR TO COMMISSIONING. VARIATIONS GREATER THAN 3" OR THE ADDITION OF ELBOWS SHOULD BE REPORTED BACK TO CONVERGINT PRIOR TO COMPLETION OF INSTALLATION FOR RE-CALCULATION.
  - SUPPORT PIPE ON NO GREATER THAN 5 FOOT CENTERS FOR CEILING INSTALLATION.
  - GLUE PIPE WITH THE APPROPRIATE ADHESIVE ON THE OUTSIDE OF THE PIPE. DO NOT ALLOW ANY ADHESIVE INSIDE PIPE.
  - DO NOT GLUE PIPE INTO THE VESDA DETECTOR MANIFOLD.
  - REMOVE ALL DUST AND SHAVINGS FROM INSIDE PIPE AND SAMPLING HOLES PRIOR TO INSTALLATION.
  - VERIFY HOLE LOCATION AND SIZE ACCORDING TO VESDA CALCULATIONS BEFORE DRILLING.
  - ORIENT DRILL PERPENDICULAR TO PIPE TO ENSURE HOLES ARE DRILLED STRAIGHT AND NOT AT AN ANGLE.
  - INSTALL LABELS AT EACH SAMPLING HOLE.
  - INSTALL PIPE LABELS EVERY 20', AND AT EVERY CHANGE OF DIRECTION PER NFPA 72.
  - NOTIFY CONVERGINT OF ANY FIELD RELATED OBSTRUCTIONS WHICH COULD EFFECT PIPE PLACEMENT OR ABILITY FOR SOMEONE TO THE REACH SAMPLING HOLES.
  - NOTIFY CONVERGINT PRIOR TO MAKING ANY FIELD CHANGES TO THE PIPE NETWORK. CHANGES IN PIPING MAY RESULT IN CHANGES TO THE SAMPLING HOLE SIZES. DO NOT DRILL HOLES, OR ONLY DRILL 5/64" PILOT HOLES ONLY, IF PIPING CHANGES ARE REQUIRED PRIOR TO RECALCULATING.
  - MAINTAIN RED-LINE SET OF INSTALLATIONS DRAWINGS SHOWING ANY MODIFICATIONS TO THE PIPE NETWORK AND DELIVER TO CONVERGINT PRIOR TO FINAL TESTING.
  - ALL VESDA PIPING SHALL BE 3/4" CPVC, UNLESS OTHERWISE NOTED.
  - REFERENCE VESDA PIPING CALCULATIONS FOR PROGRAM SETTINGS REQUIRED TO CONFIGURE THE DETECTOR.

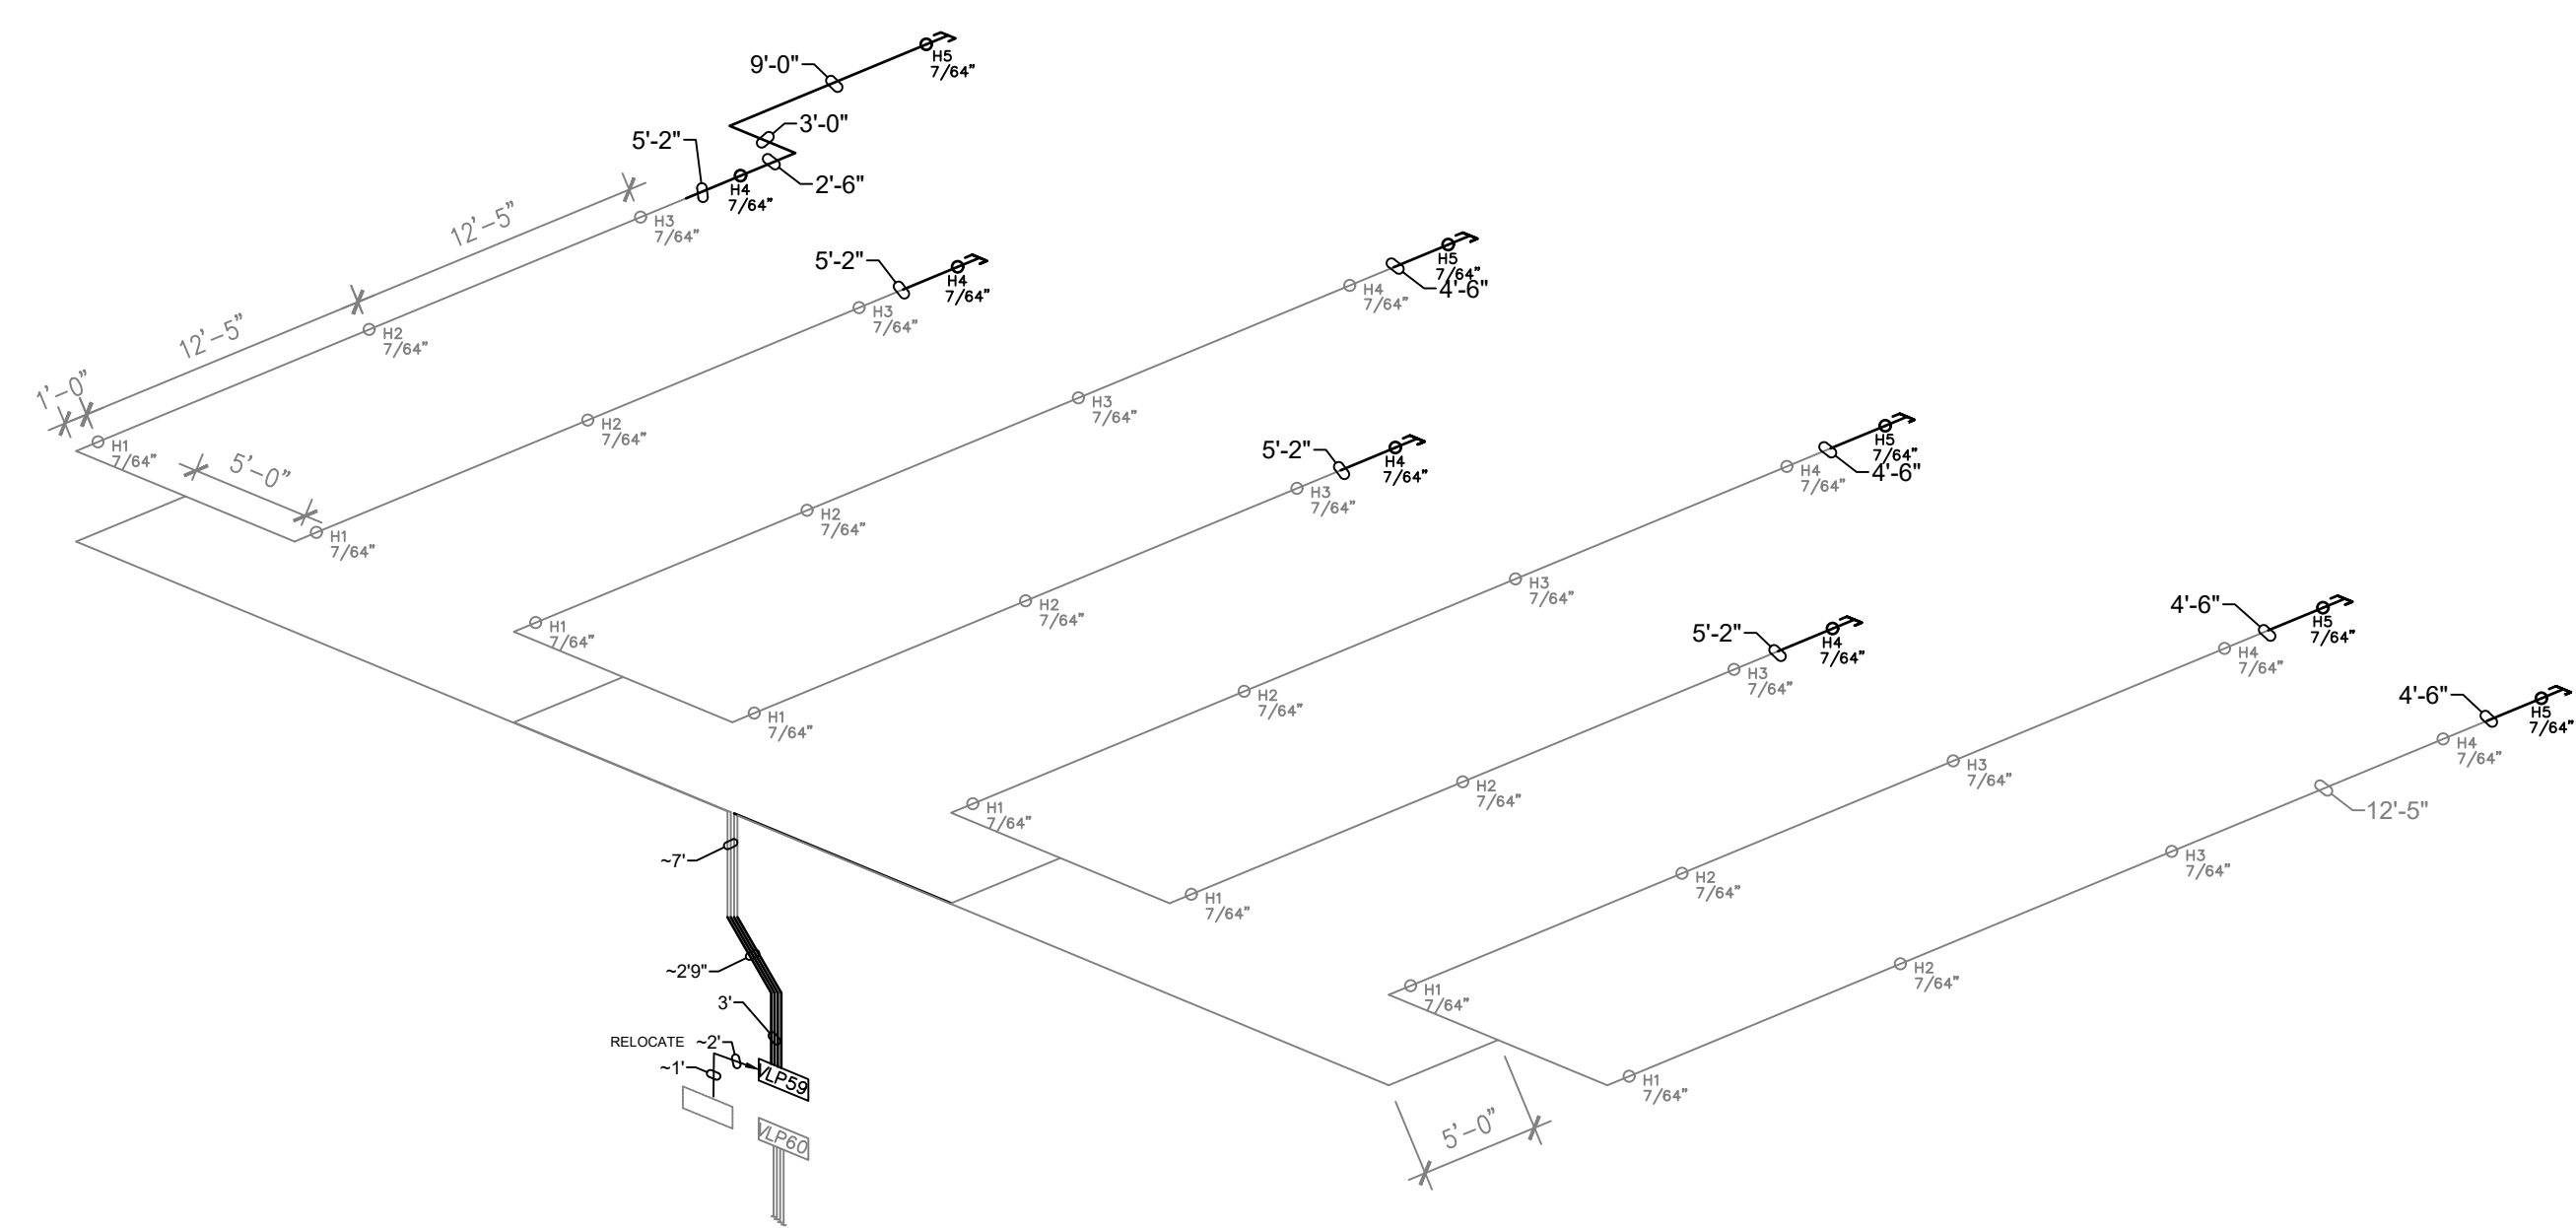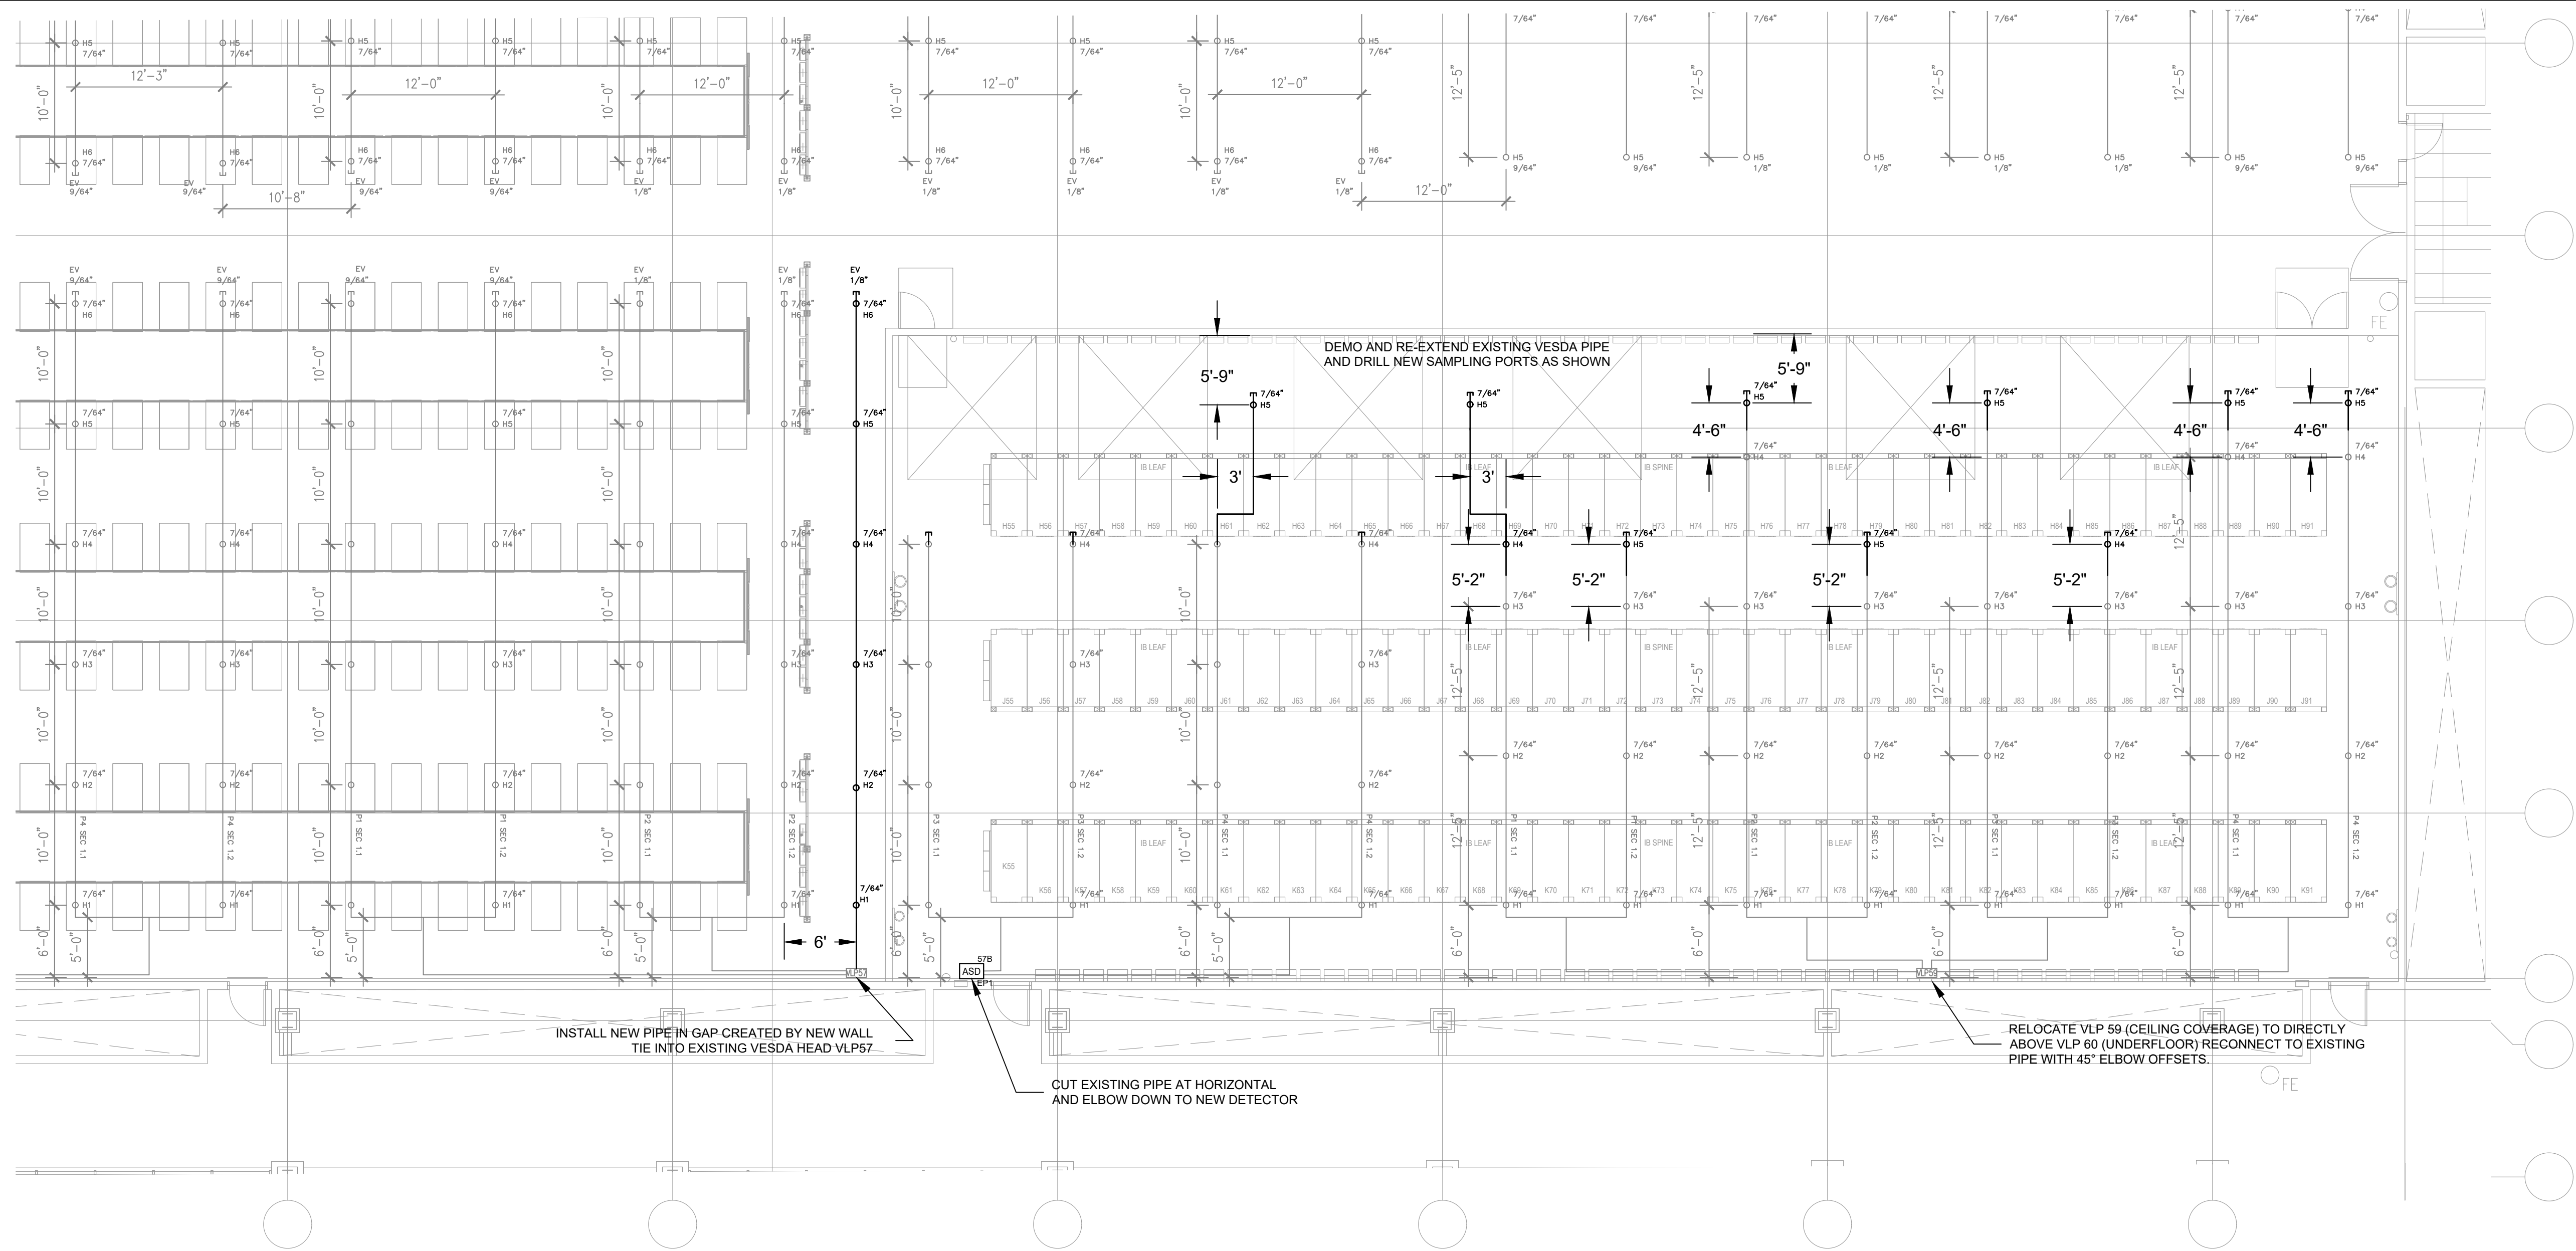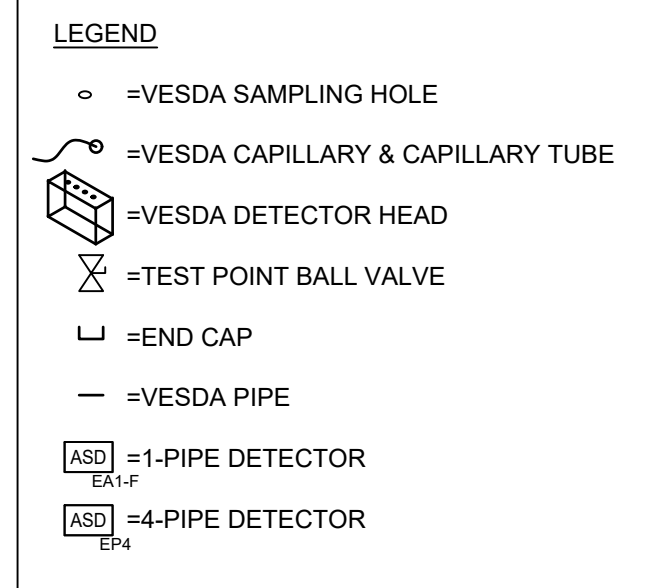

VLP 59  
ISOMETRIC DIAGRAM

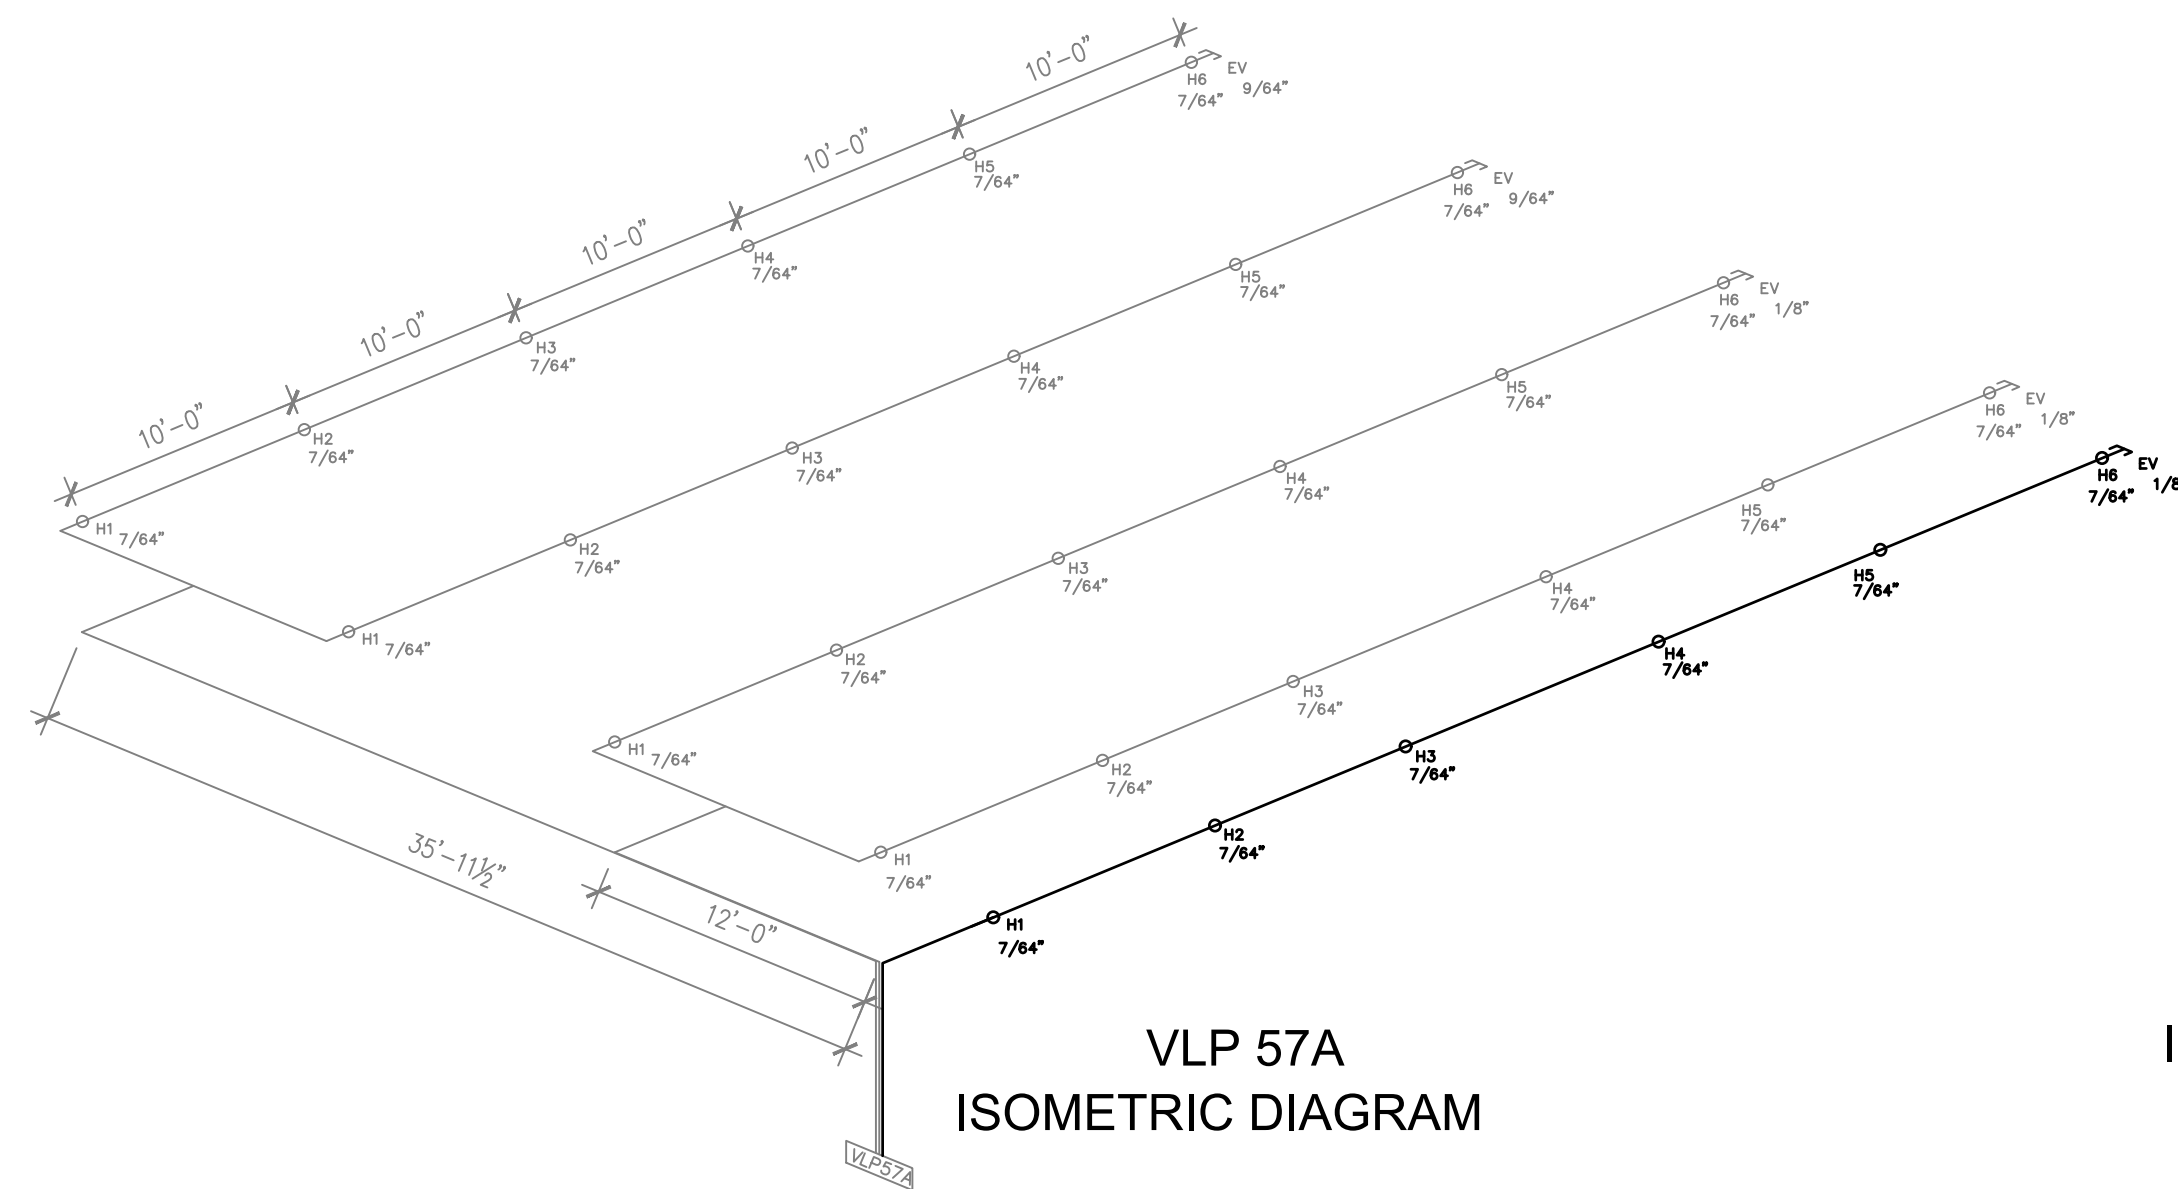

VLP 57A  
ISOMETRIC DIAGRAM

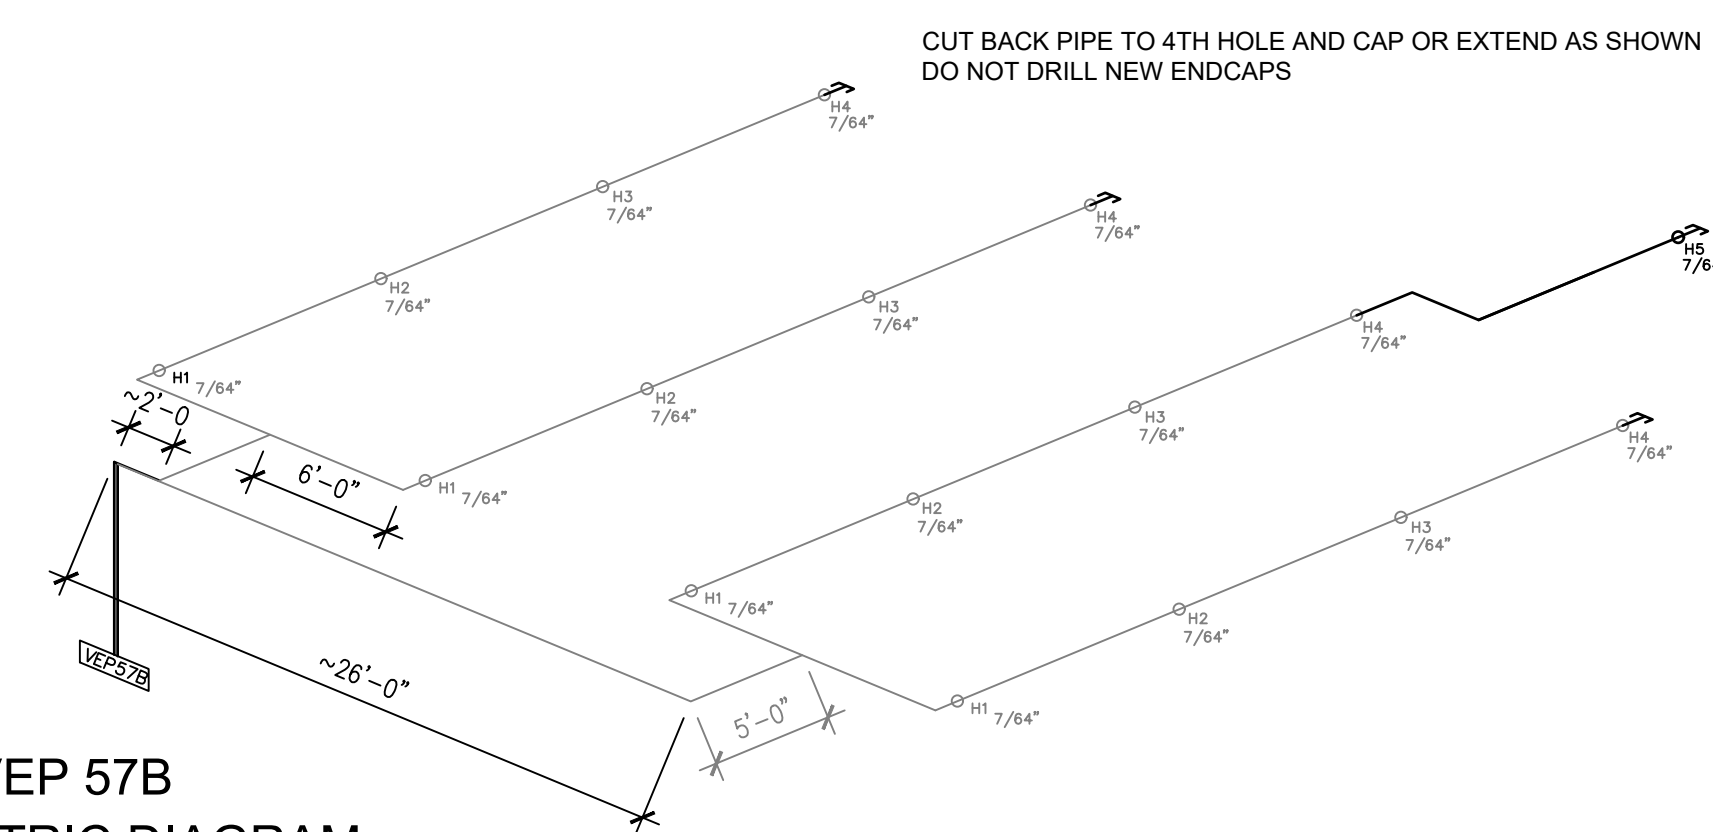



VEP 57B  
ISOMETRIC DIAGRAM

ENLARGED VESDA PLANS & DIAGRAMS

convergent

450 Shattuck Avenue South, Renton, Washington 98057  
Phone: 425-272-2250 Fax: 425-251-0949

This document and the information/depictions contained/shown is the exclusive property of Convergent Technologies LLC and shall be handled as proprietary and confidential information and must be returned upon request. This document cannot be reproduced by any means without the written authorization of Convergent Technologies LLC.

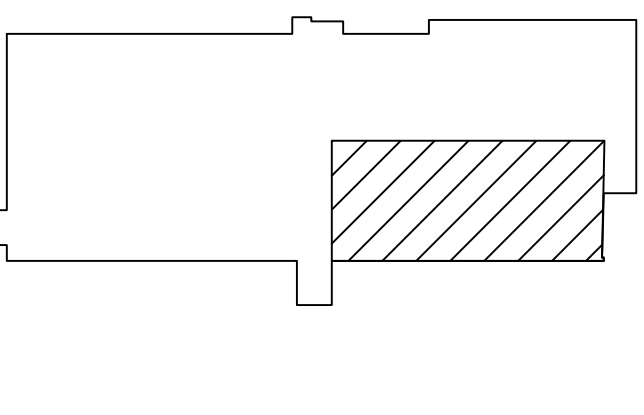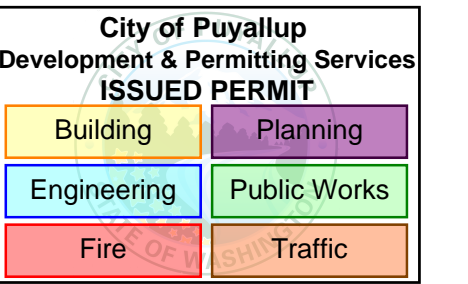

REV	JOB - DESCRIPTION	DATE	BY
-	ISSUED FOR PERMIT	02-19-2025	

DRAWN BY:	JACOB LI
PROJECT DESIGNER:	JACOB LI
PROJECT MANAGER:	CHARITY P.
JOB NUMBER:	00000798
SCALE:	AS SHOWN
DATE:	02-16-2025

CENTERIS (SHDC)  
2ND FLOOR REVISIONS  
1023 39TH AVE SE  
PUYALLUP, WA 98374

ENLARGED VESDA PLANS &  
DIAGRAMS  
FIRE ALARM SYSTEM

DRAWING:  
FA-6-2.1