




**PACIFIC
HOME
SOURCE**
LLC

THE APPROVED CONSTRUCTION PLANS,
DOCUMENTS AND ALL ENGINEERING MUST
BE POSTED ON THE JOB AT ALL
INSPECTIONS IN A VISIBLE AND READILY
ACCESSIBLE LOCATION.

FULL SIZED LEDGIBLE COLOR PLANS ARE
REQUIRED TO BE PROVIDED BY THE
PERMITEE ON SITE FOR INSPECTION

Approval of submitted plans is not an approval of omissions or oversight by this office or noncompliance with any applicable regulations of local government. The contractor is responsible for making sure that the building complies with all applicable building codes and regulations of the local government.



2015 WSEC WORKSHEET – CLIMATE ZONE 4, 5&6

DATE: 9-11-20
PROJECT#: PHS19.056
PLAN: Farris Residence

SITE ADDRESS:
2435 West Stewart
Puyallup, WA 98371



John Gabriel Spruell CGP
Pacific Home Source LLC

253-312-5523
4001 72nd Street East

gabe@pacifichomesource.com
Tacoma, WA 98443

Prescriptive Energy Code Compliance for All Climate Zones in Washington

Project Information

Rich & Kathy Farris

2435 West Stewart

Puyallup, WA 98371

Contact Information

Pacific Home Source LLC

253-312-5523

gabe@pacifichomesource.com

This project will use the requirements of the Prescriptive Path below and incorporate the the minimum values listed. In addition, based on the size of the structure, the appropriate number of additional credits are checked as chosen by the permit applicant.

Authorized Representative _____ Date _____

All Climate Zones		
	R-Value ^a	U-Factor ^a
Fenestration U-Factor ^b	n/a	0.30
Skylight U-Factor	n/a	0.50
Glazed Fenestration SHGC ^{b,e}	n/a	n/a
Ceiling ^k	49 ^j	0.026
Wood Frame Wall ^{g,m,n}	21 int	0.056
Mass Wall R-Value ⁱ	21/21 ^h	0.056
Floor	30 ^g	0.029
Below Grade Wall ^{c,m}	10/15/21 int + TB	0.042
Slab ^d R-Value & Depth	10, 2 ft	n/a

*Table R402.1.1 and Table R402.1.3 Footnotes included on Page 2.

Each dwelling unit in a residential building shall comply with sufficient options from Table R406.2 so as to achieve the following minimum number of credits:

1. Small Dwelling Unit: 1.5 credits

☐

Dwelling units less than 1500 square feet in conditioned floor area with less than 300 square feet of fenestration area. Additions to existing building that are greater than 500 square feet of heated floor area but less than 1500 square feet.

☒ **2. Medium Dwelling Unit: 3.5 credits**

☒

All dwelling units that are not included in #1 or #3. **Exception:** Dwelling units serving R-2 occupancies shall require 2.5 credits.

☐ 3. Large Dwelling Unit: 4.5 credits

Dwelling units exceeding 5000 square feet of conditioned floor area.

☐ 4. Additions less than 500 square feet: .5 credits

☐

Table R406.2 Summary

Option	Description	Credit(s)			
1a	Efficient Building Envelope 1a	0.5	<input checked="" type="checkbox"/>	0.5	
1b	Efficient Building Envelope 1b	1.0	<input type="checkbox"/>		
1c	Efficient Building Envelope 1c	2.0	<input type="checkbox"/>		
1d	Efficient Building Envelope 1d	0.5	<input type="checkbox"/>		
2a	Air Leakage Control and Efficient Ventilation 2a	0.5	<input type="checkbox"/>	1.0	
2b	Air Leakage Control and Efficient Ventilation 2b	1.0	<input type="checkbox"/>		
2c	Air Leakage Control and Efficient Ventilation 2c	1.5	<input type="checkbox"/>		
3a	High Efficiency HVAC 3a	1.0	<input type="checkbox"/>		
3b	High Efficiency HVAC 3b	1.0	<input checked="" type="checkbox"/>		
3c	High Efficiency HVAC 3c	1.5	<input type="checkbox"/>		
3d	High Efficiency HVAC 3d	1.0	<input type="checkbox"/>		
4	High Efficiency HVAC Distribution System	1.0	<input type="checkbox"/>		
5a	Efficient Water Heating 5a	0.5	<input checked="" type="checkbox"/>	0.5	
5b	Efficient Water Heating 5b	1.0	<input type="checkbox"/>		
5c	Efficient Water Heating 5c	1.5	<input checked="" type="checkbox"/>	1.5	
5d	Efficient Water Heating 5d	0.5	<input type="checkbox"/>		
6	Renewable Electric Energy	0.5	<input type="checkbox"/>	*1200 kwh	0.0

Total Credits

3.50

*Please refer to Table R406.2 for complete option descriptions

Table R402.1.1 Footnotes

For SI: 1 foot = 304.8 mm, ci = continuous insulation, int = intermediate framing.

^a R-values are minimums. U-factors and SHGC are maximums. When insulation is installed in a cavity which is less than the label or design thickness of the insulation, the compressed R-value of the insulation from Appendix Table A101.4 shall not be less than the R-value specified in the table.

^b The fenestration U-factor column excludes skylights. The SHGC column applies to all glazed fenestration.

^c "10/15/21.+TB" means R-10 continuous insulation on the exterior of the wall, or R-15 on the continuous insulation on the interior of the wall, or R-21 cavity insulation plus a thermal break between the slab and the basement wall at the interior of the basement wall. "10/15/21.+TB" shall be permitted to be met with R-13 cavity insulation on the interior of the basement wall plus R-5 continuous insulation on the interior or exterior of the wall. "10/13" means R-10 continuous insulation on the interior or exterior of the home or R-13 cavity insulation at the interior of the basement wall. "TB" means thermal break between floor slab and basement wall.

^d R-10 continuous insulation is required under heated slab on grade floors. See R402.2.9.1.

^e There are no SHGC requirements in the Marine Zone.

^f Reserved.

^g Reserved.

^h Reserved.

ⁱ The second R-value applies when more than half the insulation is on the interior of the mass wall.

^j Reserved.

^k For single rafter- or joist-vaulted ceilings, the insulation may be reduced to R-38.

^l Reserved.

^m Int. (intermediate framing) denotes standard framing 16 inches on center with headers insulated with a minimum of R-10 insulation.

Table R402.1.3 Footnote

^a Nonfenestration U-factors shall be obtained from measurement, calculation or an approved source or as specified in Section R402.1.3.

Window, Skylight and Door Schedule

Project Information

Rich & Kathy Farris
2435 West Stewart
Puyallup, WA 98371

Contact Information

Pacific Home Source LLC
253-312-5523
gabe@pacifichomesource.com

[illegible]

Vertical Fenestration (Windows and doors)

[illegible]

						0.0	0.00
						0.0	0.00
						0.0	0.00
						0.0	0.00
						0.0	0.00
						0.0	0.00
						0.0	0.00
						0.0	0.00

Sum of Vertical Fenestration Area and UA
Vertical Fenestration Area Weighted U = UA/Area

737.0	206.36
	0.28

Overhead Glazing (Skylights)

Component			Width			Height		Area	UA
Description	Ref.	U-factor	Qt.	Feet	^{Inch}	Feet	^{Inch}		
								0.0	0.00
								0.0	0.00
								0.0	0.00
								0.0	0.00
								0.0	0.00
								0.0	0.00

Sum of Overhead Glazing Area and UA
Overhead Glazing Area Weighted U = UA/Area

0.0	0.00
	0.00

Total Sum of Fenestration Area and UA (for heating system sizing calculations)

737.0	206.36
-------	--------

Simple Heating System Size: Washington State

This heating system sizing calculator is based on the Prescriptive Requirements of the 2015 Washington State Energy Code (WSEC) and ACCA Manuals J and S. This calculator will calculate heating loads only. ACCA procedures for sizing cooling systems should be used to determine cooling loads.

Please fill out all of the green drop-downs and boxes that are applicable to your project. As you make selections in the drop-downs for each section, some values will be calculated for you. If you do not see the selection you need in the drop-down options, please call the WSU Energy Extension Program at (360) 956-2042 for assistance.

Project Information

Rich & Kathy Farris

2345 West Stewart

Puyallup, WA 98371

Contact Information

Pacific Home Source LLC

253-312-5523

www.pacifichomesource.com

Heating System Type:

☐ All Other Systems☒ Heat Pump

To see detailed instructions for each section, place your cursor on the word "Instructions".

Design Temperature

Instructions

Puyallup

Design Temperature Difference (ΔT)

51

 $\Delta T = \text{Indoor (70 degrees)} - \text{Outdoor Design Temp}$

Area of Building

Conditioned Floor Area

Instructions

Conditioned Floor Area (sq ft)

4,000

Average Ceiling Height

Instructions

Average Ceiling Height (ft)

9.0

Conditioned Volume

36,000

Glazing and Doors

Instructions

U-0.28

U-Factor	X	Area	=	UA
0.280		737		206.36

U-Factor	X	Area	=	UA
0.50				---

Skylights

Instructions

Insulation

Attic

Instructions

R-49

U-Factor	X	Area	=	UA
0.026		1,350		35.10

Single Rafter or Joist Vaulted Ceilings

Instructions

R-38 Vented

U-Factor	X	Area	=	UA
0.027		1,350		36.45

Above Grade Walls (see Figure 1)

Instructions

R-21 Intermediate

U-Factor	X	Area	=	UA
0.056		3,600		201.60

Floors

Instructions

R-38

U-Factor	X	Area	=	UA
0.025		2,700		67.50

Below Grade Walls (see Figure 1)

Instructions

No Below Grade Walls in this project.

U-Factor	X	Area	=	UA
0.028				---

Slab Below Grade (see Figure 1)

Instructions

No Slab Below Grade in this project.

F-Factor	X	Length	=	UA
0.303				---

Slab on Grade (see Figure 1)

Instructions

No Slab on Grade in this project.

F-Factor	X	Length	=	UA
---				---

Location of Ducts


Instructions

Unconditioned Space

Duct Leakage Coefficient

1.10

Figure 1.

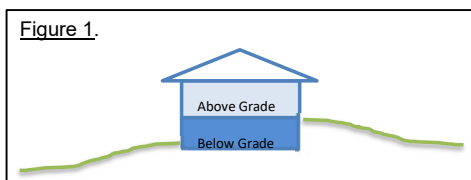

Sum of UA	547.01
Envelope Heat Load	27,898 Btu / Hour
<i>Sum of UA X ΔT</i>	
Air Leakage Heat Load	19,829 Btu / Hour
<i>Volume X 0.6 X ΔT X .018</i>	
Building Design Heat Load	47,726 Btu / Hour
<i>Air Leakage + Envelope Heat Loss</i>	
Building and Duct Heat Load	52,499 Btu / Hour
<i>Ducts in unconditioned space: Sum of Building Heat Loss X 1.10</i>	
<i>Ducts in conditioned space: Sum of Building Heat Loss X 1</i>	
Maximum Heat Equipment Output	65,624 Btu / Hour
<i>Building and Duct Heat Loss X 1.40 for Forced Air Furnace</i>	
<i>Building and Duct Heat Loss X 1.25 for Heat Pump</i>	