

LCH0022LBACZC2627 - SUBMITTAL



Project Name:	ANDERSON NESLER-TACO TIME PUYALLUP
Quote ID:	R2644438
Submitted For:	CHARLIE NESLER
Submitted By:	Jim Cellini
Identity #:	FREEZER
System Description:	Split system

Project Location:	US, WA, PUYALLUP
Item #:	1010
Submitted On:	12/11/2023
Submitted From:	ANDERSON NESLER
Tag:	FREEZER COND UNIT
System Tag:	FREEZER

For Record

For Approval

By: _____

Date: _____

General Product Information

Product Family:	HTS	Compressor Brand:	Copeland
Application:	Outdoor	Compressor Type:	Scroll
Temperature Range:	Low Temp	Compressor Hp:	2
Voltage: (Volts/Ph/Hz)	208-230/1/60	Compressor Model:	ZF07K4E-PFV-118
Refrigerant Type:	R448A	Number of Compressor(s):	1
Piping:	Standard	Coil Type:	Microchannel

Technical Information

Performance Data

Ambient Temperature (°F)	Saturated Suction Temperature (°F)	Application Capacity* (BTU/H)	Altitude (ft)	AWEF Value
100	-20.62	6206.0	0	3.04

Electrical Data

Compressor(s)		Fan Motor(s)			Electric Ratings						
RLA	LRA	Quantity	Hp	FLA	Defrost Type	High or Low Amps?	Number of Contactors	MCA	MOPD	Evap. Fan Amps	Defrost Heater Amps
12.4	75	1	1/15	0.5	ELECTRIC DEFROST			21	30	5	15

Unit Specifications

Connections (in.)		Receiver 90% Full (lbs)		Fan Blade(s) Diameter (in)	Sound Data (dB)	Approx. Net Weight (lbs)
Liquid Line	Suction	Standard	Over Sized			
0.375	0.625	9		14	63	173

Dimensional Drawing(s)

AGENCY LISTINGS

UOM: inches

PRCNC20231287

LCH0022LBACZC2627 - SUBMITTAL



Project Name:	ANDERSON NESLER-TACO TIME PUYALLUP	Project Location:	US, WA, PUYALLUP
Quote ID:	R2644438	Item #:	1010
Submitted For:	CHARLIE NESLER	Submitted On:	12/11/2023
Submitted By:	Jim Cellini	Submitted From:	ANDERSON NESLER
Identity #:	FREEZER	Tag:	FREEZER COND UNIT
System Description:	Split system	System Tag:	FREEZER

Standard Features

CABINET AND CONSTRUCTION

- MICROCHANNEL COIL TECHNOLOGY STANDARD ON ALL UNITS

QUALITY

- ALL UNITS ARE COMPLETELY LEAK TESTED IN A HELIUM ENVIRONMENT, BUMP TESTED AND ALLOWED TO CYCLE OFF ON THE HIGH AND LOW PRESSURE CONTROL. EACH UNIT HAS A COPY OF THE RUN DATA SHIPPED INSIDE THE ELECTRICAL PANEL
- ELECTRICAL CIRCUITS ARE COMPLETELY CHECKED FOR CONTINUITY
- PIPING IS LAID OUT TO MINIMIZE STRESS AND VIBRATION AND IS PRE-BENT TO ELIMINATE LEAKS
- ENCAPSULATED, AUTO-RESET, HIGH AND LOW PRESSURE CONTROLS TO ELIMINATE LEAKS (ADJUSTABLE LOW PRESSURE CONTROL STANDARD)
- PAINTED STEEL CABINETS FOR SUPERIOR STRENGTH AND CORROSION PROTECTION
- HEAVY DUTY, STEEL, 1-1/2" TALL BASE

SERVICEABILITY

- SUCTION SERVICE VALVES FOR HERMETIC AND SCROLL COMPRESSORS LOCATED OUTSIDE THE CABINET FOR QUICK INSTALLATIONS.
- RECEIVER WITH FUSIBLE PLUG, LIQUID SHUTOFF VALVE AND CHARGING PORT IS STANDARD
- LARGE ELECTRICAL PANEL FOR EASE OF ACCESS
- PREFABRICATED WIRING HARNESSSES FOR TIGHT CRIMP CONNECTIONS AND CONSISTENT LABELING
- UNIT STAYS ON IF THE HOOD IS REMOVED FOR SERVICING
- SIGHT GLASS IS EASILY VIEWABLE


Options

Mounted Options


- Brand Label - LARKIN
- Coil Selection - MICROCHANNEL COIL
- Defrost Timer Options - ELECTRIC DEFROST TIMER - PARAGON
- Suction Line Options - SPORLAN FILTER AND ACCUMULATOR
- Cabinet Selection - Painted
- Pressure Options - ADJUSTABLE LOW - FIXED HIGH
- Phase Loss Monitor - NONE
- Snow Legs - NONE
- Motor - FIXED SPEED EC
- Receiver Options - STANDARD
- Liquid Line Options - SPORLAN FILTER DRIER AND SIGHT GLASS
- Discharge Line Options - HEAD PRESSURE VALVE 100#
- Fused Disconnect - NO FUSED DISCONNECT
- Crankcase Heater - CRANKCASE HEATER
- Pre Charged - NONE
- Hail Guard Factory Installed - NONE

Minimum Unit Clearances

Walls or Obstructions for Horizontal Air Flow

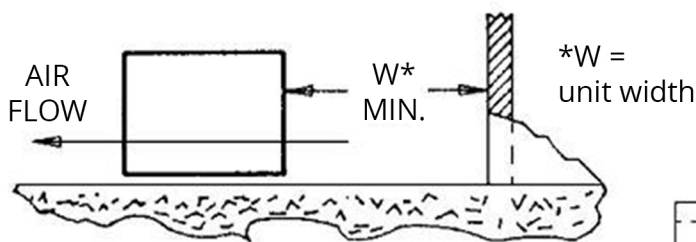

Multiple Units with Horizontal Air Flow

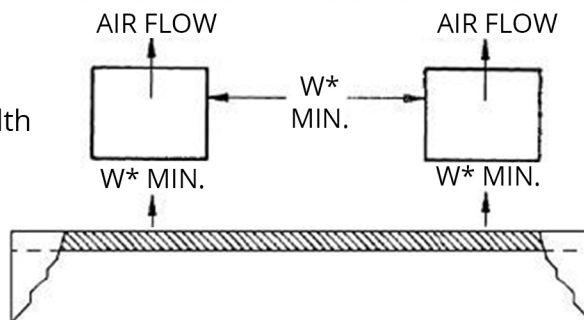

* Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

LEL0065BS6EMAD3301 - SUBMITTAL



Project Name:	ANDERSON NESLER-TACO TIME PUYALLUP
Quote ID:	R2644438
Submitted For:	CHARLIE NESLER
Submitted By:	Jim Cellini
Identity #:	FREEZER
System Description:	Split system

Project Location:	US, WA, PUYALLUP
Item #:	1020
Submitted On:	12/11/2023
Submitted From:	ANDERSON NESLER
Tag:	FREEZER EVAP
System Tag:	FREEZER

For Record

For Approval

By: _____

Date: _____

General Product Information

Product Family:	LEL	Motor type	2 SPEED EC
Defrost Type:	Electric	Number of Fans:	2
Voltage: (Volts/Ph/Hz)	208-230/1/60	Fan HorsePower	1/20
Refrigerant Type:	R448A	Fins per Inch	6

Technical Information

Performance Data

Capacity			Air Flow				Altitude (ft)	AWEF Value	
TD (°F)	SST (°F)	Application Capacity* (BTU/H)	CFM	Fan Diameter (in.)	Air Throw (ft)			Cooler > 32	Freezer <= 32
				Standard		w/Collar			
8.62	-20.62	7,200	1371	12			0	9	4.03


Electrical Data

Fan Motor(s)		Defrost Heater(s)		Drain Pan Heater(s)	
Watts	Amps	Watts	Amps	Watts	Amps
110	1	2100	9.1		

Unit Specifications

Connections (in.)						Approx. Net Weight (lbs)
Coil Inlet	Suction	External Equalizer	Drain	Side Port	Hot Gas Drain Pan	
1/2	5/8	1/4	3/4			54

Dimensional Drawing(s)

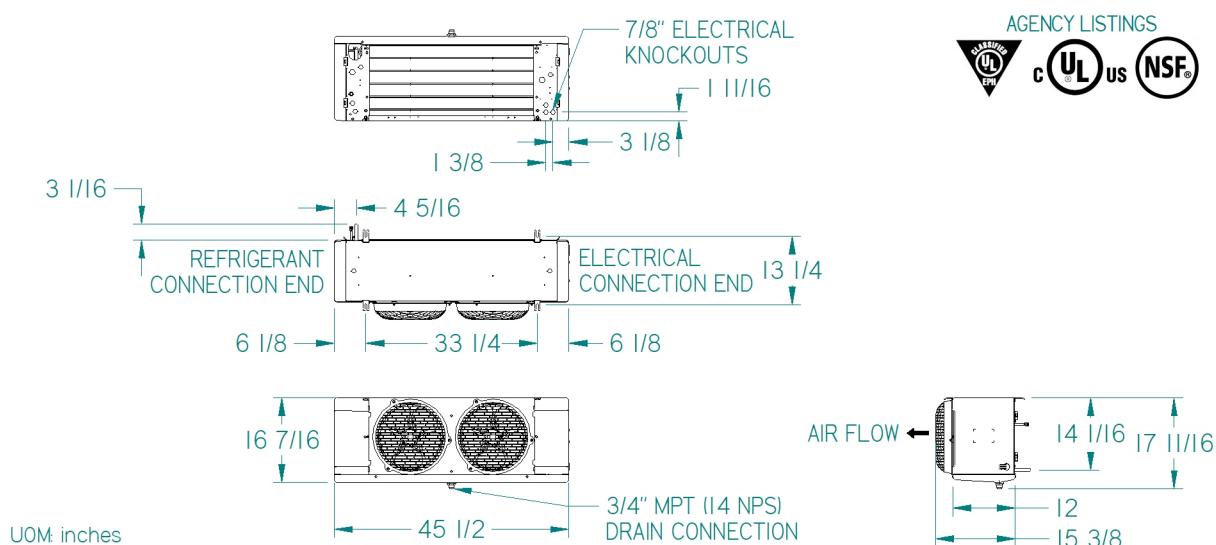

LEL0065BS6EMAD3301 - SUBMITTAL



Project Name:	ANDERSON NESLER-TACO TIME PUYALLUP	Project Location:	US, WA, PUYALLUP
Quote ID:	R2644438	Item #:	1020
Submitted For:	CHARLIE NESLER	Submitted On:	12/11/2023
Submitted By:	Jim Cellini	Submitted From:	ANDERSON NESLER
Identity #:	FREEZER	Tag:	FREEZER EVAP
System Description:	Split system	System Tag:	FREEZER

Standard Features

EASE OF INSTALLATION SERVICE

- ALL ELECTRICAL COMPONENTS FACTORY WIRED TO TERMINAL BOARD AND IDENTIFIED, MAKING IT EASY TO FIELD WIRE THE UNIT

RELIABLE DURABLE

- HEAVY GAUGE, WHITE PAINTED CABINET CLEANS EASILY AND LOOKS ATTRACTIVE
- MOLDED FAN GUARD AND ACCESS PANELS ARE MADE OF STRONG, DURABLE, AND NSF AND UL SANITATION RATED PLASTIC MATERIAL
- SWEAT CONNECTIONS TO REDUCE POTENTIAL FOR LEAKS

PERFORMANCE

- EC MOTORS STANDARD ON ALL MODELS FOR IMPROVED UNIT EFFICIENCY

VERSATILE


- LARGE DIAMETER DRAIN HOLE (3/4" ID) IS LOCATED TOWARDS THE BACK OF THE UNIT
- MINIMAL HEIGHT OF THE LOW PROFILE SERIES MAKES IT IDEAL FOR LOW CEILING COOLERS
- CABINET DESIGN FEATURES HINGED, REMOVABLE FRONT ACCESS PANELS ON EACH SIDE FOR EASY ACCESS TO ELECTRICAL AND REFRIGERATION COMPONENTS
- LIQUID LINE SOLENOID WIRE HARNESS IS FACTORY-INSTALLED FOR QUICK INSTALLATION
- MOTORS PLUG INTO WIRING HARNESS FOR EASIER SERVICING
- HINGED, REMOVABLE DRAIN PAN FOR EASY AND SAFE ACCESS
- PRE-DRILLED HOLES ON THE BACK OF THE UNIT FOR ROOM THERMOSTAT
- QUICK REMOVAL FAN GUARD/MOTOR ASSEMBLY FOR EASY SERVICE OR REPLACEMENT OF AIR MOVER PARTS
- INTERNAL PANELS ARE ISOLATED FOR QUIET OPERATION
- INTERNALLY ENHANCED TUBING AND FIN DESIGN FOR HIGHER EFFICIENCY

Options

Mounted Options


- Brand Label - LARKIN
- Drain Pan Defrost Voltage - 208-230/1/60
- Fan Blade - Standard
- Cabinet Type - White
- Controller Option - None
- Fin Material - Aluminum
- Saturated Suction Temperature - -20
- N/A - N/A
- Valve Family - L
- Motor - 2 Speed EC
- DTFD Option - Fixed
- Fan Guard - Molded
- Drain Pan Type - White
- Solenoid Voltage - 230
- Coil Mechanical Option - Sporlan TXV / Sporlan Sol
- Liquid Temperature - 95
- Customer Specified Valve Type - TXV

Minimum Unit Clearances

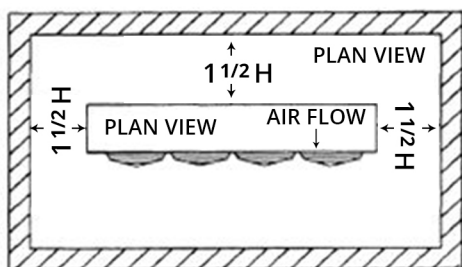

One Evaporator

NOTE:
H = Total Height evaporator coil surface.

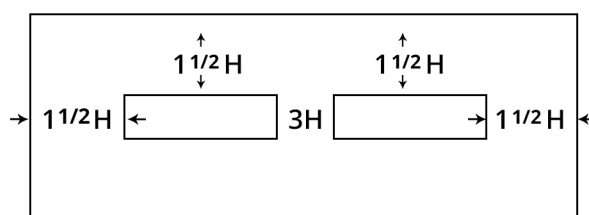

Two Evaporators

* Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

LCH0025MCACZA0000 - SUBMITTAL



Project Name:	ANDERSON NESLER-TACO TIME PUYALLUP	Project Location:	US, WA, PUYALLUP
Quote ID:	R2644438	Item #:	2010
Submitted For:	CHARLIE NESLER	Submitted On:	12/11/2023
Submitted By:	Jim Cellini	Submitted From:	ANDERSON NESLER
Identity #:	COOLER	Tag:	COOLER COND UNIT
System Description:	Split system	System Tag:	COOLER

 For Record

 For Approval

By: _____

Date: _____

General Product Information

Product Family:	HTS	Compressor Brand:	Copeland
Application:	Outdoor	Compressor Type:	Scroll
Temperature Range:	Medium Temp	Compressor Hp:	2.5
Voltage: (Volts/Ph/Hz)	208-230/3/60	Compressor Model:	ZS19KAE-TF5-118
Refrigerant Type:	R448A	Number of Compressor(s):	1
Piping:	Standard	Coil Type:	Microchannel

Technical Information

Performance Data

Ambient Temperature (°F)	Saturated Suction Temperature (°F)	Application Capacity* (BTU/H)	Altitude (ft)	AWEF Value
100	24.8	17384.0	0	7.6


Electrical Data

Compressor(s)		Fan Motor(s)			Electric Ratings						
RLA	LRA	Quantity	Hp	FLA	Defrost Type	High or Low Amps?	Number of Contactors	MCA	MOPD	Evap. Fan Amps	Defrost Heater Amps
12.3	73	2	1/15	1	AIR DEFROST			20	25	9	23

Unit Specifications

Connections (in.)		Receiver 90% Full (lbs)		Fan Blade(s) Diameter (in)	Sound Data (dB)	Approx. Net Weight (lbs)
Liquid Line	Suction	Standard	Over Sized			
0.5	0.875	14	20	14	63	230

Dimensional Drawing(s)

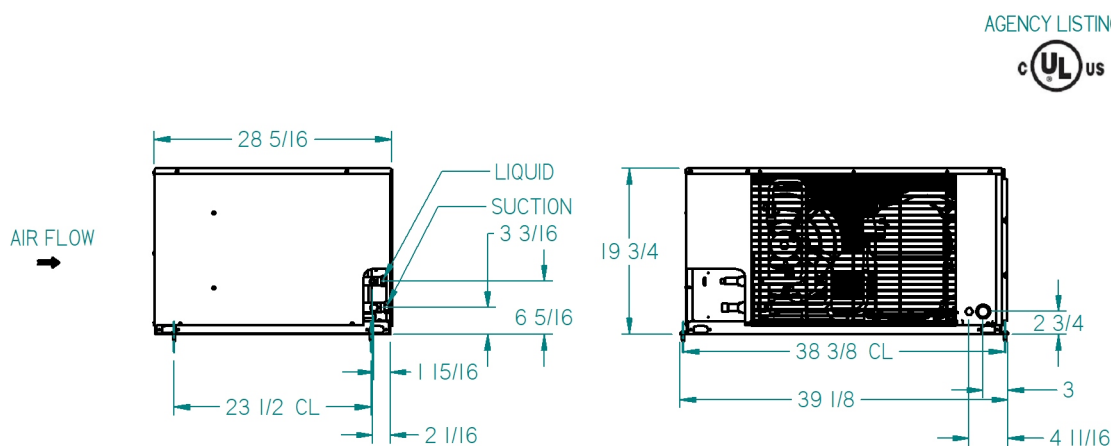

UOM: inches

LCH0025MCACZA0000 - SUBMITTAL



Project Name:	ANDERSON NESLER-TACO TIME PUYALLUP	Project Location:	US, WA, PUYALLUP
Quote ID:	R2644438	Item #:	2010
Submitted For:	CHARLIE NESLER	Submitted On:	12/11/2023
Submitted By:	Jim Cellini	Submitted From:	ANDERSON NESLER
Identity #:	COOLER	Tag:	COOLER COND UNIT
System Description:	Split system	System Tag:	COOLER

Standard Features

CABINET AND CONSTRUCTION

- MICROCHANNEL COIL TECHNOLOGY STANDARD ON ALL UNITS

QUALITY

- ALL UNITS ARE COMPLETELY LEAK TESTED IN A HELIUM ENVIRONMENT, BUMP TESTED AND ALLOWED TO CYCLE OFF ON THE HIGH AND LOW PRESSURE CONTROL. EACH UNIT HAS A COPY OF THE RUN DATA SHIPPED INSIDE THE ELECTRICAL PANEL
- ELECTRICAL CIRCUITS ARE COMPLETELY CHECKED FOR CONTINUITY
- PIPING IS LAID OUT TO MINIMIZE STRESS AND VIBRATION AND IS PRE-BENT TO ELIMINATE LEAKS
- ENCAPSULATED, AUTO-RESET, HIGH AND LOW PRESSURE CONTROLS TO ELIMINATE LEAKS (ADJUSTABLE LOW PRESSURE CONTROL STANDARD)
- PAINTED STEEL CABINETS FOR SUPERIOR STRENGTH AND CORROSION PROTECTION
- HEAVY DUTY, STEEL, 1-1/2" TALL BASE

SERVICEABILITY

- SUCTION SERVICE VALVES FOR HERMETIC AND SCROLL COMPRESSORS LOCATED OUTSIDE THE CABINET FOR QUICK INSTALLATIONS.
- RECEIVER WITH FUSIBLE PLUG, LIQUID SHUTOFF VALVE AND CHARGING PORT IS STANDARD
- LARGE ELECTRICAL PANEL FOR EASE OF ACCESS
- PREFABRICATED WIRING HARNESSSES FOR TIGHT CRIMP CONNECTIONS AND CONSISTENT LABELING
- UNIT STAYS ON IF THE HOOD IS REMOVED FOR SERVICING
- SIGHT GLASS IS EASILY VIEWABLE


Options

Mounted Options


- Preferred Package Code - A0000
- Motor - PSC
- Receiver Options - STANDARD
- Liquid Line Options - FILTER DRIER AND SIGHT GLASS
- Discharge Line Options - HEAD PRESSURE VALVE 150#
- Fused Disconnect - NO FUSED DISCONNECT
- Crankcase Heater - CRANKCASE HEATER
- Pre Charged - NONE
- Hail Guard Factory Installed - NONE
- Brand Label - LARKIN
- Coil Selection - MICROCHANNEL COIL
- Defrost Timer Options - NO TIMER
- Suction Line Options - SUCTION TUBE ONLY
- Cabinet Selection - Painted
- Pressure Options - ADJUSTABLE LOW - FIXED HIGH
- Phase Loss Monitor - NONE
- Snow Legs - NONE

Minimum Unit Clearances

Walls or Obstructions for Horizontal Air Flow

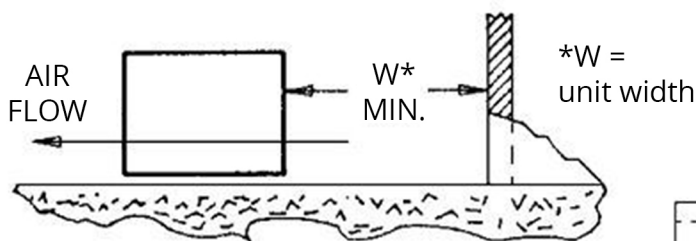

Multiple Units with Horizontal Air Flow

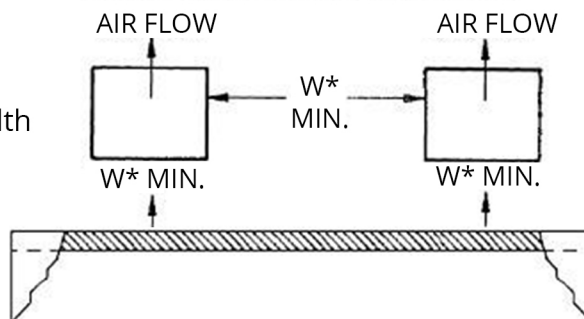

* Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov

LEL0190AS6AMAD0184 - SUBMITTAL



Project Name:	ANDERSON NESLER-TACO TIME PUYALLUP	Project Location:	US, WA, PUYALLUP
Quote ID:	R2644438	Item #:	2020
Submitted For:	CHARLIE NESLER	Submitted On:	12/11/2023
Submitted By:	Jim Cellini	Submitted From:	ANDERSON NESLER
Identity #:	COOLER	Tag:	COOLER EVAP
System Description:	Split system	System Tag:	COOLER

For Record

For Approval

By: _____

Date: _____

General Product Information

Product Family:	LEL	Motor type	2 SPEED EC
Defrost Type:	Air	Number of Fans:	3
Voltage: (Volts/Ph/Hz)	115/1/60	Fan HorsePower	1/20
Refrigerant Type:	R448A	Fins per Inch	6

Technical Information

Performance Data

Capacity			Air Flow				Altitude (ft)	AWEF Value	
TD (°F)	SST (°F)	Application Capacity* (BTU/H)	CFM	Fan Diameter (in.)	Air Throw (ft)			Cooler > 32	Freezer <= 32
				Standard		w/Collar			
8.2	24.8	21,200	1830	12			0	9	N/A


Electrical Data

Fan Motor(s)		Defrost Heater(s)		Drain Pan Heater(s)	
Watts	Amps	Watts	Amps	Watts	Amps
165	2.7				

Unit Specifications

Connections (in.)						Approx. Net Weight (lbs)
Coil Inlet	Suction	External Equalizer	Drain	Side Port	Hot Gas Drain Pan	
1/2	7/8	1/4	3/4			73

Dimensional Drawing(s)

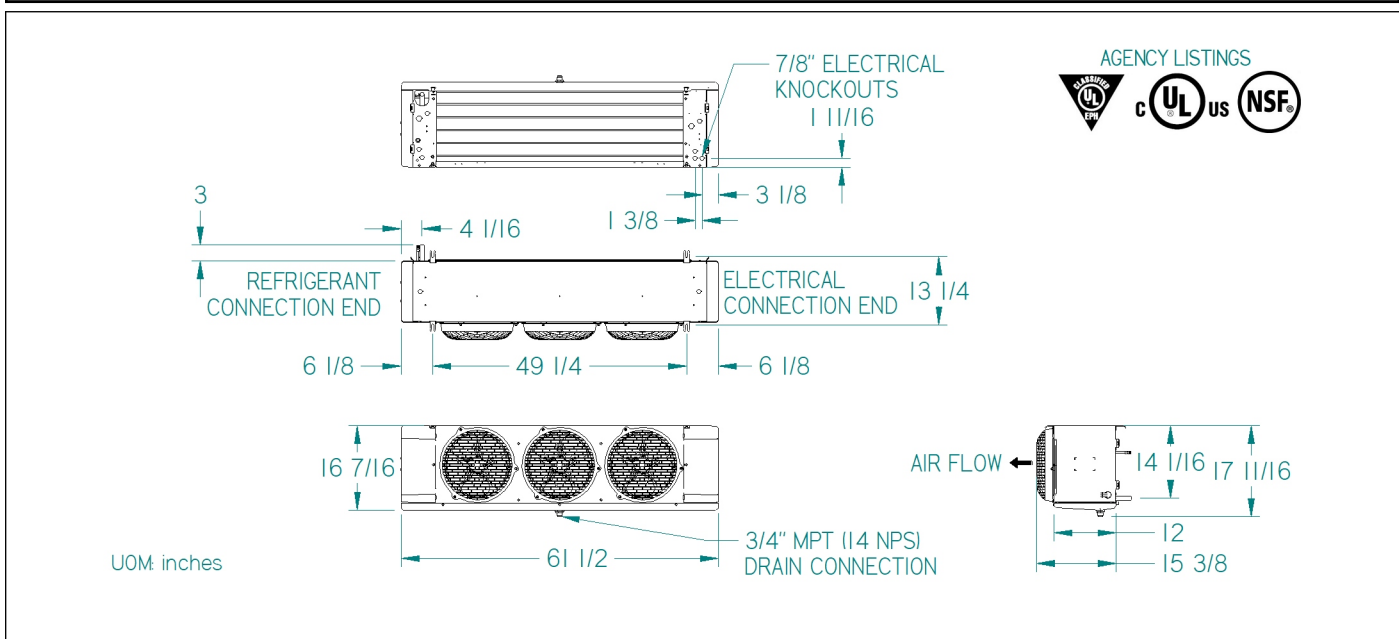

LEL0190AS6AMAD0184 - SUBMITTAL



Project Name:	ANDERSON NESLER-TACO TIME PUYALLUP	Project Location:	US, WA, PUYALLUP
Quote ID:	R2644438	Item #:	2020
Submitted For:	CHARLIE NESLER	Submitted On:	12/11/2023
Submitted By:	Jim Cellini	Submitted From:	ANDERSON NESLER
Identity #:	COOLER	Tag:	COOLER EVAP
System Description:	Split system	System Tag:	COOLER

Standard Features

EASE OF INSTALLATION SERVICE

- ALL ELECTRICAL COMPONENTS FACTORY WIRED TO TERMINAL BOARD AND IDENTIFIED, MAKING IT EASY TO FIELD WIRE THE UNIT

RELIABLE DURABLE

- HEAVY GAUGE, WHITE PAINTED CABINET CLEANS EASILY AND LOOKS ATTRACTIVE
- MOLDED FAN GUARD AND ACCESS PANELS ARE MADE OF STRONG, DURABLE, AND NSF AND UL SANITATION RATED PLASTIC MATERIAL
- SWEAT CONNECTIONS TO REDUCE POTENTIAL FOR LEAKS

PERFORMANCE

- EC MOTORS STANDARD ON ALL MODELS FOR IMPROVED UNIT EFFICIENCY

VERSATILE


- LARGE DIAMETER DRAIN HOLE (3/4" ID) IS LOCATED TOWARDS THE BACK OF THE UNIT
- MINIMAL HEIGHT OF THE LOW PROFILE SERIES MAKES IT IDEAL FOR LOW CEILING COOLERS
- CABINET DESIGN FEATURES HINGED, REMOVABLE FRONT ACCESS PANELS ON EACH SIDE FOR EASY ACCESS TO ELECTRICAL AND REFRIGERATION COMPONENTS
- LIQUID LINE SOLENOID WIRE HARNESS IS FACTORY-INSTALLED FOR QUICK INSTALLATION
- MOTORS PLUG INTO WIRING HARNESS FOR EASIER SERVICING
- HINGED, REMOVABLE DRAIN PAN FOR EASY AND SAFE ACCESS
- PRE-DRILLED HOLES ON THE BACK OF THE UNIT FOR ROOM THERMOSTAT
- QUICK REMOVAL FAN GUARD/MOTOR ASSEMBLY FOR EASY SERVICE OR REPLACEMENT OF AIR MOVER PARTS
- INTERNAL PANELS ARE ISOLATED FOR QUIET OPERATION
- INTERNALLY ENHANCED TUBING AND FIN DESIGN FOR HIGHER EFFICIENCY

Options

Mounted Options

- Brand Label - LARKIN
- DTFD Option - None
- Fan Guard - Molded
- Drain Pan Type - White
- Solenoid Voltage - 115
- Coil Mechanical Option - Sporlan TXV / Sporlan Sol
- Liquid Temperature - 95
- Customer Specified Valve Type - TXV
- Motor - 2 Speed EC
- Fan Blade - Standard
- Cabinet Type - White
- Controller Option - None
- Fin Material - Aluminum
- Saturated Suction Temperature - 25
- N/A - N/A
- Valve Family - L

Minimum Unit Clearances

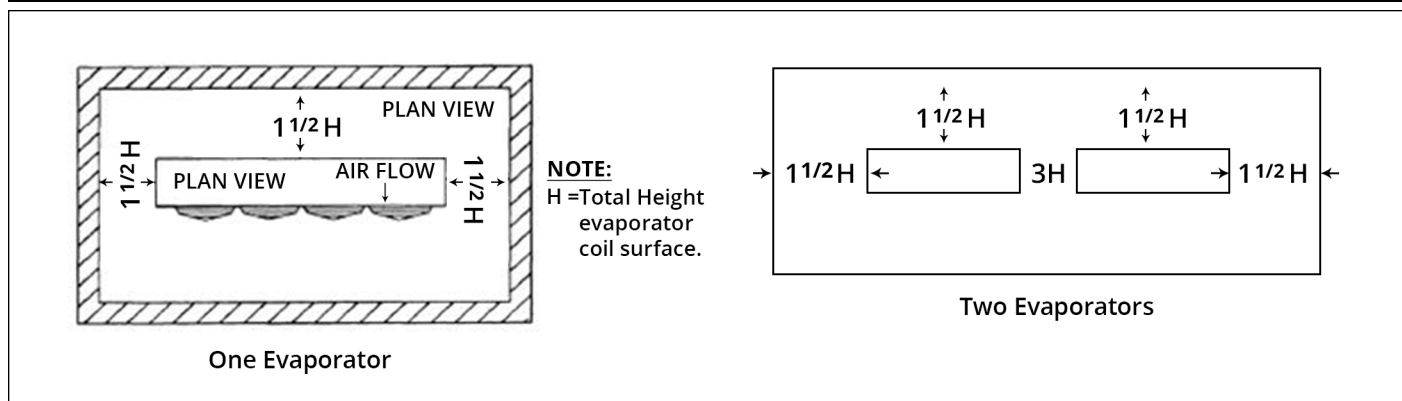

* Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov