

# ARCHER



**C O N S T R U C T I O N , I N C**

**7855 South 206<sup>th</sup> Street, Kent, WA 98032**

**• Phone: 253-872-7222 • Fax: 253-872-7277**


# **FIRE SPRINKLER EQUIPMENT SUBMITTAL**

FOR

***CHC Cannery***  
**201 W. Main St**  
**Puyallup, WA 98371**

**Archer Job # S23-090**

## PS 626 – Pipe Stop




Clamp Requires bolt and channel nut sold separately.

**Note:** For use with 2" to 8" Pipe


Weight/100 pcs: 40 lbs.

## PS 651 – Reversible Channel Bracket



A Size	Uniform Load*	Wt./100 pcs
6"	1,200	185
12"	600	293
18"	400	401
24"	300	509
*Mounted on 12 Ga. Channel		

## PS 708 – Single Channel Bracket Support



Use With: PS 200,  
PS 210,  
PS 500 2T3

**Design Moment on Upright Channel:**


16 ga. channel 3,200 in.-lbs.,  
14 ga. channel 4,400 in.-lbs.  
12 ga. channel 5,100 in.-lbs.

**Note:**

Moment is for fitting only.  
Channel may determine overall capacity.

Weight/100 pcs: 235 lbs.

## PS 661 T1, PS 661 T2 – Wrap-Around Channel Bracket

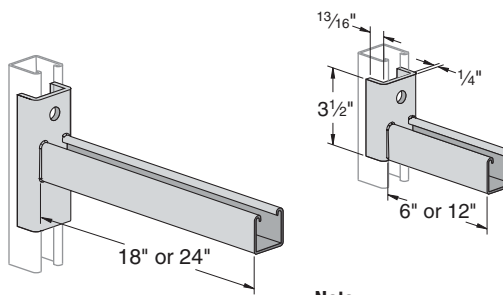


**Note:**


PS 661 T1 (Slot up) illustrated  
PS 661 T2 (Slot down) not shown

Size	Uniform Load*	Wt./100 pcs
6"	1,600	191
12"	800	292
18"	600	436
24"	450	536
*Mounted on 12 Ga. Channel		

## PS 808 T1, PS 808 T2 – Interlocking Channel Bracket




(PS 808 T1 - Slot Up)



(PS 808 T2 - Slot Down)



A Size	Uniform Load*	Wt./100 pcs
6"	1,200	161
12"	600	261
18"	400	361
24"	300	461
*Mounted on 12 Ga. Channel		

## PS 809 – Double Channel Bracket



A Size	Uniform Load*	Wt./100 pcs
12"	2,000	502
18"	1,300	692
24"	1,000	882
30"	800	1,072
36"	650	1,262
*Mounted on 12 Ga. Channel		

## PS 732 – Shelf Bracket



Size	A	B	# of Holes	Uniform Load*	Wt./100 pcs
8"	8 1/2"	4"	2	800	168
10"	10 1/2"		3		202
12"	12 1/2"	6"	4	900	258
14"	14 1/2"		4		292
16"	16 1/2"		4	1,200	381
18"	18 1/2"		4		416
20"	20 1/2"		4	1,000	461

\*Mounted on 12 ga. channel



F1FR56 Series  
Quick Response Sprinklers  
K-factor 5.6 (80)

Features

- Standard coverage quick-response sprinklers
- Upright, pendent, horizontal sidewall, and vertical sidewall deflectors
- Low profile, compact design
- Available in a wide variety of finishes


Product Description

Reliable Model F1FR56 series sprinklers are quick-response standard spray automatic fire sprinklers utilizing a sensitive 3.0 mm glass bulb thermal element.

Pendent and horizontal sidewall sprinklers may be installed exposed or surface mounted using escutcheons such as the Reliable Models B, C, or HB (reference Technical Bulletin 204). When installed recessed or concealed, the Model F1FR56 series sprinklers are specifically listed with and may only be installed with listed Reliable escutcheons and cover plates. Refer to the technical information on the following pages for specific listings for recessed and concealed installations and refer to Figures 5 and 6 for dimensional information.

When fitted with an approved water shield, these sprinklers may be considered intermediate sprinklers for use in racks, below grated walkways, and other areas where intermediate level sprinklers are required.

Table A provides a summary of the approvals and availability of specific Model F1FR series sprinkler configurations. Additional technical information for each sprinkler model is provided on the following pages.

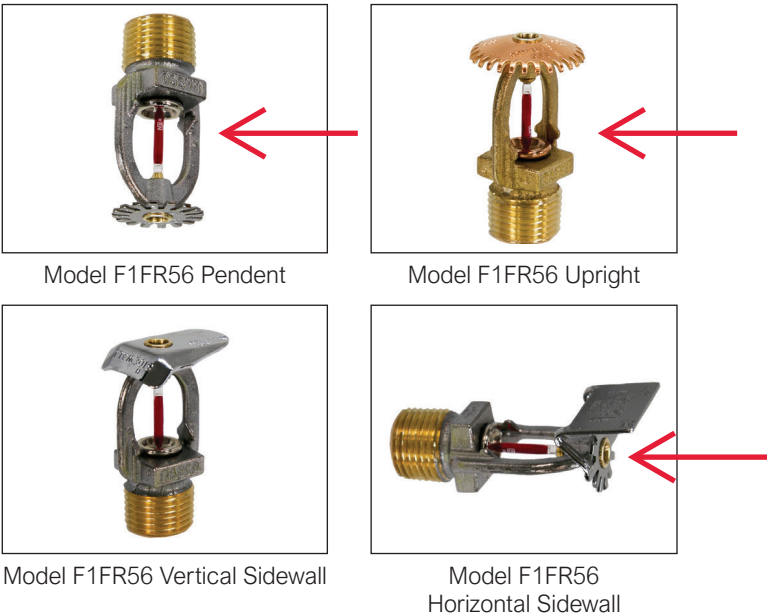

**Note:** Not all versions of the product are shown.

**Note:** This bulletin may contain information on New and Legacy sprinklers that reflects a dimensional change only. Sprinkler Identification Number (SIN), application, performance, and listings/approval are not otherwise affected. Sprinklers with New frames will include the suffix “N” in the order.

F1FR Series Sprinkler Summary

					Table A
Sprinkler Model	K-Factor gpm/psi <sup>1/2</sup> (lpm/bar <sup>1/2</sup> )	Orientation	Listings & Approvals	Max. Working Pressure psi (bar)	Sprinkler Identification Number (SIN)
F1FR56	5.6 (80)	Upright Intermediate Upright	cULus, FM, LPCB, VdS, EC, WM, UKCA	175 (12) 250 (17) (cULus only)	RA1425
		Pendent	cULus, FM, LPCB, VdS, EC, WM, UKCA	175 (12) 250 (17) (cULus only)	RA1414
		Concealed Pendent	cULus, VdS, EC, WM, UKCA	175 (12) 250 (17) (cULus only)	RA1414
		Horizontal Sidewall	cULus, FM	175 (12)	RA1435
		Vertical Sidewall	cULus, FM, LPCB, UKCA	175 (12)	RA1485

## Model F1FR56 Upright Sprinkler

SIN RA1425

### Technical Specifications

**Style:** Upright, Intermediate Upright

**Threads:** 1/2" NPT or ISO 7-R1/2

**Nominal K-Factor:** 5.6 (80 metric)

**Max. Working Pressure:**

175 psi (12 bar)

250 psi (17 bar) (cULus only)

### Material Specifications

**Thermal Sensor:** 3 mm Glass Bulb

**Sprinkler Frame:** Brass Alloy

**Cap:** Bronze Alloy

**Sealing Washer:** Nickel with PTFE

**Load Screw:** Copper Alloy

**Deflector:** Brass Alloy

### Sprinkler Finishes

(See Table B)

### Sensitivity

Quick response

### Temperature Ratings

135°F (57°C)

155°F (68°C)

175°F (79°C)

200°F (93°C)

286°F (141°C)

### Guards & Shields (New Frames)

Factory Water Shield (cULus, FM)

F-1 Guard (cULus, FM)

F-3 Guard with Shield (cULus, FM)

### Guards and Shields (Legacy Frames)

Factory Water Shield

C-1 Guard (FM)

C-3 Guard with Shield (cULus, FM)

D-1 Guard (cULus)

D-3 Guard with Shield (cULus)

### Sprinkler Wrench

Model W2

Model J (New frame with guard installed)

Model JD (Legacy frame with guard installed)

### Listings and Approvals

cULus Listed

FM Approved

LPCB

VdS

EC


WM

UKCA: 0832-UKCA-CPR-S5045



## Model F1FR56 Upright Sprinkler Components and Dimensions

Figure 1

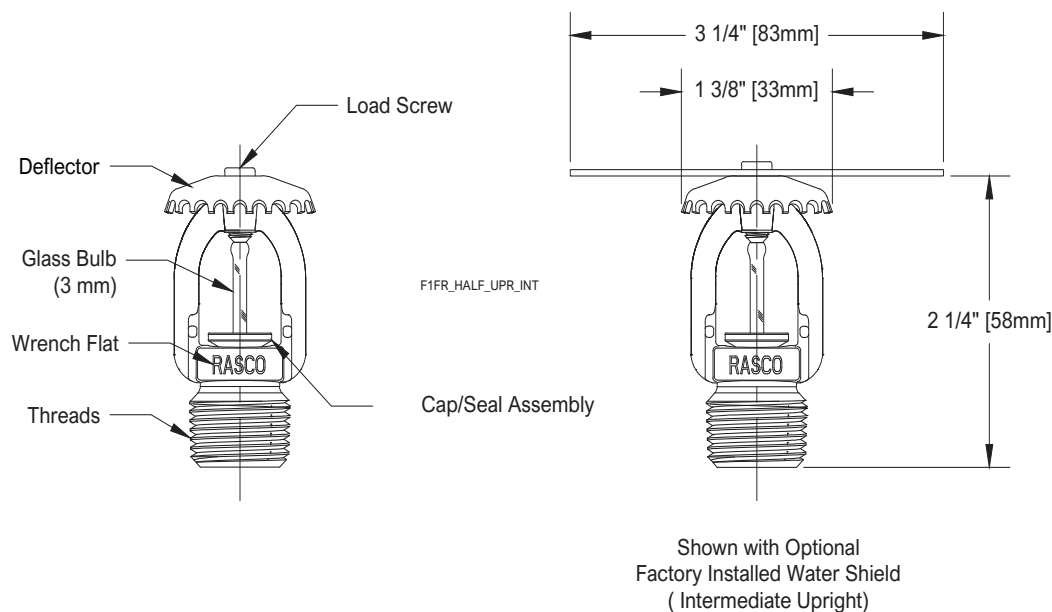

**Technical Specifications****Style:**

Pendent  
Recessed Pendent  
Concealed Pendent

**Threads:** 1/2" NPT or ISO 7-R1/2

**Nominal K-Factor:** 5.6 (80 metric)

**Max. Working Pressure:**

175 psi (12 bar)  
250 psi (17 bar) (cULus only)

**Material Specifications**

**Thermal Sensor:** 3 mm Glass Bulb

**Sprinkler Frame:** Brass Alloy

**Cap:** Bronze Alloy

**Sealing Washer:** Nickel with PTFE

**Load Screw:** Copper Alloy

**Deflector:** Brass Alloy

**Sprinkler Finishes**

(See Table B)

**Sensitivity**

Quick response

**Temperature Ratings<sup>(1)</sup>**

135°F (57°C)  
155°F (68°C)  
175°F (79°C)  
200°F (93°C)  
286°F (141°C)

**Recessed Escutcheons**

Model F1 (cULus, LPCB, VdS, CE, WM)  
Model F2 (cULus, FM, LPCB, VdS, CE, WM)  
Model FP (cULus, VdS, CE, WM)

**Cover Plate**

Model CCP (cULus, VdS<sup>(2)</sup>, CE<sup>(2)</sup>)

**Guards & Shields (New Frames)<sup>(3)</sup>**

F-1 Guard (FM)  
F-5 Guard/Shield Kit (FM)  
F-7 Guard (cULus)  
F-8 Guard/Shield Kit (cULus)  
S-1 Shield (cULus, FM)

**Guards & Shields (Legacy Frames)<sup>(3)</sup>**

C-1 Guard (FM)  
C-5 Guard/Shield Kit (FM)  
D-1 Guard (cULus, FM)  
D-4 Guard/Shield Kit (FM)  
D-5 Guard/Shield Kit (cULus, FM)  
S-1 Shield (cULus, FM)

**Sprinkler Wrenches**


Model W2 (pendent)  
Model W4 (recessed or concealed)  
Model J (New frame with guard installed)  
Model JD (Legacy frame with guard installed)

**Listings and Approvals<sup>(4)</sup>**

cULus Listed  
FM Approved  
LPCB  
VdS  
EC  
WM  
UKCA: 0832-UKCA-CPR-S5045,  
0831-UKCA-CPR-5072 (CCP)

**Notes:**

1. 286°F (141°C) temperature rated sprinkler not listed for recessed or concealed use.
2. VdS and CE approval for CCP concealed use is for 155°C (68°C) sprinkler ONLY.
3. Not suitable for recessed or concealed installations.
4. When used surface mounted or exposed. See Recessed Escutcheon and Cover Plate section for specific approvals when installed recessed or concealed.

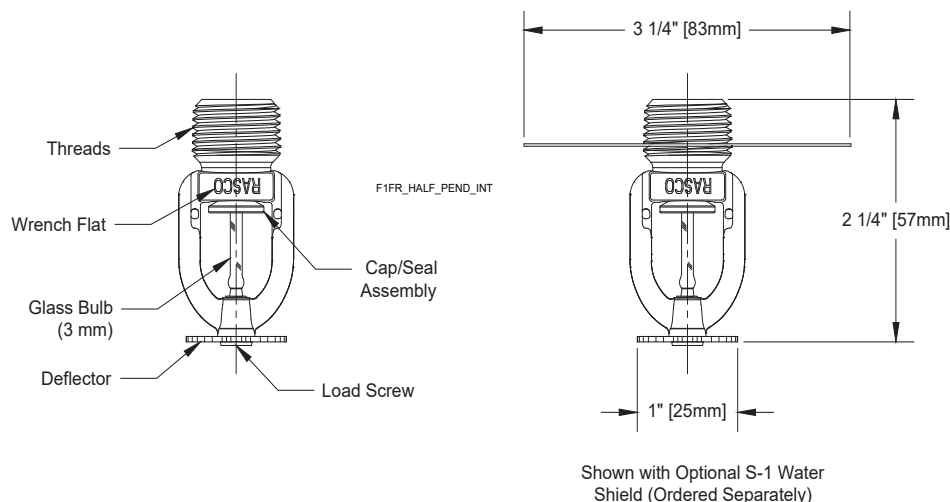**Model F1FR56 Pendent Sprinkler Components and Dimensions****Figure 2**

**Note:** Please refer to Figure 8 for recessed and concealed installation.

**Technical Specifications****Style:**

Horizontal Sidewall  
Recessed Horizontal Sidewall

**Threads:** 1/2" NPT or ISO 7-R1/2**Nominal K-Factor:** 5.6 (80 metric)**Max. Working Pressure:**

175 psi (12 bar)

**Material Specifications****Thermal Sensor:** 3 mm Glass Bulb**Sprinkler Frame:** Brass Alloy**Cap:** Bronze Alloy**Sealing Washer:** Nickel with PTFE**Load Screw:** Copper Alloy**Deflector:** Brass Alloy**Sprinkler Finishes**

(See Table B)

**Sensitivity**

Quick response

**Temperature Ratings <sup>(1)</sup>**

135°F (57°C)

155°F (68°C)

175°F (79°C)

200°F (93°C)

286°F (141°C)

**Recessed Escutcheons<sup>(2)</sup>**

Model F1 (cULus)

Model F2 (cULus, FM)

Model FP (cULus)

**Guards & Shields (New Frames)<sup>(3)</sup>**

F-4 Guard (FM)

F-7 Guard (cULus)

**Guards & Shields (Legacy Frames)<sup>(3)</sup>**

C1 Guard (FM)

D1 Guard (cULus)

**Sprinkler Wrenches**

Model W2 (non-recessed)


Model W4 (recessed)

Model J (New frame with guard installed)

Model JD (Legacy frame with guard installed)

**Listings and Approvals**cULus Listed<sup>(4)</sup>FM Approved<sup>(5)</sup>**Notes:**

1. 286°F (141°C) temperature rated sprinkler not listed for recessed use.
2. FM approved recessed installation when used with Model F2 escutcheon ONLY.
3. Not suitable for recessed horizontal sidewall installations.
4. cULus Listed for Light and Ordinary Hazard when installed exposed or surface mounted. Listed for Light Hazard ONLY when installed recessed.
5. FM Approved for Light Hazard ONLY.

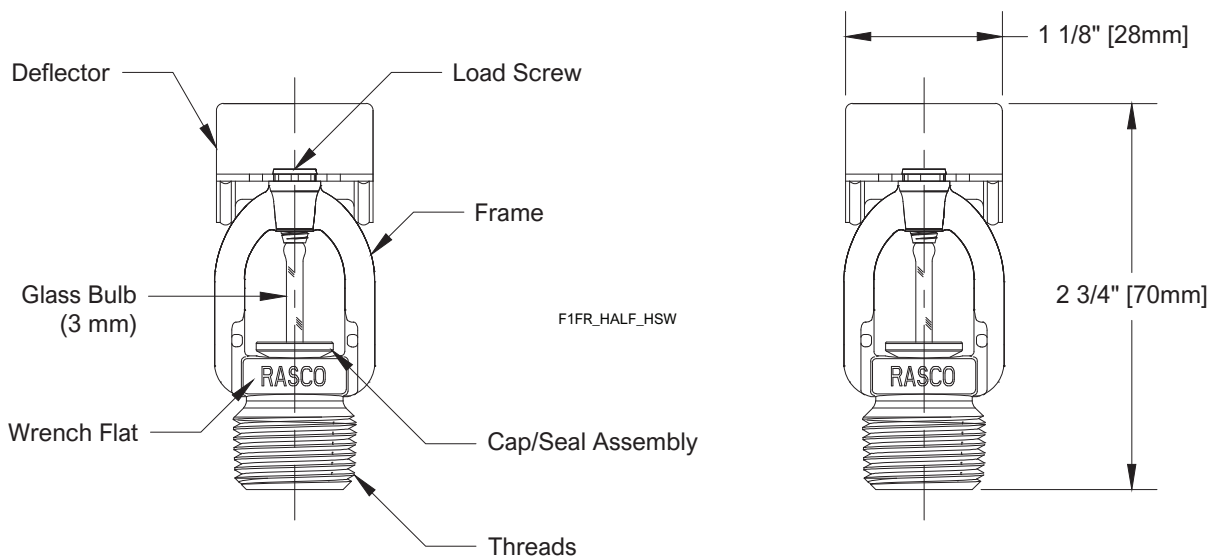**Model F1FR56 Horizontal Sidewall Sprinkler Components and Dimensions****Figure 3****Note:** Please refer to Figure 9 for recessed installation.

**Technical Specifications****Style:**

Upright Vertical Sidewall  
Pendent Vertical Sidewall

**Threads:** 1/2" NPT or ISO 7-R1/2

**Nominal K-Factor:** 5.6 (80 metric)

**Max. Working Pressure:** 175 psi (12 bar)

**Material Specifications**

**Thermal Sensor:** 3 mm Glass Bulb

**Sprinkler Frame:** Brass Alloy

**Cap:** Bronze Alloy

**Sealing Washer:** Nickel with PTFE

**Load Screw:** Copper Alloy

**Deflector:** Brass Alloy

**Sprinkler Finishes**

(See Table B)

**Sensitivity**

Quick response

**Temperature Ratings**

135°F (57°C)

155°F (68°C)

175°F (79°C)

200°F (93°C)

286°F (141°C)

**Guards & Shields (New Frames)**

F-2 Guard (FM)

**Guards & Shields (Legacy Frames)**

C1 Guard (FM)

**Sprinkler Wrenches**

Model W2

Model J (New frame with guard installed)

Model JD (Legacy frame with guard installed)

**Listings and Approvals<sup>(1)</sup>**

cULus Listed



FM Approved



LPCB<sup>(2)</sup>

UKCA: 0832-UKCA-CPR-S5045



**Notes:**

1. Listed and approved for Light Hazard ONLY.
2. LPCB approved for use in pendent position ONLY.

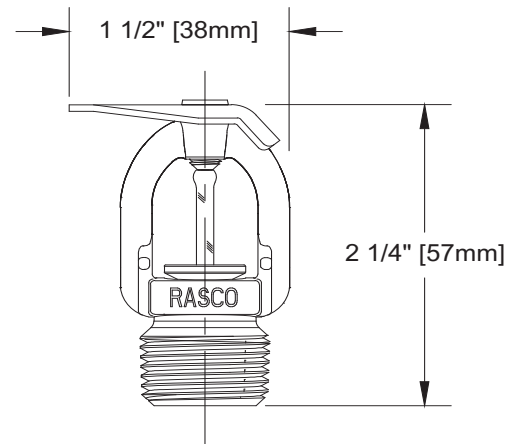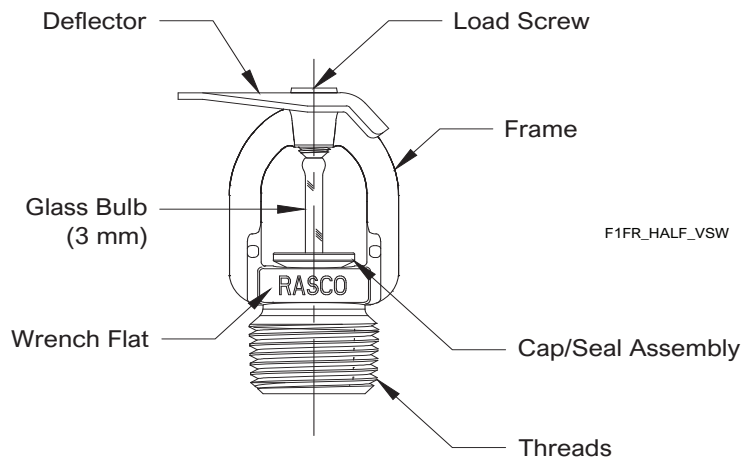**Model F1FR56 Vertical Sprinkler Components and Dimensions****Figure 4**

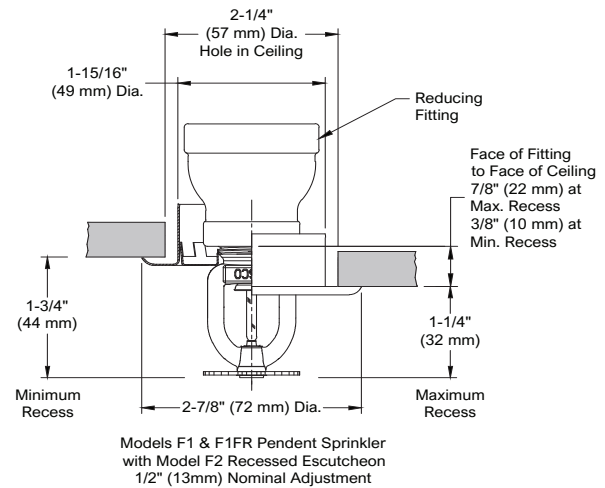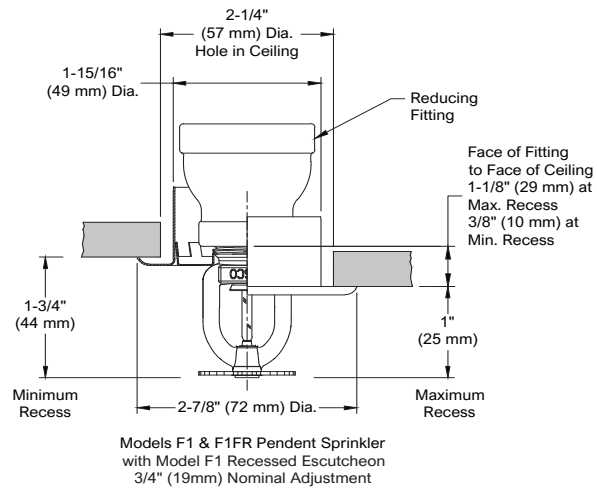

F1\_REC\_PEND\_CCP

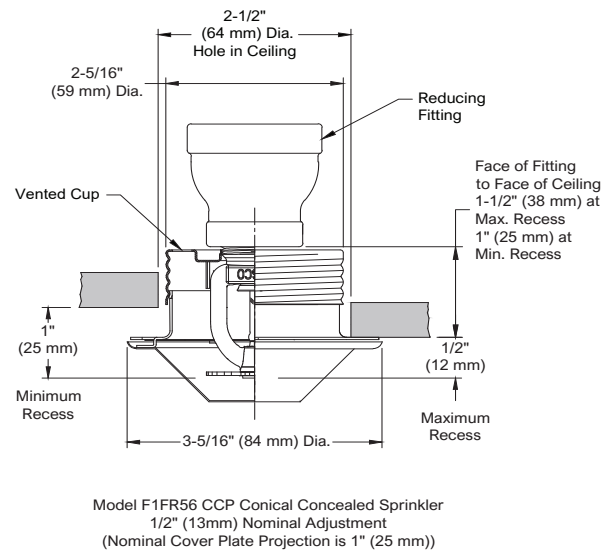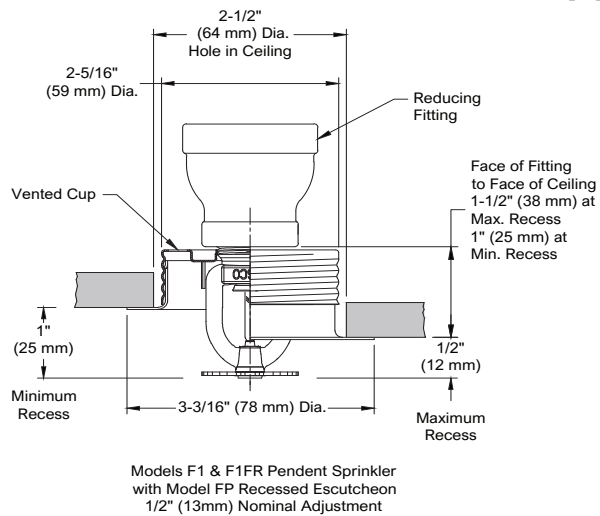


Note: Model FP recessed assemblies may not be used where the pressure in the space above the ceiling is positive with respect to the protected area. Ensure that the openings in the Model FP cup are unobstructed following installation.

Note: Model CCP concealed assemblies may not be used where the pressure in the space above the ceiling is positive with respect to the protected area. Ensure that the openings in the Model CCP cup are unobstructed following installation.






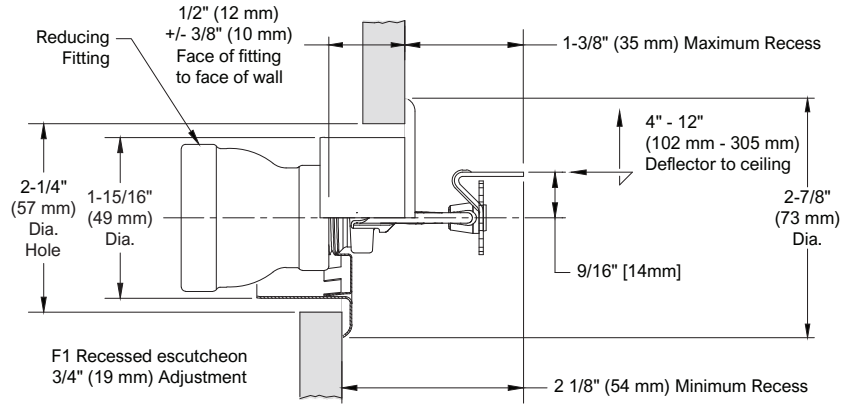


Model F1FR Horizontal Sidewall Sprinkler  
with Model F1 Recessed Escutcheon  
3/4" (19mm) Nominal Adjustment

F1FR\_REC\_HSW

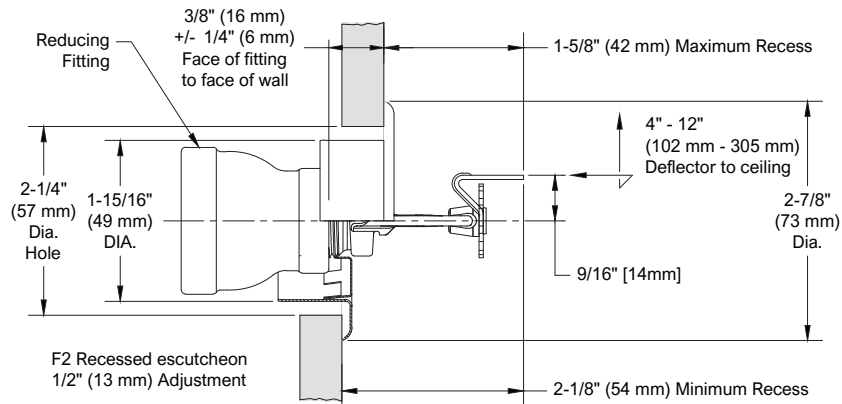

Model F1FR Horizontal Sidewall Sprinkler  
with Model F2 Recessed Escutcheon  
1/2" (13mm) Nominal Adjustment

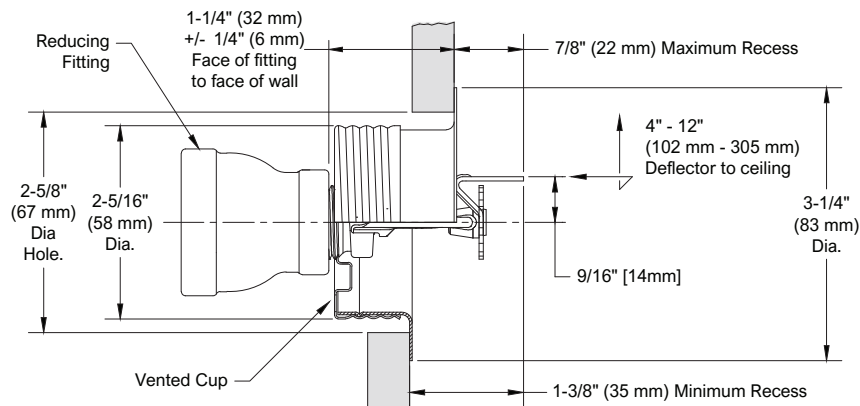

Model F1FR Horizontal Sidewall Sprinkler  
with Model FP Recessed Escutcheon  
1/2" (13mm) Nominal Adjustment

Note: Model FP recessed assemblies may not be used where the pressure in the space behind the sprinkler is positive with respect to the space in the protected area. Ensure that the openings in the Model FP cup are unobstructed following installation.

## Wrenches



Model W2 (upright, pendent)



Model J (New frame with guard installed)  
Model JD (Legacy frame with guard installed, similar but with zinc finish)



Model W4  
(recessed, concealed pendent)

## Finishes<sup>(1)</sup>

Table B

Standard Finishes			Special Application Finishes		
Sprinkler	F1, F2 and FP <sup>(2)</sup> Escutcheons	CCP Cover Plate <sup>(2)</sup>	Sprinkler	F1, F2 and FP <sup>(2)</sup> Escutcheons	CCP Cover Plate <sup>(2)</sup>
Bronze	Brass	Chrome	Electroless Nickel PTFE <sup>(3)(4)</sup>	Bright Brass	Bright Brass
Chrome	Chrome	White Paint	Bright Brass <sup>(5)</sup>	Satin Chrome	Satin Chrome
White Polyester <sup>(3)</sup>	White Polyester		Satin Chrome	Custom Color Polyester	Custom Color Paint
			Custom Color Polyester <sup>(3)</sup>		

### Notes:

1. Paint or any other coating applied over the factory finish will void all approvals and warranties.
2. Model FP escutcheons and Model CCP sprinklers utilize a galvanized steel cup with a finished trim ring or cover plate.
3. cULus Listed as corrosion resistant.
4. FM Approved as corrosion resistant.
5. For 200°F (93°C) maximum temperature rated sprinklers only.

## Installation

Model F1FR Series sprinklers must be installed in accordance with NFPA13 and the requirements of all applicable authorities having jurisdiction. Model F1FR Series sprinklers must be installed with the Reliable sprinkler installation wrench identified in this Bulletin. Any other wrench may damage the sprinkler. The Models W2 and W4 wrenches have two sets of jaws. Use the smallest set of jaws that fit on the wrench flats of the sprinkler. A leak tight sprinkler joint can be obtained with a torque of 8 to 18 lb-ft (11 to 24 N-m). Do not tighten sprinklers over the maximum recommended installation torque. Exceeding the maximum recommended installation torque may cause leakage or impairment of the sprinkler.

Glass bulb sprinklers have orange bulb protectors or protective caps to minimize bulb damage during shipping, handling and installation. Reliable sprinkler installation wrenches are designed to install sprinklers with bulb protectors in place. Remove the bulb protector at the time when the sprinkler system is placed in service for fire protection. Removal of the bulb protector before this time may leave the bulb vulnerable to damage. Remove bulb protectors by undoing the clasp by hand. Do not use tools to remove bulb protectors.

## Maintenance

Reliable Model F1FR series sprinklers should be inspected and the sprinkler system maintained in accordance with NFPA 25, as well as the requirements of any Authorities Having Jurisdiction.

Prior to installation, sprinklers should remain in the original cartons and packaging until used. This will minimize the potential for damage to sprinklers that could cause improper operation or non-operation.

Do not clean sprinklers with soap and water, ammonia liquid or any other cleaning fluids. Remove dust by gentle vacuuming without touching the sprinkler.

Replace any sprinkler which has been painted (other than factory applied). A stock of spare sprinklers should be maintained to allow quick replacement of damaged or operated sprinklers. Failure to properly maintain sprinklers may result in inadvertent operation or non-operation during a fire event.

## Guarantee

For the guarantee, terms, and conditions, visit [www.reliablesprinkler.com](http://www.reliablesprinkler.com).

## Ordering Information

**Specify the following when ordering:**

### Model

- F1FR56

### Deflector/Orientation

- Upright
- Intermediate Upright
- Pendent
- CCP Concealed Pendent
- Horizontal Sidewall
- Vertical Sidewall

### Temperature Rating

- See sprinkler technical specifications

### Sprinkler Finish

- See Table B

### Recessed Escutcheon<sup>(1)(2)</sup>

- F1
- F2
- FP

### Escutcheon Finish

- See Table B

### CCP Cover Plate Temperature Rating

- 135°F (57°C) [For use with 135°F (57°C) and 155°F (68°C) sprinklers.]
- 165°F (74°C) [For use with 175°F (79°C) and 200°F (93°C) sprinklers.]

### CCP Cover Plate Finish

- See Table B

### Sprinkler Wrench

- Model W2
- Model W4 (recessed, concealed)
- Model J (New frame with guard installed)
- Model JD (Legacy frame with guard installed)

### Notes:

1. 286°F (141°C) sprinklers are not listed to be used recessed or concealed.
2. For FM, recessed sprinklers must use the Model F2 escutcheon.



F1FR42 Series  
Quick-Response Sprinklers  
K-factor 4.2 (60)

Features

- Standard coverage quick-response sprinklers
- Upright and pendent deflectors
- Low profile, compact design
- Available in a wide variety of finishes

Product Description


Reliable Model F1FR series sprinklers are quick-response standard spray automatic fire sprinklers utilizing a sensitive 3.0 mm glass bulb thermal element.

Pendent and horizontal sidewall sprinklers may be installed exposed or surface mounted using escutcheons such as the Reliable Models B, C, or HB (reference Technical Bulletin 204). When installed recessed, the Model F1FR42 series sprinklers are specifically listed with and may only be installed with listed Reliable escutcheons. Refer to the technical information on the following pages for specific listings for recessed installations and refer to Figure 3 for dimensional information.

When fitted with an approved water shield, these sprinklers may be considered intermediate sprinklers for use in racks, below grated walkways, and other areas where intermediate level sprinklers are required.

Table A provides a summary of the approvals and availability of specific Model F1FR series sprinkler configurations. Additional technical information for each sprinkler model is provided on the following pages.

**Note:** This bulletin may contain information on New and Legacy sprinklers that reflects a dimensional change only. Sprinkler Identification Number (SIN), application, performance, and listings/approval are not otherwise affected. Sprinklers with new frames can be identified by a rotoclip indent on one side of the wrench boss and in some cases an installed rotoclip. Sprinklers with new frames will include the suffix “N” in the order. For reference only, legacy version of this sprinkler can be found on Technical Bulletin 014.



Model F1FR42 Pendent



Model F1FR42 Upright

**Note:** Not all versions of the product are shown.

F1FR42 Series Sprinkler Summary					Table A
Sprinkler Model	K-Factor gpm/psi <sup>1/2</sup> (lpm/bar <sup>1/2</sup> )	Orientation	Listings & Approvals	Max. Working Pressure psi (bar)	Sprinkler Identification Number (SIN)
F1FR42	4.2 (60)	Upright	cULus	175 (12)	RA1423
		Pendent		175 (12)	RA1413

## Model F1FR42 Upright Sprinkler

SIN RA1423

### Technical Specifications

**Style:** Upright

**Threads:** 1/2" NPT or ISO 7-R1/2

**Nominal K-Factor:** 4.2 (60)

**Max. Working Pressure:** 175 psi (12 bar)

### Material Specifications

**Thermal Sensor:** 3 mm Glass Bulb

**Sprinkler Frame:** Brass Alloy

**Cap:** Bronze Alloy

**Sealing Washer:** Nickel with PTFE

**Load Screw:** Copper Alloy

**Deflector:** Brass Alloy

### Sprinkler Finishes

(See Table B)

### Sensitivity

Quick Response

### Temperature Ratings

135°F (57°C)

155°F (68°C)

175°F (79°C)

200°F (93°C)

286°F (141°C)

### Guards & Shields (New Frames)

F-1 Guard Kit

F-3 Guard/Shield Kit

### Guards & Shields (Legacy Frames)

D-1 Guard

### Sprinkler Wrenches

Model W2

Model J (New frame with guard installed)

Model JD (Legacy frame with guard installed)



### Listings and Approvals

cULus



Model F1FR42 Upright Sprinkler Components and Dimensions

Figure 1

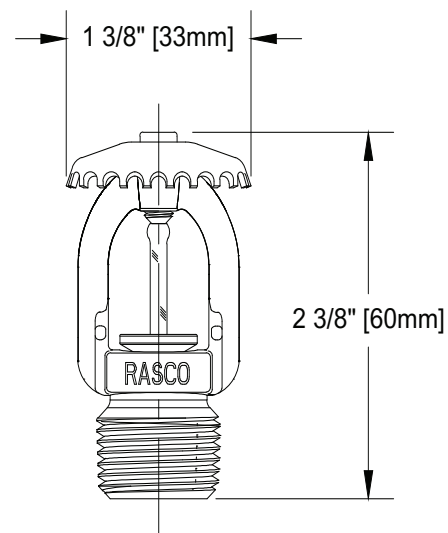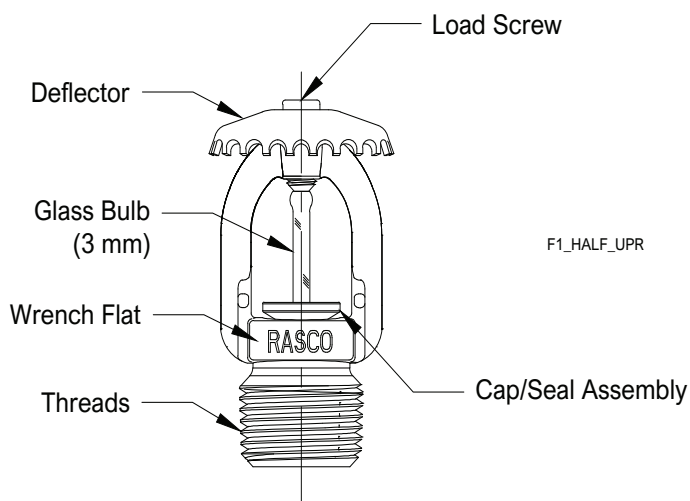

## Model F1FR42 Pendent Sprinkler

SIN RA1413

### Technical Specifications

#### Style:

Pendent  
Recessed Pendent

**Threads:** 1/2" NPT or ISO 7-R1/2

**Nominal K-Factor:** 4.2 (60)

**Max. Working Pressure:** 175 psi (12 bar)

### Material Specifications

**Thermal Sensor:** 3 mm Glass Bulb

**Sprinkler Frame:** Brass Alloy

**Cap:** Bronze Alloy

**Sealing Washer:** Nickel with PTFE

**Load Screw:** Copper Alloy

**Deflector:** Brass Alloy

### Sprinkler Finishes

(See Table B)

### Sensitivity

Quick Response

### Temperature Ratings<sup>(1)</sup>

135°F (57°C)

155°F (68°C)

175°F (79°C)

200°F (93°C)

286°F (141°C)

### Recessed Escutcheons

Model F1

Model F2

Model FP

### Guards & Shields (New Frames)<sup>(2)</sup>

F-7 Guard Kit

F-8 Guard/Shield Kit

### Guards & Shields (Legacy Frames)<sup>(2)</sup>

D-1 Guard

### Sprinkler Wrenches

Model W2 (pendent)

Model W4 (recessed)

Model J (New frame with guard installed)

Model JD (Legacy frame with guard installed)

### Listings and Approvals

cULus




### Notes:


1. 286°F (141°C) and higher temperature rated sprinklers not listed for recessed use.
2. Not suitable for recessed pendent installations.

## Model F1FR42 Pendent Sprinkler Components and Dimensions

Figure 2

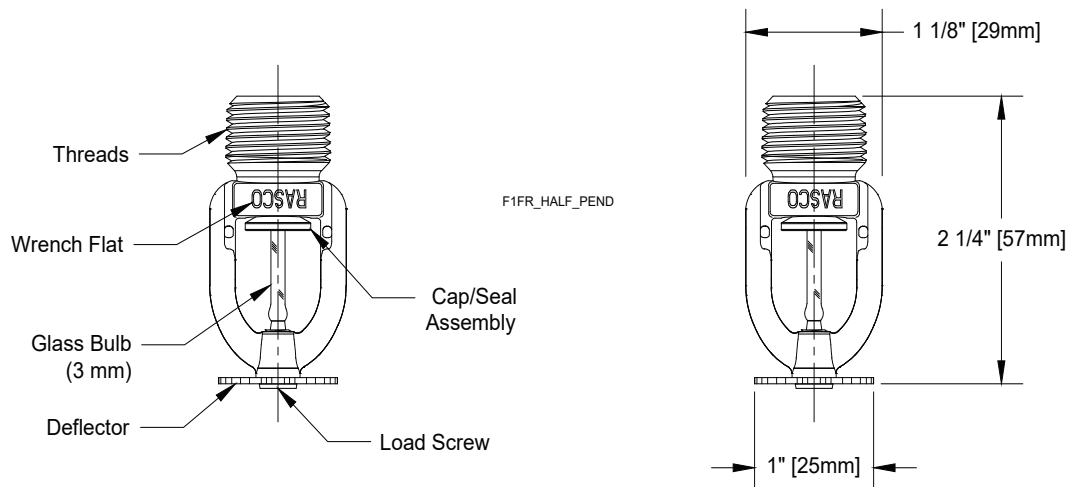

**Note:** Please refer to Figure 3 for recessed installation.

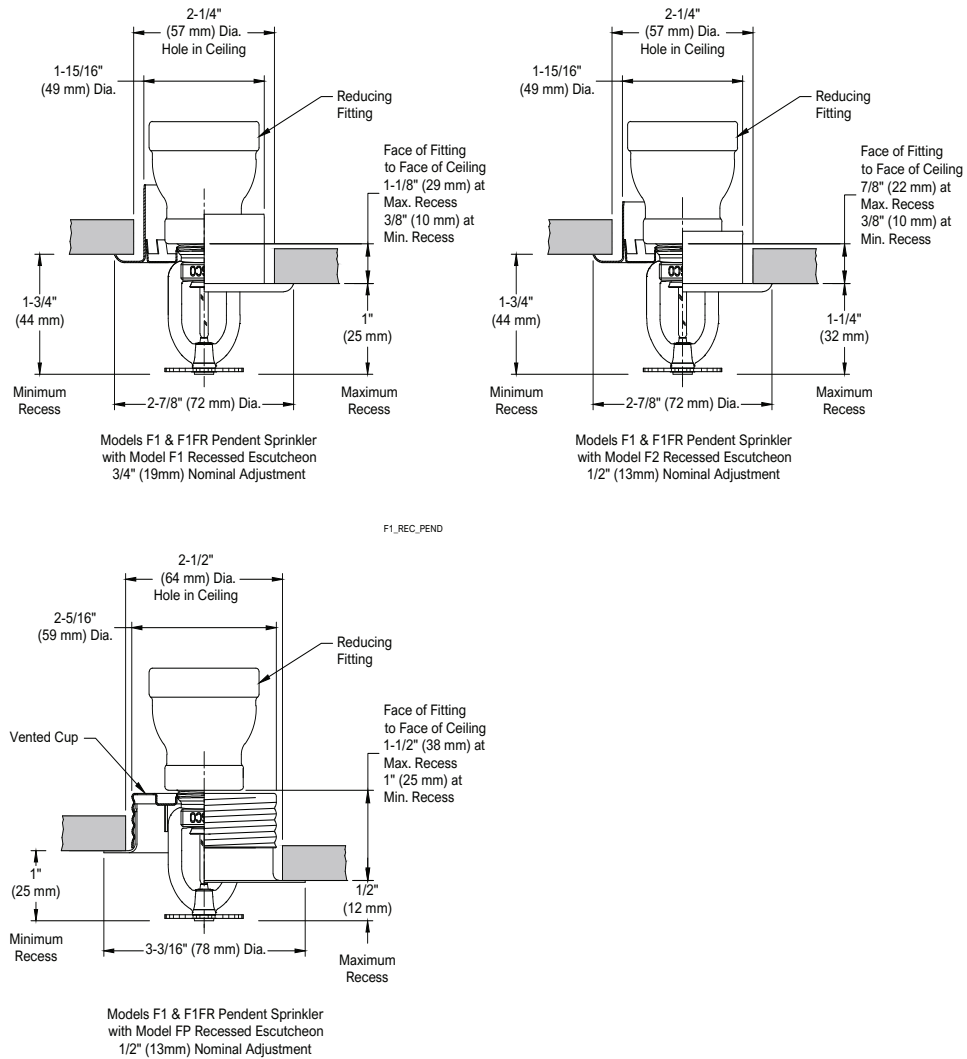

Note: Model FP recessed assemblies may not be used where the pressure in the space above the ceiling is positive with respect to the protected area. Ensure that the openings in the Model FP cup are unobstructed following installation.



## Wrenches



Model W2 (upright, pendent)



Model W4 (recessed pendent)



Model J (New frame with guard installed)



Model JD (Legacy frame with guard installed)

## Finishes<sup>(1)</sup>

Table B

Standard Finishes		Special Application Finishes	
Sprinkler	F1, F2 and FP <sup>(2)</sup> Escutcheons	Sprinkler	F1, F2 and FP <sup>(2)</sup> Escutcheons
Bronze	Brass	Electroless Nickel PTFE <sup>(3)</sup>	Bright Brass
Chrome Plated	Chrome Plated	Bright Brass <sup>(4)</sup>	Satin Chrome
White Polyester <sup>(3)</sup>	White Polyester	Satin Chrome	Custom Color Polyester
		Custom Color Polyester <sup>(3)</sup>	

### Notes:

1. Paint or any other coating applied over the factory finish will void all approvals and warranties.
2. Model FP escutcheons utilize a galvanized steel cup with a finished trim ring.
3. cULus Listed as corrosion resistant.
4. For 200°F (93°C) maximum temperature rated sprinklers only.

## Installation

Model F1FR Series sprinklers must be installed in accordance with NFPA13 and the requirements of all applicable authorities having jurisdiction. Model F1FR Series sprinklers must be installed with the Reliable sprinkler installation wrench identified in this Bulletin. Any other wrench may damage the sprinkler. A leak tight sprinkler joint can be obtained with a torque of 6 to 18 lb-ft (11 to 24 N-m). Do not tighten sprinklers over the maximum recommended installation torque. Exceeding the maximum recommended installation torque may cause leakage or impairment of the sprinkler.

Glass bulb sprinklers have orange bulb protectors or protective caps to minimize bulb damage during shipping, handling and installation. Reliable sprinkler installation wrenches are designed to install sprinklers with bulb protectors in place. Remove the bulb protector at the time when the sprinkler system is placed in service for fire protection. Removal of the bulb protector before this time may leave the bulb vulnerable to damage. Remove bulb protectors by undoing the clasp by hand. Do not use tools to remove bulb protectors.

## Maintenance

Reliable Model F1FR series sprinklers should be inspected and the sprinkler system maintained in accordance with NFPA 25, as well as the requirements of any Authorities Having Jurisdiction.

Prior to installation, sprinklers should remain in the original cartons and packaging until used. This will minimize the potential for damage to sprinklers that could cause improper operation or non-operation.

Do not clean sprinklers with soap and water, ammonia liquid or any other cleaning fluids. Remove dust by gentle vacuuming without touching the sprinkler.

Replace any sprinkler which has been painted (other than factory applied). A stock of spare sprinklers should be maintained to allow quick replacement of damaged or operated sprinklers. Failure to properly maintain sprinklers may result in inadvertent operation or non-operation during a fire event.



## Guarantee

For the guarantee, terms, and conditions, visit [www.reliablesprinkler.com](http://www.reliablesprinkler.com).

## Ordering Information

**Specify the following when ordering:**

### Model

- F1FR42

### Deflector/Orientation

- Upright
- Pendent

### Temperature Rating

- See sprinkler technical specifications

### Sprinkler Finish

- See Table B

### Recessed Escutcheon\*

- F1
- F2
- FP

### Escutcheon Finish

- See Table B


### Sprinkler Wrench

- Model W2 (upright and pendent)
- Model W4 (recessed)
- Model J (New frame with guard installed)
- Model JD (Legacy frame with guard installed)

**\*Notes:** 286°F (141°C) sprinklers are not listed to be used recessed.

# Victaulic® VicFlex™ Sprinkler Fittings

## Series AH2 and AH2-CC Braided Flexible Hoses



Series AH2



Series AH2-CC

### 1.0 PRODUCT DESCRIPTION

#### Available Sizes by Component

**Series AH2 1"/DN25 ID Braided Hose:** 31, 36, 48, 60, 72"/790, 915, 1220, 1525, 1830 mm. Note: length includes adapter nipple and 5.75"/140 mm straight reducer.

**Series AH2-CC 1"/DN25 ID Braided Hose:** 31, 36, 48, 60, 72"/790, 915, 1220, 1525, 1830 mm.

Note: length includes captured coupling and 5.75"/140 mm straight reducer.

#### Connections

- **From Branchline**

- ¾"/20mm BSPT female thread (VdS only)
- 1 ¼"/32mm BSPT female thread (LPCB only)
- 1"/25mm NPT or BSPT female Thread
- 1"/25mm Grooved IGS (refer to Submittal 10.54 for additional IGS connections)
  - No. 116 CPVC Adapter (1"/25mm Female CPVC Socket x 1"/25mm Grooved IGS)
  - No. 142 Welded Outlet
  - Style 922 Outlet-T
  - Style 920N Mechanical-T Outlet
  - No. 65 Grooved End of Run Fitting

- **Hose Inlet**

- 1"/25mm Grooved IGS
- 1"/25mm NPT or BSPT male thread
- ¾"/20mm BSPT male thread (VdS only)
- 1 ¼"/32mm BSPT male thread (LPCB only)

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.



---

## 1.0 PRODUCT DESCRIPTION (CONTINUED)

---

### • Sprinkler Reducer

- Sprinkler Connection: ½" and ¾"/15mm and 20mm NPT or BSPT female thread
- Straight Lengths: 5.75", 9", 13"/140mm, 230mm, 330mm
- 90° Elbows
  - Standard Short
  - Low Profile Short
  - Standard Long
  - Low Profile Long

(Short elbows typically used with concealed sprinklers. Long elbows typically used with recessed pendent sprinklers)

### Brackets

- Style AB2 for suspended and hard-lid ceilings and sidewalls, allows for vertical sprinkler adjustment, and installation before most ceiling tiles in place
- Style AB3 for surface mount applications, wood, metal and block walls, or ceilings
- Style AB4 for hard-lid ceilings with hat furring channel grid systems, allows for vertical sprinkler adjustment
- Style AB5 for hard-lid ceilings and sidewalls, allows for vertical sprinkler adjustment
- Style AB7 for suspended and hard-lid ceilings
- Style AB7 Adjustable for suspended and hard-lid ceilings
- Style AB10 for Armstrong® TechZone™ ceilings
- Style AB11 for lay-in panel suspended t-grid ceilings or drywall suspended t-grid ceilings, allows for low profile installations (use only with 90° low profile elbows)
- Style AB12 for suspended and hard-lid ceilings, allows for vertical sprinkler adjustment, and allows for low profile installation down to 4"/100mm.
- Style ABBA bracket for suspended, exposed, and hard-lid ceilings
- Style ABMM bracket for surface mount and stand off-mount applications, wood, metal and block walls, or ceilings and hard-lid ceilings
- Strut channel and pipe clamp, not supplied by Victaulic

### Maximum Working Temperature

- 225°F/107°C
- 150°F/65°C (No. 116 CPVC Adapter)

### Maximum Working Pressure

- 200 psi/1375 kPa (FM Approval)
- 175 psi/1206 kPa (cULus Listed)
- 1600 kPa/232 psi (VdS/LPCB Approved)
- 1.4 MPa (CCCf Approved)
- 175 psi/1206 kPa (No. 116 CPVC Adapter)

### Minimum Bend Radius


- 7"/178 mm (FM/CCCf Approval)
- 2"/51 mm (cULus Listed)
- 3"/76.2 mm (VdS/LPCB Approved)

## 1.0 PRODUCT DESCRIPTION (CONTINUED)

### Maximum Allowable Sprinkler K-Factors

- FM (½"/15 mm reducer) K5.6/8,1 (S.I.), (¾"/20 mm reducer) K14.0/20,2 (S.I.)
- cULus (½"/15 mm reducer) K8.0/11,5 (S.I.), (¾"/20 mm reducer) K14.0/20,2 (S.I.)
- VdS/LPCB (½"/15 mm reducer) K5.6/8,1 (S.I.), (¾"/20 mm reducer) K8.0/11,5 (S.I.)

## 2.0 CERTIFICATION/LISTINGS



### NOTE

- The VicFlex Series AH2 Hose has been tested and evaluated by Spears® for acceptable use with Spears® CPVC Products and is therefore covered under the Spears® FlameGuard® Installer Protection Plan.

## 3.0 SPECIFICATIONS – MATERIAL

### Series AH2:

**Flexible Hose:** 300-series Stainless Steel  
**Collar/Weld Fitting:** 300-series Stainless Steel  
**Gasket Seal:** Victaulic EPDM  
**Isolation Ring:** Nylon  
**Nut and Nipple:** Carbon Steel, Zinc-Plated  
**Reducer (½"/15 mm or ¾"/20 mm):** Carbon Steel, Zinc-Plated  
**Low Profile Elbows:** Ductile Iron, Zinc-Plated

**Brackets:** Carbon Steel, Zinc-Plated

### Series AH2-CC:

**Flexible Hose:** 300-series Stainless Steel  
**Collar/Weld Fitting:** 300-series Stainless Steel  
**Gasket Seal:** Victaulic EPDM  
**Isolation Ring:** Nylon  
**Coupling Retainer Ring:** Polyethylene  
**Nut:** Carbon Steel, Zinc-Plated  
**Reducer (½"/15 mm or ¾"/20 mm):** Carbon Steel, Zinc-Plated  
**Low Profile Elbows:** Ductile Iron, Zinc-Plated  
**Housing:** Ductile iron conforming to ASTM A 536, Grade 65-45-12. Ductile iron conforming to ASTM A 395, Grade 65-45-15, is available upon special request.

### Coupling Housing Coating:

- Orange enamel (North America, Asia Pacific).
- Red enamel (Europe).
- Hot dipped galvanized.

### Gasket:<sup>1</sup>

#### Grade "E" EPDM (Type A)

FireLock EZ products have been Listed by Underwriters Laboratories Inc., Underwriters Laboratories of Canada Limited, and Approved by Factory Mutual Research for wet and dry (oil free air) sprinkler services within the rated working pressure.

<sup>1</sup> Services listed are General Service Guidelines only. It should be noted that there are services for which these gaskets are not compatible. Reference should always be made to the latest [Victaulic Gasket Selection Guide](#) for specific gasket service guidelines and for a listing of services which are not compatible.

**Bolts/Nut:** Zinc electroplated carbon steel, trackhead meeting the physical and chemical requirements of ASTM A 449 and physical requirements of ASTM A 183.


**Linkage:** CrMo Alloy Steel zinc electroplated per ASTM B633 Zn/Fe 5, Type III Finish

**No. 116 Adapter Fitting:** CPVC and Brass

**Seal:** Victaulic EPDM

4.0 DIMENSIONS

Product Details - Series AH2 Braided Hose

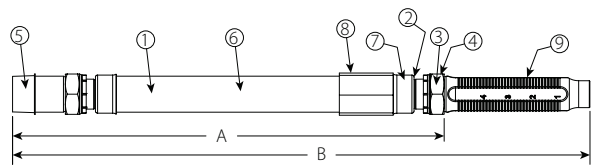


Item	Description
1	Flexible Hose
2	Isolation Ring
3	Gasket
4	Nut
5	Adapter Nipple
6	Braid
7	Collar/Weld Fitting
8	Sleeve
9	Reducer

Hose Length Dimensions

Hose Length	A	B
inches	inches	inches
mm	mm	mm
31	25.3	31
790	641	790
36	31.3	36
915	794	915
48	42.3	48
1219	1073	1220
60	54.3	60
1525	1378	1525
72	66.3	72
1830	1683	1830

Series AH2-CC Braided Hose

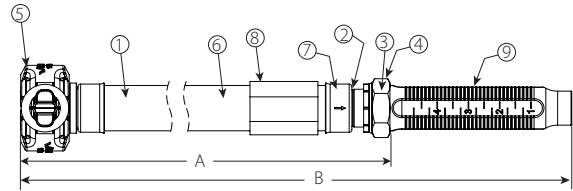


Item	Description
1	Flexible Hose
2	Isolation Ring
3	Gasket
4	Nut
5	Captured Coupling
6	Braid
7	Collar/Weld Fitting
8	Sleeve
9	Reducer

Hose Length	A	B
inches	inches	inches
mm	mm	mm
31	24.5	29.8
790	622	757
36	29.5	34.8
915	749	884
48	41.5	46.8
1219	1054	1189
60	53.5	58.8
1525	1359	1494
72	65.5	70.8
1830	1664	1798


## 4.0 DIMENSIONS (CONTINUED)

### Standard Reducer




5.75"/140 mm straight reducer


### Optional Reducers




9.0"/229 mm straight reducer



13.0"/330 mm straight reducer



Short 90° elbow reducer

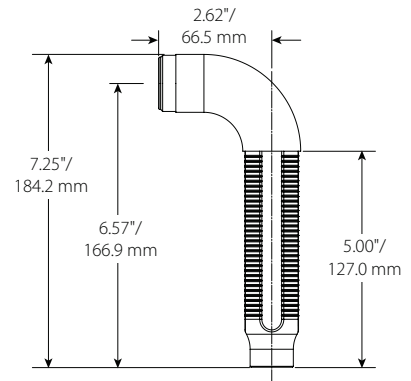


Long 90° elbow reducer


#### NOTE

- The Short 90° elbow reducer is typically used with concealed sprinklers while the longer 90° elbow is typically used in the installation of recessed pendent sprinklers.
- FM/VdS Approved only.

### Low Profile



Short 90° elbow reducer




Long 90° elbow reducer

#### NOTE

- Style AB11: When low profiles elbows are with the Style AB11 bracket, the Low Profile Short Elbow is typically used with concealed sprinklers while the Low Profile Long Elbow is typically used in the installation of recessed pendent sprinklers.

### No. 116 CPVC Adapter



#### NOTES

- E to E is 3.0"/76.0 mm
- The No. 116 CPVC Adapter has 2 ft. (0.6 m) EQL of 1" Schedule 40 pipe.

## 4.1 DIMENSIONS

### VicFlex Brackets


#### Style AB2

- Suspended Ceilings
- Hard-Lid Ceilings

Item	Description
1	24"/610 mm or 48"/1219 mm Square Bar
2	Patented Vertically Adjustable Center Bracket
3	End Bracket


**NOTE**

- Both sizes FM/VdS/LPCB Approved, cULus listed

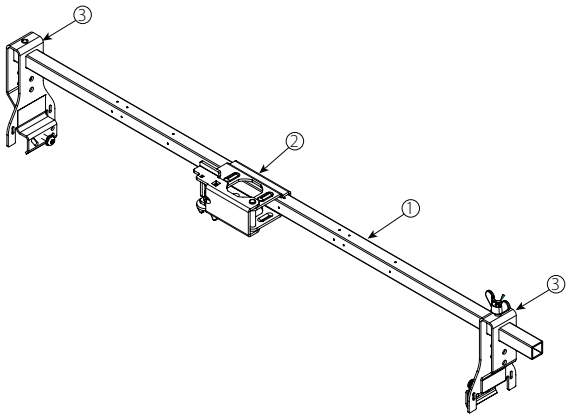

#### Style AB3

- Surface Mount Applications
- FM/LPCB Approved




#### Style AB4

- Hard-Lid Ceilings with Hat furring channel grid system

Item	Description
1	24"/610 mm or 48"/1219 mm Square Bar
2	Patented Vertically Adjustable Center Bracket
3	End Bracket for Hat Furring Channel

**NOTE**

- Both sizes FM/VdS/LPCB Approved, cULus listed.

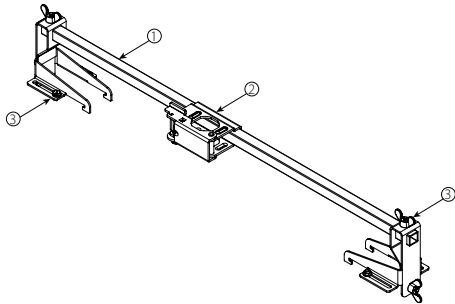

4.2 DIMENSIONS

VicFlex Brackets


Style AB5

- Hard-Lid Ceilings

Item	Description
1	24"/610 mm or 48"/1219 mm Square Bar
2	Patented Vertically Adjustable Center Bracket
3	End Bracket

NOTE

- Both sizes FM/VdS/LPCB Approved, cULus listed.

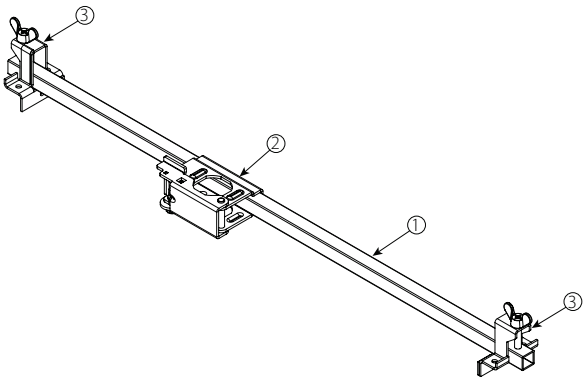


Style AB7

- Suspended Ceilings
- Hard-Lid Ceilings

Item	Description
1	24"/610 mm or 48"/1219 mm Square Bar
2	Patented 1-Bee2® Center Bracket
3	End Bracket

NOTE

- Both sizes FM/VdS/LPCB Approved.

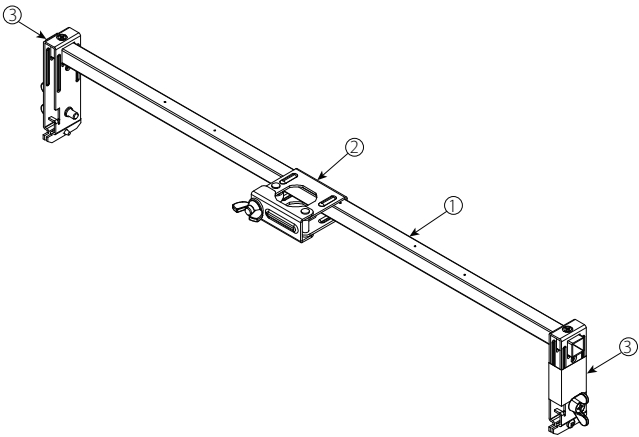


Style AB7 Adjustable

- Suspended Ceilings
- Hard-Lid Ceilings

Item	Description
1	700 mm or 1400 mm Square Bar
2	Patented 1-Bee2® Center Bracket
3	End Bracket (adjustable)

NOTE

- Both sizes FM/VdS/LPCB Approved.

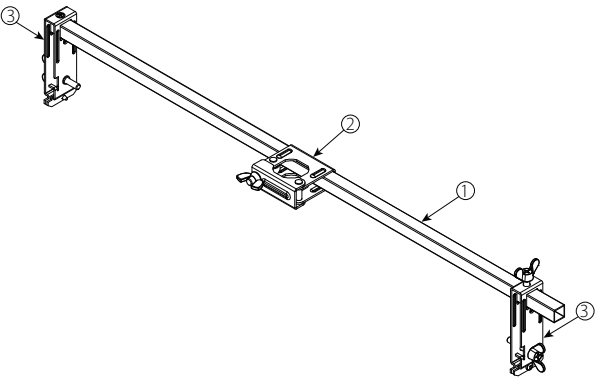




### 4.3 DIMENSIONS

#### VicFlex Brackets

##### Style AB10

- Suspended ceilings
- Armstrong® TechZone™

Item	Description
1	6"/152mm Square Bar
2	Patented 1-Bee2® Center Bracket
3	End Bracket




##### NOTE

- FM/VdS/LPCB Approved, cULus listed.

##### Style AB11

- Suspended ceilings
- Hard-Lid ceilings

Item	Description
1	24"/610 mm or 48"/1219 mm Square Bar
2	Patented 1-Bee2® Center Bracket
3	End Bracket

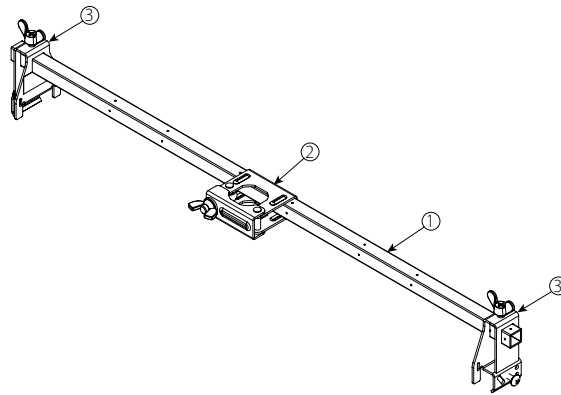


##### NOTE

- FM/VdS Approved, cULus listed.

##### Style AB12

- Suspended ceilings
- Hard-Lid ceilings

Item	Description
1	Style AB12 Bracket Body
2	#2 Square Drive Set Screw



##### NOTE

- FM/VdS Approved.

4.3 DIMENSIONS (CONTINUED)

VicFlex Brackets


Style ABBA

- Floor-above mount
- Cantilever mount
- Temporary mount in exposed ceilings

Item	Description
1	Style ABBA Mounting Plate
2	Style ABBA Square Bar
3	Cap Screw, Serated Flange, M6 x 1 x 20, T25 Torx Drive Recessed
4	Style ABMM Bracket Body
5	Cap Screw, Serated Flange, M6 x 1 x 15.24, T25 Torx Drive Recessed

NOTE

- FM Approved.

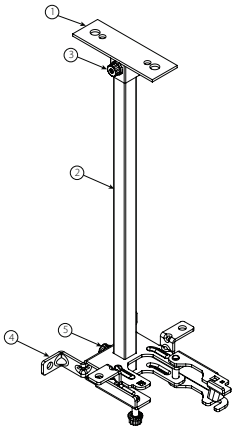


Style ABMM

- Surface mount
- Stand-off mount

Item	Description
1	Style ABMM Bracket Body
2	Cap Screw, Serated Flange, M6 x 1 x 15.24, T25 Torx Drive Recessed

NOTE


- FM Approved.



4.4 DIMENSIONS

Clearances

Series AH2 Braided Hose and Style AB2 Bracket

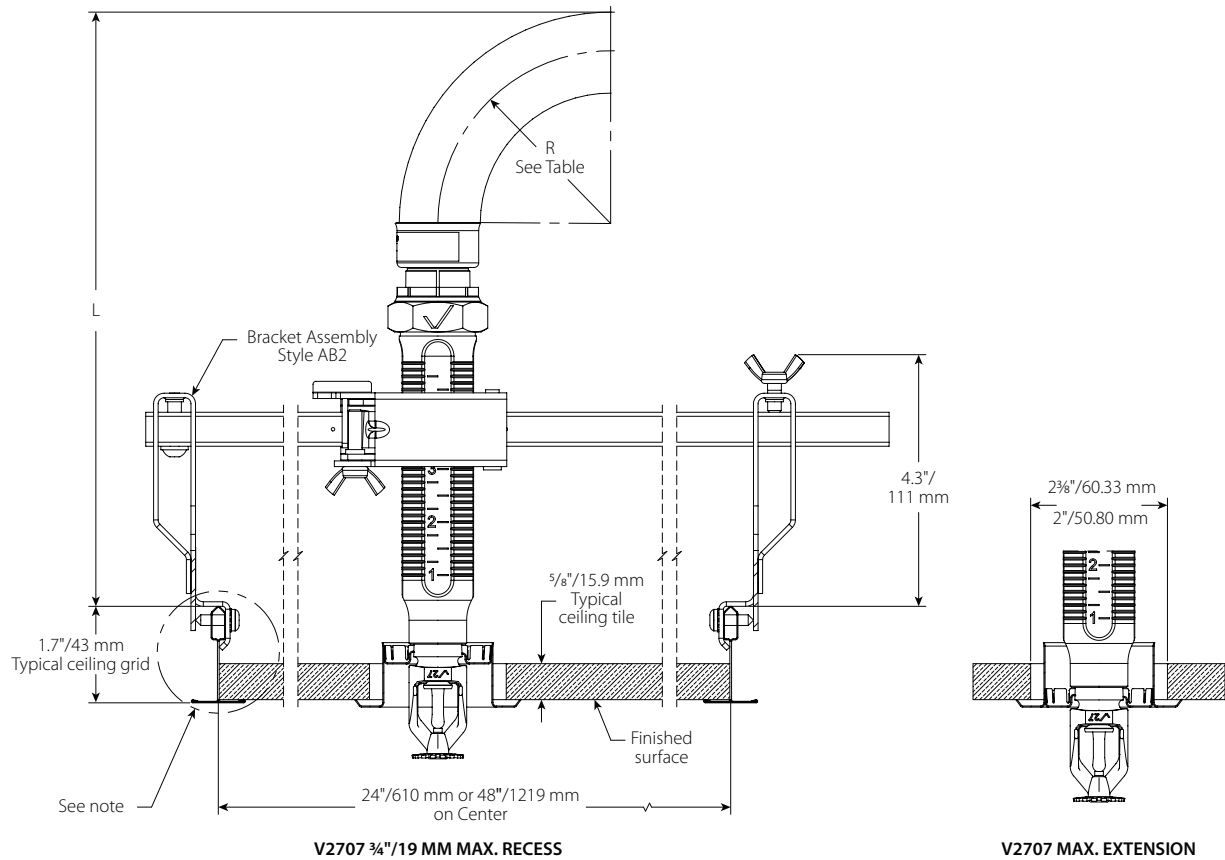

Hose Clearance Chart								
	Straight Reducer						Long Elbow	Short Elbow
	V2707 3/4" Max Recess inches mm	V3802 1/2" Max Recess inches mm	V2707 3/4" Max Recess inches mm	V3802 1/2" Max Recess inches mm	V2707 3/4" Max Recess inches mm	V3802 1/2" Max Recess inches mm	V2707 3/4" Max Recess inches mm	V3802 1/2" Max Recess inches mm
"R" Minimum Bend Radius	2.0 50		3.0 80		7.0 175		—	
"A" Minimum Required Installation Space	8.6 218	10.1 269	9.6 244	11.1 281	13.6 345	15.1 383	5.8 147	5.8 147


NOTE

- Variations of ceiling grids, sprinkler heads, brackets, and hoses are permitted but may result in clearance differences from the figures above.

## 4.5 DIMENSIONS

### Clearances

Series AH2 Braided Hose and Style AB2 Bracket

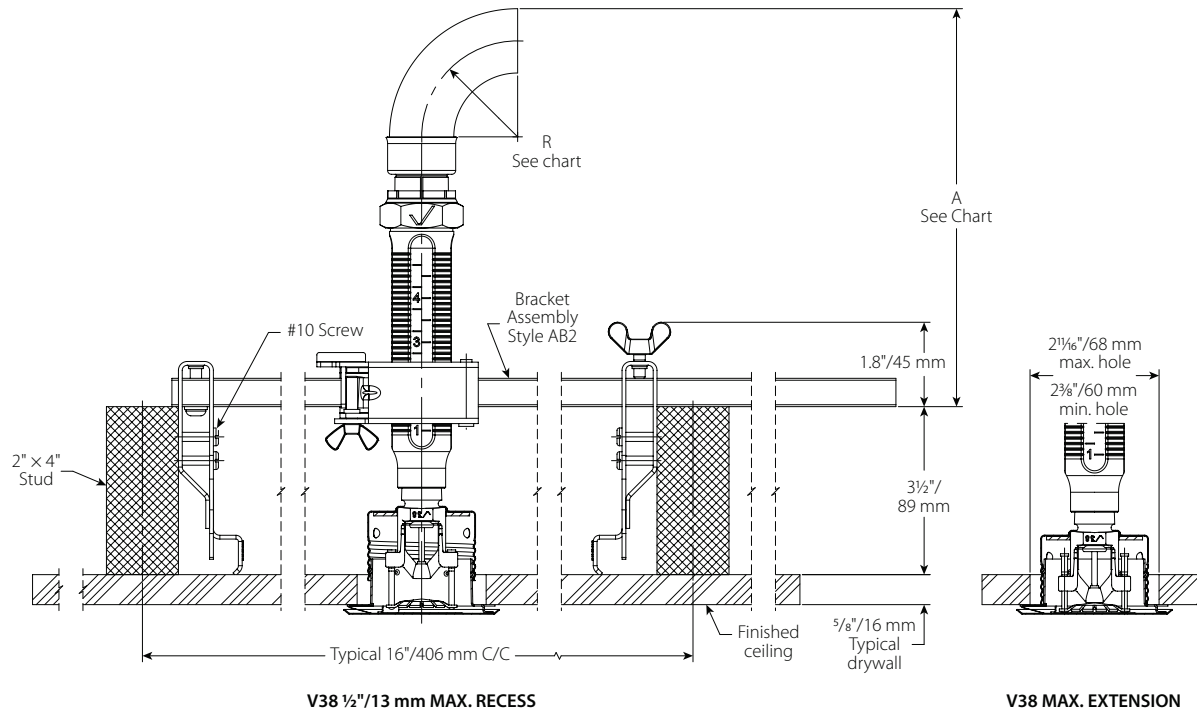

Hose Clearance Chart									
	Straight Reducer								
	V2707 3/4"   20 mm Max Recess inches mm	V3802 1/2"   13 mm Max Recess inches mm	V2709 3/4"   20 mm Sidewall inches mm	V2707 3/4"   20 mm Max Recess inches mm	V3802 1/2"   13 mm Max Recess inches mm	V2709 3/4"   20 mm Sidewall inches mm	V2707 3/4"   20 mm Max Recess inches mm	V3802 1/2"   13 mm Max Recess inches mm	V2709 3/4"   20 mm Sidewall inches mm
"R" Minimum Bend Radius	2.0 50			3.0 80			7.0 175		
"A" Minimum Required Installation Space	6.2 158	7.6 193	6.1 155	7.2 183	8.6 218	7.1 180	11.2 285	12.6 320	11.1 282

Hose Clearance Chart			
	Long Elbow		Short Elbow
	V2707 3/4"   20 mm Max Recess inches mm	V2709 3/4"   20 mm Sidewall inches mm	V3802 1/2"   13 mm Max Recess inches mm
"R" Minimum Bend Radius	-		
"A" Minimum Required Installation Space	3.3 84	3.6 91	3.3 84


#### NOTE

- Variations of ceiling grids, sprinkler heads, brackets, and hoses are permitted but may result in clearance differences from the figures above.

4.6 DIMENSIONS

Clearances

Series AH2 Braided Hose and Style AB4 Bracket

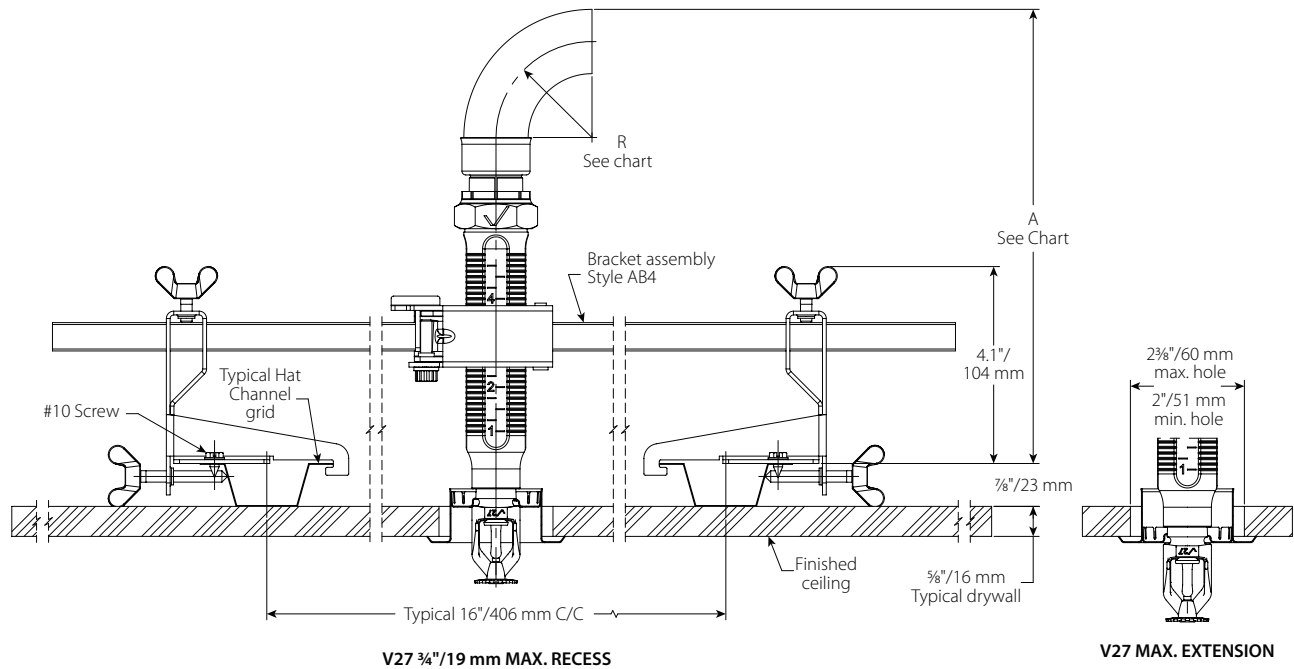

Hose Clearance Chart								
	Straight Reducer						Long Elbow	Short Elbow
	V2707 ¾" Max Recess inches mm	V3802 ½" Max Recess inches mm	V2707 ¾" Max Recess inches mm	V3802 ½" Max Recess inches mm	V2707 ¾" Max Recess inches mm	V3802 ½" Max Recess inches mm	V2707 ¾" Max Recess inches mm	V3802 ½" Max Recess inches mm
"R" Minimum Bend Radius	2.0 50	2.0 50	3.0 80	3.0 80	7.0 175	7.0 175	-	
"A" Minimum Required Installation Space	8.8 224	10.2 259	9.8 249	11.2 285	13.8 351	15.2 386	8.0 203	5.9 150


NOTE

Variations of ceiling grids, sprinkler heads, brackets, and hoses are permitted but may result in clearance differences from the figures above.

## 4.7 DIMENSIONS

### Clearances

Series AH2 Braided Hose and Style AB5 Bracket

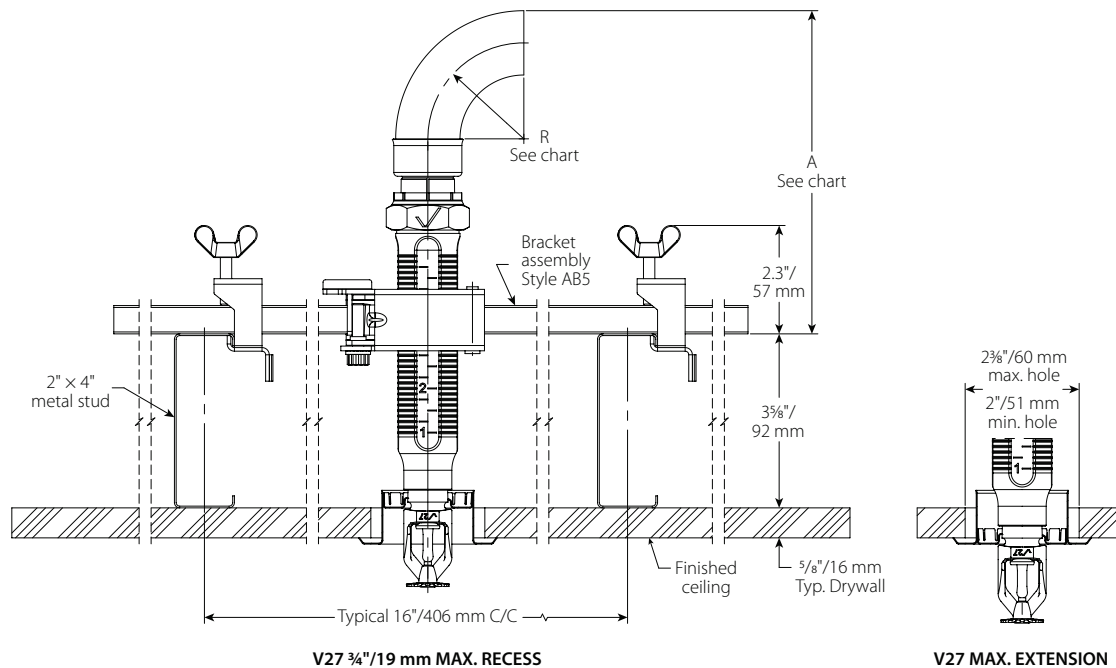

Hose Clearance Chart									
	Straight Reducer								
	<b>"V2707 3/4"   20 mm Max Recess"</b> inches mm	<b>V3802 1/2"   13 mm Max Recess</b> inches mm	<b>V2709 3/4"   20 mm Sidewall</b> inches mm	<b>V2707 3/4"   20 mm Max Recess</b> inches mm	<b>V3802 1/2"   13 mm Max Recess</b> inches mm	<b>V2709 3/4"   20 mm Sidewall</b> inches mm	<b>V2707 3/4"   20 mm Max Recess</b> inches mm	<b>V3802 1/2"   13 mm Max Recess</b> inches mm	<b>V2709 3/4"   20 mm Sidewall</b> inches mm
"R" Minimum Bend Radius	2.0 50			3.0 80			7.0 175		
"A" Minimum Required Installation Space	6.0 158	7.7 196	6.1 155	7.0 178	8.7 221	7.1 180	11.0 279	12.7 323	11.1 282

Hose Clearance Chart					
	Long Elbow			Low-Profile Long Elbow	Short Elbow
	<b>V2707 3/4"   20 mm Max Recess</b> inches mm	<b>V3802 1/2"   13 mm Max Recess</b> inches mm	<b>V2709 3/4"   20 mm Sidewall</b> inches mm	<b>V3802 1/2"   13 mm Max Recess</b> inches mm	<b>V3802 1/2"   13 mm Max Recess</b> inches mm
"R" Minimum Bend Radius	-				
"A" Minimum Required Installation Space	3.5 89	4.9 124	3.6 91	2.9 74	3.3 84


#### NOTE

- Variations of ceiling grids, sprinkler heads, brackets, and hoses are permitted but may result in clearance differences from the figures above.

4.8 DIMENSIONS

Clearances

Series AH2 Braided Hose and Style AB11 Bracket (LOW PROFILE SOLUTION)

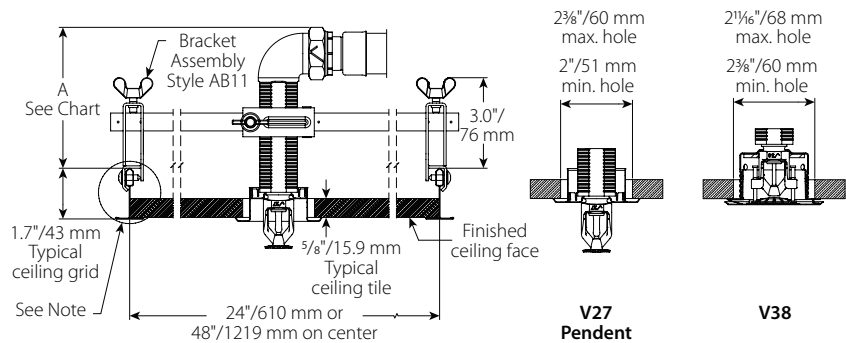

Hose Clearance Chart		
	Low-Profile Long Elbow	Low-Profile Short Elbow
	V2707 ¾"   20 mm Max Recess	V3802 ½"   13 mm Max Recess
	inches mm	inches mm
"A" Minimum Required Installation Space	4.0 102	3.9 99

NOTE


- Variations of ceiling grids, sprinkler heads, brackets, and hoses are permitted but may result in clearance differences from the figures above.

4.9 DIMENSIONS

Clearances


Style AB12 and ABBA Bracket

Suspended Ceiling Grid with Recessed Sprinkler with Low Profile Short Elbow

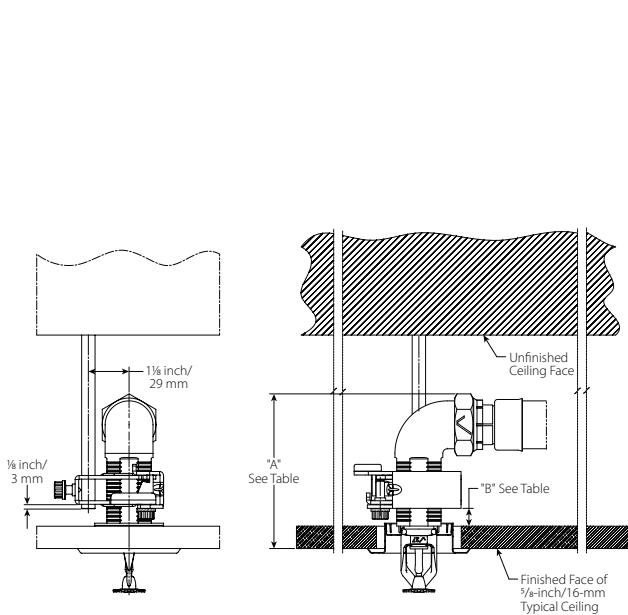

V2707 1/2" / 12.7 mm MAX. RECESS

Suspended Ceiling Grid with Recessed Sprinkler and Straight 5.75"/140 mm Reducer

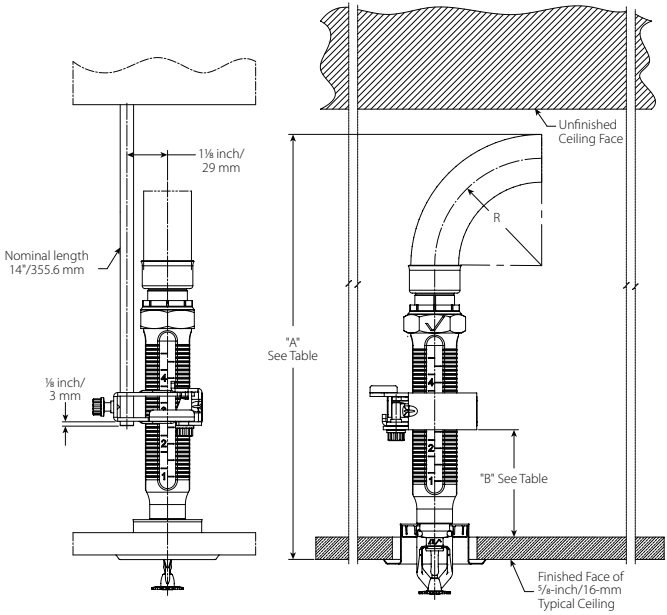


V2707 3/4" / 19 mm MAX. RECESS

Dimension		Low Profile Short Elbow		Low Profile Long Elbow		Standard Short Elbow		Standard Long Elbow		Standard Straight Reducer	
		3/4" / 19 mm Recessed*	Concealed	3/4" / 19 mm Recessed	Concealed	3/4" / 19 mm Recessed	Concealed	3/4" / 19 mm Recessed	Concealed	3/4" / 19 mm Recessed	Concealed
		inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm
A	Minimum Required Installation Space	4.0 101.6	5.5 139.7	5.6 142.2	7.2 182.9	5.9 149.9	7.5 190.5	7.7 195.6	9.3 236.2	15.0 381.0	16.6 421.6
B	Distance from Top of Typical Ceiling Tile to Bottom of Gate	0.5 12.7	2.0 50.8	1.5 38.1	1.5 38.1	1.5 38.1	1.5 38.1	3.0 76.2	3.0 76.2	3.0 76.2	3.0 76.2

\* Adjustability will be limited

Style ABMM Bracket

Stand-off Dimensions

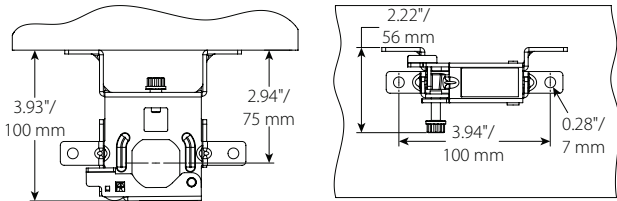




4.10 DIMENSIONS

Clearances

Style AB3 and ABMM Bracket

Surface Mount Application with Recessed Sprinkler

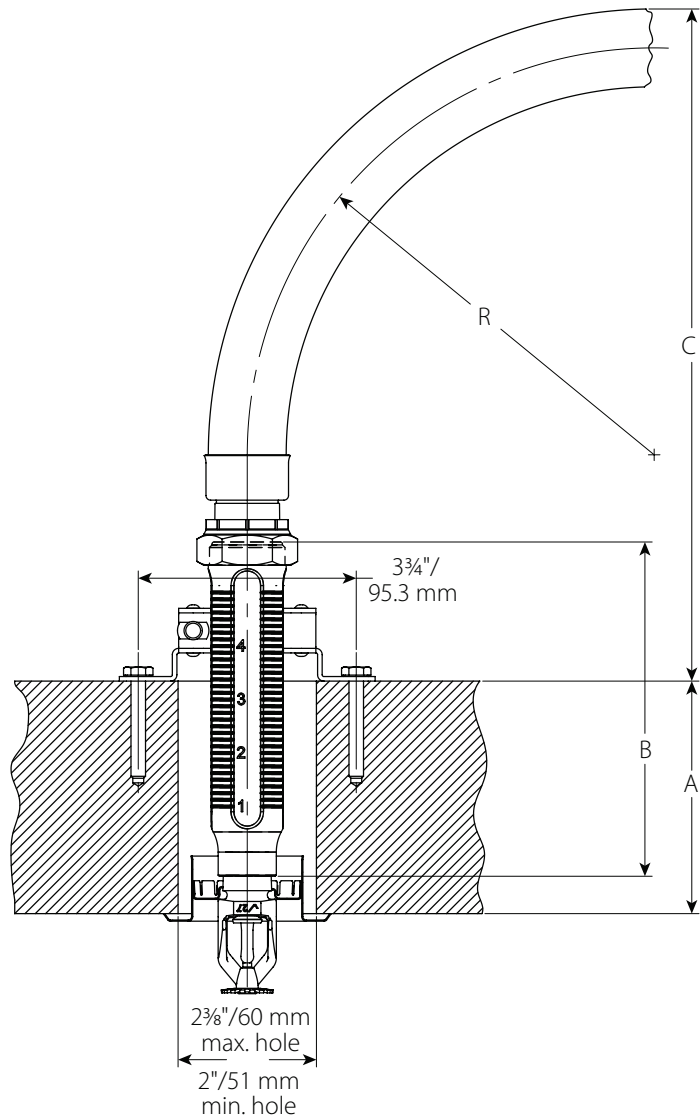

Hose Clearances																				
Dimension	inches mm			inches mm			inches mm		inches mm	inches mm	inches mm			inches mm			inches mm		inches mm	inches mm
Wall Thickness "A"	2 50			4 100			6 150		8 200	10 250	2 50			4 100			6 150		8 200	10 250
Outlet Length "B"	5.75 146.1	9 228.6	13 330.2	5.75 146.1	9 228.6	13 330.2	9 228.6	13 330.2	13 330.2	13 330.2	5.75 146.1	9 228.6	13 330.2	5.75 146.1	9 228.6	13 330.2	9 228.6	13 330.2	13 330.2	13 330.2
Hose Clearance "C"	11.6 294	14.8 376	18.8 478	9.6 243	12.8 325	16.8 427	10.8 275	14.8 376	12.8 325	10.8 275	12.6 319	15.8 402	19.8 503	10.6 268	13.8 351	17.8 452	11.8 300	15.8 402	13.8 351	11.8 300
Bend Radius "R"	7 175										8 200									

NOTE



- Variations of ceiling grids, sprinkler heads, brackets, and hoses are permitted but may result in clearance differences from the figures above.

4.11 DIMENSIONS

BRANCHLINE CLEARANCES

Series AH2 Braided Hose with Style 922 threaded outlet

Series AH2-CC Braided Hose with Style 922 grooved outlet

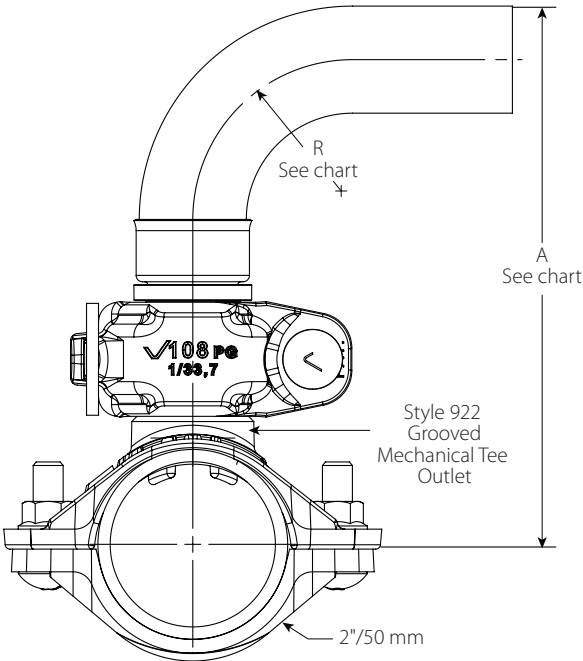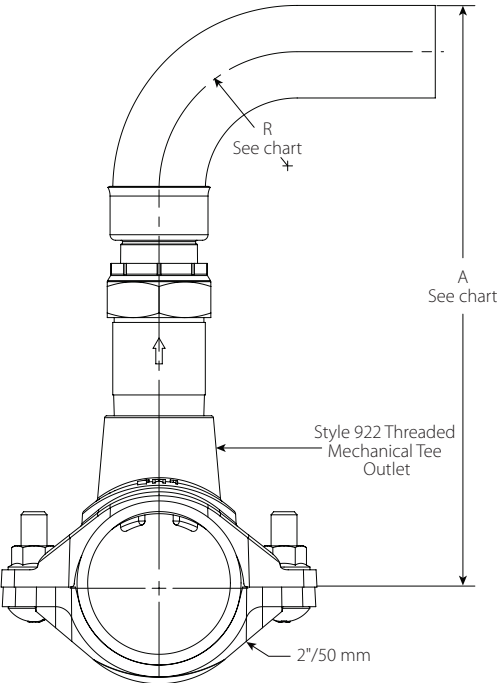


Hose Clearance Chart						
Dimension		inches mm	inches mm	inches mm	inches mm	inches mm
R	Minimum Bend Radius	3	4	5	6	7
		80	100	125	150	175
A	Min.	9.4	10.4	11.4	12.4	13.4
		238	263	289	314	339

Hose Clearance Chart						
Dimension		inches mm	inches mm	inches mm	inches mm	inches mm
R	Minimum Bend Radius	3	4	5	6	7
		80	100	125	150	175
A	Min.	7.7	8.7	9.7	10.7	11.7
		197	222	247	273	298


4.12 DIMENSIONS

BRANCHLINE CLEARANCES

Series AH2 Braided Hose with female threaded outlet

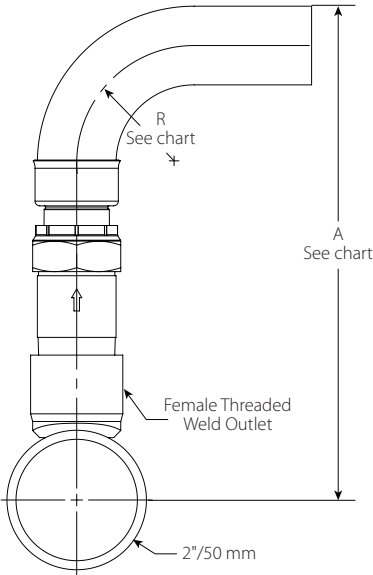

Series AH2-CC Braided Hose with grooved outlet

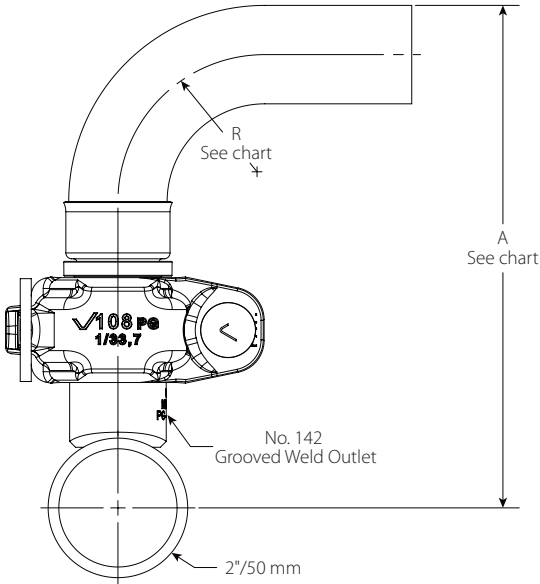

Hose Clearance Chart						
Dimension		inches mm	inches mm	inches mm	inches mm	inches mm
R	Minimum Bend Radius	3 80	4 100	5 125	6 150	7 175
A	Min.	9.4 239	10.4 264	11.4 290	12.4 315	13.41 341

Hose Clearance Chart						
Dimension		inches mm	inches mm	inches mm	inches mm	inches mm
R	Minimum Bend Radius	3 80	4 100	5 125	6 150	7 175
A	Min.	8.1 205	9.1 231	10.1 256	11.1 281	12.1 307

## 5.0 PERFORMANCE – FRICTION LOSS DATA



### Series AH2 and AH2-CC Braided Hoses with Straight 5.75"/140 mm Reducers Style AB2, AB4, AB5 and AB10 Brackets

Hose  Length inches mm	Reducer		UL	
	Type	Nominal Outlet Size inches DN	Equivalent Length of 1"/33.7mm Sch. 40 pipe feet meters	Max Bends
31 790	Straight	1/2 DN15	15.0 4.6	3
31 790	Straight	1/2 DN15	16.0 4.9	4
31 790	Straight	3/4 DN20	19.0 5.8	3
31 790	Straight	3/4 DN20	20.0 6.1	4
36 915	Straight	1/2 DN15	18.0 5.5	3
36 915	Straight	1/2 DN15	21.0 6.4	5
36 915	Straight	3/4 DN20	21.0 6.4	3
36 915	Straight	3/4 DN20	23.0 7.0	5
48 1220	Straight	1/2 DN15	21.0 6.4	3
48 1220	Straight	1/2 DN15	32.0 9.8	8
48 1220	Straight	3/4 DN20	26.0 7.9	3
48 1220	Straight	3/4 DN20	37.0 11.3	8
60 1525	Straight	1/2 DN15	27.0 8.2	3
60 1525	Straight	1/2 DN15	46.0 14.0	10
60 1525	Straight	3/4 DN20	27.0 8.2	3
60 1525	Straight	3/4 DN20	46.0 14.0	10
72 1830	Straight	1/2 DN15	31.0 9.4	3
72 1830	Straight	1/2 DN15	55.0 16.8	12
72 1830	Straight	3/4 DN20	30.0 9.1	3
72 1830	Straight	3/4 DN20	60.0 18.3	12

## 5.0 PERFORMANCE – FRICTION LOSS DATA (CONTINUED)



Series AH2 and AH2-CC Braided Hose with 90° Low Profile Elbows  
Style AB11 VicFlex Bracket

Hose  Length inches mm	Reducer		UL	
	Type	Nominal Outlet Size inches DN	Equivalent Length of 1"/33.7mm Sch. 40 pipe feet meters	Max Bends
31 790	LP Elbow	1/2 DN15	18.0 5.5	3
31 790	LP Elbow	1/2 DN15	24.0 7.3	4
31 790	LP Elbow	3/4 DN20	21.0 6.4	3
31 790	LP Elbow	3/4 DN20	24.0 7.3	4
36 915	LP Elbow	1/2 DN15	19.0 5.8	3
36 915	LP Elbow	1/2 DN15	26.0 7.9	5
36 915	LP Elbow	3/4 DN20	23.0 7.0	3
36 915	LP Elbow	3/4 DN20	28.0 8.5	5
48 1220	LP Elbow	1/2 DN15	23.0 7.0	3
48 1220	LP Elbow	1/2 DN15	43.0 13.1	8
48 1220	LP Elbow	3/4 DN20	30.0 9.1	3
48 1220	LP Elbow	3/4 DN20	42.0 12.8	8
60 1525	LP Elbow	1/2 DN15	28.0 8.5	3
60 1525	LP Elbow	1/2 DN15	49.0 14.9	10
60 1525	LP Elbow	3/4 DN20	31.0 9.4	3
60 1525	LP Elbow	3/4 DN20	50.0 15.2	10
72 1830	LP Elbow	1/2 DN15	31.0 9.4	3
72 1830	LP Elbow	1/2 DN15	65.0 19.8	12
72 1830	LP Elbow	3/4 DN20	36.0 11.0	3
72 1830	LP Elbow	3/4 DN20	63.0 19.2	12

## 5.0 PERFORMANCE – FRICTION LOSS DATA (CONTINUED)

### Series AH2 and AH2-CC Braided Hoses Equivalent Length Design Guide

Equivalent length values at various numbers of 90 degree bends at 2"/51 mm center line bend radius

Length inches mm	Nominal Outlet Size inches DN	1 Bend feet meters	2 Bends feet meters	3 Bends feet meters	4 Bends feet meters	5 Bends feet meters	6 Bends feet meters	7 Bends feet meters	8 Bends feet meters	9 Bends feet meters	10 Bends feet meters	11 Bends feet meters	12 Bends feet meters
31 790	½ DN15	11.0 3.4	13.0 4.0	15.0 4.6	16.0 4.9	–	–	–	–	–	–	–	–
31 790	¾ DN20	12.0 3.7	14.0 4.3	19.0 5.8	20.0 6.1	–	–	–	–	–	–	–	–
36 915	½ DN15	14.0 4.3	16.0 4.9	18.0 5.5	19.0 5.8	21.0 6.4	–	–	–	–	–	–	–
36 915	¾ DN20	17.0 5.2	19.0 5.8	21.0 6.4	22.0 6.7	23.0 7.0	–	–	–	–	–	–	–
48 1220	½ DN15	18.0 5.5	19.0 5.8	21.0 6.4	23.0 7.0	25.0 7.6	27.0 8.2	30.0 9.1	32.0 9.8	–	–	–	–
48 1220	¾ DN20	21.0 6.4	24.0 7.3	26.0 7.9	28.0 8.5	31.0 9.4	33.0 10.1	35.0 10.7	37.0 11.3	–	–	–	–
60 1525	½ DN15	21.0 6.4	24.0 7.3	27.0 8.2	30.0 9.1	32.0 9.8	35.0 10.7	37.0 11.3	40.0 12.2	43.0 13.1	46.0 14.0	–	–
60 1525	¾ DN20	23.0 7.0	25.0 7.6	27.0 8.2	29.0 8.8	32.0 9.8	34.0 10.4	37.0 11.3	40.0 12.2	43.0 13.1	46.0 14.0	–	–
72 1830	½ DN15	27.0 8.2	29.0 8.8	31.0 9.4	34.0 10.4	37.0 11.3	40.0 12.2	43.0 13.1	46.0 14.0	48.0 14.6	50.0 15.2	52.0 15.8	55.0 16.8
72 1830	¾ DN20	26.0 7.9	28.0 8.5	30.0 9.1	33.0 10.1	37.0 11.3	40.0 12.2	44.0 13.4	48.0 14.6	51.0 15.5	54.0 16.5	57.0 17.4	60.0 18.3

#### NOTES

- Values for use with 5.75"/140 mm straight reducers.
- The values in this table are provided by the manufacturer for reference only. For friction loss data in accordance with the UL Certification, please refer to pages 19 and 20 of this publication.

How to use this Design Guide:

- For some systems, it may be advantageous for the designer to calculate the system hydraulics using shorter equivalent lengths associated with fewer than the maximum allowable number of bends. In this case, the designer may select a design number of bends for the job and use the associated equivalent length from the design guide to determine the system hydraulics.
- It is possible that the actual installed condition of some of the flexible drops may have more bends than the designer selected. When this happens, the design guide may be used to find equivalent lengths based on the actual installed number of bends for particular sprinkler installations. The system hydraulics can be recalculated using actual equivalent lengths to verify the performance of the system.

## 5.1 PERFORMANCE – FRICTION LOSS DATA



## Series AH2 and AH2-CC Braided Hoses

Style AB2, AB3, AB4, AB5, AB7, AB7 Adj., AB8, AB10, AB12, ABBA and ABMM *VicFlex* Brackets

Length of Stainless Steel Flexible Hose	K-Factor	Outlet Size	Equivalent Length of 1"/33.7 mm Sch. 40 Pipe	Maximum Number of 90° Bends at 7"/178 mm Bend Radius
inches mm	Imperial S.I.	inches mm type	feet meters	
31 790	5.6 8.1	½ 15 Straight	13.8 4.2	2
		½ 15 90° Elbow	23.5 7.1	
36 915	5.6 8.1	½ 15 Straight	16.6 5.1	2
		½ 15 90° Elbow	25.6 7.8	
48 1220	5.6 8.1	½ 15 Straight	23.4 7.1	3
		½ 15 90° Elbow	30.7 9.3	
60 1525	5.6 8.1	½ 15 Straight	30.2 9.2	4
		½ 15 90° Elbow	35.9 10.9	
72 1830	5.6 8.1	½ 15 Straight	37.0 11.3	4
		½ 15 90° Elbow	41.1 12.5	
31 790	8.0 11.5	¾ 20 Straight	16.8 5.1	2
		¾ 20 90° Elbow	16.8 5.1	
36 915	8.0 11.5	¾ 20 Straight	20 6.0	2
		¾ 20 90° Elbow	19.7 6.0	
48 1220	8.0 11.5	¾ 20 Straight	27.8 8.4	3
		¾ 20 90° Elbow	26.6 8.1	

## FM NOTES

- The Series AH2 hose has been tested and Approved by FM Global for use in wet, dry and preaction systems per NFPA 13, 13R, and 13D and FM data sheets 2-0, 2-5, and 2-8. FM 1637 standard for safety include, but are not limited to, pressure cycling, corrosion resistance, flow characteristics, vibration resistance, leakage, mechanical and hydrostatic strength.
- EXAMPLE: A 48-inch hose installed with two 30° bends and two 90° bends is permitted and considered equivalent to the data in the table shown above. In this example, the total number of degrees is 240°, which is less than the allowable 270°.

## 5.1 PERFORMANCE – FRICTION LOSS DATA (CONTINUED)



## Series AH2 and AH2-CC Braided Hoses

Style AB2, AB3, AB4, AB5, AB7, AB7 Adj., AB8, AB10, AB12, ABBA and ABMM *VicFlex* Brackets

Length of Stainless Steel Flexible Hose  inches mm	K-Factor  Imperial S.I.	Outlet Size inches mm type	Equivalent Length of 1"/33.7 mm Sch. 40 Pipe  feet meters	Maximum Number of 90° Bends at 7"/178 mm Bend Radius
60 1525	8.0 11.5	$\frac{3}{4}$ 20 Straight	35.7 10.9	4
		$\frac{3}{4}$ 20 90° Elbow	33.6 10.2	
72 1830	8.0 11.5	$\frac{3}{4}$ 20 Straight	43.5 13.2	4
		$\frac{3}{4}$ 20 90° Elbow	40.6 12.2	
31 790	11.2 16.1	$\frac{3}{4}$ 20 Straight	16.5 5.0	2
		$\frac{3}{4}$ 20 90° Elbow	17.8 5.4	
36 915	11.2 16.1	$\frac{3}{4}$ 20 Straight	19.5 5.9	2
		$\frac{3}{4}$ 20 90° Elbow	20.7 6.3	
48 1220	11.2 16.1	$\frac{3}{4}$ 20 Straight	26.7 8.1	3
		$\frac{3}{4}$ 20 90° Elbow	27.9 8.5	
60 1525	11.2 16.1	$\frac{3}{4}$ 20 Straight	33.9 10.3	4
		$\frac{3}{4}$ 20 90° Elbow	35 10.7	
72 1830	11.2 16.1	$\frac{3}{4}$ 20 Straight	41.3 12.5	4
		$\frac{3}{4}$ 20 90° Elbow	42.2 12.8	
31 790	14.0 20.2	$\frac{3}{4}$ 20 Straight	14.9 4.5	2
		$\frac{3}{4}$ 20 90° Elbow	15.5 4.72	

## FM NOTES

- The Series AH2 hose has been tested and Approved by FM Global for use in wet, dry and preaction systems per NFPA 13, 13R, and 13D and FM data sheets 2-0, 2-5, and 2-8. FM 1637 standard for safety include, but are not limited to, pressure cycling, corrosion resistance, flow characteristics, vibration resistance, leakage, mechanical and hydrostatic strength.
- EXAMPLE: A 48-inch hose installed with two 30° bends and two 90° bends is permitted and considered equivalent to the data in the table shown above. In this example, the total number of degrees is 240°, which is less than the allowable 270°.



## 5.1 PERFORMANCE – FRICTION LOSS DATA (CONTINUED)



### Series AH2 and AH2-CC Braided Hoses

Style AB2, AB3, AB4, AB5, AB7, AB7 Adj., AB8, AB10, AB12, ABBA and ABMM *VicFlex* Brackets

Length of Stainless Steel Flexible Hose	K-Factor	Outlet Size	Equivalent Length of 1"/33.7 mm Sch. 40 Pipe	Maximum Number of 90° Bends at 7"/178 mm Bend Radius
inches mm	Imperial S.I.	inches mm type	feet meters	
36 915	14.0 20.2	$\frac{3}{4}$ 20 Straight	19.4 5.9	2
		$\frac{3}{4}$ 20 90° Elbow	19.6 5.9	
48 1220	14.0 20.2	$\frac{3}{4}$ 20 Straight	30.3 9.2	3
		$\frac{3}{4}$ 20 90° Elbow	29.5 8.9	
60 1525	14.0 20.2	$\frac{3}{4}$ 20 Straight	33.9 10.3	4
		$\frac{3}{4}$ 20 90° Elbow	34.1 10.4	
72 1830	14.0 20.2	$\frac{3}{4}$ 20 Straight	37.5 11.4	4
		$\frac{3}{4}$ 20 90° Elbow	38.6 11.7	

#### FM NOTES

- The Series AH2 hose has been tested and Approved by FM Global for use in wet, dry and preaction systems per NFPA 13, 13R, and 13D and FM data sheets 2-0, 2-5, and 2-8. FM 1637 standard for safety include, but are not limited to, pressure cycling, corrosion resistance, flow characteristics, vibration resistance, leakage, mechanical and hydrostatic strength.
- EXAMPLE: A 48-inch hose installed with two 30° bends and two 90° bends is permitted and considered equivalent to the data in the table shown above. In this example, the total number of degrees is 240°, which is less than the allowable 270°.

## 5.2 PERFORMANCE – FRICTION LOSS DATA



### Series AH2 Braided Hose with 90° Low Profile Elbows Style AB5, AB11, AB12, ABBA and ABMM *VicFlex* Bracket

Length of Stainless Steel Flexible Hose inches mm	K-Factor Imperial S.I.	Outlet Size inches mm	Equivalent Length of 1"/33.7mm Sch. 40 Pipe feet meters	Maximum Number of 90° Bends at 7"/178mm Bend Radius
31 790	5.6 8.1	½ 15	13.7 4.2	2
36 915	5.6 8.1	½ 15	17.0 5.2	2
48 1220	5.6 8.1	½ 15	25.0 7.6	3
60 1525	5.6 8.1	½ 15	33.0 10.1	4
72 1830	5.6 8.1	½ 15	41.1 12.5	4
31 790	8.0 11.5	¾ 20	13.6 4.14	2
36 915	8.0 11.5	¾ 20	16.9 5.2	2
48 1220	8.0 11.5	¾ 20	27.8 8.5	3
60 1525	8.0 11.5	¾ 20	32.6 9.9	4
72 1830	8.0 11.5	¾ 20	40.6 12.4	4
31 790	11.2 16.1	¾ 20	13.7 4.2	2
36 915	11.2 16.1	¾ 20	17.0 5.2	2
48 1220	11.2 16.1	¾ 20	24.9 7.6	3
60 1525	11.2 16.1	¾ 20	32.9 10.0	4
72 1830	11.2 16.1	¾ 20	40.9 12.5	4
31 790	14.0 20.2	¾ 20	13.5 4.1	2
36 915	14.0 20.2	¾ 20	16.8 5.1	2
48 1220	14.0 20.2	¾ 20	24.7 7.5	3
60 1525	14.0 20.2	¾ 20	32.7 9.9	4
72 1830	14.0 20.2	¾ 20	40.7 12.4	4

#### FM NOTES

- The Series AH2 hose has been tested and Approved by FM Global for use in wet, dry and preaction systems per NFPA 13, 13R, and 13D and FM data sheets 2-0, 2-5, and 2-8. FM 1637 standard for safety include, but are not limited to, pressure cycling, corrosion resistance, flow characteristics, vibration resistance, leakage, mechanical and hydrostatic strength.
- EXAMPLE: A 48-inch hose installed with two 30° bends and two 90° bends is permitted and considered equivalent to the data in the table shown above. In this example, the total number of degrees is 240°, which is less than the allowable 270°.

### 5.3 PERFORMANCE – FRICTION LOSS DATA



Series AH2 and AH2-CC Braided Hose  
Style AB2, AB4, AB5, AB7, AB7 Adj., AB8, AB10, AB11 and AB12 Brackets

Length of Stainless Steel Flexible Hose mm inches	Outlet Size DN inches	Equivalent Length of steel pipe according to EN 10255 DN 25 (33,7 x 3,25) meters feet	Maximum Number of 90° Bends at 3"/76.2mm Bend Radius
790 31	DN15 ½	5.5 18.0	3
	DN20 ¾		
915 36	DN15 ½	6.4 21.0	3
	DN20 ¾		
1220 48	DN15 ½	8.5 27.9	3
	DN20 ¾		
1525 60	DN15 ½	10.7 35.1	4
	DN20 ¾		
1830 72	DN15 ½	12.8 42.0	4
	DN20 ¾		

#### VdS Ceiling Manufacturers List

##### AB2, AB7, AB10 ,AB11

1. AMF
2. Armstrong
3. Chicago Metallic
4. Dipling
5. Durlum
6. Geipel
7. Gema-Armstrong
8. Hilti
9. Knauf
10. Lafarge
11. Linder
12. Odenwald
13. Richter
14. Rigips
15. Rockfon Pagos
16. Suckow & Fischer
17. USG Donn

##### AB4

No specific approval

##### AB5, AB8

1. Hilti
2. Knauf
3. Lafarge
4. Lindner
5. Rigips

### 5.3 PERFORMANCE – FRICTION LOSS DATA



#### Series AH2 and AH2-CC Braided Hose Style AB2, AB3, AB4, AB5, AB7, AB8, and AB10 Brackets

Length of Stainless Steel Flexible Hose  mm inches	Outlet Size  mm inches type	Equivalent Length of steel pipe according to EN 10255 DN 25 (33,7 x 3,25)  meters feet	Maximum Number of 90° Bends at 3"/76.2 mm Bend Radius
790 31	15 mm ½ Straight	1.8 6.0	2
	20 mm ¾ Straight		
915 36	15 mm ½ Straight	3.6 11.9	3
	20 mm ¾ Straight		
1220 48	15 mm ½ Straight	4.3 14.0	3
	20 mm ¾ Straight		
1525 60	15 mm ½ Straight	4.1 13.6	3
	20 mm ¾ Straight		
1830 72	15 mm ½ Straight	5.5 18.1	3
	20 mm ¾ Straight		



#### Series AH2 Braided Hose Style AB2, AB3, AB4, AB5, AB7, AB8, AB10 and AB12 Brackets


Length of Flexible Hose  mm inches	Equivalent Length of 1"/33.7 mm Sch. 40 Pipe	
	Straight Configuration  meters feet	Bend Configuration  meters feet
790 31	0.87 2.9	2.70 8.9
915 36	1.00 3.3	2.80 9.2
1220 48	2.23 7.3	4.66 15.3
1525 60	2.90 9.5	6.5 21.3
1830 72	3.31 10.9	7.16 23.5

#### CCCF NOTE

- Friction loss data is in accordance with GB5135.16 tested at a flow rate of 114 liters per minute (30 gallons per minute).

## 6.0 NOTIFICATIONS

### WARNING

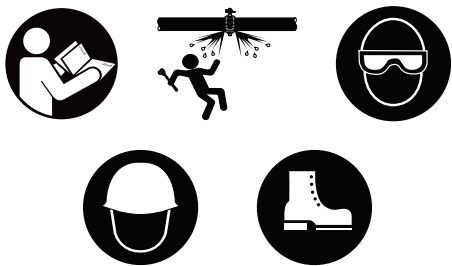

- Read and understand all instructions before attempting to install any Victaulic products.
- Always verify that the piping system has been completely depressurized and drained immediately prior to installation, removal, adjustment, or maintenance of any Victaulic products.
- Wear safety glasses, hardhat, and foot protection.

- These products shall be used only in fire protection systems that are designed and installed in accordance with current, applicable National Fire Protection Association (NFPA 13, 13D, 13R, etc.) standards, or equivalent standards, and in accordance with applicable building and fire codes. These standards and codes contain important information regarding protection of systems from freezing temperatures, corrosion, mechanical damage, etc.
- The installer shall understand the use of this product and why it was specified for the particular application.
- The installer shall understand common industry safety standards and potential consequences of improper product installation.

### WARNING

- It is the responsibility of the system designer to verify suitability of 300-series stainless steel flexible hose for use with the intended fluid media within the piping system and external environments.
- The effect of chemical composition, pH level, operating temperature, chloride level, oxygen level, and flow rate on 300-series stainless steel flexible hose must be evaluated by the material specifier to confirm system life will be acceptable for the intended service.
- It is the responsibility of the owner of a building or their authorized agent to provide the sprinkler system installer with any knowledge that the water supply might be contaminated with or conducive to the development of micro-biologically influenced corrosion (MIC), including as required by NFPA 13. Failure to identify adverse water quality issues may affect the VicFlex product and void the manufacturer's warranty.

Failure to follow these instructions could cause product failure, resulting in serious personal injury and/or property damage.

Victaulic VicFlex Series AH2 and AH2-CC Flexible Sprinkler Fittings may be painted provided the paint is compatible with stainless steel and zinc-plated carbon steel or ductile iron. Care should be taken to ensure the sprinkler and associated escutcheon or coverplate are not painted.

Victaulic VicFlex Series AH2 and AH2-CC penetrating through non-fire rated gypsum wall (drywall) will function as designed, provided the components are installed in accordance with the respective installation instructions referenced in this document.

## 7.0 REFERENCE MATERIALS – CHARACTERISTICS

### *VicFlex* Maximum Load Values

#### Series AH2 Hose with 24" Bracket

Model Size	Actual Length ft m	Total Load		Max. Uniform Load	
		lb	N	lb/linear ft	N/linear m
31/790	2.6 0.8	5.2	23	2.6	38
36/915	3 0.9	5.5	25	2.8	40
48/1220	4 1.2	6.3	28	3.1	46
60/1525	5 1.5	7.0	31	3.5	51
72/1830	6 1.8	7.7	34	3.9	57

#### Series AH2 Hose with 48" Bracket

Model Size	Actual Length ft m	Total Load		Max. Uniform Load	
		lb	N	lb/linear ft	N/linear m
31/790	2.6 0.8	6.1	27	1.5	22
36/915	3 0.9	6.4	29	1.6	23
48/1220	4 1.2	7.2	32	1.8	26
60/1525	5 1.5	7.9	35	2.0	29
72/1830	6 1.8	8.7	39	2.2	32

Total Load is defined as the sum of the weights of the following:

- water-filled flexible sprinkler hose with threaded end fittings, including a typical fire sprinkler
- bracket assembly (any applicable Victaulic bracket model of the relevant associated size)


#### ASTM C 635: Suspension System Load-Carrying Capabilities (excerpted)

Suspension System	Actual Length ft/m	Min. Allowable Uniform Load	
		lb/linear ft	N/linear m
Direct Hung	Light	5.0	75.7
	Intermediate	12.0	181.0
	Heavy	16.0	241.7

SUMMARY: All direct-hung suspension system duty classifications per ASTM C 635 are able to withstand the maximum water-filled weight of the *VicFlex* sprinkler hose and bracket.

7.0 REFERENCE MATERIALS – CHARACTERISTICS (CONTINUED)

Flexible Hose In-Plane Bend Characteristics

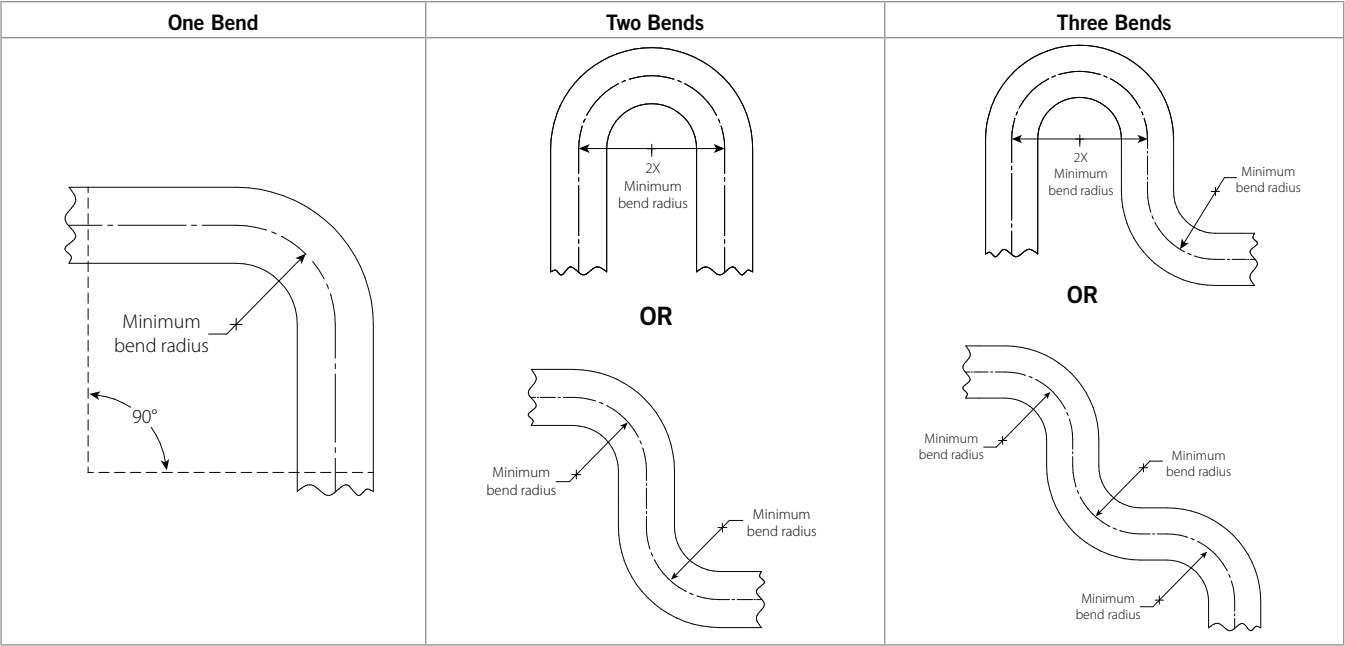

**NOTE**  
For out-of-plane (three-dimensional) bends, care must be taken to avoid imparting torque on the hose.

- [I-VicFlex-AB1-AB2](#)
- [I-VicFlex-AB3](#)
- [I-VicFlex-AB4](#)
- [I-VicFlex-AB5](#)
- [I-VicFlex-AB7](#)
- [I-VicFlex-AB12](#)
- [I-VicFlex-ABBA](#)
- [I-VicFlex-ABMM](#)
- [I-RES](#)

**User Responsibility for Product Selection and Suitability**  
Each user bears final responsibility for making a determination as to the suitability of Victaulic products for a particular end-use application, in accordance with industry standards and project specifications, and the applicable building codes and related regulations as well as Victaulic performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, installation guide, or this disclaimer.

**Intellectual Property Rights**  
No statement contained herein concerning a possible or suggested use of any material, product, service, or design is intended, or should be constructed, to grant any license under any patent or other intellectual property right of Victaulic or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries.

**Note**  
This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

**Installation**  
Reference should always be made to I-VICFLEX-AB1-AB2-AB10, I-VICFLEX-AB4, I-VICFLEX-AB7, or I-VICFLEX-AB8 for the product you are installing. Handbooks are included with each shipment of Victaulic products for complete installation and assembly data, and are available in PDF format on our website at [www.victaulic.com](http://www.victaulic.com).

**Warranty**  
Refer to the Warranty section of the current Price List or contact Victaulic for details.

**Trademarks**  
Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.



## Two Hole Standoff Hanger and Restrainer Fig. 188R (Formerly Afcon Fig. 514)

**Size Range:** 3/4" through 2"

**Material:** Carbon Steel

**Finish:** Pre-Galvanized per ASTM A653

**Service:**

- Hanger and surge restraint for horizontal CPVC, steel, and copper piping when installed on the top, bottom, and side of the supporting structure.
- Guide for vertical CPVC, steel, and copper piping when installed on the side of the supporting structure.
- Horizontal and vertical seismic restraint per NFPA 13–2016 requirements.
- May be installed with concrete, steel structural members, and other structural members with fasteners which comply with the requirements of NFPA 13.

**Approvals:** cULus Listed

**Patents:** No. 6,648,278



**Installation:**

- Snap hanger over pipe. If needed, squeeze strap back around pipe.
- CPVC pipe must be allowed to slide freely through the Fig. 188R.
- Secure hanger to mounting surface with screws provided or with listed fasteners.

**Features:**

- Beveled edge design helps protect the CPVC pipe from any rough surface and eliminates pipe abrasion.
- Easily attaches to wood structure with #10 x 1" hex washer head self-threading screw supplied with product. No pre-drilling required.
- Bottom of pipe is offset 1 1/2" from the structure. Eliminates wooden spacer blocks.

**Ordering:** Specify CPVC pipe size, figure number and description.

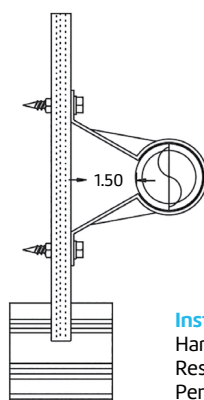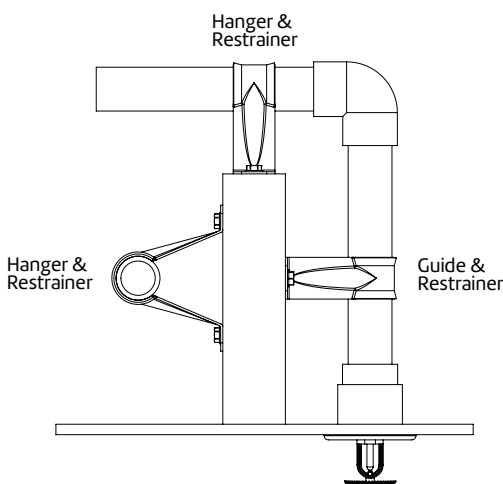

**Installation – Backing Nut**

Hanger = 1 – At top fastener  
Restraint = 2 – On each fastener  
Per NFPA-13D and NFPA-13R




PROJECT INFORMATION	APPROVAL STAMP
Project:	<input type="checkbox"/> Approved
Address:	<input type="checkbox"/> Approved as noted
Contractor:	<input type="checkbox"/> Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	




## Two Hole Standoff Hanger and Restrainer (cont.)

**Fig. 188R** (Formerly Afcon Fig. 514)

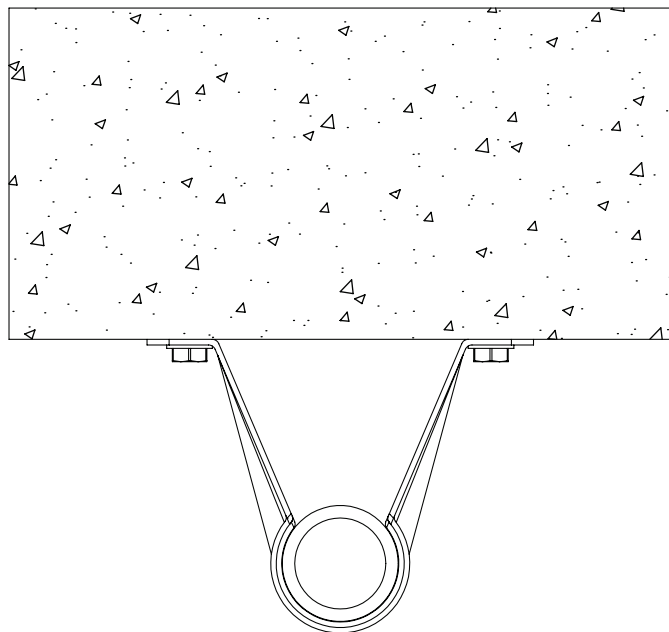

Hanger and Restrainer

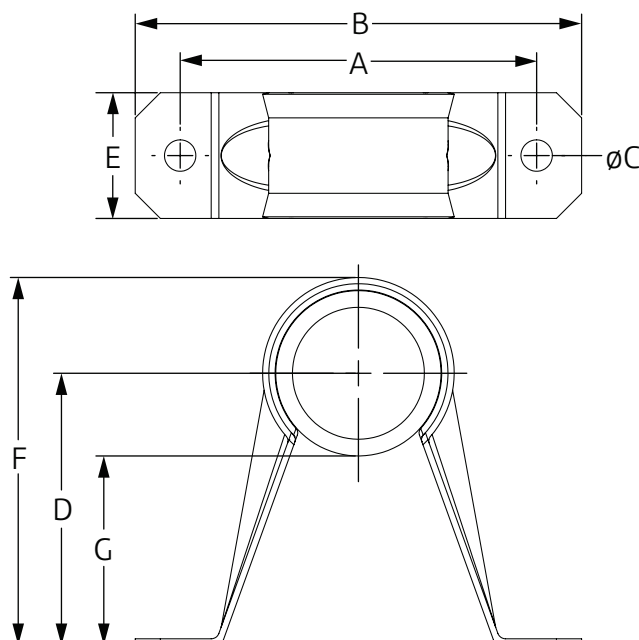

**Fig. 188R: Dimensions (in) • Weight (lbs)**

CPVC Pipe Size	A	B	ØC	D	E	F	G	Max. Hanger Spacing (ft)	Approx. Weight/100 (lbs)
3/4	2 3/4	3 1/2	1/4	2	1	2 5/8	1 1/2	5 1/2	11
1	2 13/16	3 1/2	1/4	2 3/16	1	2 15/16	1 1/2	6	12
1 1/4	2 13/16	3 1/2	1/4	2 5/16	1	3 1/4	1 1/2	6 1/2	13
1 1/2	3 5/8	4 1/4	1/4	2 7/16	1	3 1/2	1 1/2	7	14
2	3 11/16	4 3/8	1/4	2 11/16	1	4	1 1/2	8	16

**Fig. 188R: Listed Fasteners**

Pipe	Wood and Composite Beams	Steel (18ga. Minimum)
CPVC	Screw Supplied or #10 x 1" TEK Screw	#14 x 1" TEK Screw or 1/4" x 1" TEK Screw
Steel & Copper	#14 x 1" TEK Screw or 1/4" x 1 1/2" Lag Screw	#14 x 1" TEK Screw or 1/4" x 1" TEK Screw