


PREMANUFACTURED TRUSS NOTES:

- TRUSS DESIGN LOADS:
TOP CHORD, DL = 10 PSF
LL = 25 PSF (SNOW)
BOTTOM CHORD, DL = 5 PSF
- "G.E.T." INDICATES GABLE END TRUSS.
- "GRDR TRUSS" INDICATES GIRDER TRUSS.

FOOTING SCHEDULE

MARK	SIZE	REINFORCING
FA	3'-6" X 10'-0" X 1'-0" DEEP	(4) #5 LONG WAY BOTTOM #5 @ 12" o.c. SHORT WAY BOTTOM

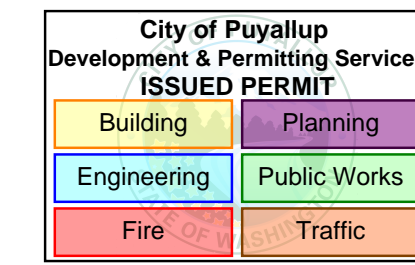


PLAN NOTES:

- TOP OF SLAB ON GRADE IS REFERENCE ELEVATION 0'-0".
- TOP OF DOUBLE PLATE AT ROOF IS TYPICALLY +18'-0" ABOVE REFERENCE ELEVATION 0'-0".
- INDICATES:
[X] AT ROOF FRAMING PLAN - SHEARWALLS BELOW
[X] INDICATES:
[X] AT FOUNDATION PLAN - SHEARWALLS ABOVE.
SHEATH AND NAIL SHEARWALLS PER SCHEDULE ON SHEET S2.1. TYPICAL SHEARWALL TYPE SHALL BE AS FOLLOWS UNLESS NOTED OTHERWISE ON PLANS:
EXTERIOR WALLS, P-1
INTERIOR WALLS, P-1
- [X] INDICATES POST ABOVE U.N.O. ON PLAN.
[X] INDICATES POST BELOW.
- [1] INDICATES SIMPSON HOLDDOWN AT END OF SHEARWALL.
[1] HDU5-SDS2.5 WITH (4) SDS 1/4 X 2 1/2 WOOD SCREWS INTO DOUBLE STUD
[2] HHD011-SDS2.5 CONNECT TO 6 X 6 POST WITH (24) SDS 1/4 X 2 1/2 WOOD SCREWS.
- TYPICAL HEADER AT ALL INTERIOR AND EXTERIOR BEARING WALLS SHALL BE 4 X 10 DF#2 UNLESS NOTED OTHERWISE ON PLAN.
- SEE SHEET S2.1 FOR BALANCE OF FRAMING NOTES AND SCHEDULES. SEE SHEETS S2.1 & S2.2 FOR TYPICAL DETAILS.
- SEE ARCHITECTURAL PLANS FOR DIMENSIONS.

REVISIONS
DATE DESCRIPTION

PRGA20241682
B & T DESIGN & ENGINEERING, INC.
P.O. BOX 595
PUYALLUP, WA 98407
(253) 857-0770 (PHONE)

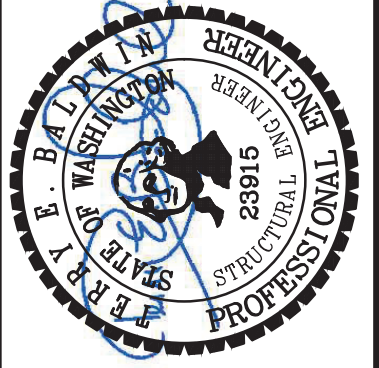

LOCKWOOD GARAGE/SHOP
3305 S FRUITLAND AVE
PUYALLUP, WA 98373



FOUNDATION PLAN & ROOF FRAMING PLAN

PROJECT 24056
DATE 10/17/24
DRAWN NH
CHKD. JT

SHEET :
S1.1

OF

© 2024 B&T DESIGN & ENGINEERING, INC.

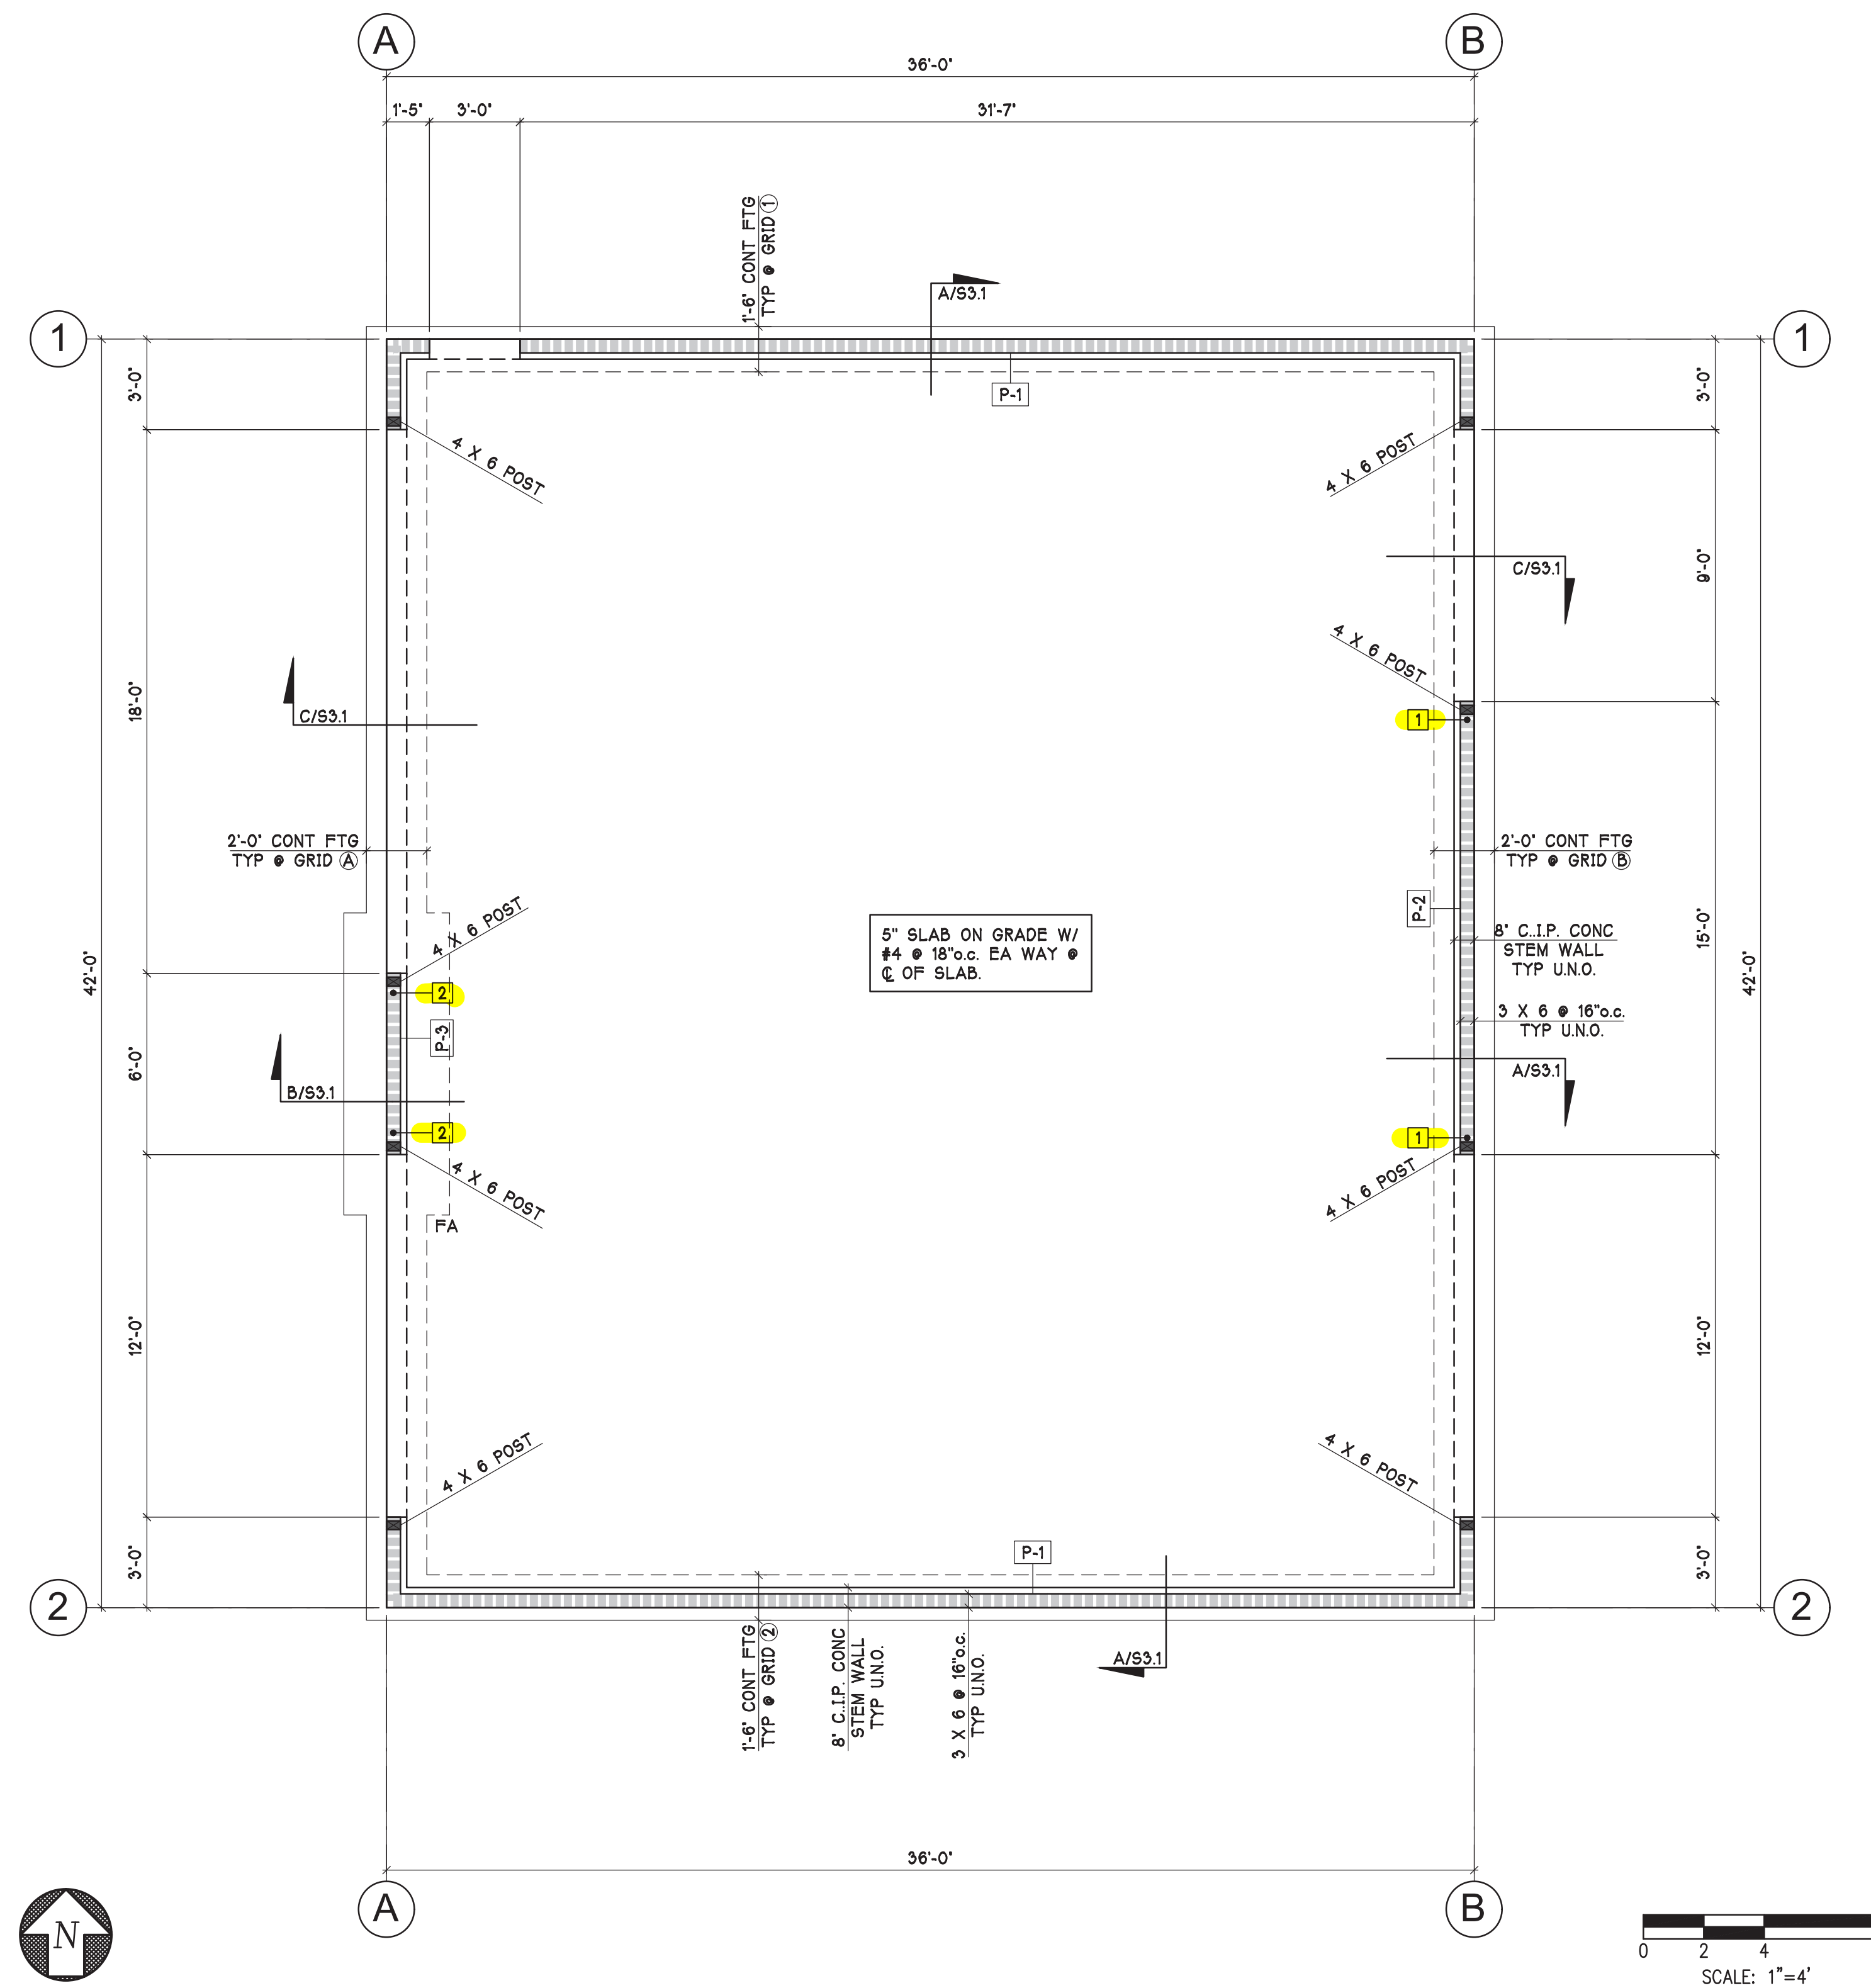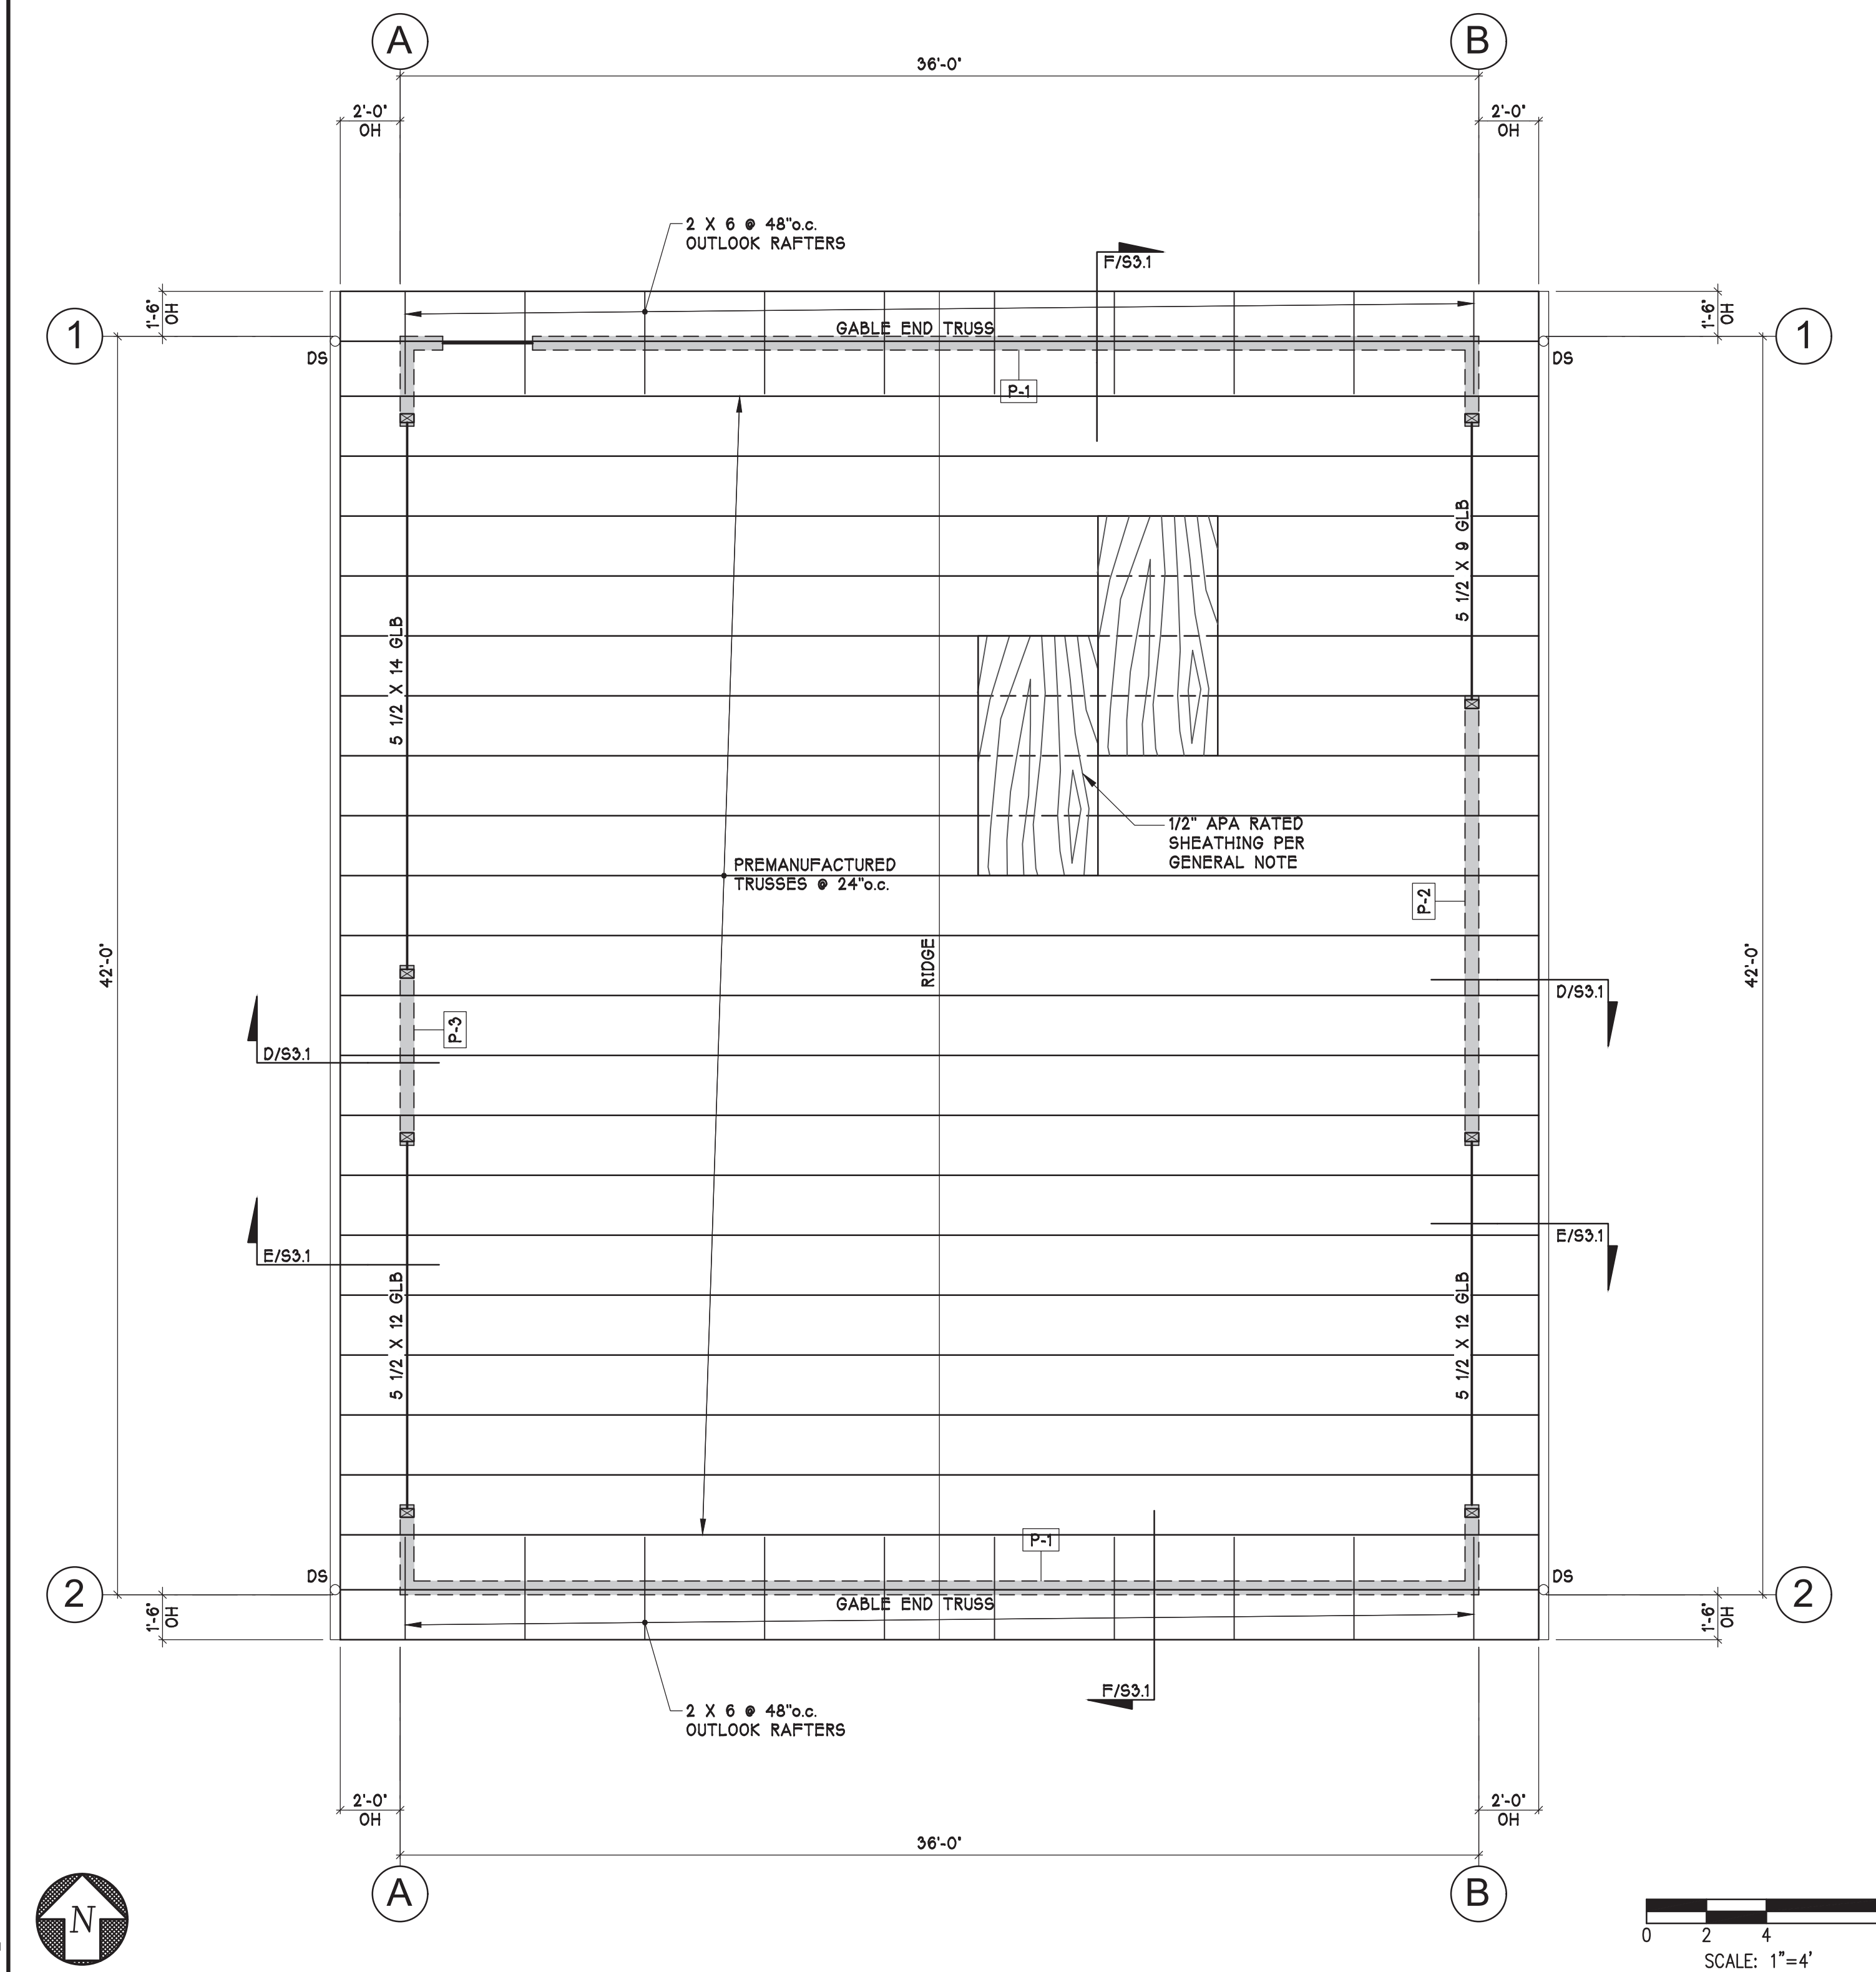

24056-S1.1 10/21/24