

REINFORCING SCHEDULE					
TOTAL NUMBER OF PANELS IN WALL	TOTAL WALL HEIGHT "H"	LAYER NO.	REINFORCEMENT TYPE	REINFORCEMENT LENGTH "L"	HEIGHT (FT)
3 OR LESS	NO REINFORCEMENT REQUIRED				
4	5.33 FT	1	MIRAFI 5 XT	4.50 FT	0.66
5	6.67 FT	1 2	MIRAFI 5 XT	5.50 FT 5.50 FT	0.66 2.00
6	8.00 FT	1 2 3	MIRAFI 5 XT	6.50 FT 6.50 FT 6.50 FT	0.66 2.00 3.33

NOTE: GEOGRID ELEVATION TOLERANCE ± 5' (ALL DIMENSIONS ARE IN FEET)

GENERAL NOTES

- REFER TO CIVIL GRADING PLANS FOR WALL ALIGNMENTS AND ELEVATIONS.
- REFER TO REINFORCING SCHEDULE FOR GEOGRID LENGTHS AND ELEVATIONS.
- GEOGRID ELEVATION MEASURED FROM TOP OF CRUSHED ROCK LEVELING PAD.
- GEOGRID LENGTH "L" MEASURED FROM BACK OF FACE UNIT.
- GEOGRID SHALL BE INSTALLED BEHIND WALL WITH MACHINE DIRECTION (STRONGEST AXIS) PERPENDICULAR TO WALL.
- GEOGRID SHALL BE INSTALLED ON HORIZONTAL SURFACE OF COMPACTED STRUCTURAL FILL.
- GEOGRID SHALL BE PULLED TIGHT BEHIND WALL. STAKE END OF GEOGRID AS REQUIRED TO MAINTAIN TENSION BEFORE COVERING WITH STRUCTURAL FILL.
- PROTECT GEOGRID FROM CONSTRUCTION DAMAGE PER MANUFACTURERS SPECIFICATIONS. CONSTRUCTION EQUIPMENT SHALL NOT TRAVEL DIRECTLY ON GEOGRID. ANY GEOGRID THAT IS DAMAGED SHALL BE REPLACED WITH NEW GEOGRID AT CONTRACTORS EXPENSE.
- LOCK+LOAD® WALL ASSEMBLY TO BE COMPLETED PER MANUFACTURERS SPECIFICATIONS.
- STRUCTURAL FILL SHALL BE PLACED AND COMPACTED ACCORDING TO RECOMMENDATIONS PROVIDED IN THE GEOTECHNICAL REPORT, 240 - 15TH STREET SE INDUSTRIAL, 240 - 15TH STREET SOUTHEAST, PUYALLUP, WASHINGTON, PROJECT NO. T-8661, PREPARED BY TERRA ASSOCIATES, INC., DATED JANUARY 12, 2022, REVISED JUNE 23, 2023. STRUCTURAL FILL IN REINFORCED ZONE SHALL BE GRANULAR MATERIAL WITH A MAXIMUM AGGREGATE SIZE OF 3-INCHES AND A MAXIMUM SOIL FINES (LESS THAN # 200 SIEVE) CONTENT OF 30 PERCENT.
- HEAVY CONSTRUCTION EQUIPMENT SUCH AS VIBRATORY DRUM ROLLERS, LOADED DUMP TRUCKS, FRONT-END LOADERS, ETC., SHALL NOT OPERATE WITHIN FIVE FEET OF BACK OF WALLS. STRUCTURAL FILL PLACED IN THIS ZONE SHALL HAVE MAXIMUM LOOSE LIFT THICKNESS OF 12 INCHES AND SHALL BE COMPACTED USING HAND OPERATED COMPACTION EQUIPMENT.

**City of Puyallup
Building
REVIEWED
FOR
COMPLIANCE**


BSnowden
10/23/2024
2:21:53 PM



Approval of submitted plans is not an approval of omissions or oversights by this office or non compliance with any applicable regulations of local government. The contractor is responsible for making sure that the building complies with all applicable codes and regulations of the local government.

The approved construction plans, documents, and all engineering must be posted on the job at all inspections in a visible and readily accessible location.

Full sized legible color plans are required to be provided by the permittee on site for inspection.

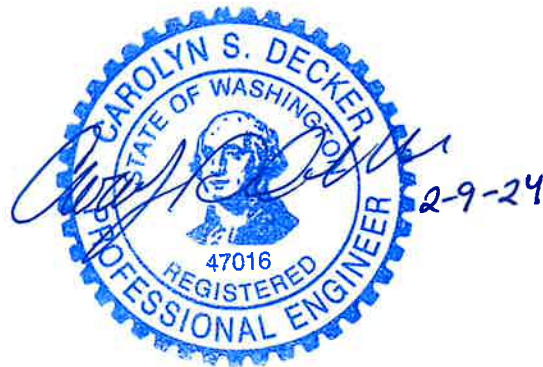

<p>Terra Associates, Inc. Consultants in Geotechnical Engineering Geology and Environmental Earth Sciences</p>	<p>LOCK+LOAD WALL DETAIL 240 - 15TH ST SE INDUSTRIAL PUYALLUP, WASHINGTON</p>	
	<p>Proj.No. T-8661</p>	<p>Date: FEB 2024</p>