


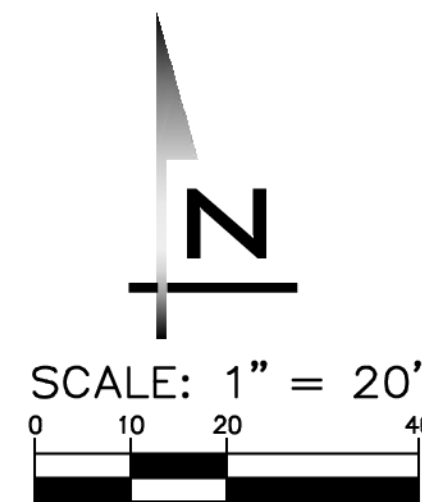

SCALE:
AS NOTED
PROJECT MANAGER:
JON KOEPFGEN, PE
PROJECT ENGINEER:
PETER RALSTON, PE
DESIGNER:
JUSTIN RODDA
ISSUE DATE:
11/26/2024

REVISIONS

NO. DATE BY

COMPOSITE UTILITY PLAN

MCD PUYALLUP
CIVIL PLANS

CITY OF PUYALLUP WASHINGTON



11/26/24
JOB NUMBER:
24006004
SHEET NAME:
CU-01

SHT 11 OF 14

FOOTING DRAIN NOTE

- FOOTING DRAINS TO BE 4" PERFORATED PVC IN 3/4" OR 1-1/2" WASHED ROCK WRAPPED W/ MIRAFI 140N OR APPROVED EQUAL AND INSTALLED AT A SLOPE OF 0.00%
- CLEANOUTS IN SIDEWALKS OR DRIVE AISLES SHALL HAVE CAST IRON RING AND COVER SET FLUSH WITH FINAL GRADE.
- CLEANOUTS IN SOFT AREAS TO RECEIVE CONCRETE COLLARS.
- BENDS, WYES, ETC. (AS NECESSARY) TO BE DETERMINED BY CONTRACTOR.
- FOOTING DRAINS TO BE LAID FLAT OR WITH POSITIVE SLOPE TOWARDS CONNECTION TO PROPOSED STORM SYSTEM.
- CLEANOUTS SHALL BE PROVIDED EVERY 100' OR 135' IN DIRECTIONAL CHANGE.

EXISTING UTILITY NOTE

EXISTING UTILITIES ARE SHOWN IN THE APPROXIMATE LOCATION. THERE IS NO GUARANTEE THAT ALL UTILITY LINES ARE SHOWN, OR THAT THE LOCATION, SIZE AND MATERIAL IS ACCURATE. THE CONTRACTOR SHALL UNCOVER ALL INDICATED PIPING WHERE CROSSING, INTERFERENCES, OR CONNECTIONS OCCUR PRIOR TO TRENCHING OR EXCAVATION FOR ANY PIPE OR STRUCTURES TO DETERMINE ACTUAL LOCATIONS, SIZE AND MATERIAL. THE CONTRACTOR SHALL MAKE THE APPROPRIATE PROVISION FOR PROTECTION OF SAID FACILITIES. THE CONTRACTOR SHALL NOTIFY ONE CALL AT 8-1-1 (WASHINGTON11.COM) AND ARRANGE FOR FIELD LOCATION OF EXISTING FACILITIES BEFORE CONSTRUCTION.

