

3rd Review  
PRCCP20240808  
December 2024



## **Stormwater Site Plan – Phase 2**

*PREPARED FOR:*

Greg Helle  
1001 Shaw Road  
Puyallup, WA 98372

*PROJECT:*

East Town Crossing  
2902 E Pioneer  
Puyallup, WA 98372  
2230752.10

*PREPARED BY:*

Christopher Watt  
Project Engineer

*REVIEWED BY:*

Todd C. Sawin, PE, DBIA, LEED AP  
Principal

*DATE:*

May 2024  
Revised January 2025

## **Stormwater Site Plan – Phase 2**

*PREPARED FOR:*

Greg Helle  
1001 Shaw Road  
Puyallup, WA 98372

*PROJECT:*

East Town Crossing  
2902 E Pioneer  
Puyallup, WA 98372  
2230752.10

*PREPARED BY:*


Christopher Watt  
Project Engineer

*REVIEWED BY:*

Todd C. Sawin, PE, DBIA, LEED AP  
Principal

*DATE:*

May 2024  
Revised January 2025



I hereby state that this [Stormwater Site Plan – Phase 2](#) for the [East Town Crossing](#) project has been prepared by me or under my supervision and meets the standard of care and expertise that is usual and customary in this community for professional engineers. I understand that [the City of Puyallup](#) does not and will not assume liability for the sufficiency, suitability, or performance of drainage facilities prepared by me.

# Table of Contents

---

Section	Page
<b>1.0 Project Overview .....</b>	<b>1</b>
1.1 Purpose and Scope.....	1
1.2 Existing Conditions Summary .....	1
1.2.1 Existing Site Features .....	1
1.2.2 Soils .....	1
1.3 Proposed Conditions Summary .....	2
<b>2.0 Offsite Analysis Report .....</b>	<b>2</b>
2.1 Upstream Analysis .....	2
2.2 Downstream Analysis.....	2
<b>3.0 Permanent Stormwater Control Plan .....</b>	<b>2</b>
<b>4.0 Summary of Minimum Requirements .....</b>	<b>3</b>
4.1 MR 1 – Preparation of Stormwater Site Plans .....	3
4.2 MR 2 - Construction Stormwater Pollution Prevention .....	3
4.3 MR 3 – Source Control of Pollution.....	3
4.4 MR 4 – Preservation of Natural Drainage Systems and Outfalls.....	4
4.5 MR 5 – Onsite Stormwater Control .....	4
4.6 MR 6 – Runoff Treatment .....	5
4.7 MR 7 – Flow Control .....	5
4.8 MR 8 – Wetland Protection .....	6
4.9 MR 9 – Operation and Maintenance .....	6
<b>5.0 Wells and Septic Systems.....</b>	<b>6</b>
<b>6.0 Fuel Tanks .....</b>	<b>6</b>
<b>7.0 Construction Stormwater Pollution Prevention Plan .....</b>	<b>6</b>
<b>8.0 Special Reports and Studies .....</b>	<b>6</b>
<b>9.0 Other Permits .....</b>	<b>6</b>
<b>10.0 Operations and Maintenance Manual .....</b>	<b>6</b>
<b>11.0 Conclusion.....</b>	<b>7</b>



# Appendices

---

## Appendix A

### Exhibits

- A-1..... Vicinity Map
- A-2..... Existing Conditions Map
- A-3..... Developed Conditions Map
- A-3a..... Developed Conditions Basin Map
- A-4..... NRCS Soil Survey
- A-5..... Flow Chart for Determining Requirements for New Development
- A-6..... Flow Chart for Determining MR #5 Requirements
- A-7..... Infeasibility Checklists
- A-8..... FEMA Flood Map
- A-9..... FEMA Letter of Map Revision

## Appendix B

- B-1..... Geotechnical Report by Krazan & Associates, Inc., dated April 11, 2019
- B-2..... Project Infiltration Feasibility Letter by Migizi Group, dated August 25, 2023
- B-3..... Water Table Monitoring Information by Abbey Road Group, dated January 17, 2023.
- B-4..... Stream Restoration and Mitigation Plan by Soundview Consultants, dated September 2023 (To be Updated during Phase 2)

## Appendix C

### Maintenance Report

## Appendix D

### Drainage Calculations

- D-1..... Conveyance Calculations and Analysis
- D-2..... Water Quality Calculations and GULD Standards.
- D-3..... Buoyancy Calculations for R-Tank 4
- D-4..... Flow Control Calculations for R-Tank 4
- D-5..... Shaw Road Development Storm Report (Dated December 2004)

## Appendix E

- Construction Stormwater Pollution Prevention Plan (CSWPPP)

## Appendix F

- TESC Plan
- TESC Notes and Details
- Temporary Sediment Trap Calculations

**Appendix G**

- Inspection Logs

**Appendix H**

- Best Management Practices (BMPs)

## **1.0 Project Overview**

### **1.1 Purpose and Scope**

This Stormwater Site Plan accompanies the site development plans for the East Town Crossing Phase 2 project located on tax parcels 0420351066, 0420264053, 0420264054. The site is bordered by E Pioneer to the north, East Town Crossing Phase 1 to the west, commercial businesses to the south, and vacant land to the east. The three parcels contain approximately 2.45 acres that will be disturbed. Refer to Appendix A, Figure A-1 for a Vicinity Map.

This Stormwater Site Plan is for storm drainage approval. This report describes the design and analysis of the basic treatment, detention, and conveyance facilities proposed as part of the site improvements. This report will demonstrate that the stormwater design for this project will meet the requirements of the 2019 Department of Ecology (DOE) *Stormwater Management Manual for Western Washington (SMMWW)*, as adopted by the City of Puyallup.

### **1.2 Existing Conditions Summary**

#### **1.2.1 Existing Site Features**

The existing site area is approximately 2.45 acres and is currently undeveloped land cover. Within the three parcels, a gravel access road connects E Pioneer to the commercial property to the south. Most of the groundcover is made up of tall grass, shrubs, and a few trees.

The existing site area contains a combined detention/wetpond that receives runoff from the commercial property to the south before overflowing into the existing channel lining the east and north of the property. Apart from the existing storm facility, the site generally slopes from southeast to northwest, with the large majority of runoff discharging to the northern portion of the channel. Small sections of the eastern part of the site discharge to the channel on to the east, but not enough to be significant. In general, the northern channel is the site's point of discharge. A topographical survey of the project was prepared by Abbey Road Group. that shows existing site conditions. See Appendix A, Exhibit A-2 for the Existing Conditions Map.

#### **1.2.2 Soils**

The National Resources Conservation Service (NRCS) classifies the onsite soils as Briscot Loam in the northern part of the site and Puyallup fine sandy loam in the southern portion of the site. Appendix A, Exhibit A-4 provides the NRCS soil map. Briscot Loam is classified as hydrologic soil group B/D with poorly draining characteristics. Puyallup fine sandy loam is classified as hydrologic soil group A with well-draining characteristics.

Krazan & Associates, Inc prepared a geotechnical report for the site. On March 4, 2021, two large-scale pilot infiltration tests were completed. Based on the results presented in the Geotechnical Report, it was determined that the soils at the site contain high silt content and are considered a very low infiltrative to relatively impermeable layer. Migizi Group, Inc., confirmed in their Project Infiltration Letter, dated August 25, 2023 (provided as Appendix B, Exhibit B-1) that Krazan & Associates, Inc.'s findings result in a calculated 0 inches per hour infiltration rate. Thus, in opposition of the NRCS report, the entire site is not recommended for any infiltration due to the presence of unfavorable soils.

See Appendix B, Exhibit B-1 for the Krazan & Associates, Inc. Geotechnical Engineering Report and Appendix B-2 for the Migizi Group Geotechnical Letter.

### **1.3 Proposed Conditions Summary**

The proposed improvements include storm conveyance, detention, grading, paving, and striping, for 3 multi-family buildings and a property management/clubhouse building. Stormwater in proposed paved areas will be collected in a new collection system which will drain to one of two Biopods located in the northern and south portion on the site. After treatment, stormwater will be detained in an R-Tank to the west of the site that was installed as a part of East Town Crossing Phase 1. After detention, stormwater will be released into the enhanced stream to the north of the site.

In addition to the on-site storm system improvements, the existing detention/wetpond located on the southeastern portion of the site will be replaced with a detention and treatment system. This system will only serve the upstream properties and will release to the upstream portion of the enhanced stream.

See Appendix A, Exhibit A-3, for the Developed Conditions Map.

## **2.0 Offsite Analysis Report**

### **2.1 Upstream Analysis**

In existing conditions, the commercial property on the parcel to the south drains to the combined detention/wetpond located on the southeastern portion of our site. Due to lack of maintenance, the existing stream has breached the storm facilities eastern berm and the control structure now detains and releases the streams flow as well as the runoff from the southern property. After release from the control structure, stormwater is conveyed to the Pioneer Way ditch located at the north property line and then via a storm pipe away from the site. As a part of phase 2, the existing storm facility will be replaced, and the stream will be relocated.

### **2.2 Downstream Analysis**

In existing condition, stormwater leaves the site on the northern portion of the channel that runs around the east and north of the site. A culvert collects the water from the channel and directs it northwest under the intersection of E Pioneer and Shaw Road E. A channel then runs along E Pioneer on the roadside of the railroad before it intersects another culvert directing water through Deer Creek and then to the Puyallup River less than a mile away.

As a part of phase 2, the existing channel will be enhanced within the bounds of the site. Stream regrading will occur under the stream grading permit.

## **3.0 Permanent Stormwater Control Plan**

This project is a new development that includes more than 5,000 square feet of impervious surfaces; therefore, all Minimum Requirements (MR) apply to this project. Refer to Appendix A, Exhibit A-5 for the Flow Chart for Determining Requirements for New Development.

The existing channel to the north and east of the site will be enhanced under a separate permit. A new system is proposed to collect all stormwater generated onsite as well as directed to the site. The proposed system will include catch basins that will convey stormwater through one of two BioPods (which are designed for enhanced treatment) before being detained in an existing system of R-Tanks, located west of the project site. Refer to Phase 1 submittal for information related to the existing R-Tank system. The existing R-Tank outfall will be upgraded to a 20" by 20" Mirafi wrapped washed rock channel overtopped by rip rap as a part of Phase 2. This will be to prevent fish from swimming back into the detention system on-site. The stream will direct water

along Pioneer Way ditch, then the main stem of Deer Creek before discharging to the main body of the Puyallup River approximately 1.5 miles to the west-northwest.

A new R-Tank and treatment system are proposed for Phase 2 to replace the existing combined detention/wetpond receiving water from the southern commercial property. Stormwater received from the upstream commercial property through the existing 15" pipe will first be treated. A BioPod is proposed to replace the volume-based wetpond with flow-based treatment meeting DOE GULD standards. After treatment the stormwater will enter the R-Tank that has been designed to detain the existing required detention volume from the pond. A control structure will slow the release of stormwater matching the existing control structure's release rate. The released stormwater will outfall to the enhanced stream through a 34" by 34" Mirafi wrapped washed rock channel overtopped by rip rap. This will prevent fish from swimming back into the detention systems onsite. Refer to Sections 4.6 and 4.7 for more information on the proposed water quality and flow control plans.

Refer to Appendix D Exhibit D-2 for Water Quality Basin Map and Calculations used for sizing. Information on the existing combined detention/wetpond to be replaced in this phase can be found in the original storm drainage report available as Appendix D Exhibit D-5.

## **4.0 Summary of Minimum Requirements**

### **4.1 MR 1 – Preparation of Stormwater Site Plans**

This report and project plans have been prepared to provide justification of the water quality and flow control design proposed for this project.

### **4.2 MR 2 - Construction Stormwater Pollution Prevention**

A Construction Stormwater Pollution Prevention Plan (CSWPPP) has been prepared to satisfy MR 2 and is included as Appendix E of this report.

### **4.3 MR 3 – Source Control of Pollution**

The proposed project is required to provide source control of pollution. Following are proposed measures to be implemented as part of the civil plans.

- All discharges to the city storm system require City of Puyallup approval.
- All pollutants, including waste materials and demolition debris created onsite during construction, shall be handled and disposed of in a manner that does not cause contamination of surface water.
- Cover, containment, and protection from vandalism shall be provided for all chemicals, liquid products, petroleum products, and non-inert wastes present on the site (see Chapter 173-304 WAC for the definition of inert waste).
- Maintenance and repair of heavy equipment and vehicles that may result in discharge or spillage of pollutants to the ground or into surface water runoff must be conducted using spill prevention measures such as drip pans.
- Concrete Handling (BMP C151) shall be used to prevent or treat contamination of surface water runoff by pH modifying sources.

The CSWPPP provides details on the control of pollution during construction.



#### 4.4 MR 4 – Preservation of Natural Drainage Systems and Outfalls

The existing land cover drains to the northern portion of the channel that wraps around the parcels east and north borders before running alongside E Pioneer and into Deer Creek before joining the Puyallup River. The discharge to the channel will be maintained during developed conditions.

Under proposed conditions, treated runoff will be discharged to the northwestern section of the channel where it will enter an existing culvert that redirects the stream diagonally across the intersection of E Pioneer and Shaw Road E, travel alongside E Pioneer to Deer Creek before joining the Puyallup River. Flows from the commercial properties to the south were released into the southern portion of the stream in pre-existing condition before the storm pond was created. Proposed conditions will restore this upstream flow path.

#### 4.5 MR 5 – Onsite Stormwater Control

Onsite stormwater management Best Management Practices (BMPs) are not practical for the site due to native site soils, which have no infiltrative properties. With that in mind, per the Flow Chart for Determining MR #5 Requirements, refer to Appendix A, Exhibit A-6, List #2 of the List Approach is required. Below is a summary of the findings of List #2, refer to Appendix A, Exhibit A-7 for the Infeasibility Checklists.

**Surface Type: Lawn and Landscaped Areas:**

Chosen BMP: T5.13: Post-Construction Soil Quality and Depth.

**Surface Type: Roofs:**

All options on the List Approach are infeasible, runoff from roofs will be directed towards a detention system.

**Surface Type: Other Hard Surfaces:**

All options on the List Approach are infeasible, runoff will be directed towards a detention system.

Given the infeasibility of the List Approach BMPs, the proposed storm system will utilize an existing R-Tank System from Phase 1 and two proposed Oldcastle BioPods to provide flow control and water quality to mitigate stormwater onsite. The R-Tanks were sized in Phase 1 to include Phase 2 development. Refer to PRCCP20230970 for the sizing. The two BioPods have been sized using the flows from the WWHM model and DOE GULD standards, refer to Appendix D, Exhibit D-2 for the water quality calculations and BioPod sizing.

Runoff from the multifamily buildings and associated surfaces utilize catch basins and roof drains to collect stormwater runoff. Runoff from pollution generating surfaces is conveyed to one of two underground BioPods to treat runoff before conveying to the Phase 1 R-Tank west of Building F. Runoff from the multifamily buildings roofs will either directly connect to the above-mentioned R-Tank, bypassing treatment, or connect to the existing stormwater system from Phase 1. The existing stormwater system was designed to convey and contain runoff generated by Phase 2 improvements. Stormwater within the existing R-Tanks is eventually released to the enhanced stream.

Refer to Appendix D, Exhibit D-1 for the Conveyance Calculations and Analysis. This analysis, performed using Storm and Sanitary Sewer Analysis, shows that the proposed stormwater conveyance system has sufficient capacity to convey and contain the 25-year storm flow event of the fully developed project site. No proposed structures overtop and over 6-inches of freeboard is shown between the maximum hydraulic grade line and the proposed rim elevations of all proposed structures.

#### 4.6 MR 6 – Runoff Treatment

Over 5,000 square feet of pollution-generating surface (PGIS) will be added as part of phase 2 improvements; therefore, water quality treatment will be provided. 2 BioPods are proposed to provide treatment for stormwater runoff and will be located upstream of the detention system. Per the DOE GULD standard specifications, the system is sized at a hydraulic load rating of 1.6 gallon per minute per square foot of media surface area of which the flow is based off the water quality design flow rate using the peak 15-minute flow rate using WWHM.

This project proposes to replace the existing volume-based water quality device with a flow-based water quality device. Biopods are being used to replace the water quality treatment of the existing combined detention/wetpond. The existing areas were input into WWHM to obtain a water quality flow rate used for sizing the biopods matches the flow rate calculated in the original storm report for sizing the existing combined detention/wetpond.

Refer to Appendix D, Exhibit D-2 for the Water Quality Calculations for Phase 2, and a copy of the GULD standards. Refer to Appendix D-5 for the “Storm Drainage and Erosion Control Report for Shaw Road Development” dated December 2004. Refer to exhibit B-2 within Appendix D-5 for the areas used in WWHM for the water quality flow rate required for the replacement in this phase for the upstream basin.

#### 4.7 MR 7 – Flow Control

The proposed stormwater system will be conveyed to an existing detention system composed of three R-Tanks. This system of R-tanks is located to the west of proposed Building F and were constructed as a part of East Town Crossing Phase 1. The existing R-Tanks were sized in Phase 1 to accommodate the flow from Phase 2 improvements. The proposed Phase 2 storm system will be conveyed into the eastern most existing, ‘R-Tank 3’, through two stubs constructed in phase 1. Refer to phase 1 submittal, PRCCP20230970, for more information on the existing R-Tank system including Flow Control Calculations and Flow Control Basin Map.

A fourth R-Tank referred as ‘R-Tank 4’ is to be constructed during phase 2. This additional R-Tank is to replace the detention portion of the existing combined detention/wetpond in the southeast portion of the site that serves the commercial property south of the project site. The R-Tank will roughly be in the same location as the existing storm facility and is sized to match existing volume of storage. At the end of ‘R-Tank 4’, a control structure controls the release of flow into the enhanced stream. The proposed replacement control structure was designed using the simple orifice equation from Volume V of the SWMMWW and the release rates for the 2-, 10-, and 100-yr storms, the peak surface water elevation in the system, and the active volume associated with the surface water elevation in the existing system. By converting the active volumes into cubic feet, and then into an elevation (by dividing out the surface area of the proposed detention system) the head at each of the three storms was determined. Next, the simple orifice equation was used to determine orifice sizes and elevations until the release rates at each of the three storms matched the values shown in the old report. Refer to Appendix D-4 for the control structure calculations. Refer to Appendix D-5 for the “Storm Drainage and Erosion Control Report for Shaw Road Development” dated December 2004. Within Appendix D-5, exhibits C-3 and C-4 are the existing control structure release rates and detention pond volumes that are to be matched by R-Tank 4 and the proposed control structure. Refer to Appendix D, Exhibits D-3 for the Buoyancy Calculations for R-Tank 4.

Please note that the configuration of ‘R-Tank 4’ outlet has changed from the initial plan in the Phase 1 submittal. ‘R-Tank 4’ now bypasses the rest of the storm drainage system and is not connected to the other three existing R-Tanks.

#### **4.8 MR 8 – Wetland Protection**

It is to our knowledge that no wetlands exist on or adjacent to the site that would be impacted by the proposed site development.

Refer to Appendix A, Exhibit A-8 and A-9 for the FEMA Map and FEMA Letter of Map Revision.

#### **4.9 MR 9 – Operation and Maintenance**

See Appendix C for a copy of the Operations and Maintenance Manual. This manual shall be readily available for inspection by the City of Puyallup. The maintenance and operations shall be the responsibility of the owner of the East Town Crossing project.

#### **5.0 Wells and Septic Systems**

The Department of Ecology (DOE) Well Report Map does not identify any wells present on the site. Any wells located will be decommissioned following the Tacoma-Pierce County Health Department (TPCHD) removal regulations.

Two septic systems were located in the 2019 survey provided by Abbey Road Group at the existing residential parcels. Both were decommissioned in Phase 1 following TPCHD sewer removal regulations.

#### **6.0 Fuel Tanks**

To our knowledge, there are no existing fuel tanks on the site. If located during construction, the fuel tanks will be abandoned according to TPCHD and DOE standards.

#### **7.0 Construction Stormwater Pollution Prevention Plan**

A Temporary Erosion Control Plan is included with the plan set, and a CSWPPP for the project is included as Appendix E of this report.

#### **8.0 Special Reports and Studies**

A Geotechnical Report was prepared by Krazen & Associates, Inc., dated April 11, 2019. Refer to Appendix B-1. In addition, a letter from Migizi Group is included as Appendix B-2.

A Stream Restoration and Mitigation Plan was prepared by Soundview Consultants, dated September 2023. Refer to Appendix B-4.

The project site is not within a 100-year flood plain, as seen in Appendix A, Exhibit A-6.

#### **9.0 Other Permits**

A State Environmental Policy Act (SEPA) Checklist has been completed for this project. At the time of writing, a Clear, Fill, and Grade Permit was readied for issuance as Permit # PRGR-2023-0972. Coverage under DOE's Construction Stormwater General Permit must be obtained.

#### **10.0 Operations and Maintenance Manual**

Refer to Appendix C for the Maintenance Standards for the proposed drainage facilities and the Maintenance Checklist for the finished project site.

A Stormwater Maintenance Agreement will be recorded at the time of Occupancy in accordance with City Standards.

## 11.0 Conclusion

Based on our understanding and the attached documentation, we believe the proposed improvements conform to City of Puyallup and Washington State Department of Ecology standards. We conclude that this project, as proposed, will not have adverse impacts to the site or the downstream drainage system.

This analysis is based on data and records either supplied to or obtained by AHBL. These documents are referenced within the text of the analysis. The analysis has been prepared using procedures and practices within the standard accepted practices of the industry.

AHBL, Inc.



Christopher Watt  
Project Engineer

ZCP/ CJW

January 2025

Q:\2023\2230752\10\_CIV\NON\_CAD\REPORTS\SSP - Phase 2\20240417 PHASE 2 Rpt (SSP) 2230752.10.docx

# Appendix A

---

## Exhibits




- A-1.....Vicinity Map
- A-2.....Existing Conditions Map
- A-3.....Developed Conditions Map
- A-3a.....Developed Conditions Basin Map
- A-4.....NRCS Soil Survey
- A-5.....Flow Chart for Determining Requirements for New Development
- A-6.....Flow Chart for Determining MR #5 Requirements
- A-7.....Infeasibility Checklists
- A-8.....FEMA Flood Map
- A-9.....FEMA Letter of Map Revision



2215 North 30th Street,  
 Suite 300,  
 Tacoma, WA 98403  
 253.383.2422 TEL  
 253.383.2572 FAX

VICINITY MAP  
 EAST TOWN CROSSING

2230752  
 FIGURE 1

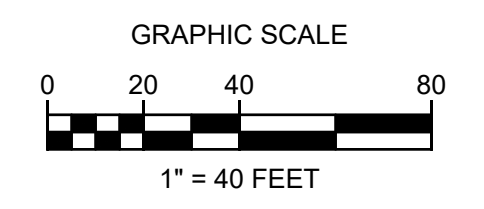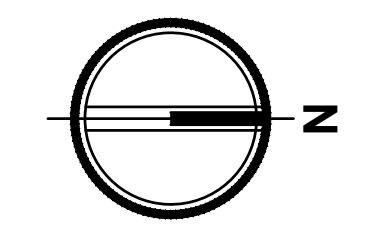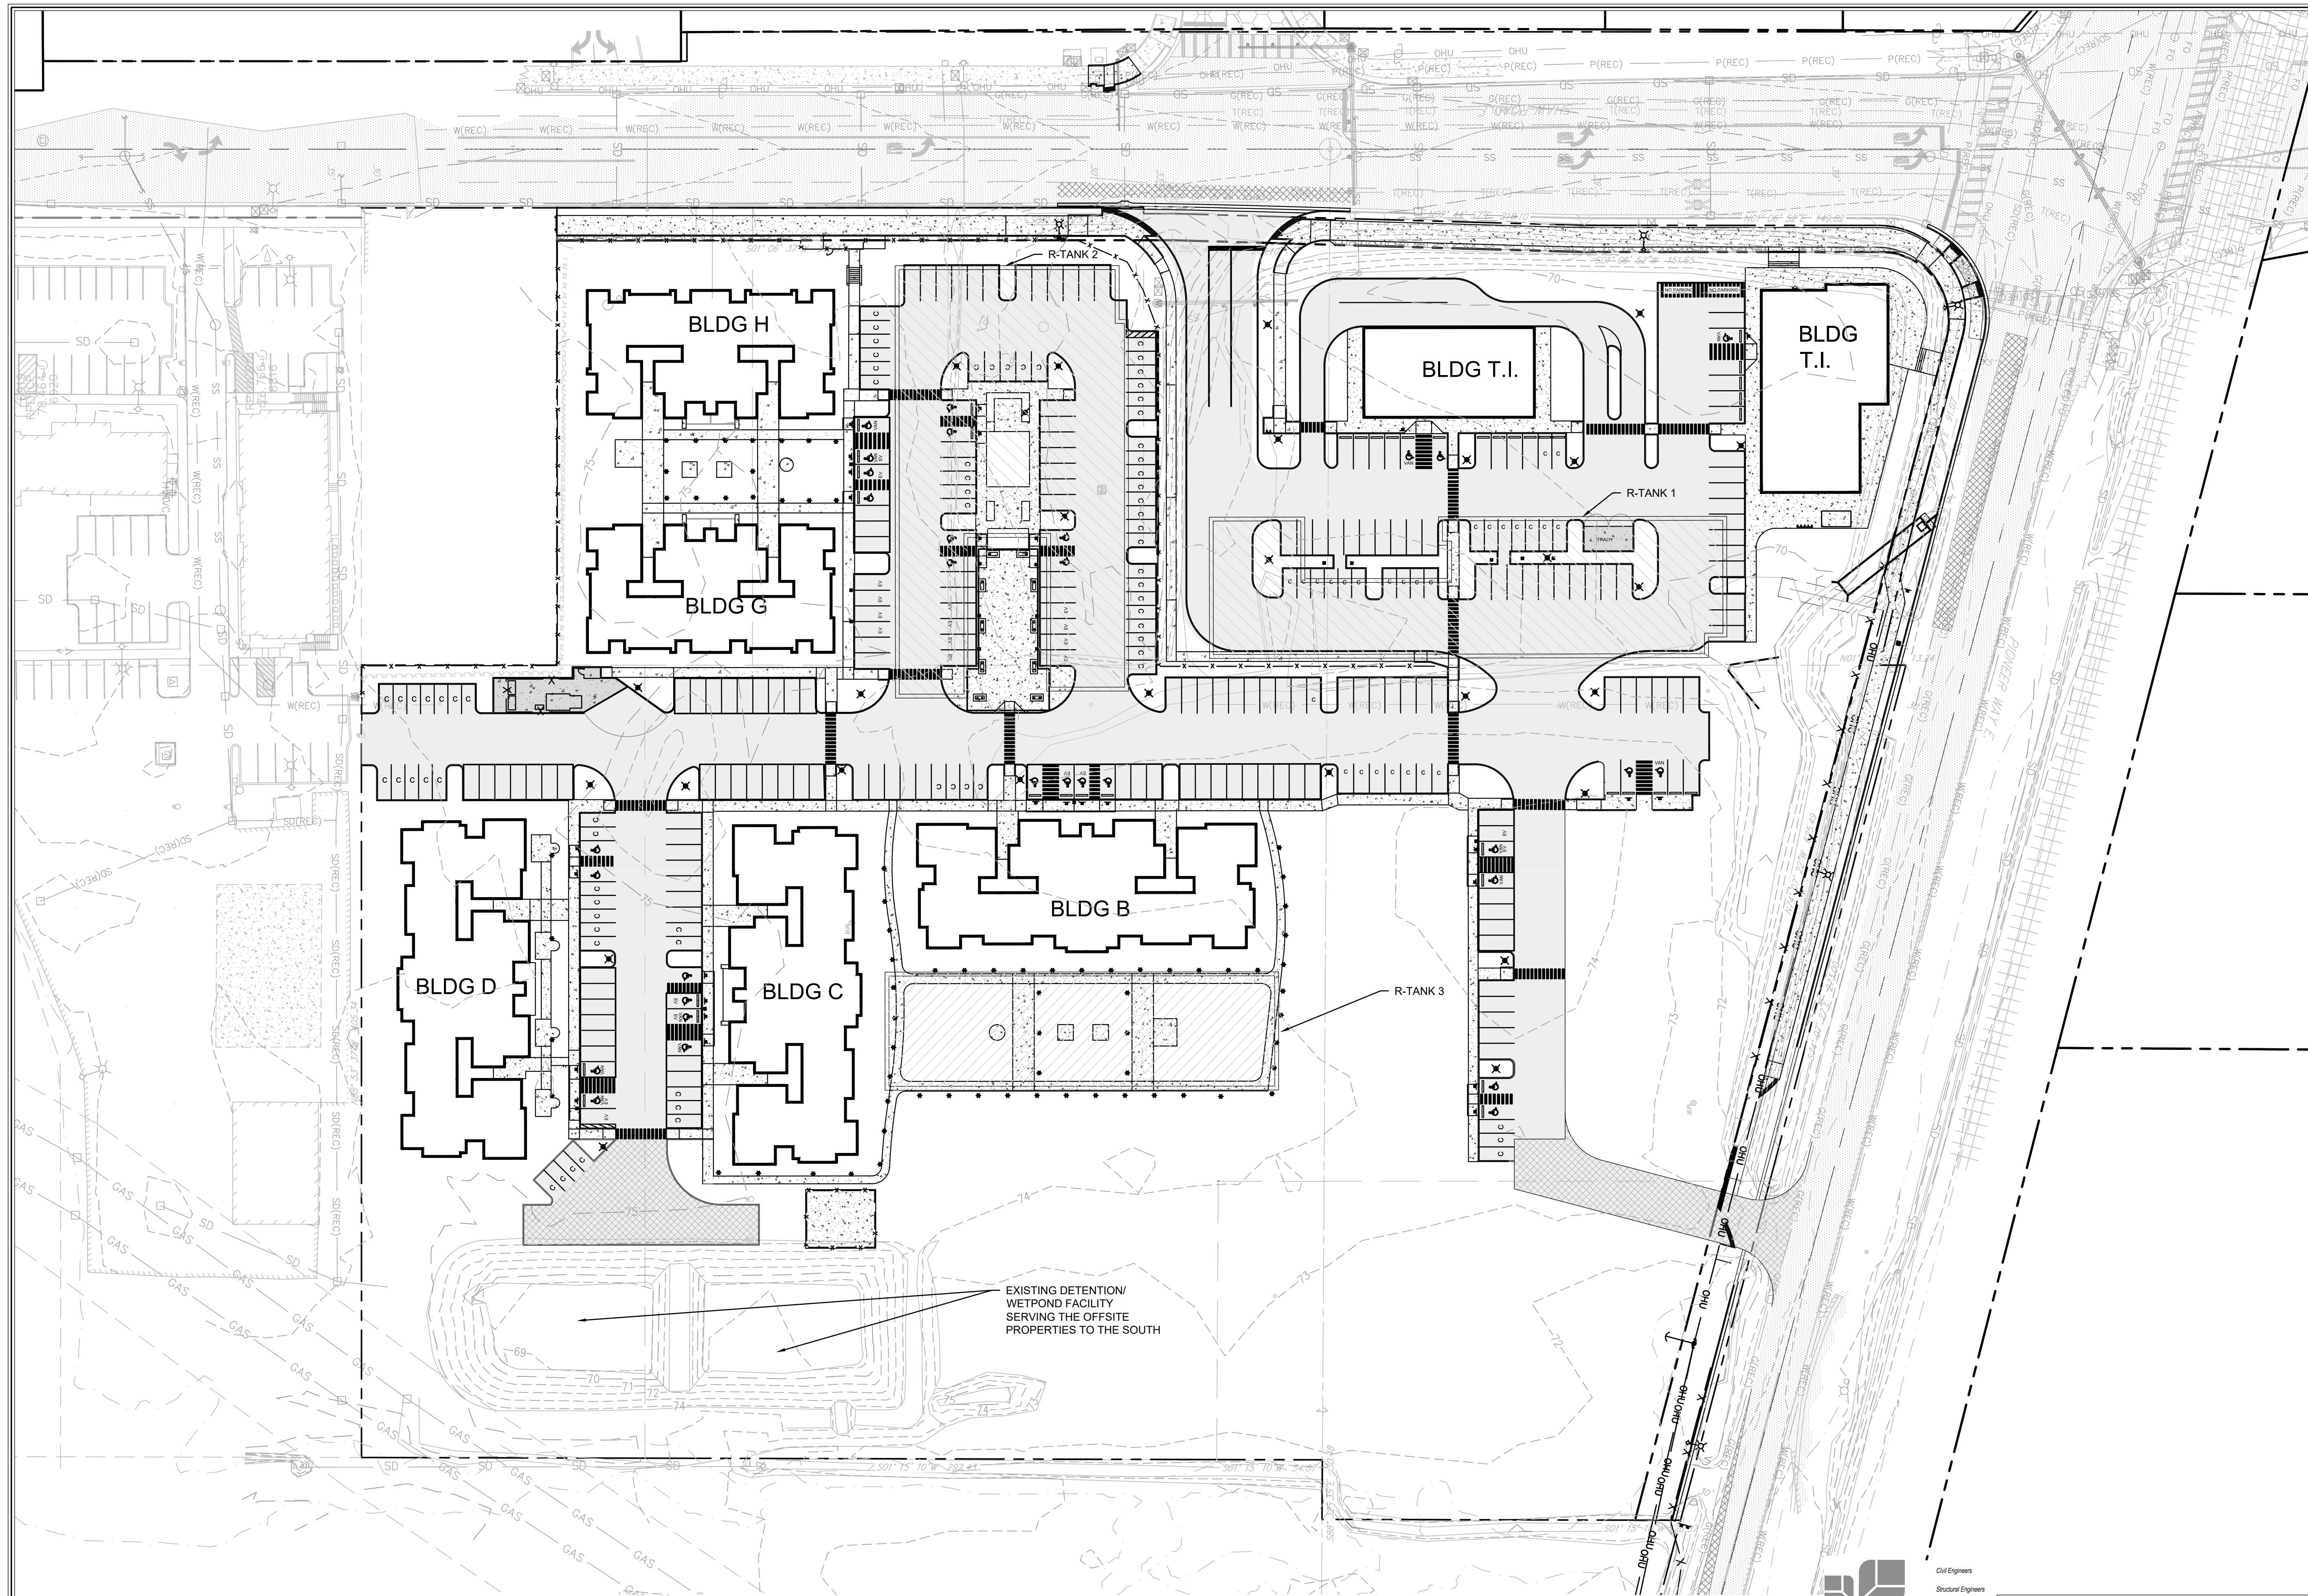




EXISTING DETENTION/  
WETPOND FACILITY  
SERVING THE OFFSITE  
PROPERTIES TO THE SOUTH

**AHBL**  
TACOMA · SEATTLE  
2215 North 30th Street, Suite 300, Tacoma, WA 98403  
316 Occidental Avenue South, Suite 330, Seattle, WA 98104

Civil Engineers  
Structural Engineers  
Landscape Architects  
Community Planners  
Land Surveyors  
Historians

**EXISTING CONDITIONS MAP**  
**EAST TOWN CROSSING PHASE 2**

**A-2**

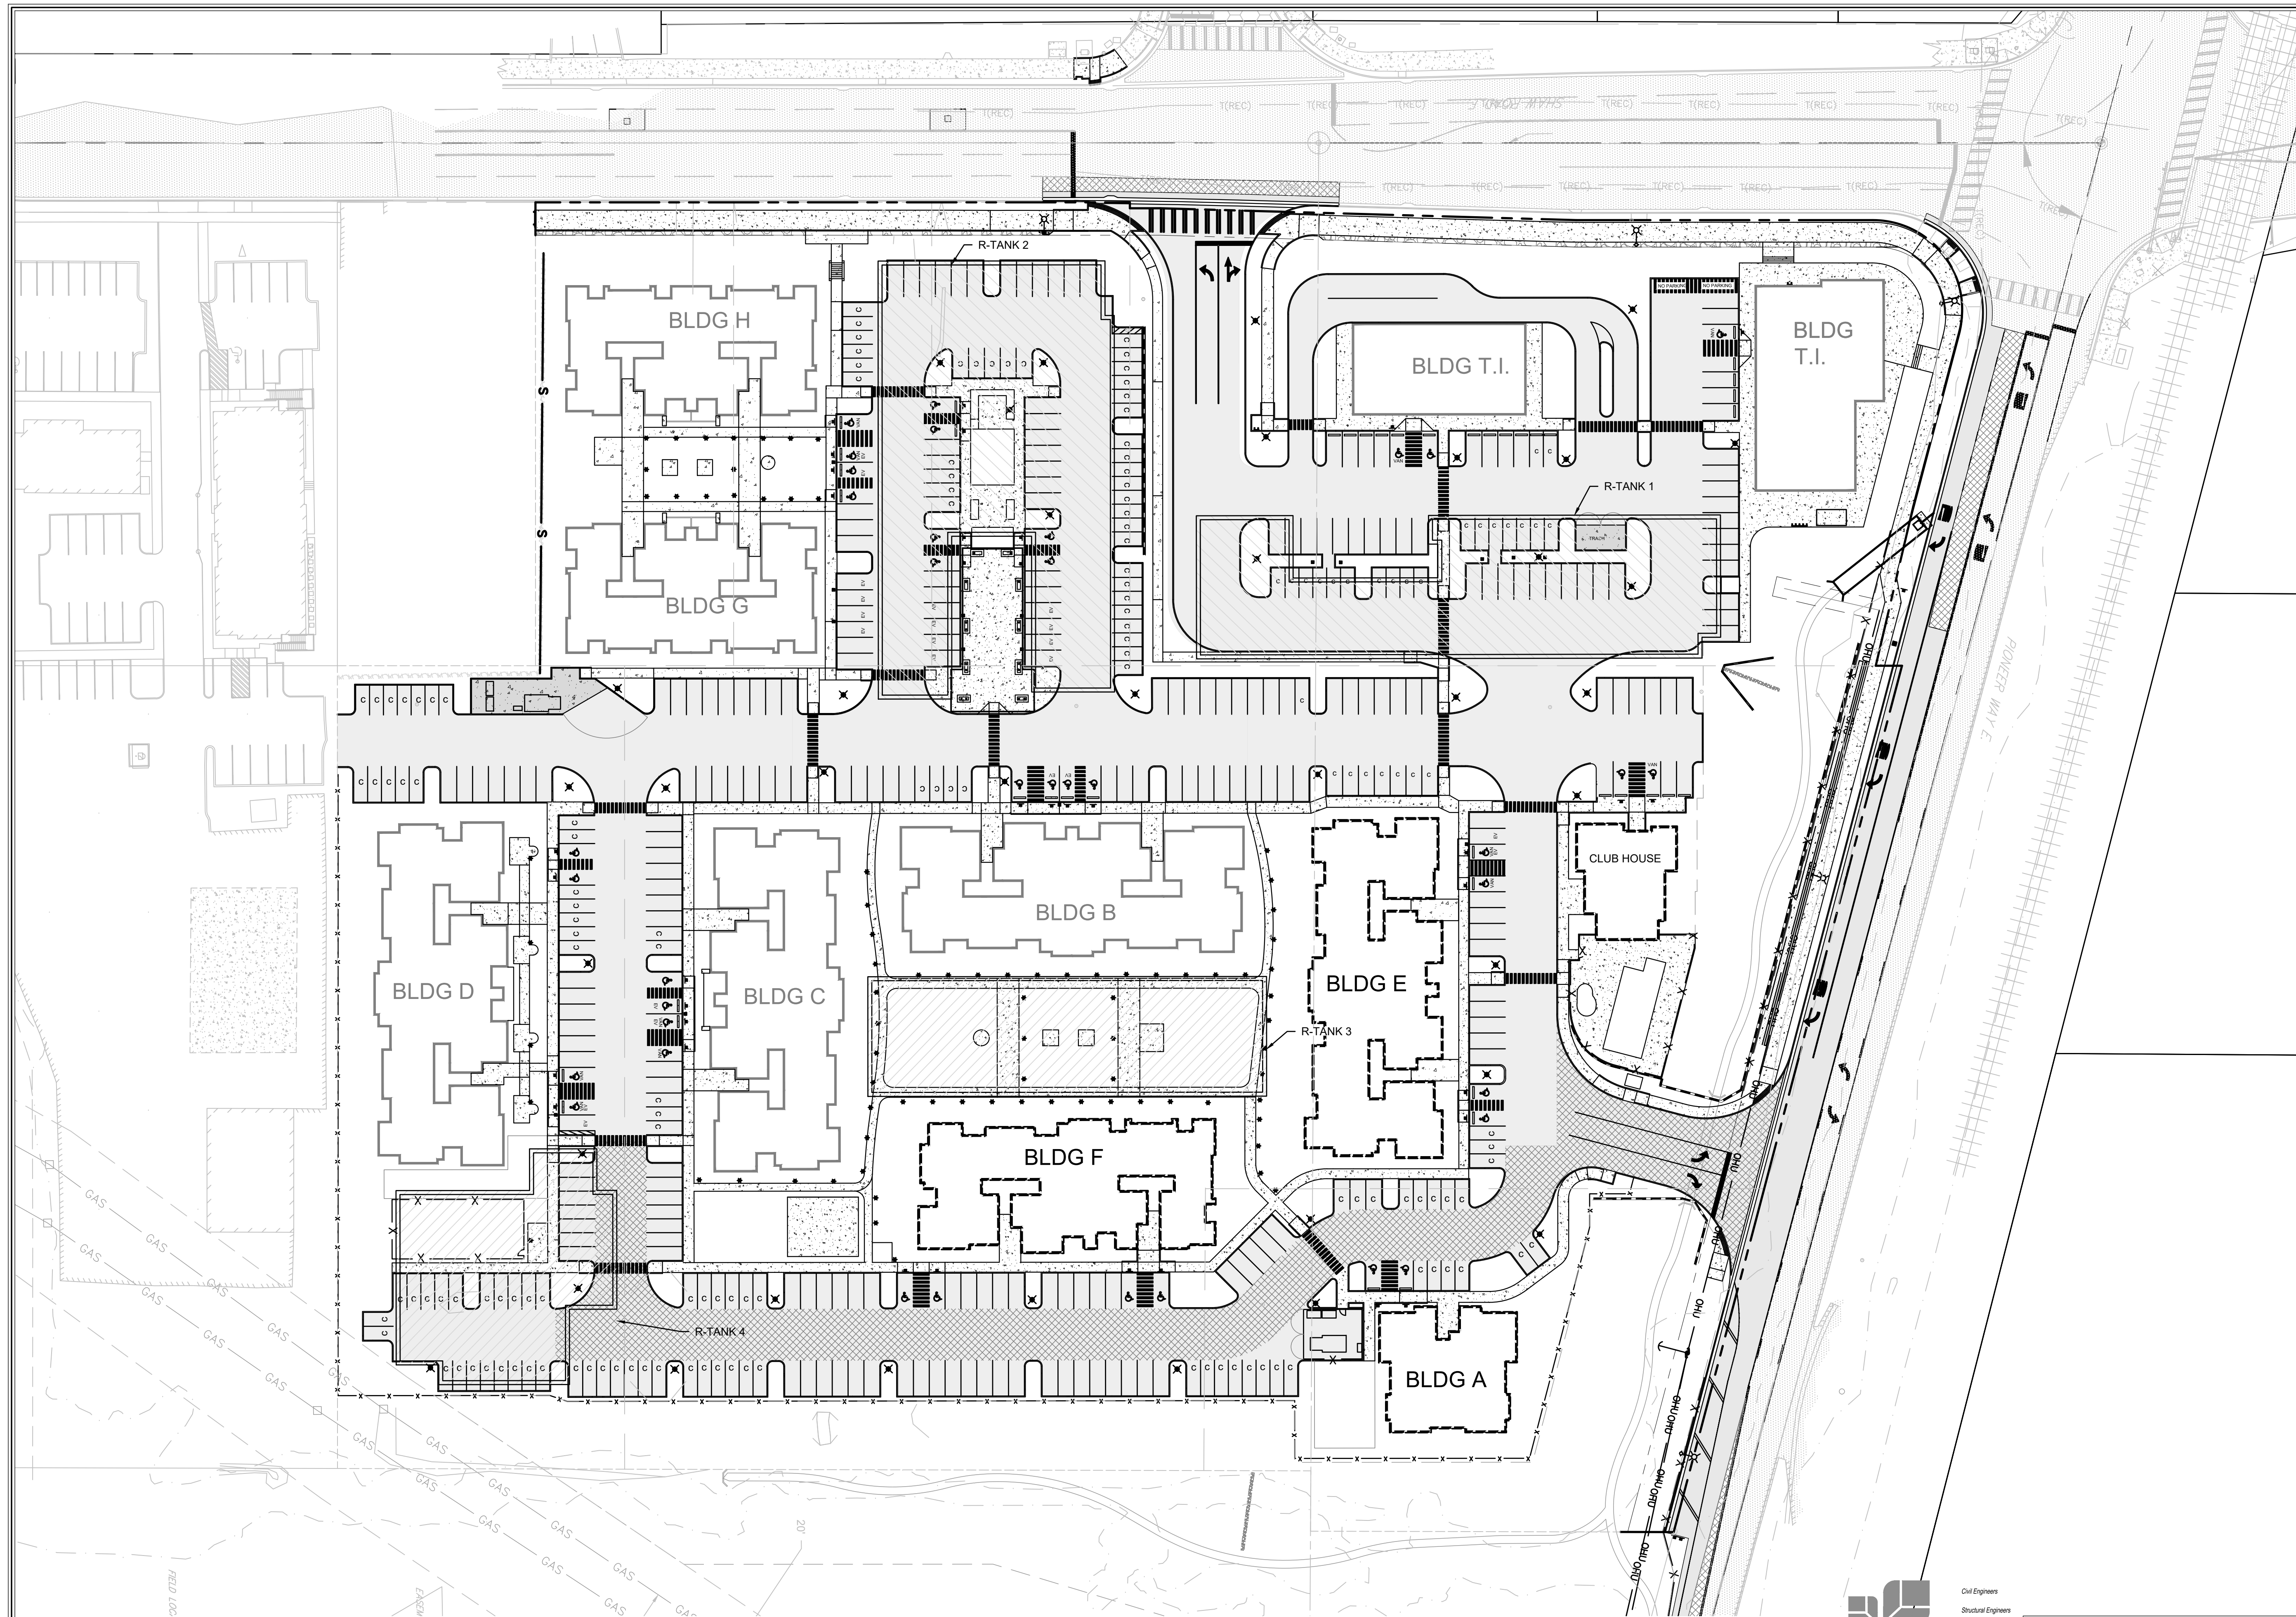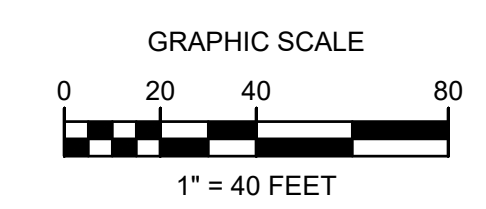




**AHBL**  
 TACOMA · SEATTLE  
 2215 North 30th Street, Suite 300, Tacoma, WA 98403  
 316 Occidental Avenue South, Suite 330, Seattle, WA 98104

Civil Engineers  
 Structural Engineers  
 Landscape Architects  
 Community Planners  
 Land Surveyors  
 Neighbors

DEVELOPED CONDITIONS MAP  
 EAST TOWN CROSSING PHASE 2

A-3



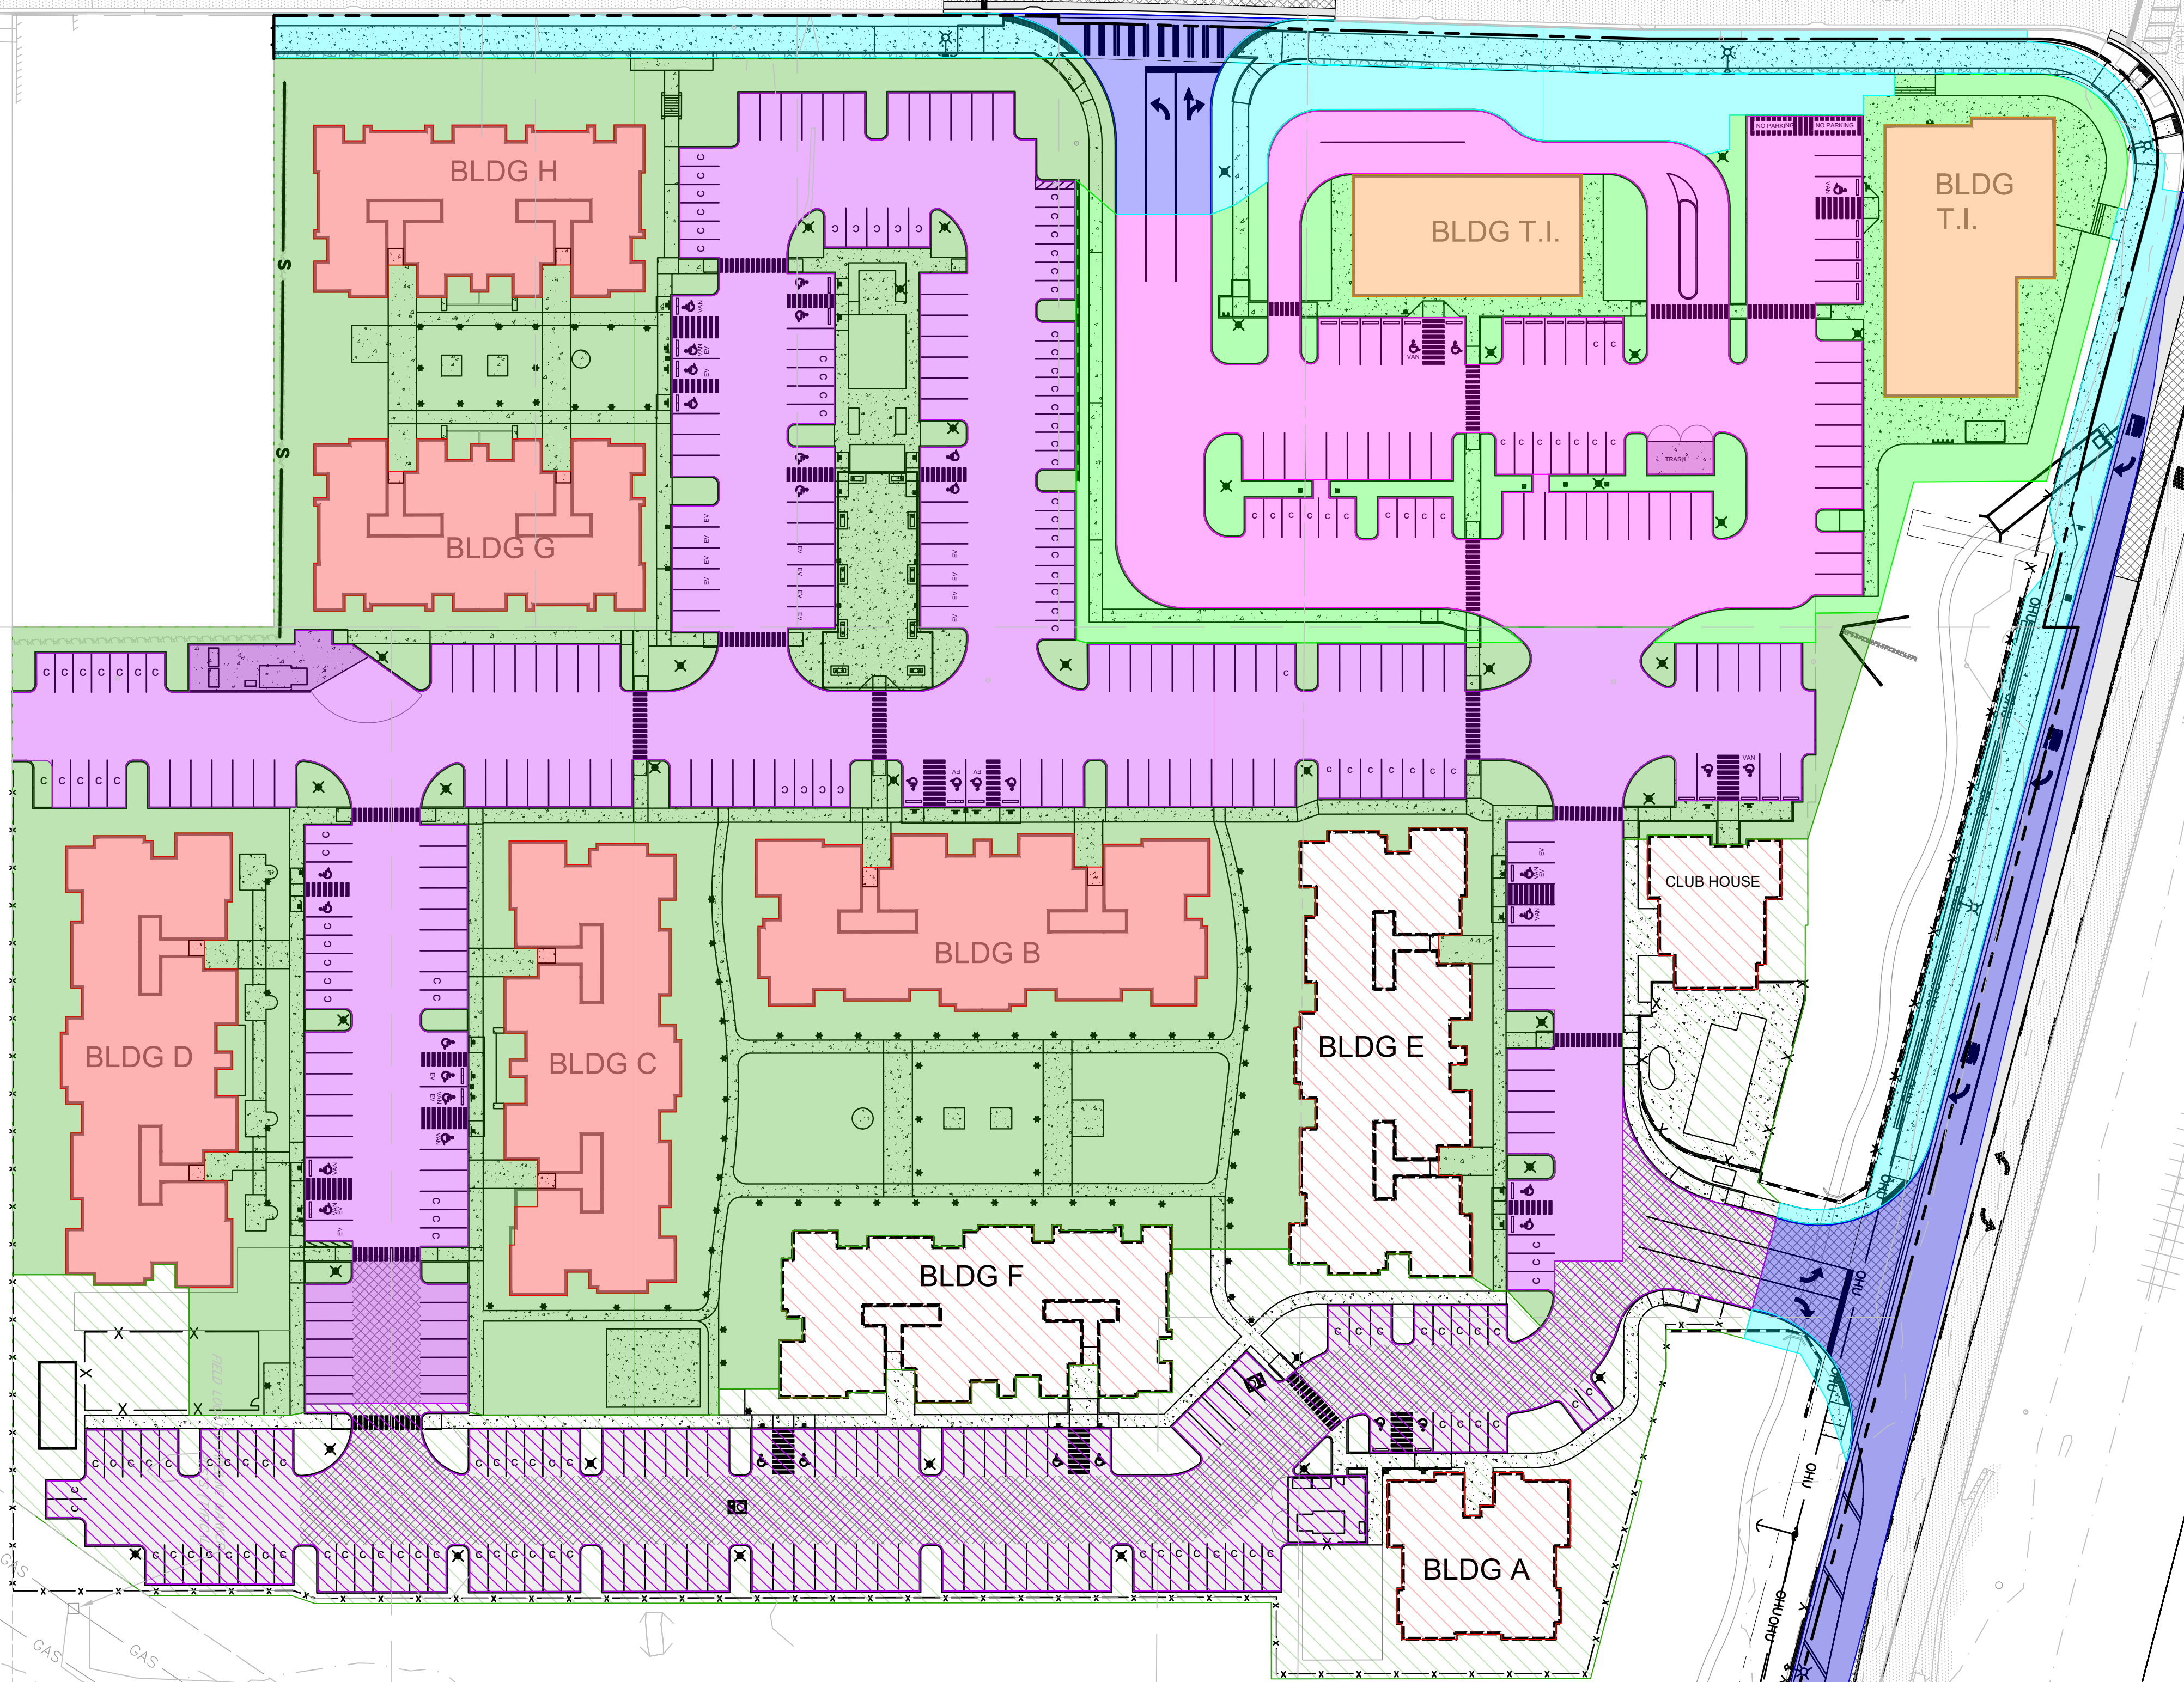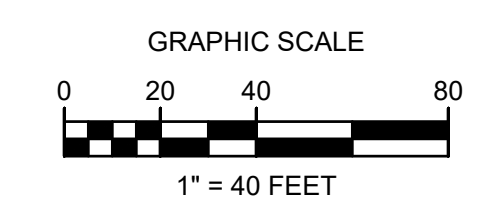

**SURFACE AREA BREAKDOWN:**

**UPPER BASIN:**

PHASE 1:

ROAD: 1.90 AC	
ROOF: 1.05 AC	
LAWN: 2.30 AC	

PHASE 2:

ROAD: 0.90 AC	
ROOF: 0.65 AC	
LAWN: 0.90 AC	

**TOTAL:**

ROAD: 2.80 AC
ROOF: 1.70 AC
LAWN: 3.20 AC

**BASIN TOTAL: 7.7 AC**  
FACTOR OF SAFETY FOR CALCULATIONS: +0.3 AC  
CALCULATED BASIN: 8.0 AC

**LOWER BASIN:**

PHASE 1:

ROAD: 0.87 AC	
ROOF: 0.24 AC	
LAWN: 0.59 AC	

**BASIN TOTAL: 1.7 AC**  
FACTOR OF SAFETY FOR CALCULATIONS: +0.3 AC  
CALCULATED BASIN: 2.0 AC

**BYPASS:**

PHASE 2:

ROAD: 0.39 AC	
ROOF: 0.00 AC	
LAWN: 0.56 AC	

**BASIN TOTAL: 0.95 AC**

NOTE: F.S. TO ENSURE ANY ADDITIONAL RUNOFF NOT BOUNDED BY BASIN OUTLINES TO THE LEFT IS CAPTURED AND DOES NOT COMPROMISE THE SYSTEM.

NOTE: TEMPORARY ACCESS AND TURNAROUND IS NOT INCLUDED IN THESE VALUES.

**AHBL**  
TACOMA · SEATTLE  
2215 North 30th Street, Suite 300, Tacoma, WA 98403  
316 Occidental Avenue South, Suite 330, Seattle, WA 98104

Civil Engineers  
Structural Engineers  
Landscape Architects  
Community Planners  
Land Surveyors  
Historians

**DEVELOPED CONDITIONS BASIN MAP**

**EAST TOWN CROSSING PHASE 2**

**A-3a**

APPROXIMATE LOCATION OF PRELIMINARY CONCEPT PLAN (PHASE 1) SHOWN

FIELD LOCATED PRELIMINARY MARKERS (TYPICAL)

EXHIBIT A-4 NRCS SOIL SURVEY



A product of the National Cooperative Soil Survey, a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local participants

# Custom Soil Resource Report for Pierce County Area, Washington



# Preface

---

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist ([http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2\\_053951](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951)).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

# Contents

---

<b>Preface</b> .....	2
<b>How Soil Surveys Are Made</b> .....	5
<b>Soil Map</b> .....	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	11
Map Unit Descriptions.....	11
Pierce County Area, Washington.....	13
6A—Briscot loam.....	13
31A—Puyallup fine sandy loam.....	14
<b>References</b> .....	16

# How Soil Surveys Are Made

---

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

## Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and

## Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.




# Soil Map

---

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

# Custom Soil Resource Report Soil Map

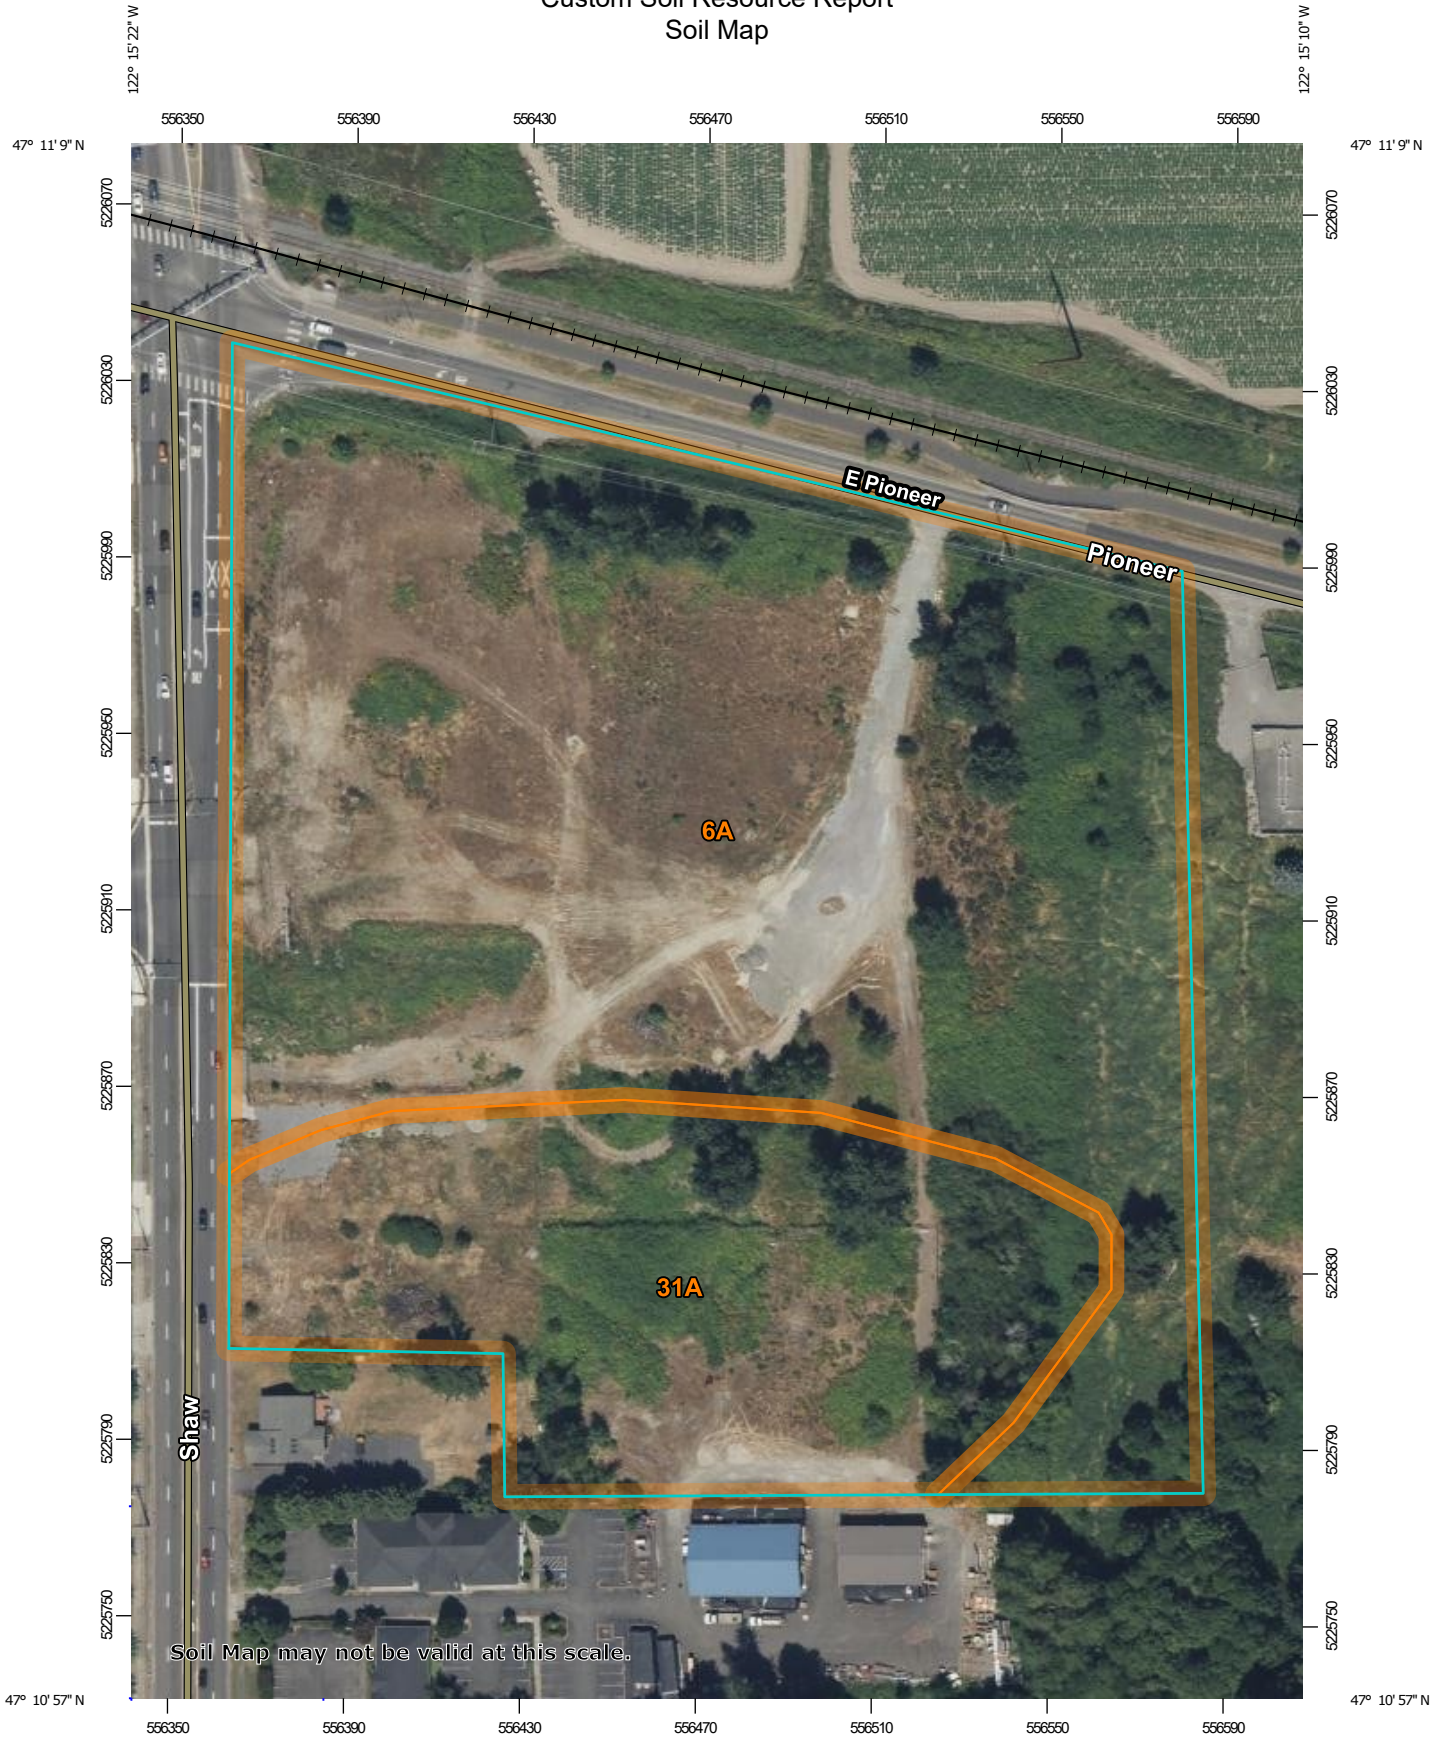

Map Scale: 1:1,720 if printed on A portrait (8.5" x 11") sheet.



Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 10N WGS84

### MAP LEGEND

**Area of Interest (AOI)**

 Area of Interest (AOI)

**Soils**

 Soil Map Unit Polygons

 Soil Map Unit Lines


 Soil Map Unit Points

**Special Point Features**






-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot

-  Spoil Area
-  Stony Spot
-  Very Stony Spot
-  Wet Spot
-  Other
-  Special Line Features


**Water Features**

 Streams and Canals

**Transportation**

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

**Background**

 Aerial Photography

### MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
 Web Soil Survey URL:  
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Pierce County Area, Washington  
 Survey Area Data: Version 19, Aug 29, 2023

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jul 31, 2022—Aug 8, 2022

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
6A	Briscot loam	8.8	72.1%
31A	Puyallup fine sandy loam	3.4	27.9%
<b>Totals for Area of Interest</b>		<b>12.3</b>	<b>100.0%</b>

## Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however,

## Custom Soil Resource Report

onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

## Pierce County Area, Washington

### 6A—Briscot loam

#### Map Unit Setting

*National map unit symbol:* 2hrc  
*Elevation:* 20 to 250 feet  
*Mean annual precipitation:* 30 to 55 inches  
*Mean annual air temperature:* 48 to 50 degrees F  
*Frost-free period:* 160 to 210 days  
*Farmland classification:* Prime farmland if drained

#### Map Unit Composition

*Briscot, drained, and similar soils:* 95 percent  
*Minor components:* 5 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Briscot, Drained

##### Setting

*Landform:* Flood plains  
*Parent material:* Alluvium

##### Typical profile

*H1 - 0 to 11 inches:* loam  
*H2 - 11 to 38 inches:* stratified fine sand to silt loam  
*H3 - 38 to 60 inches:* sand

##### Properties and qualities

*Slope:* 0 to 2 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Poorly drained  
*Capacity of the most limiting layer to transmit water (Ksat):* Moderately high to high  
(0.57 to 1.98 in/hr)  
*Depth to water table:* About 12 to 35 inches  
*Frequency of flooding:* NoneOccasional  
*Frequency of ponding:* None  
*Available water supply, 0 to 60 inches:* High (about 11.4 inches)

##### Interpretive groups

*Land capability classification (irrigated):* None specified  
*Land capability classification (nonirrigated):* 4w  
*Hydrologic Soil Group:* B/D  
*Ecological site:* F002XA007WA - Puget Lowlands Wet Forest  
*Forage suitability group:* Seasonally Wet Soils (G002XN202WA)  
*Other vegetative classification:* Seasonally Wet Soils (G002XN202WA)  
*Hydric soil rating:* Yes

#### Minor Components

##### Briscot, undrained

*Percent of map unit:* 5 percent  
*Landform:* Flood plains  
*Other vegetative classification:* Seasonally Wet Soils (G002XN202WA)  
*Hydric soil rating:* Yes

## 31A—Puyallup fine sandy loam

### Map Unit Setting

*National map unit symbol:* 2hq9  
*Elevation:* 0 to 390 feet  
*Mean annual precipitation:* 35 to 60 inches  
*Mean annual air temperature:* 50 degrees F  
*Frost-free period:* 170 to 200 days  
*Farmland classification:* Prime farmland if irrigated

### Map Unit Composition

*Puyallup and similar soils:* 85 percent  
*Minor components:* 2 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

### Description of Puyallup

#### Setting

*Landform:* Terraces, flood plains  
*Parent material:* Alluvium

#### Typical profile

*H1 - 0 to 13 inches:* ashy fine sandy loam  
*H2 - 13 to 29 inches:* loamy fine sand  
*H3 - 29 to 60 inches:* fine sand

#### Properties and qualities

*Slope:* 0 to 3 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Well drained  
*Capacity of the most limiting layer to transmit water (Ksat):* High (1.98 to 5.95 in/hr)  
*Depth to water table:* About 48 to 79 inches  
*Frequency of flooding:* NoneOccasional  
*Frequency of ponding:* None  
*Available water supply, 0 to 60 inches:* Moderate (about 6.6 inches)

#### Interpretive groups

*Land capability classification (irrigated):* 3w  
*Land capability classification (nonirrigated):* 3w  
*Hydrologic Soil Group:* A  
*Ecological site:* F002XA008WA - Puget Lowlands Riparian Forest  
*Forage suitability group:* Droughty Soils (G002XN402WA)  
*Other vegetative classification:* Droughty Soils (G002XN402WA)  
*Hydric soil rating:* No

### Minor Components

#### Briscot, undrained

*Percent of map unit:* 2 percent

## Custom Soil Resource Report

*Landform:* Depressions

*Other vegetative classification:* Seasonally Wet Soils (G002XN202WA)

*Hydric soil rating:* Yes



# References

---

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_054262](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262)
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053577](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577)
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053580](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580)
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2\\_053374](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374)
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>


## Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2\\_054242](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242)

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053624](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624)

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. [http://www.nrcs.usda.gov/Internet/FSE\\_DOCUMENTS/nrcs142p2\\_052290.pdf](http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf)

**Figure I-3.1: Flow Chart for Determining Requirements for New Development**

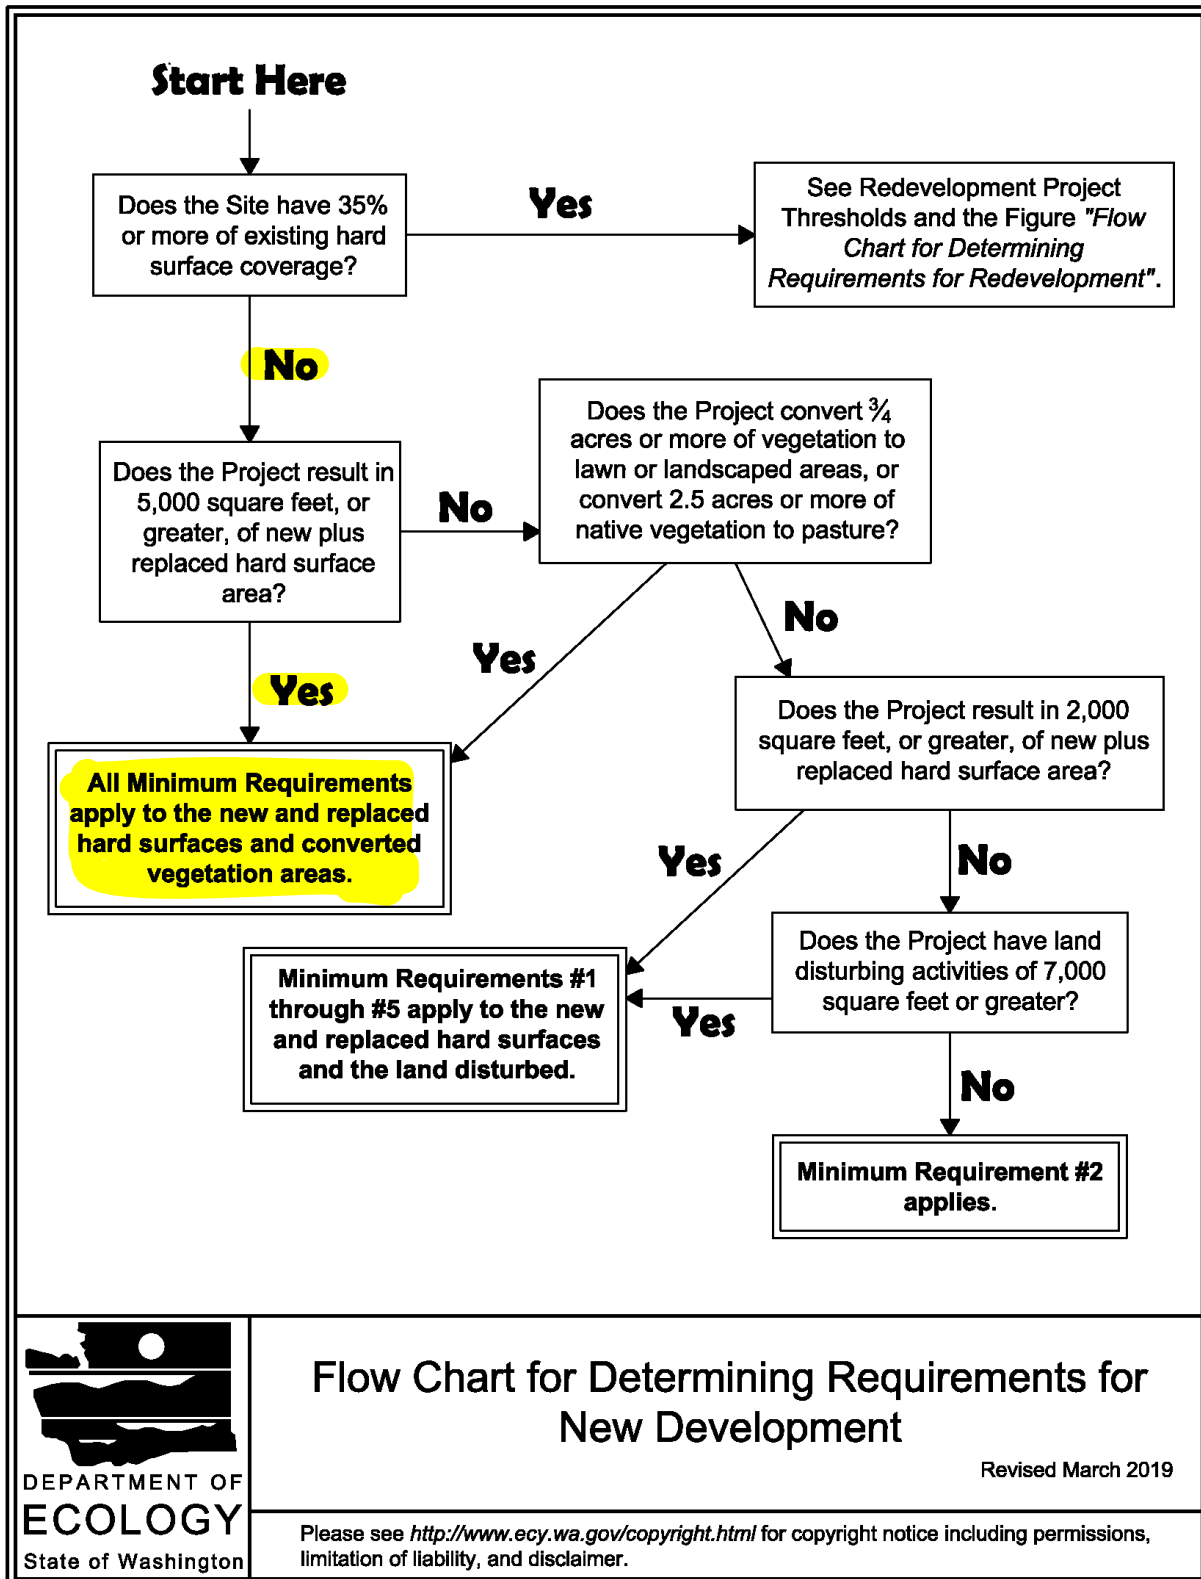


**Flow Chart for Determining Requirements for New Development**

Revised March 2019

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

Figure I-3.3: Flow Chart for Determining MR #5 Requirements

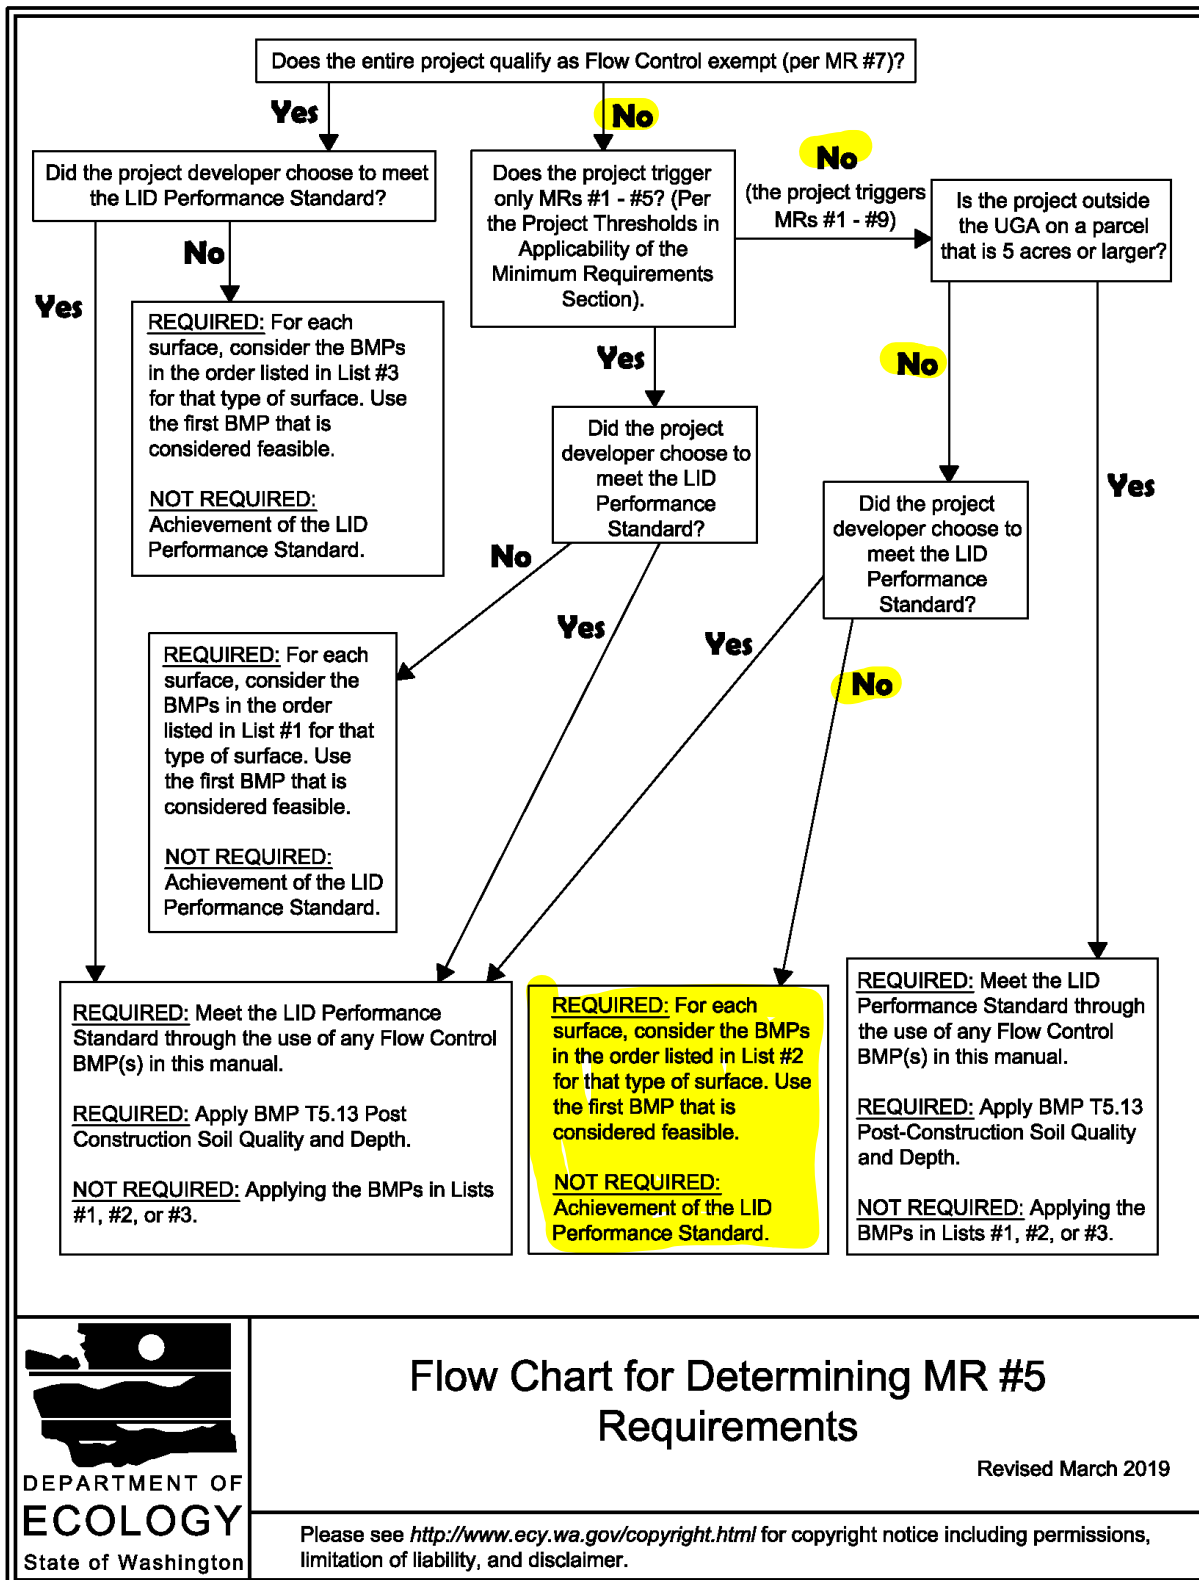

**Appendix A-7:**

**Surface Type: Lawn and Landscaped Areas**

Infeasibility Checklist BMP T5.13 Post Construction Soil Quality and Depth				
<i>It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.</i>				
Questions #1-2 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries and certain design criteria.				
Question Number	Question	Yes	No	NA
1	Can the soil amendments be placed on slopes less than 33%?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	Will installing sheet flow dispersion cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (2a-2e).	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act		<input type="checkbox"/>	
2b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts		<input type="checkbox"/>	
2c	Public health and safety standards		<input type="checkbox"/>	
2d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way		<input type="checkbox"/>	
2e	Critical Area Preservation Ordinance		<input type="checkbox"/>	

**Surface Type: Roofs**

Infeasibility Checklist BMP T5.30 Full Dispersion				
<i>It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.</i>				
Questions #1-9 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries and certain design criteria.				
Question Number	Question	Yes	No	NA
1	Can the flow spreader and dispersion areas be placed 10 feet or more from any building structure?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Can the flow spreader and dispersion areas be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	Can the dispersion areas be placed 50 feet or more from the top of any slope 15% or greater?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the dispersion areas be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the dispersion area be located outside of critical areas, critical area buffers, streams, or lakes?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

6	Can the flow spreader and dispersion area maintain setbacks from Onsite Sewage Systems per WAC 246-272A-0210?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	Will installing a full dispersion system cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (8a-8e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act		<input type="checkbox"/>	
8b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts		<input type="checkbox"/>	
8c	Public health and safety standards		<input type="checkbox"/>	
8d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way		<input type="checkbox"/>	
8e	Critical Area Preservation Ordinance		<input type="checkbox"/>	
9	Can the design standards in BMP T5.30 be met?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9a	Describe the design standard that cannot be met:			
<b>Questions #10 require evaluation of site specific conditions and a written recommendation from an appropriate Washington State Licensed Professional (e.g., Professional Engineer, Professional Geologist, Professional Hydrogeologist).</b>				
10	Will the use of a full dispersion cause erosion or flooding problems onsite or on adjacent properties? (An answer of yes means this BMP is not feasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Infeasibility Checklist</b>				
<b>BMP T5.10A Downspout Full Infiltration</b>				
<i>It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.</i>				
Questions #1-7 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries and certain design criteria.				
Question Number	Question	Yes	No	NA
1	Can the infiltration trench or drywell be placed 10 feet or more from any building structure?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	Can the infiltration trench or drywell be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	Can the infiltration trench or drywell be placed 50 feet or more from the top of any slope 20% or greater?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the infiltration trench or drywell be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the infiltration trench or drywell meet setback requirements from Onsite Sewage Systems per WAC 246-272A-0210?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	Will installing an infiltration trench or drywell cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (6a-6e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act		<input type="checkbox"/>	
6b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts		<input type="checkbox"/>	

6c	Public health and safety standards	<input type="checkbox"/>		
6d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way	<input type="checkbox"/>		
6e	Critical Area Preservation Ordinance	<input type="checkbox"/>		
7	Can the design standards in BMP T5.10A be met?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7a	Describe the design standards that cannot be met:			
Questions #8-10 relate to infeasibility criteria that are based upon subsurface characteristics and require a soils report to determine infeasibility.				
8	Was the soil classified as being clay, sandy clay, clay loam, silty clay loam, sandy clay loam, or silt according to the USDA Textural Soil Triangle? (An answer of yes means this BMP is not feasible).	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9	Is the depth from proposed final grade to the seasonal high groundwater table or other impermeable layer equal to or greater than 3 feet?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
10	Is the depth from the bottom of the infiltration trench or drywell to the seasonal high groundwater table equal to or greater than 1 foot?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Infeasibility Checklist BMP T5.14 Rain Gardens				
<i>It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.</i>				
Questions #1-18 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries. Citation of the following do not need site-specific written recommendations from a Washington State Licensed Professional Engineer or Washington State Licensed Professional Geologist though some criteria may require professional services to determine if the infeasibility criteria apply.				
Question Number	Question	Yes	No	NA
1	Can the rain garden be placed 10 feet or more from any building structure?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Can the rain garden be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	Can the rain garden be placed 50 feet or more from the top of any slope greater than 20%?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the rain garden be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the rain garden be located outside of designated erosion or landslide hazard areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	Can the rain garden be located greater than 100 feet from an underground storage tank whose capacity including tank and underground connecting pipe is 1100 gallons or more?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	Can the rain garden be located greater than 10 feet from an underground storage tank (tank used for petroleum product, chemical, or liquid hazardous waste storage) whose capacity including tank and underground connecting pipe is 1100 gallons or less?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	Can the rain garden be located greater than 100 feet of a closed or active landfill?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	Can the rain garden be located greater than 100 feet from drinking water well or a spring used for drinking water supply?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

10	Can the rain garden be placed 10 feet or more from small on-site sewage disposal drainfields? (For large on-site sewage disposal setbacks see WAC Chapter 246-727B).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	Can the rain garden be located on slopes less than 8%?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12	Is the rain garden compatible with the surrounding drainage system (e.g., project drains to an existing stormwater system whose elevation precludes proper connection to a rain garden)?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13	For properties with known soil or groundwater contamination, can the rain garden be located greater than 100 feet from an area known to have deep soil contamination?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14	For properties with known soil or groundwater contamination, can the rain garden be located such that infiltration will not increase or change the direction of the migration of pollutants in the groundwater? (Based upon groundwater modeling).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	For properties with known soil or groundwater contamination, can the rain garden be located in an area that does not have contaminated surface soils that are proposed to remain in place?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16	For properties with known soil or groundwater contamination, can the rain garden be located in areas not prohibited by an approved cleanup plan under the state Model Toxics Control Act or Federal Superfund Law, or an environmental covenant under Chapter 64.70 RCW?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
17	For rain gardens that are constructed with imported compost materials, can the rain garden be located greater than ¼ mile from a phosphorus-sensitive waterbody? (Does not apply to discharges to Wapato Lake).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18	Will installing a rain garden cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (18a-18e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act		<input type="checkbox"/>	
18b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts		<input type="checkbox"/>	
18c	Public health and safety standards		<input type="checkbox"/>	
18d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way		<input type="checkbox"/>	
18e	Critical Area Preservation Ordinance		<input type="checkbox"/>	
<b>Questions #19-20 relate to infeasibility criteria that are based upon subsurface characteristics and require a soils report to determine infeasibility.</b>				
19	Is the depth from the lowest level of the rain garden soil mix or any underlying gravel layer to the seasonal high groundwater table or other impermeable layer equal to or greater than 1 foot?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20	Was the soil classified as having a measured native soil saturated hydraulic conductivity of 0.3 in/hour or more?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<b>Questions 21-28 require evaluation of site specific conditions and a written recommendation from an appropriate Washington State Licensed Professional (e.g., Professional Engineer, Professional Geologist, Professional Hydrogeologist).</b>				
21	Will the proposed rain garden location threaten the safety or reliability of preexisting underground utilities, preexisting underground storage tanks, preexisting structures, or preexisting road or parking lot surfaces? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
22	Will the proposed rain garden location allow for a safe overflow pathway to the City stormwater system or a private stormwater system?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
23	Are there reasonable concerns about erosion, slope failure, or downgradient flooding due to infiltration? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



24	Is the project located in an area whose groundwater drains into an erosion hazard or landslide hazard area? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
25	Will infiltrating water threaten existing below grade basements? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
26	Will infiltrating water threaten shoreline structures such as bulkheads? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
27	Is there lack of usable space onsite for rain gardens at redevelopment sites? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
28	For public road projects, is there insufficient space within the ROW to install a rain garden? (An answer of yes means this BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Infeasibility Checklist BMP T7.30 Bioretention				
<i>It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach</i>				
Questions #1-18 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries. Citation of the following do not need site-specific written recommendations from a Washington State Licensed Professional Engineer or Washington State Licensed Professional Geologist though some criteria may require professional services to determine if the infeasibility criteria apply.				
Question Number	Question	Yes	No	NA
1	<b>Can the bioretention facility be placed 10 feet or more from any building structure?</b>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Can the bioretention facility be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	Can the bioretention facility be placed 50 feet or more from the top of any slope greater than 20%?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the bioretention facility be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the bioretention facility be located outside of designated erosion or landslide hazard areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	Can the bioretention facility be located greater than 100 feet from an underground storage tank whose capacity including tank and underground connecting pipe is 1100 gallons or more?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	Can the bioretention facility be located greater than 10 feet from an underground storage tank (tank used for petroleum product, chemical, or liquid hazardous waste storage) whose capacity including tank and underground connecting pipe is 1100 gallons or less?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	Can the bioretention facility be located greater than 100 feet of a closed or active landfill?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	Can the bioretention facility be located greater than 100 feet from drinking water well or a spring used for drinking water supply?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	Can the bioretention facility be placed 10 feet or more from small on-site sewage disposal drainfields? (For large on-site sewage disposal setbacks see WAC Chapter 246-727B).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	Can the bioretention facility be located on slopes less than 8%?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12	Is the bioretention facility compatible with the surrounding drainage system (e.g., project drains to an existing stormwater system whose elevation precludes proper connection to the bioretention facility)?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13	For properties with known soil or groundwater contamination, can the bioretention facility be located greater than 100 feet from an area known to have deep soil contamination?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14	For properties with known soil or groundwater contamination, can the bioretention facility be located such that infiltration will not increase or change the direction of the migration of pollutants in the groundwater? (Based upon groundwater modeling).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

15	For properties with known soil or groundwater contamination, can the bioretention facility be located in an area that does not have contaminated surface soils that are proposed to remain in place?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16	For properties with known soil or groundwater contamination, can the bioretention facility be located in areas not prohibited by an approved cleanup plan under the state Model Toxics Control Act or Federal Superfund Law, or an environmental covenant under Chapter 64.70 RCW?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
17	For bioretention facilities that are constructed with imported compost materials, can the bioretention facility be located greater than ¼ mile from a phosphorus-sensitive waterbody? (Does not apply to discharges to Wapato Lake).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18	Will installing a bioretention facility cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (18a-18e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act		<input type="checkbox"/>	
18b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts		<input type="checkbox"/>	
18c	Public health and safety standards		<input type="checkbox"/>	
18d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way		<input type="checkbox"/>	
18e	Critical Area Preservation Ordinance		<input type="checkbox"/>	
<b>Questions #19-21 relate to infeasibility criteria that are based upon subsurface characteristics and require a soils report to determine infeasibility.</b>				
19	Is the depth from the lowest level of the bioretention soil mix or any underlying gravel layer to the seasonal high groundwater table or other impermeable layer equal to or greater than 1 foot? This applies only if the contributing area to the bioretention facility has less than 5,000 square feet of pollution-generating impervious surface, and less than 10,000 square feet of impervious surface, and less than ¾ acre pervious surface.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20	Is the depth from the lowest level of the bioretention soil mix or any underlying gravel layer to the seasonal high groundwater table or other impermeable layer equal to or greater than 3 feet? This applies only if the contributing area to the bioretention facility has: 5,000 square feet or greater of pollution-generating impervious surface, or 10,000 square feet or greater of impervious surface, or more ¾ acre pervious surface AND the bioretention facility cannot be broken down into amounts smaller than those listed above.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
21	Was the soil classified as having a measured native soil saturated hydraulic conductivity of 0.3 in/hour or more?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<b>Questions 22-29 require evaluation of site specific conditions and a written recommendation from an appropriate Washington State Licensed Professional (e.g., Professional Engineer, Professional Geologist, Professional Hydrogeologist).</b>				
22	Will the proposed bioretention facility location threaten the safety or reliability of preexisting underground utilities, preexisting underground storage tanks, preexisting structures, or preexisting road or parking lot surfaces? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
23	Will the proposed bioretention facility location allow for a safe overflow pathway to the City stormwater system or a private stormwater system?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
24	Are there reasonable concerns about erosion, slope failure, or downgradient flooding due to infiltration? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
25	Is the project located in an area whose groundwater drains into an erosion hazard or landslide hazard area? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
26	Will infiltrating water threaten existing below grade basements? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

27	Will infiltrating water threaten shoreline structures such as bulkheads? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
28	Is there lack of usable space onsite for bioretention facilities at redevelopment sites? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
29	For public road projects, is there insufficient space within the ROW to install a bioretention facility? (An answer of yes means this BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Infeasibility Checklist				
BMP T5.10B Downspout Dispersion				
<i>It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.</i>				
Questions #1-10 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries and certain design criteria.				
Question Number	Question	Yes	No	NA
1	Can the dispersion trench or splashblocks be placed 10 feet or more from any building structure?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Can the dispersion trench or splashblocks be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	Can the dispersion trench or splashblocks be placed 50 feet or more from the top of any slope 15% or greater?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the dispersion trench or splashblocks be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the dispersion trench or splashblock maintain setbacks from Onsite Sewage Systems per WAC 246-272A-0210?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	Is it possible to maintain or construct a vegetated flowpath of at least 25 feet from the outlet of a dispersion trench and any property line, structure, stream, wetland, other infiltration or dispersion system, or impervious surface?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
7	Is it possible to maintain or construct a vegetated flowpath of at least 50 feet from the outlet of a dispersion trench and any slope greater than 15%?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	Is it possible to maintain or construct a vegetated flowpath of at least 50 feet from the outlet of splashblock and any property line, structure, slope over 15%, stream, wetland, other infiltration or dispersion system, or impervious surface?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	Will installing a dispersion trench or splashblocks cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (9a-9e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act		<input type="checkbox"/>	
9b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts		<input type="checkbox"/>	
9c	Public health and safety standards		<input type="checkbox"/>	
9d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way		<input type="checkbox"/>	
9e	Critical Area Preservation Ordinance		<input type="checkbox"/>	
10	Can the design standards in BMP T5.10B be met?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10a	Describe the design standard that cannot be met:			
<b>Questions #11 require evaluation of site specific conditions and a written recommendation from an appropriate Washington State Licensed Professional (e.g., Professional Engineer, Professional Geologist, Professional Hydrogeologist).</b>				

11	Will the use of a dispersion trench or splashblocks cause erosion or flooding problems onsite or on adjacent properties? (An answer of yes means this BMP is not feasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
----	---	--------------------------	--------------------------	--------------------------

**Infeasibility Checklist**  
**BMP T5.10C: Perforated Stub-out Connections**

*It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.*

Questions #1-7 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries and certain design criteria.

Question Number	Question	Yes	No	NA
1	Can the perforated stub-out connection be placed 10 feet or more from any building structure?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Can the perforated stub-out connection be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	Can the perforated stub-out connection be placed 50 feet or more from the top of any slope 20% or greater?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the perforated stub-out connection be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the perforated stub-out connection meet setback requirements from Onsite Sewage Systems per WAC 246-272A-0210?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	Will installing a perforated stub-out connection cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (6a-6e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act	<input type="checkbox"/>		
6b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts	<input type="checkbox"/>		
6c	Public health and safety standards	<input type="checkbox"/>		
6d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way	<input type="checkbox"/>		
6e	Critical Area Preservation Ordinance	<input type="checkbox"/>		
7	Can the design standards in BMP T5.10C be met?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7a	Describe the design standard that cannot be met:			
Questions #8 relates to infeasibility criteria that are based upon subsurface characteristics and require a soils report to determine infeasibility.				
8	Is the depth from the bottom of the perforated stub-out connection to the seasonal high groundwater table equal to or greater than 1 foot?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**Surface Type: Other Hard Surfaces**

**Infeasibility Checklist**  
**BMP T5.15 Permeable Pavement**

*It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.*

Questions #1-24 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries. Citation of the following do not need site-specific written recommendations from a

Washington State Licensed Professional Engineer or Washington State Licensed Professional Geologist though some criteria may require professional services to determine if the infeasibility criteria apply.				
Question Number	Question	Yes	No	NA
1	<b>Can the permeable pavement be placed 10 feet or more from any building structure?</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	Can the permeable pavement be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	Can the permeable pavement be placed 50 feet or more from the top of any slope greater than 20%?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the permeable pavement be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the permeable pavement be located outside of designated erosion or landslide hazard areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	Can the permeable pavement be located greater than 10 feet from an underground storage tank (tank used for petroleum product, chemical, or liquid hazardous waste storage) whose capacity including tank and underground connecting pipe is 1100 gallons or less?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	Can the permeable pavement be located greater than 100 feet of a closed or active landfill?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	Can the permeable pavement be located greater than 100 feet from drinking water well or a spring used for drinking water supply if the permeable pavement is (or has run-on from) a pollution-generating hard surface?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	Can the permeable pavement be placed 10 feet or more from small on-site sewage disposal drainfields? (For large on-site sewage disposal setbacks see WAC Chapter 246-727B).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	Can the permeable pavement be constructed such that the subgrade is less than 6%?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12	Can the permeable pavement be constructed such that the wearing course is less than 6% (after reasonable attempts have been made to design the grade)?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13	Is the location for permeable pavement a multi-level parking garage, above a culvert, or a bridge? An answer of yes means the BMP is not feasible.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14	Does the road receive more than very low traffic volumes? (Roads with a projected average daily traffic volume of 400 vehicles or less). This infeasibility criterion cannot be used for sidewalks or non-traffic bearing surfaces. An answer of yes means the BMP is not feasible.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	Does the road receive more than very low truck traffic? (Roads not subject to through truck traffic but may receive up to weekly use by utility trucks, daily school bus use, and multiple daily use by pick-up trucks, mail/parcel delivery trucks, and maintenance vehicles.). This infeasibility criterion cannot be used for sidewalks or non-traffic bearing surfaces. An answer of yes means the BMP is not feasible.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16	Does the area typically generate high concentrations of oil due to high traffic turnover or frequent transfer of oil? (See SWMM for additional guidance.) An answer of yes means the BMP is not feasible.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
17	Can the permeable pavement be located outside of areas with industrial activity as identified in 40 CFR 122.26(b)14?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18	Can permeable pavement be located outside of areas where the risk of concentrated pollutant spills is likely such as gas stations, truck stops, and industrial chemical storage areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
19	Can permeable pavement be located outside of areas likely to have long-term excessive sediment deposition after construction?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20	For properties with known soil or groundwater contamination, can the permeable pavement be located greater than 100 feet from an area known to have deep soil contamination?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
21	For properties with known soil or groundwater contamination, can the permeable pavement be located such that infiltration will not increase or change the direction of the migration of pollutants in the groundwater? (Based upon groundwater modeling).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

22	For properties with known soil or groundwater contamination, can the permeable pavement be located in an area that does not have contaminated surface soils that are proposed to remain in place?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
23	For properties with known soil or groundwater contamination, can the permeable pavement be located in areas not prohibited by an approved cleanup plan under the state Model Toxics Control Act or Federal Superfund Law, or an environmental covenant under Chapter 64.70 RCW?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
24	Will installing permeable pavement cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (24a-24e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
24a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act		<input type="checkbox"/>	
24b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts		<input type="checkbox"/>	
24c	Public health and safety standards		<input type="checkbox"/>	
24d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way		<input type="checkbox"/>	
24e	Critical Area Preservation Ordinance		<input type="checkbox"/>	
<b>Questions #25-28 relate to infeasibility criteria that are based upon subsurface characteristics and require a soils report to determine infeasibility.</b>				
25	Is the depth from the lowest layer designed as part of the permeable pavement section to the seasonal high groundwater elevation, bedrock, or other impermeable layer equal to or greater than 1 foot?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
26	For pollution generating pervious pavement surfaces, can the soil suitability criteria for treatment be met? (See SWMM – BMP T5.15)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
27	Was the soil classified as having a measured native soil saturated hydraulic conductivity of 0.3 in/hour or more?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
28	Is the existing impervious surface that will be replaced non-polluting generating and located over an outwash soil with a saturated hydraulic conductivity of 4 inches/hour or greater?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Questions 29-40 require evaluation of site specific conditions and a written recommendation from an appropriate Washington State Licensed Professional (e.g., Professional Engineer, Professional Geologist, Professional Hydrogeologist).</b>				
29	Will the proposed permeable pavement location threaten the safety or reliability of preexisting underground utilities, preexisting underground storage tanks, preexisting structures, or preexisting road or parking lot surfaces? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
30	Will infiltrating and ponded water compromise existing adjacent impervious pavements? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
31	Are there reasonable concerns about erosion, slope failure, or downgradient flooding due to infiltration? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
32	Can the permeable pavement be located outside area whose groundwater drains into an erosion hazard or landslide hazard area?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
33	Will infiltrating water threaten existing below grade basements? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
34	Will infiltrating water threaten shoreline structures such as bulkheads? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
35	Can permeable pavement be located away from the bottom of steep, erosion prone areas that are likely to erode sediment?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
36	Can permeable pavement be located away from fill soils that can become unstable when saturated?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
37	Will permeable pavement construction on steep slopes cause erosion and structural failure? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

38	Will permeable pavement construction on steep slopes cause runoff velocities that preclude adequate infiltration at the pavement surfaces? (An answer of yes means the BMP is infeasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
39	Can permeable pavement provide sufficient strength to support the anticipated loads?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
40	Are underlying soils suitable for supporting traffic loads when saturated?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**Infeasibility Checklist**  
**BMP T5.12: Sheet Flow Dispersion**

*It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.*

Questions #1-9 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries and certain design criteria.

Question Number	Question	Yes	No	NA
1	Can the sheet flow dispersion system be placed 10 feet or more from any building structure?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Can the sheet flow dispersion system be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	Can the sheet flow dispersion system be placed 50 feet or more from the top of any slope 15% or greater?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the sheet flow dispersion system be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the sheet flow dispersion system maintain setbacks from Onsite Sewage Systems per WAC 246-272A-0210?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	Is it possible to provide a vegetated flowpath width of 10 feet or greater for up to 20 feet of width of paved or impervious surface?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
7	For paved or impervious surfaces widths 20 feet or greater, is it possible to provide a vegetated flowpath width of 20 feet or greater (additional 10 feet of width must be added for each increment of 20 feet or more in width)?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
8	Will installing sheet flow dispersion cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (8a-8e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act		<input type="checkbox"/>	
8b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts		<input type="checkbox"/>	
8c	Public health and safety standards		<input type="checkbox"/>	
8d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way		<input type="checkbox"/>	
8e	Critical Area Preservation Ordinance		<input type="checkbox"/>	
9	Can the design standards in BMP T5.12 be met?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9a	Describe the design standard that cannot be met:			
<b>Questions #10 require evaluation of site specific conditions and a written recommendation from an appropriate Washington State Licensed Professional (e.g., Professional Engineer, Professional Geologist, Professional Hydrogeologist).</b>				
10	Will the use of sheet flow dispersion cause erosion or flooding problems onsite or an adjacent properties? (An answer of yes means this BMP is not feasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Infeasibility Checklist				
BMP T5.11: Concentrated Flow Dispersion				
<i>It is not necessary to answer all questions when determining if a BMP is feasible for Minimum Requirement #5 – The List Approach. Unless otherwise noted, a single answer of No means the BMP is considered infeasible for meeting Minimum Requirement #5 – The List Approach.</i>				
Questions #1-8 relate to infeasibility criteria that are based on conditions such as topography and distances to predetermined boundaries and certain design criteria.				
Question Number	Question	Yes	No	NA
1	Can the concentrated flow dispersion system be placed 10 feet or more from any building structure?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Can the concentrated flow dispersion system be placed 5 feet or more from any other structure or property line?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	Can the concentrated flow dispersion system be placed 50 feet or more from the top of any slope 15% or greater?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Can the concentrated flow dispersion system be placed 50 feet or more from geologically hazardous areas?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Can the concentrated flow dispersion system maintain setbacks from Onsite Sewage Systems per WAC 246-272A-0210?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	Is it possible to maintain or construct a vegetated flowpath of at least 25 feet from the discharge location and any property line, structure, slope greater than 15%, surface water, or other hard surface?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
7	Will installing concentrated flow dispersion cause conflicts with any of the following? (An answer of yes means this BMP is infeasible.) Place a checkmark next to the applicable item (7a-7e).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7a	Requirements of the Historic Preservation Laws and Archeology Laws, Federal Superfund or Washington State Model Toxics Control Act, Federal Aviation Administration requirements for airports, or Americans with Disability Act	<input type="checkbox"/>		
7b	Special zoning district design criteria adopted and being implemented through any City of Puyallup planning efforts	<input type="checkbox"/>		
7c	Public health and safety standards	<input type="checkbox"/>		
7d	Transportation regulations to maintain the option for future expansion or multi-modal use of public rights-of-way	<input type="checkbox"/>		
7e	Critical Area Preservation Ordinance	<input type="checkbox"/>		
8	Can the design standards in BMP T5.11 be met?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8a	Describe the design standard that cannot be met:			
<b>Questions #9 require evaluation of site specific conditions and a written recommendation from an appropriate Washington State Licensed Professional (e.g., Professional Engineer, Professional Geologist, Professional Hydrogeologist).</b>				
9	Will the use of concentrated flow dispersion cause erosion or flooding problems onsite or an adjacent properties? (An answer of yes means this BMP is not feasible).	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



# EXHIBIT A-8 FEMA MAP

## NOTES TO USERS

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources or small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations (BFEs)** and/or **Floodways** have been determined, users are encouraged to contact the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) Report that accompanies the FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS Report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

**Coastal Base Flood Elevations** shown on this map apply only to landward of 0.7 North American Vertical Datum of 1988 (NAVD 88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study Report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study Report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to Section 2.4 "Flood Protection Measures" of the Flood Insurance Study Report for information on flood control structures for this jurisdiction.

The projection used in the preparation of this map was Universal Transverse Mercator (UTM) zone 10. The horizontal datum was NAD 83, GRS 1980 spheroid. Differences in datum, spheroid, projection or UTM zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the North American Vertical Datum of 1988. These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov> or contact the National Geodetic Survey at the following address:

NGS Information Services  
 NOAA, NNGS-12  
 National Geodetic Survey  
 SSMC-3, #6202  
 1315 East-West Highway  
 Silver Spring, Maryland 20910-3282  
 (301) 713-3242

To obtain current elevation, description, and/or location information for **bench marks** shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242, or visit its website at <http://www.ngs.noaa.gov>.

**Base map information** shown on this map was derived from multiple sources. Base map files were provided in digital format by Pierce County GIS, WA DMR, WSDOT, USFWS, Washington State Department of Ecology, and Puget Sound Regional Council. This information was compiled at scales of 1:1,200 to 1:24,000 during the time period 1995-2012.


The **profile baselines** depicted on this map represent the hydraulic modeling baselines that match the flood profiles in the FIS report. As a result of improved topographic data, the **profile baselines** in some cases may deviate significantly from the channel centerline or appear outside the SFHA.

**Corporate limits** shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed **Map Index** for an overview map of the county showing the layout of map panels, community map inventory addresses, and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.

For information on available products associated with this FIRM visit the **Map Service Center (MSC)** website at <http://www.fema.gov>. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. Many of these products can be ordered or obtained directly from the MSC website.

If you have **questions about this map**, how to order products, or the National Flood Insurance Program in general, please call the **FEMA Map Information eXchange (FMIX)** at 1-877-FEMA-MAP (1-877-336-2627) or visit the FEMA website at <http://www.fema.gov/information>.

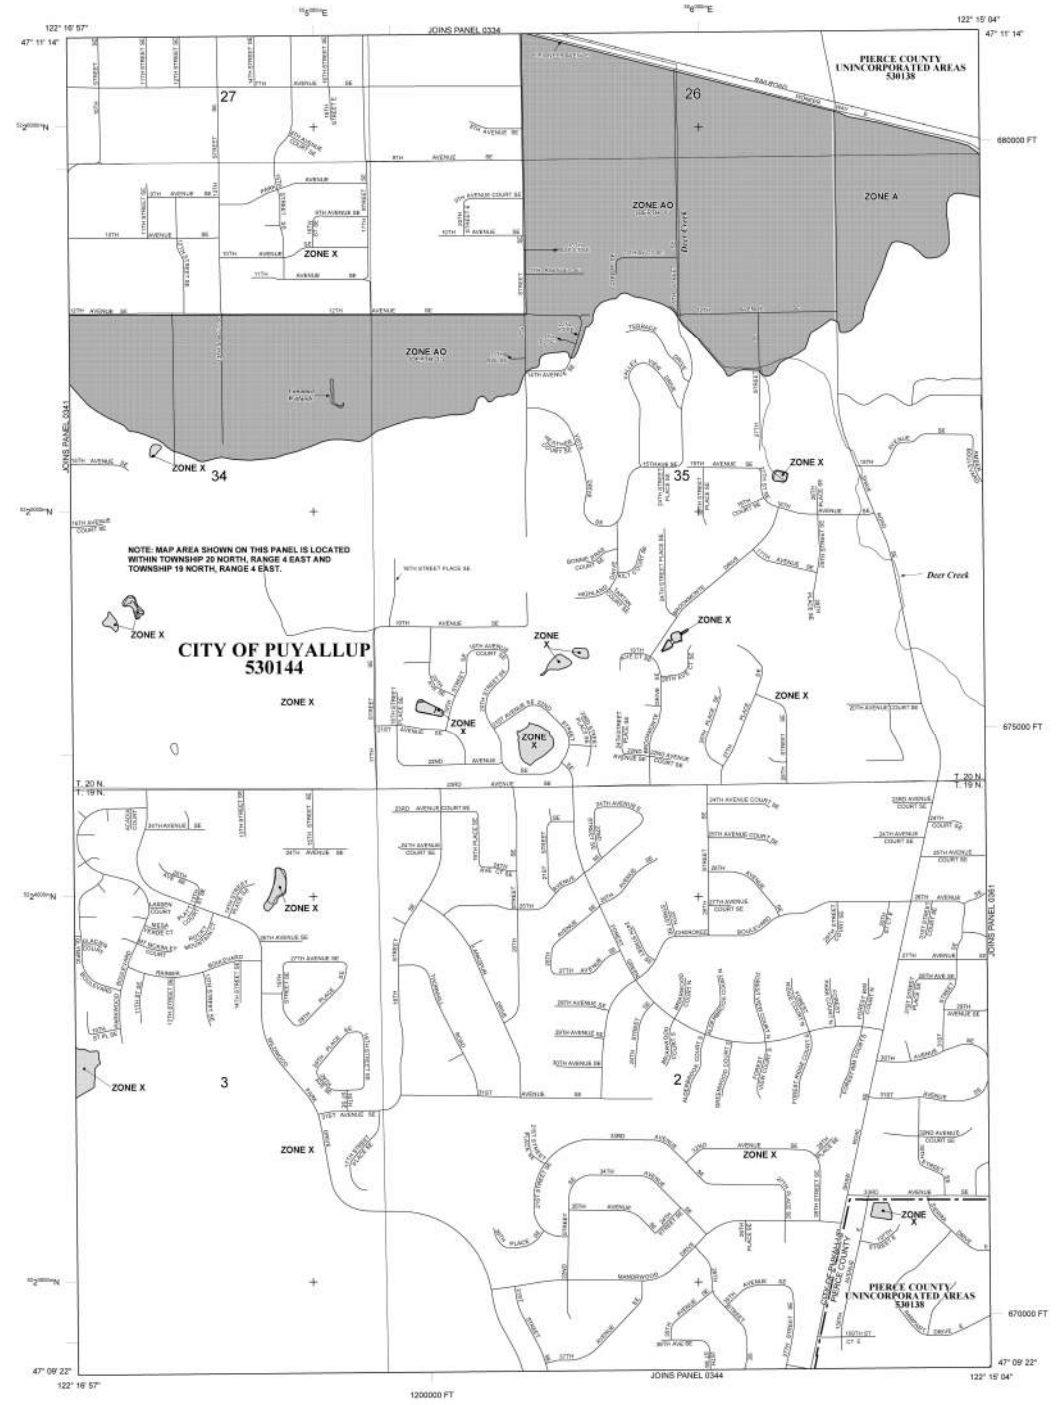

## LEGEND

**SPECIAL FLOOD HAZARD AREAS (SFHA) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD**

The 1% annual chance flood (100-year flood), also known as the "base flood," is the flood that has a 1% annual chance of being equaled or exceeded in any given year. Areas of Special Flood Hazard include Zone A, AE, AH, AO, AR, AV, and VE. The Base Flood Elevation is the water surface elevation of the 1% annual chance flood.

**ZONE A** No Base Flood Elevations determined.

**ZONE AE** Base Flood Elevations determined.

**ZONE AH** Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.

**ZONE AO** Flood depths of 1 to 3 feet (usually sheet flow on impervious surfaces); average depths determined; for areas of about 100,000 sq. ft. or less.

**ZONE AR** Special Flood Hazard Areas formerly protected from the 1% annual chance flood by a flood control system that was subsequently dismantled. Zone AR includes that former flood control system's levee, intended to provide protection from the 1% annual chance or greater flood. Areas are protected from the 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations determined.

**ZONE AV** Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.

**ZONE VE** Coastal flood zone with velocity hazard (wave action); Base Flood Elevations determined.

**FLOODWAY AREAS IN ZONE AE:**

The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachments to the 1% annual chance flood. It can be carved without substantial increases in flood heights.

**OTHER FLOOD AREAS**

**ZONE X** Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot or with drainage areas less than 1 square mile; and areas protected by levees from the 1% annual chance flood.

**OTHER AREAS**

**ZONE D** Areas determined to be outside the 0.2% annual chance floodplain.

**COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS**

**OTHERWISE PROTECTED AREAS (OPA)**

CBRS areas and OPAs are normally adjacent within or adjacent to Special Flood Hazard Areas:

- 1% Annual Chance Floodplain Boundary
- 0.2% Annual Chance Floodplain Boundary
- Floodway boundary
- Zone D boundary
- CBRS and OPA boundary

Boundary defining Special Flood Hazard Area (Zone) and boundary defining Special Flood Hazard Area of different Base Flood Elevation, flood depth, or flood velocity.

Base Flood Elevation line and velocity condition in feet

Base Flood Elevation value where velocity value zero; elevation in feet

Referenced to the North American Vertical Datum of 1988

**MAP IDENTIFICATION**

Refer to Map Repository for a Map Index

**EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP**  
 March 7, 2017

**EFFECTIVE DATES OF REVISIONS TO THIS PANEL**

For community map revision history prior to community mapping, refer to the Community Map Inventory table located in the Flood Insurance Study report for the jurisdiction.

To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6622.

**NATIONAL FLOOD INSURANCE PROGRAM**

**MAP SCALE 1" = 500'**

200 0 200 400 600 800 1000 FEET  
 0 0 150 300 450 600 METERS

**NFP**

**PANEL 0342E**

**FIRM**

**FLOOD INSURANCE RATE MAP**

**PIERCE COUNTY, WASHINGTON, AND INCORPORATED AREAS**

**PANEL 342 OF 1376**  
 (SEE MAP INDEX FOR FIRM PANEL LAYOUT)

**CONTAINS:**

COMMUNITY	NUMBER	PANEL	SUFFIX
PIERCE COUNTY	0342E	342	X
PUYALLUP CITY OF	03014	0340	E

Notice to User: The **Map Number** shown below should be used when placing map orders; the **Community Number** shown above should be used on insurance applications for the subject community.

**MAP NUMBER**  
 53053C0342E

**EFFECTIVE DATE**  
 MARCH 7, 2017

**Federal Emergency Management Agency**


**EXHIBIT A-9 FEMA LETTER OF MAP REVISION**
**Federal Emergency Management Agency**  
 Washington, D.C. 20472

**LETTER OF MAP REVISION  
 DETERMINATION DOCUMENT**

COMMUNITY AND REVISION INFORMATION		PROJECT DESCRIPTION	BASIS OF REQUEST
COMMUNITY	City of Puyallup Pierce County Washington	CHANNELIZATION CULVERT DETENTION BASIN	HYDROLOGIC ANALYSIS 1D HYDRAULIC ANALYSIS UPDATED TOPOGRAPHIC DATA
	COMMUNITY NO.: 530144		
IDENTIFIER	06-171 East Town Crossing	APPROXIMATE LATITUDE & LONGITUDE: 47.184, -122.254 SOURCE: Other DATUM: WGS 84	
ANNOTATED MAPPING ENCLOSURES		ANNOTATED STUDY ENCLOSURES	
TYPE: FIRM*	NO.: 53053C0342E	DATE: March 7, 2017	DATE OF EFFECTIVE FLOOD INSURANCE STUDY: March 7, 2017
TYPE: FIRM	NO.: 53053C0361E	DATE: March 7, 2017	PROFILE(S): 363P, 365P(NEW), AND 366P(NEW) SUMMARY OF DISCHARGES TABLE: 2

Enclosures reflect changes to flooding sources affected by this revision.

\* FIRM - Flood Insurance Rate Map

**FLOODING SOURCE(S) & REVISED REACH(ES)**

See Page 2 for Additional Flooding Sources

Deer Creek - Pioneer - From just downstream of E Pioneer Ave & Shaw Road E to approximately 1,520 feet upstream of E Pioneer Ave & Shaw Road E  
 Pioneer South Creek - From just downstream of E Pioneer Ave & Shaw Road E to approximately 1,530 feet upstream of E Pioneer Ave & Shaw Road E

**SUMMARY OF REVISIONS**

Flooding Source	Effective Flooding	Revised Flooding	Increases	Decreases
Deer Creek - Pioneer	No BFEs*	BFEs	YES	NONE
	Zone X (unshaded)	Zone AE	YES	NONE
Pioneer South Creek	No BFEs	BFEs	YES	NONE
	Zone A	Zone AE	YES	NONE

\* BFEs - Base (1-percent-annual-chance) Flood Elevations

**DETERMINATION**

This document provides the determination from the Department of Homeland Security's Federal Emergency Management Agency (FEMA) regarding a request for a Letter of Map Revision (LOMR) for the area described above. Using the information submitted, we have determined that a revision to the flood hazards depicted in the Flood Insurance Study (FIS) report and/or National Flood Insurance Program (NFIP) map is warranted. This document revises the effective NFIP map, as indicated in the attached documentation. Please use the enclosed annotated map panels revised by this LOMR for floodplain management purposes and for all flood insurance policies and renewals in your community.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Mapping and Insurance eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional Information about the NFIP is available on our website at <https://www.fema.gov/flood-insurance>.

Patrick "Rick" F. Sacbibit, P.E., Branch Chief  
 Engineering Services Branch  
 Federal Insurance and Mitigation Administration



**Federal Emergency Management Agency**  
Washington, D.C. 20472

**LETTER OF MAP REVISION  
DETERMINATION DOCUMENT (CONTINUED)**

**OTHER FLOODING SOURCES AFFECTED BY THIS REVISION**

**FLOODING SOURCE(S) & REVISED REACH(ES)**

Pioneer South Creek Tributary - From confluence with Pioneer South Creek to approximately 1,860 feet upstream of confluence with Pioneer South Creek

**SUMMARY OF REVISIONS**

<b>Flooding Source</b>	<b>Effective Flooding</b>	<b>Revised Flooding</b>	<b>Increases</b>	<b>Decreases</b>
Pioneer South Creek Tributary	No BFEs*	BFEs	YES	NONE
	Zone A	Zone AE	YES	YES

\* BFEs - Base (1-percent-annual-chance) Flood Elevations

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Mapping and Insurance eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional Information about the NFIP is available on our website at <https://www.fema.gov/flood-insurance>.

Patrick "Rick" F. Sacbibit, P.E., Branch Chief  
Engineering Services Branch  
Federal Insurance and Mitigation Administration



# Federal Emergency Management Agency

Washington, D.C. 20472

## LETTER OF MAP REVISION DETERMINATION DOCUMENT (CONTINUED)

### COMMUNITY INFORMATION

#### APPLICABLE NFIP REGULATIONS/COMMUNITY OBLIGATION

We have made this determination pursuant to Section 206 of the Flood Disaster Protection Act of 1973 (P.L. 93-234) and in accordance with the National Flood Insurance Act of 1968, as amended (Title XIII of the Housing and Urban Development Act of 1968, P.L. 90-448), 42 U.S.C. 4001-4128, and 44 CFR Part 65. Pursuant to Section 1361 of the National Flood Insurance Act of 1968, as amended, communities participating in the NFIP are required to adopt and enforce floodplain management regulations that meet or exceed NFIP criteria. These criteria, including adoption of the FIS report and FIRM, and the modifications made by this LOMR, are the minimum requirements for continued NFIP participation and do not supersede more stringent State/Commonwealth or local requirements to which the regulations apply.

NFIP regulations Subparagraph 60.3(b)(7) requires communities to ensure that the flood-carrying capacity within the altered or relocated portion of any watercourse is maintained. This provision is incorporated into your community's existing floodplain management ordinances; therefore, responsibility for maintenance of the altered or relocated watercourse, including any related appurtenances such as bridges, culverts, and other drainage structures, rests with your community. We may request that your community submit a description and schedule of maintenance activities necessary to ensure this requirement.

#### COMMUNITY REMINDERS

We based this determination on the 1-percent-annual-chance discharges computed in the submitted hydrologic model. Future development of projects upstream could cause increased discharges, which could cause increased flood hazards. A comprehensive restudy of your community's flood hazards would consider the cumulative effects of development on discharges and could, therefore, indicate that greater flood hazards exist in this area.

Your community must regulate all proposed floodplain development and ensure that permits required by Federal and/or State/Commonwealth law have been obtained. State/Commonwealth or community officials, based on knowledge of local conditions and in the interest of safety, may set higher standards for construction or may limit development in floodplain areas. If your State/Commonwealth or community has adopted more restrictive or comprehensive floodplain management criteria, those criteria take precedence over the minimum NFIP requirements.

We will not print and distribute this LOMR to primary users, such as local insurance agents or mortgage lenders; instead, the community will serve as a repository for the new data. We encourage you to disseminate the information in this LOMR by preparing a news release for publication in your community's newspaper that describes the revision and explains how your community will provide the data and help interpret the NFIP maps. In that way, interested persons, such as property owners, insurance agents, and mortgage lenders, can benefit from the information.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Mapping and Insurance eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional Information about the NFIP is available on our website at <https://www.fema.gov/flood-insurance>.

A handwritten signature in black ink, appearing to read "Rick Sacbibit".

Patrick "Rick" F. Sacbibit, P.E., Branch Chief  
Engineering Services Branch  
Federal Insurance and Mitigation Administration



Federal Emergency Management Agency  
Washington, D.C. 20472

**LETTER OF MAP REVISION  
DETERMINATION DOCUMENT (CONTINUED)**

We have designated a Consultation Coordination Officer (CCO) to assist your community. The CCO will be the primary liaison between your community and FEMA. For information regarding your CCO, please contact:

Ms. Kristen Meyers  
Director, Mitigation Division  
Federal Emergency Management Agency, Region X  
Federal Regional Center  
130 228th Street, Southwest  
Bothell, WA 98021-8627  
(425) 487-4543

**STATUS OF THE COMMUNITY NFIP MAPS**

We will not physically revise and republish the FIRM and FIS report for your community to reflect the modifications made by this LOMR at this time. When changes to the previously cited FIRM panel(s) and FIS report warrant physical revision and republication in the future, we will incorporate the modifications made by this LOMR at that time.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Mapping and Insurance eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional Information about the NFIP is available on our website at <https://www.fema.gov/flood-insurance>.

Handwritten signature of Patrick "Rick" F. Sacbbit.

Patrick "Rick" F. Sacbbit, P.E., Branch Chief  
Engineering Services Branch  
Federal Insurance and Mitigation Administration



Federal Emergency Management Agency  
Washington, D.C. 20472

**LETTER OF MAP REVISION  
DETERMINATION DOCUMENT (CONTINUED)**

**PUBLIC NOTIFICATION OF REVISION**

A notice of changes will be published in the *Federal Register*. This information also will be published in your local newspaper on or about the dates listed below, and through FEMA's Flood Hazard Mapping website at [https://www.floodmaps.fema.gov/fhm/bfe\\_status/bfe\\_main.asp](https://www.floodmaps.fema.gov/fhm/bfe_status/bfe_main.asp)

LOCAL NEWSPAPER

Name: *The News Tribune*

Dates: May 4, 2022 and May 11, 2022

Within 90 days of the second publication in the local newspaper, any interested party may request that we reconsider this determination. Any request for reconsideration must be based on scientific or technical data. Therefore, this letter will be effective only after the 90-day appeal period has elapsed and we have resolved any appeals that we receive during this appeal period. Until this LOMR is effective, the revised flood hazard determination presented in this LOMR may be changed.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Mapping and Insurance eXchange toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMC Clearinghouse, 3601 Eisenhower Avenue, Suite 500, Alexandria, VA 22304-6426. Additional Information about the NFIP is available on our website at <https://www.fema.gov/flood-insurance>.

A handwritten signature in black ink, appearing to read "Rick Sacibit".

Patrick "Rick" F. Sacibit, P.E., Branch Chief  
Engineering Services Branch  
Federal Insurance and Mitigation Administration


REVISED TO  
REFLECT LOMR  
EFFECTIVE: April 4,  
2019

REVISED TO  
REFLECT LOMR  
EFFECTIVE: September 8, 2022


Table 2 – Summary of Discharges

<u>Flooding Source and Location</u>	<u>Drainage Area (square miles)</u>	<u>Peak Discharges (cubic feet per second)</u>			
		<u>10-Percent- Annual-Chance</u>	<u>2-Percent- Annual-Chance</u>	<u>1-Percent- Annual-Chance</u>	<u>0.2-Percent- Annual-Chance</u>
DEBRA JANE CREEK					
At Mouth	1.3	45	62	69	85
At Confluence with Bonney Lake Outflow	0.8	26	34	38	48
At Upstream End of Debra Jane Lake	0.1	9	12	14	17
DEER CREEK					
At the BNSF Railroad crossing near E. Pioneer Way and 23 <sup>rd</sup> Street SE	2.4	N/A	N/A	220	N/A
DEER CREEK - PIONEER					
Upstream of Shaw Road E	0.8	N/A	N/A	11	N/A
PIONEER SOUTH CREEK					
Upstream of Shaw Road E	1.7	N/A	N/A	35	N/A
PIONEER SOUTH CREEK TRIBUTARY					
At confluence with Pioneer South Creek	0.2	N/A	N/A	3	N/A

Revised Data

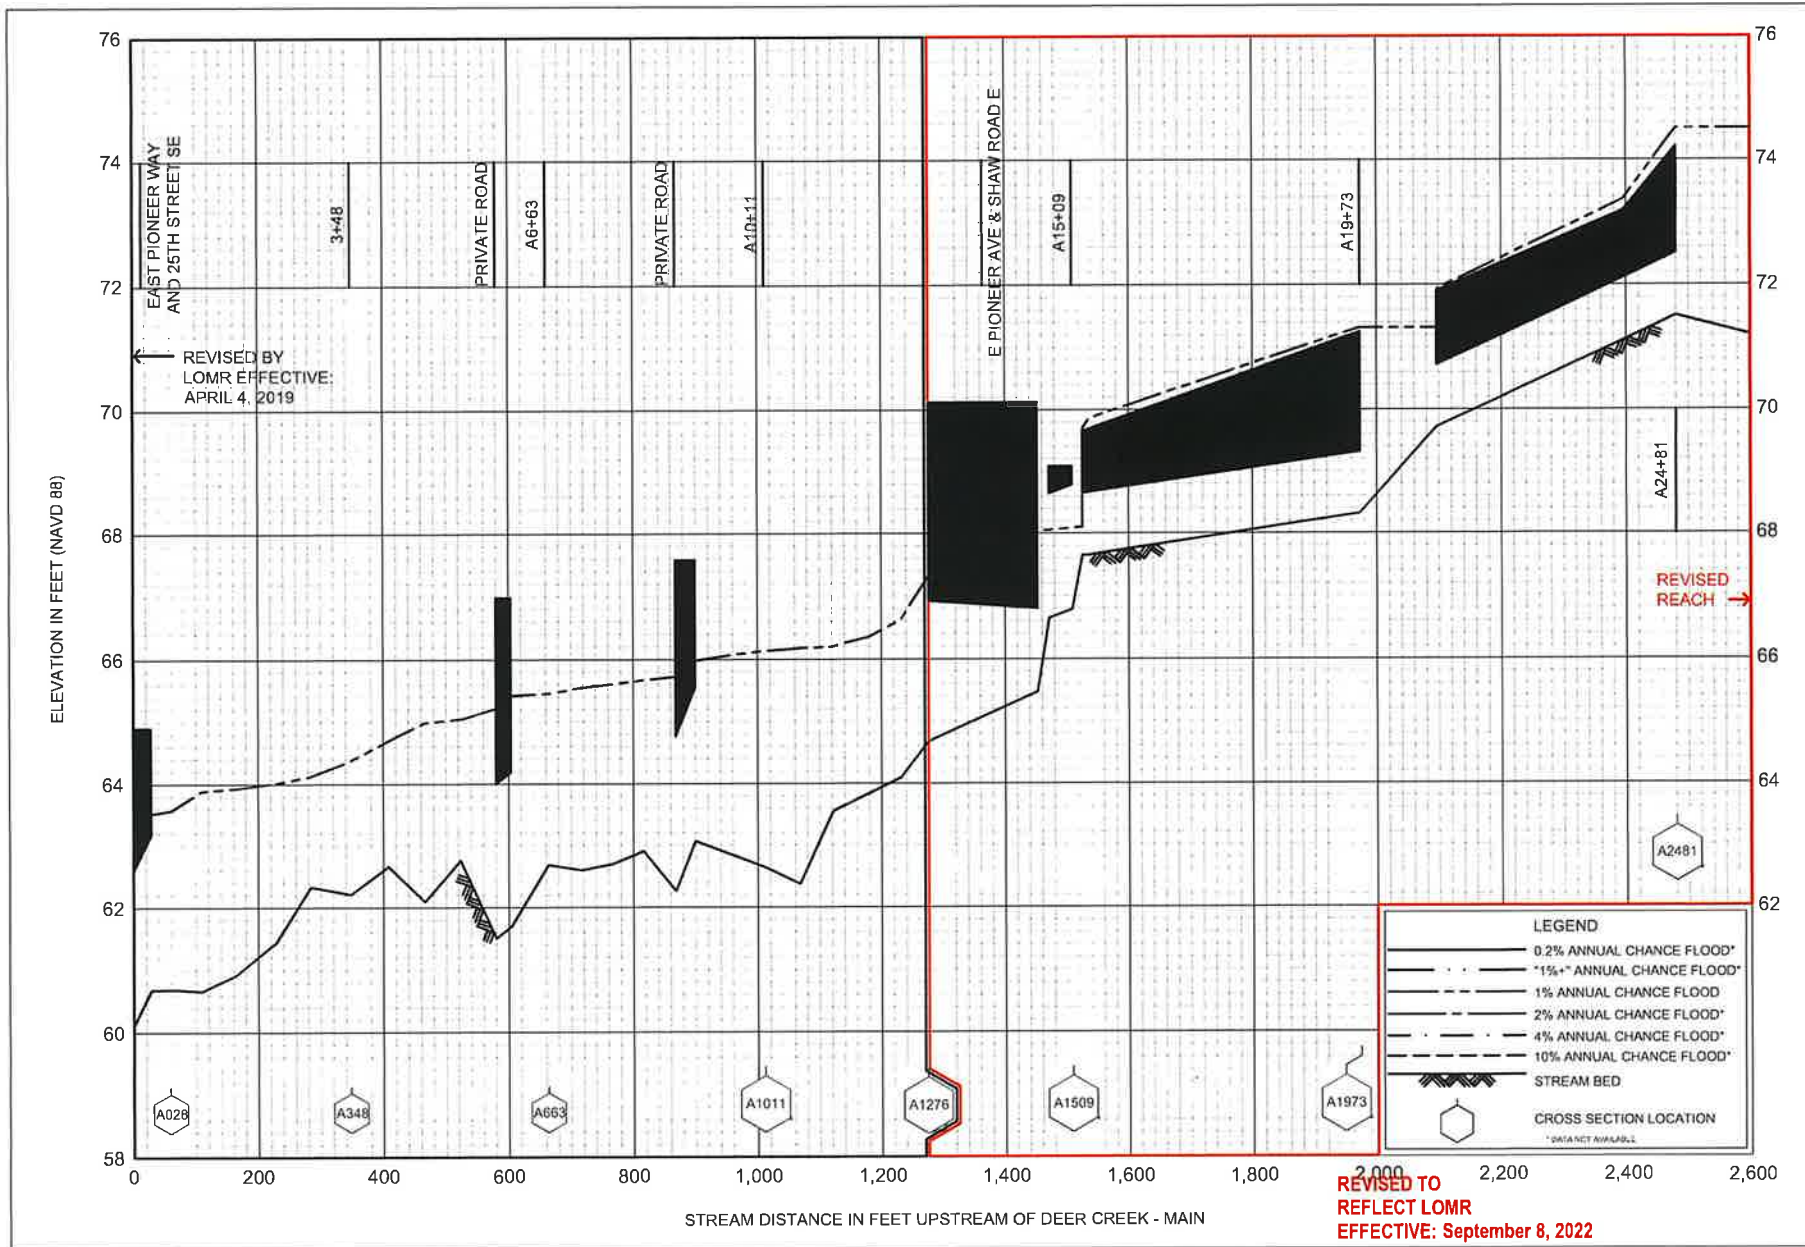




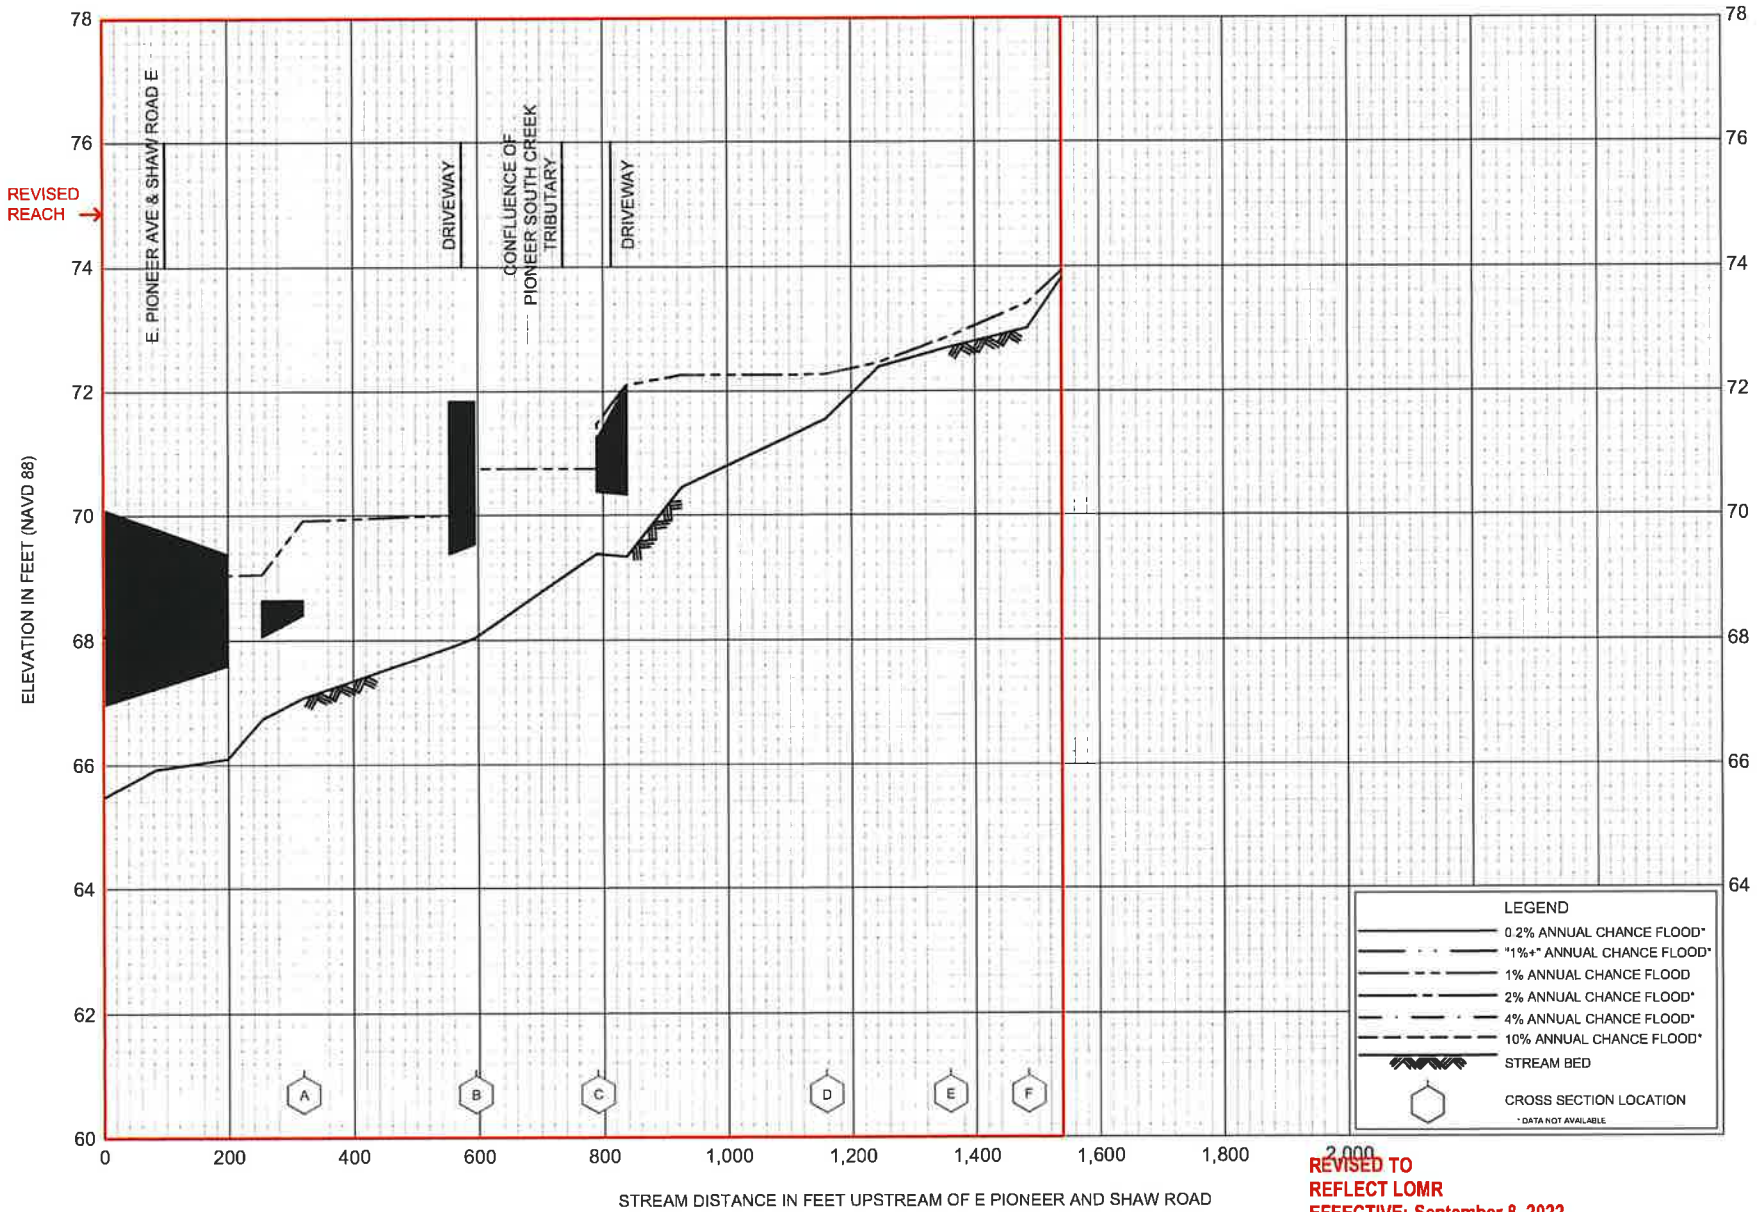

FLOOD PROFILES  
PIONEER SOUTH CREEK

FEDERAL EMERGENCY MANAGEMENT AGENCY  
PIERCE COUNTY, WA  
AND INCORPORATED AREAS

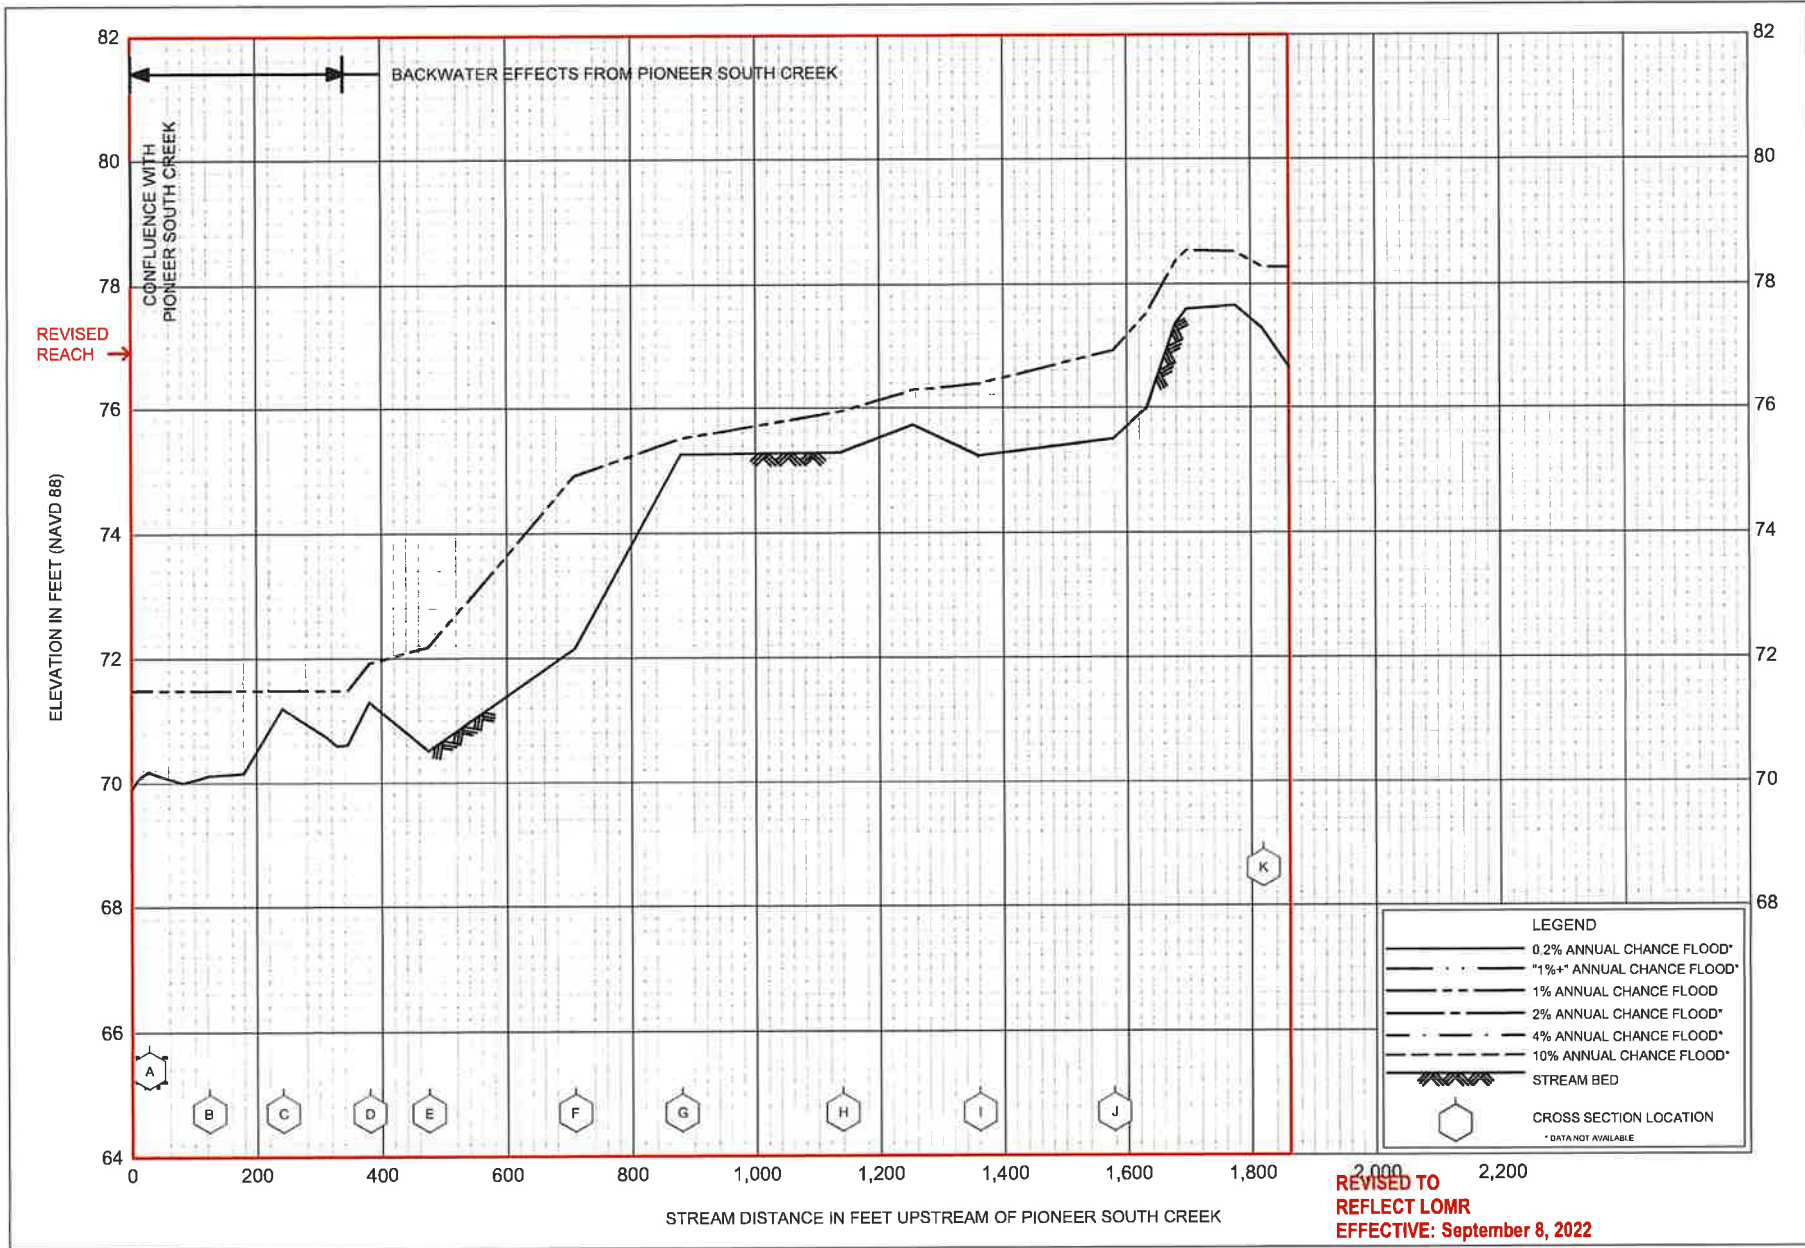

FLOOD PROFILES  
PIONEER SOUTH CREEK TRIBUTARY


FEDERAL EMERGENCY MANAGEMENT AGENCY  
PIERCE COUNTY, WA  
UNINCORPORATED AREAS

366P

NOTE: MAP AREA SHOWN ON THIS PANEL IS LOCATED WITHIN TOWNSHIP 20 NORTH, RANGE 4 EAST AND TOWNSHIP 19 NORTH, RANGE 4 EAST.

1-PERCENT-ANNUAL-CHANCE FLOOD DISCHARGE CONTAINED IN STRUCTURE

**KEY TO STRUCTURES**  
 1. 1-PERCENT-ANNUAL-CHANCE FLOOD DISCHARGE CONTAINED IN STRUCTURE  
 2. Driveway Culvert

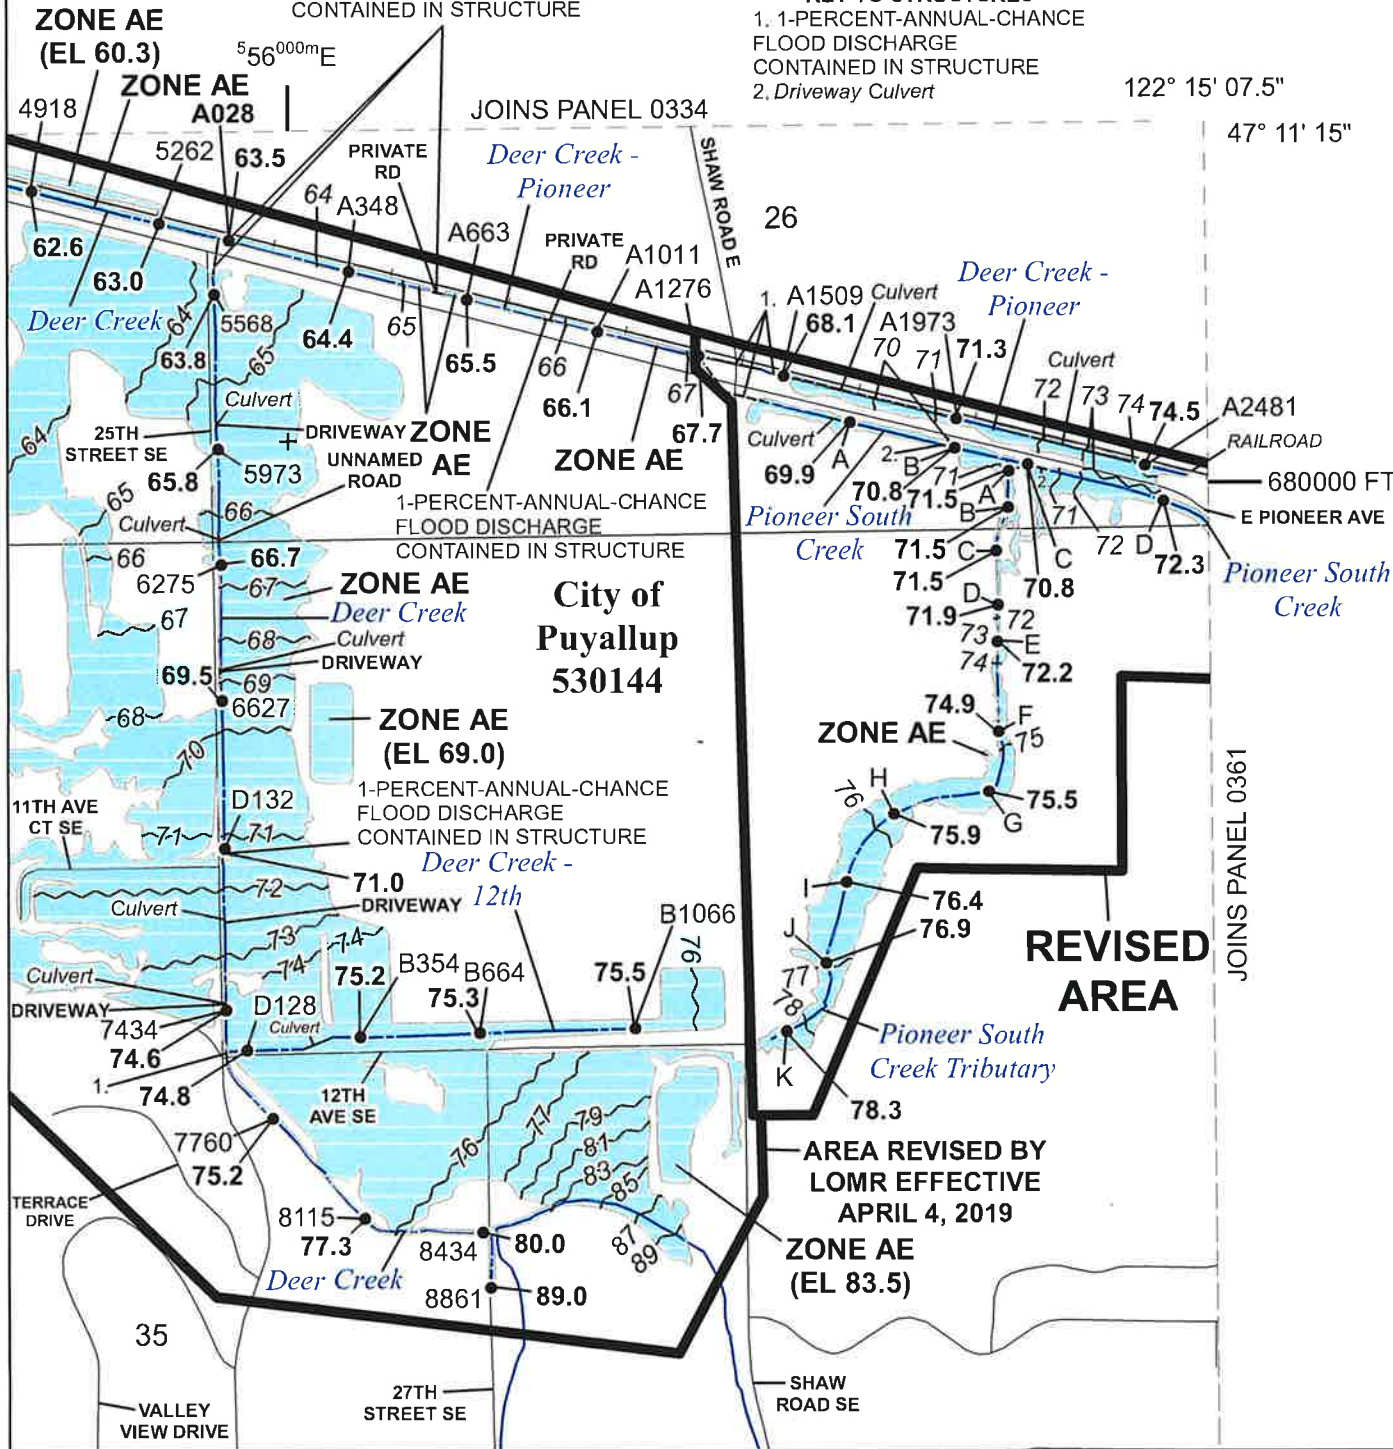

122° 15' 07.5"  
 47° 11' 15"

**SPECIAL FLOOD HAZARD AREAS**

- Without Base Flood Elevation (BFE) Zone A V, AR
- With BFE or Depth Zone AE, AO, AH, VE, AR
- Regulatory Floodway
- 0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile Zone X
- Future Conditions 1% Annual Chance Flood Hazard Zone X
- Area with Reduced Flood Risk due to Levee See Notes. Zone X

**OTHER AREAS OF FLOOD HAZARD**

**SCALE**

Map Projection:  
 NAD 1983 UTM Zone 10N;  
 Western Hemisphere; Vertical Datum: NAVD 88

1 inch = 500 feet      1:6,000

0 250 500 1,000 Feet  
 0 75 150 300 Meters

**FEMA National Flood Insurance Program**

**NATIONAL FLOOD INSURANCE PROGRAM**  
 FLOOD INSURANCE RATE MAP  
 PIERCE COUNTY, WASHINGTON  
 and Incorporated Areas


Panel **342** OF **1375**

COMMUNITY	NUMBER	PANEL	SUFFIX
PIERCE COUNTY	530138	0342	E
PUYALLUP, CITY OF	530144	0342	E

**REVISED TO REFLECT LOMR EFFECTIVE: September 8, 2022**

VERSION NUMBER  
 2.1.3.0  
 MAP NUMBER  
 53053C0342E  
 EFFECTIVE DATE  
 MARCH 7, 2017

MAP AREA SHOWN ON THIS PANEL IS LOCATED WITHIN TOWNSHIP 19 NORTH, RANGE 4 EAST, TOWNSHIP 19 NORTH, RANGE 5 EAST, TOWNSHIP 20 NORTH, RANGE 4 EAST, AND TOWNSHIP 20 NORTH, RANGE 5 EAST.

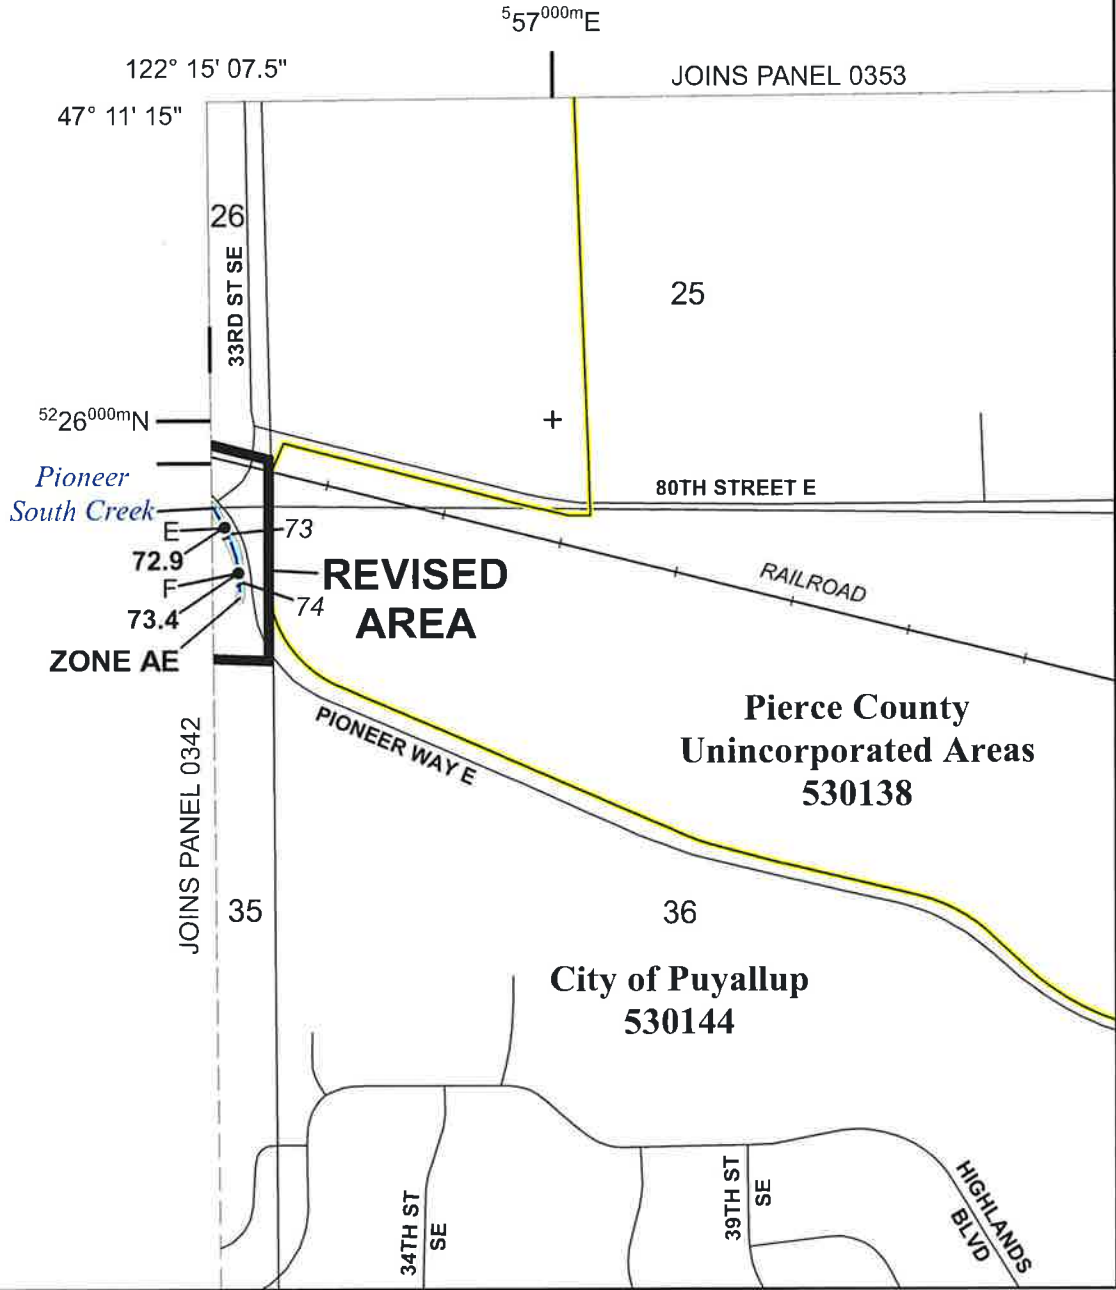


**SPECIAL FLOOD HAZARD AREAS**

- Without Base Flood Elevation (BFE) Zone A V, A99
- With BFE or Depth Zone AE, AO, AH, VE, AR
- Regulatory Floodway

**OTHER AREAS OF FLOOD HAZARD**

- 0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile Zone X
- Future Conditions 1% Annual Chance Flood Hazard Zone X
- Area with Reduced Flood Risk due to Levee See Notes, Zone X

**SCALE**

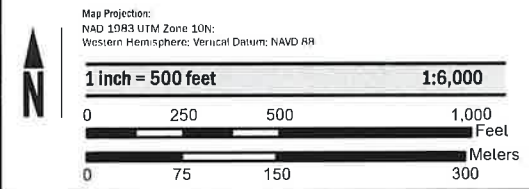

**FEMA**  
National Flood Insurance Program

**NATIONAL FLOOD INSURANCE PROGRAM**  
FLOOD INSURANCE RATE MAP  
PIERCE COUNTY, WASHINGTON  
and Incorporated Areas

PANEL **361** OF **1375**

COMMUNITY	NUMBER	PANEL	SUFFIX
PIERCE COUNTY	530138	0361	E
PUYALLUP, CITY OF	530144	0361	E
SUMNER, CITY OF	530147	0361	E

**REVISED TO REFLECT LOMR**  
**EFFECTIVE: September 8, 2022**

VERSION NUMBER  
2.1.3.0  
MAP NUMBER  
53053C0361E  
EFFECTIVE DATE  
MARCH 7, 2017

# Appendix B

---

- B-1.....Geotechnical Report by Krazan & Associates, Inc., dated April 11, 2019
- B-2.....Project Infiltration Feasibility Letter by Migizi Group, dated August 25, 2023
- B-3.....Water Table Monitoring Information by Abbey Road Group, dated January 17, 2023.
- B-4.....Stream Restoration and Mitigation Plan by Soundview Consultants, dated September 2023 (To be Updated during Phase 2)



GEOTECHNICAL ENGINEERING • ENVIRONMENTAL ENGINEERING  
CONSTRUCTION TESTING & INSPECTION

April 11, 2019

KA Project No. 062-19005

**Abbey Road Group Land Development Services Company, LLC**  
PO Box 1224  
Puyallup, Washington 98371

**Attn: Mr. Gil Hulsmann**

Email: [Gil.Hulsmann@AbbeyRoadGroup.com](mailto:Gil.Hulsmann@AbbeyRoadGroup.com)  
Tel: (253) 435-3699 (ext. 101)

**Reference: Geotechnical Engineering Investigation**  
**East Town Crossing**  
Parcel Nos. 0420264053, 0420264054, 0420351066  
SE Corner of E. Shaw Road and E. Pioneer Way  
Puyallup, Washington 98371

Dear Mr. Hulsmann,

In accordance with your request, we have completed a Geotechnical Engineering Investigation for the referenced site. The results of our investigation are presented in the attached report.

If you have any questions, or if we can be of further assistance, please do not hesitate to contact our office.

Respectfully submitted,  
**KRAZAN & ASSOCIATES, INC.**

*Theresa R. Nunan*

Theresa R. Nunan  
Project Engineer

TRN:MR

**GEOTECHNICAL ENGINEERING INVESTIGATION  
EAST TOWN CROSSING  
PARCEL NOS. 0420264053, 0420264054, 0420351066  
SE CORNER OF E. SHAW ROAD & E. PIONEER WAY  
PUYALLUP, WASHINGTON**

**PROJECT NO. 062-19005  
APRIL 11, 2019**

**Prepared for:**

**ABBAY ROAD GROUP LAND DEVELOPMENT  
SERVICES COMPANY, LLC  
ATTN: MR. GIL HULSMANN  
PO BOX 1224  
PUYALLUP, WA 98371**

**Prepared by:**

**KRAZAN & ASSOCIATES, INC.  
GEOTECHNICAL ENGINEERING DIVISION  
825 CENTER STREET, STE A  
TACOMA, WASHINGTON 98409  
(253) 939-2500**

# **Krazan & ASSOCIATES, INC.**

**GEOTECHNICAL ENGINEERING • ENVIRONMENTAL ENGINEERING  
CONSTRUCTION TESTING & INSPECTION**

## **TABLE OF CONTENTS**

<b>INTRODUCTION</b> .....	<b>1</b>
<b>PURPOSE AND SCOPE</b> .....	<b>1</b>
<b>SITE LOCATION AND DESCRIPTION</b> .....	<b>2</b>
<b>GEOLOGIC SETTING</b> .....	<b>3</b>
<b>FIELD INVESTIGATION</b> .....	<b>3</b>
<b>SOIL PROFILE AND SUBSURFACE CONDITIONS</b> .....	<b>4</b>
<b>GROUNDWATER</b> .....	<b>5</b>
<b>GEOLOGIC HAZARDS</b> .....	<b>5</b>
Erosion Concern/Hazard .....	<b>5</b>
Seismic Hazard.....	<b>5</b>
<b>CONCLUSIONS AND RECOMMENDATIONS</b> .....	<b>7</b>
Site Preparation .....	<b>8</b>
Temporary Excavations .....	<b>9</b>
Structural Fill.....	<b>10</b>
Foundations .....	<b>10</b>
Lateral Earth Pressures and Retaining Walls.....	<b>12</b>
Floor Slabs and Exterior Flatwork.....	<b>13</b>
Erosion and Sediment Control.....	<b>13</b>
Groundwater Influence on Structures/Construction.....	<b>14</b>
Drainage .....	<b>14</b>
Utility Trench Backfill.....	<b>15</b>
Pavement Design .....	<b>15</b>
Testing and Inspection.....	<b>17</b>
<b>LIMITATIONS</b> .....	<b>17</b>
<b>VICINITY MAP</b> .....	<b>Figure 1</b>
<b>SITE PLAN</b> .....	<b>Figure 2</b>
<b>FIELD INVESTIGATION AND LABORATORY TESTING</b> .....	<b>Appendix A</b>
<b>EARTHWORK SPECIFICATIONS</b> .....	<b>Appendix B</b>
<b>PAVEMENT SPECIFICATIONS</b> .....	<b>Appendix C</b>

---

**Offices Serving The Western United States**

**825 Center Street, Suite A • Tacoma, Washington 98409 • (253) 939-2500 • Fax: (253) 939-2556**



April 11, 2019

KA Project No. 062-19005

**GEOTECHNICAL ENGINEERING INVESTIGATION  
EAST TOWN CROSSING  
PARCEL NOS. 0420264053, 0420264054, 0420351066  
SE CORNER OF EAST SHAW ROAD AND EAST PIONEER WAY  
PUYALLUP, WASHINGTON**

**INTRODUCTION**

This report presents the results of our Geotechnical Engineering Investigation for the proposed East Town Crossing project located near the southeast corner of East Shaw Road and East Pioneer Way in Puyallup, Washington, as shown on the Vicinity Map in Figure 1. Discussions regarding site conditions are presented in this report, together with conclusions and recommendations pertaining to site preparation, excavations, structural fill, utility trench backfill, drainage and landscaping, erosion control, foundations, concrete floor slabs and exterior flatwork, lateral earth pressures, and pavement.

A Site Plan showing the approximate exploratory boring and monitoring well locations is presented following the text of this report in Figure 2. Appendix A includes USCS Soil Classification information, as well as a description of the field investigation, exploratory boring logs, and the laboratory testing results. Appendix B contains a guide to aid in the development of earthwork specifications. Pavement design guidelines are presented in Appendix C. The recommendations in the main text of the report have precedence over the more general specifications in the appendices.

**PURPOSE AND SCOPE**

This investigation was conducted to evaluate the subsurface soil and groundwater conditions at the site, to develop geotechnical engineering recommendations for use in design of specific construction elements, and to provide criteria for site preparation and earthwork construction.

Our scope of services was performed in general accordance with our proposal for this project, dated January 25, 2019 (Proposal Number G19001WAT) and included the following:

- Exploration of the subsurface soil and groundwater conditions by conducting approximately three (3) geotechnical borings and installing two (2) groundwater level monitoring wells using a subcontracted drill rig;
- Provide a site plan showing the geotechnical boring and monitoring well locations;

- Provide comprehensive boring and monitoring well logs, including soil stratification and classification, and groundwater levels where applicable;
- Recommended foundation type for the proposed structures;
- Allowable foundation bearing pressure, anticipated settlements (both total and differential), coefficient of horizontal friction for footing design, and frost penetration depth;
- Recommendations for seismic design considerations including site coefficient and ground acceleration based on the 2015 IBC;
- Recommendations for structural fill materials, placement, and compaction;
- Recommendations for suitability of on-site soils as structural fill;
- Recommendations for temporary excavations;
- Recommendations for site drainage and erosion control;
- Recommendations for flexible and rigid pavements, as well as permeable pavement.

### **PROPOSED CONSTRUCTION**

Based on the Overall Site Plan prepared by Abbey Road Group Land Development Services, dated December 12, 2018, we understand that the proposed development will include construction of six residential structures (designated Buildings A through E) and a club house/office building. Site drainage systems will include a subsurface stormwater system located in the southern portion of the property, and a rain garden along the northern and eastern edges of the site. We have not been provided with details regarding construction of the subsurface stormwater system. The planned development will also include utility installation, and paved parking areas and driveways. For the purpose of our analyses, we have assumed that the residential buildings and club house will be 1- to 2-story structures with a slab-on-grade floor system. We have also assumed only minor grading up to 1 foot of cut or fill will be required to establish planned elevations for the site.

### **SITE LOCATION AND DESCRIPTION**

The site consists of three undeveloped parcels encompassing approximately 7 acres of land located south and east of the intersection of Shaw Road with East Pioneer Way. The site is bordered to the north by East Pioneer Way, to the south by commercial property, to the east by undeveloped land and a creek, and to the west by undeveloped land and abandoned residences. The site is roughly rectangular in shape and relatively level at approximately Elevation 72 to 74 feet. A dirt road runs north-south through the center of the site, and also extends from the center of the site westward towards Shaw Road. An existing storm pond is located in the southeast corner of the site, with the bottom at Elevation 69

feet. A wetland that has been field verified by others is located within the western central edge of the site. A creek runs along the eastern boundary of the site.

Most of the property is covered with seasonal vegetation, brambles, and a few trees located within the central portion of the site. Some trash and an abandoned trailer are located in the north central portion of the site. The southern portion of the site is currently being used by the adjacent business for container storage.

We understand that past construction activities for the undeveloped parcel to the west of the site that borders Shaw Road and East Pioneer Way consisted of the placement of fill material to raise the existing grades, based on the Geotechnical Evaluation and Additional Recommendations report prepared by Krazan & Associates, dated March 13, 2007. Those fill activities did not extend into this site.

### **GEOLOGIC SETTING**

The site lies within the central Puget Lowland. The lowland is part of a regional north-south trending trough that extends from southwestern British Columbia to near Eugene, Oregon. North of Olympia, Washington, this lowland is glacially carved, with a depositional and erosional history including at least four separate glacial advances and retreats. The Puget Lowland is bounded to the west by the Olympic Mountains and to the east by the Cascade Range. The lowland is filled with glacial and nonglacial sediments.

The Washington Division of Geology and Earth Resources, Geologic Map of the South Half of the Tacoma Quadrangle, Washington (Open File Report 87-3) indicates that the property is located in an area that is predominantly underlain by recent alluvium deposited by the Puyallup River. The recent alluvium consists of interbedded silt, sandy silt, silty sand, sand, gravel, local areas of peat and clay. The finer material represents overbank material and local lacustrine deposits, and the coarser materials most likely represent deposits in abandoned channels of the Puyallup River.

### **FIELD INVESTIGATION**

A field investigation consisting of three (3) exploratory soil borings and installation of two (2) monitoring wells was completed to evaluate the subsurface soil and groundwater conditions at the project location. The soil borings were completed on March 11, 2019 by a Krazan subcontractor utilizing a hollow stem auger drill rig. The soil borings were advanced to depths ranging from 21.5 to 38.5 feet below the existing ground surface (bgs). A geotechnical engineer from Krazan and Associates was present during the explorations, examined the soils and geologic conditions encountered, obtained samples of the different soil types, and maintained logs of the explorations.

Representative samples of the subsurface soils encountered in the borings were collected and sealed in plastic bags. These samples were transported to our laboratory for further examination and testing. The

soils encountered in the exploratory borings were continuously examined and visually classified in accordance with the Unified Soil Classification System (USCS).

### **SOIL PROFILE AND SUBSURFACE CONDITIONS**

The geotechnical subsurface exploration for this project consisted of soil borings and monitoring wells advanced to depths of approximately 21.5 to 38.5 feet bgs. The locations of the soil borings and monitoring wells are shown on the Site Plan in Figure 2.

Beneath 5 to 8 inches of surficial topsoil, the borings encountered alluvial soils to their explored depths. The topsoil was underlain by 4.5 to 7 feet of brown silty sand (SM) and poorly graded sand (SP) with relative densities in the loose to medium dense range. The sand soils were underlain by a 3-foot thick stratum of interbedded sandy silt (ML) that exhibited medium stiff to stiff consistencies and silty sand (SM) soils with relative densities in the loose to medium dense range.

Boring B-1 encountered a layer of silty clay and clayey silt beneath the sandy silt and silty sands from 7.5 to 11.0 feet bgs. The silty clay (CL) and clayey silt (ML) exhibited a very soft consistency with a Standard Penetration Test (SPT) resistance (N-value) of 1/12 inches and a moisture content of 51 percent.

The clayey silt in boring B-1 and the silty sand/sandy silt stratum in borings B-2 and B-3 were underlain by silty sand, sand, and gravel soils with varying silt contents to the termination depths of 21.5, 38.5, and 21.5 feet bgs, respectively. These granular soils exhibited relative densities in the loose to very dense range with N-values ranging from 8 to 60/8" blows per foot.

Gradation and Atterberg Limits tests were conducted on representative samples of the soils for classification purposes and for determination of engineering properties. The gradation and Atterberg Limits results are graphically depicted in Appendix A. For additional information about the soils encountered, please refer to the boring logs in Appendix A.

**Monitoring Wells:** Two monitoring wells, designated W-1 and W-2, were installed at the site on March 11, 2019 using a subcontracted driller and track mounted drill rig. Monitoring well W-1 was installed within borehole B-1. The boreholes for monitoring wells W-1 and W-2 were advanced to a depth of 21.5 feet and 20 feet below the existing ground surface, respectively, using 4¼-inch diameter hollow stem augers. A 10-foot long section of slotted PVC pipe attached to a 10-foot section of solid PVC pipe was inserted into the borehole, and the annular space between the pipe and the augers was backfilled with filter sand to a depth of 8 feet bgs followed by bentonite chips to the ground surface. A metal well cap was then installed over the pipe and cemented in-place to protect the well from unauthorized access. The installation log for monitoring wells W-1 and W-2 are included in Appendix A.

--

## **GROUNDWATER**

Groundwater was encountered during the drilling operations at a depth of about 7 to 8 feet below the existing ground surface. It should be recognized that groundwater elevations may fluctuate with time. The groundwater level will be dependent upon seasonal precipitation, irrigation, land use, climatic conditions, as well as other factors. Therefore, water levels at the time of the field investigation may be different from those encountered during the construction phase of the project. The evaluation of such factors is beyond the scope of this report.

## **GEOLOGIC HAZARDS**

### **Erosion Concern/Hazard**

The Natural Resources Conservation Services (NRCS) map for Pierce County Area, Washington, classifies the site area as Briscot loam. The NRCS classifies the Briscot loam as Hydrologic Soil Group B/D with low potential for erosion in a disturbed state.

It has been our experience that soil erosion can be minimized through landscaping and surface water runoff control. Typically, erosion of exposed soils will be most noticeable during periods of rainfall and may be controlled by the use of normal temporary erosion control measures, i.e., silt fences, hay bales, mulching, control ditches or diversion trenching, and contour furrowing. Erosion control measures should be in place before the onset of wet weather.

### **Seismic Hazard**

The 2015 International Building Code (IBC), Section 1613.3.2, refers to Chapter 20 of ASCE-7 for Site Class Definitions. It is our opinion that the overall soil profile corresponds to Site Class D as defined by Table 20.3-1 "Site Class Definitions," according to the 2010 ASCE-7 Standard. Site Class D applies to a "stiff soil" profile. The seismic site class is based on a soil profile extending to a depth of 100 feet. The soil borings on this site extended to a maximum depth of 38.5 feet and this seismic site class designation is based on the assumption that similar soil conditions continue below the depth explored.

We referred to the U.S. Geological Survey (USGS) Earthquake Hazards Program Website and 2012/2015 IBC to obtain values for  $S_S$ ,  $S_{MS}$ ,  $S_{DS}$ ,  $S_I$ ,  $S_{MI}$ ,  $S_{DI}$ ,  $F_a$ , and  $F_v$ . The USGS website includes the most updated published data on seismic conditions. The seismic design parameters for this site are as follows:

**Seismic Design Parameters**  
**(Reference: 2015 IBC Section 1613.3.2, ASCE, and USGS)**

<b>Seismic Item</b>	<b>Value</b>
Site Coefficient $F_a$	1.003
$S_s$	1.243 g
$S_{MS}$	1.247 g
$S_{DS}$	0.831 g
Site Coefficient $F_v$	1.524
$S_1$	0.476 g
$S_{M1}$	0.726 g
$S_{D1}$	0.484 g

Additional seismic considerations include liquefaction potential and amplification of ground motions by loose/soft soil deposits. The liquefaction potential is highest for loose sand with a high groundwater table. Soil liquefaction is a state where soil particles lose contact with each other and become suspended in a viscous fluid. This suspension of the soil grains results in a complete loss of strength as the effective stress drops to zero. Liquefaction normally occurs under saturated conditions in soils such as sand in which the strength is purely frictional. However, liquefaction has occurred in soils other than clean sand. Liquefaction usually occurs under vibratory conditions such as those induced by seismic events.

We have reviewed “Liquefaction Susceptibility Map of Pierce County, Washington” by Stephen P. Palmer et al., (WA DNR, 2004). The map indicates that the site area is located in a zone of high liquefaction susceptibility. At the request of our client, we have conducted a site-specific liquefaction analysis for this project.

To evaluate the liquefaction potential of the site, we analyzed the following factors:

- 1) Soil type
- 2) Groundwater depth
- 3) Relative soil density
- 4) Initial confining pressure
- 5) Maximum anticipated intensity and duration of ground shaking

**Liquefaction Analysis:** The commercially available liquefaction analysis software, LiquefyPro from CivilTech, was used to evaluate the liquefaction potential and the possible liquefaction induced settlement for the site soil and groundwater conditions based on our explorations. The analysis was performed using the information from the soil test boring and laboratory gradation analyses. **Maximum**

Considered Earthquake (MCE) was selected in accordance with the 2015 International Building Code (IBC) Chapter 16 and the U.S. Geological Survey (USGS) Earthquake Hazards Program website. For this analysis, a maximum earthquake magnitude of 7.11 and peak horizontal ground surface acceleration of 0.5g were used. Our analysis assumed a groundwater depth of 7.0 feet during the earthquake.

The maximum liquefaction induced settlement for this type of seismic event is estimated to be on the order of about 2 inches. The differential settlements are estimated to be on the order of about 1-inch.

## **CONCLUSIONS AND RECOMMENDATIONS**

### **General**

It is our opinion that the planned improvements at this site are feasible, provided that the geotechnical engineering recommendations presented in this report are included in the project design. Based on our explorations, it is our opinion that conventional spread foundations supported on medium dense/stiff or firmer native soil, or on structural fill extending to the medium dense/stiff or firmer native soil would be appropriate for the new buildings.

We recommend that organic topsoil, undocumented fill, and loose/soft soils be stripped to expose the underlying medium dense/stiff or firmer native soil. Footings should extend through any organic or loose soil and be founded on the underlying medium dense or firmer native soil, or structural fill extending to the competent native soils.

Exploration boring B-1 was drilled in the northern portion of the site, in the area of the planned rain garden between Pioneer Way and the Club House and Residential Building E. Boring B-1 encountered a layer of very soft silty clay between 7.5 and 11 feet below the existing ground surface. These materials are not considered suitable to support foundations and will need to be removed where they are encountered. Test pits should be conducted prior to the construction phase to determine the aerial extent (i.e. lateral extent and depth) of this very soft clay layer. If the additional test pit exploration reveals that the soft clay layer extends into the footprint of the Clubhouse or Residential Building E, or any of the other structures, additional foundation recommendations will be necessary to address the effect of the very soft clays. If the very soft clay is encountered in building areas, a deep foundation system may be required for support of the structure(s).

Borings B-2 and B-3 (drilled within the eastern and southern portions of the site) and monitoring well W-2 (installed within the central portion of the site) encountered medium dense/stiff native soils at depths of approximately 5 and 7 feet bgs, respectively; however, deeper layers of loose/soft soils may be encountered in unexplored areas of the site.

The soils encountered on this site are considered moisture-sensitive and will be easily disturbed and difficult to compact when wet. We recommend that construction take place during the drier summer months, if possible. If construction is to take place during wet weather, additional expenses and delays

should be expected due to the wet conditions. Additional expenses could include the need for placing a blanket of rock spalls to protect exposed subgrades and construction traffic areas.

### **Site Preparation**

General site clearing should include removal of any undocumented fill, organics, asphaltic concrete, abandoned utilities, structures including foundations, basement walls and floors, rubble, and rubbish. After stripping operations and removal of any loose and/or debris-laden fill, the exposed subgrade should be visually inspected and/or proof rolled to identify any soft/loose areas. Additional recommendations for preparation of specific areas are provided in the **Foundations, Pavement Design** and **Exterior Flatwork** subsections of this report.

The soils that will be encountered during site development are considered extremely moisture-sensitive and may disturb easily in wet conditions. The prepared subgrade should be protected from construction traffic and surface water should be diverted around prepared subgrade. We recommend that the site be developed only during extended periods of dry weather.

During wet weather conditions, subgrade stability problems and grading difficulties may develop due to excess moisture, disturbance of sensitive soils and/or the presence of perched groundwater. Construction during the extended periods of wet weather could result in the need to remove wet disturbed soils if they cannot be suitably compacted due to elevated moisture contents. The onsite soils have significant silt content in the explored areas and are moisture sensitive, and can be easily disturbed when wet. If over-excavation is necessary, it should be confirmed through continuous monitoring and testing by a qualified geotechnical engineer or geologist. Soils that have become unstable may require drying to near their optimal moisture content before compaction is feasible. Selective drying may be accomplished by scarifying or windrowing surficial material during extended periods of dry, warm weather (typically during the summer months). If the soils cannot be dried back to a workable moisture condition, remedial measures may be required. General project site winterization should consist of the placement of aggregate base and the protection of exposed soils during the construction phase. It should be understood that even if Best Management Practices (BMP's) for wintertime soil protection are implemented and followed there is a significant chance that moisture disturbed soil mitigation work will still be required.

Any buried structures encountered during construction should be properly removed and backfilled. Excavations, depressions, or soft and pliant areas extending below the planned finish subgrade levels should be excavated to expose firm undisturbed soil, and backfilled with structural fill. In general, any septic tanks, underground storage tanks, debris pits, cesspools, or similar structures should be completely removed. Concrete footings should be removed to an equivalent depth of at least 3 feet below proposed footing elevations or as recommended by the geotechnical engineer. The resulting excavations should be backfilled with structural fill.



We understand that backfilling of the wetland in the central western edge of the site that has been field identified by others will be permitted for construction of the paved parking area and subsurface storm system. We also understand that proposed Residential Building C will be constructed within the area currently occupied by an existing storm pond. Our field explorations were not specifically conducted within either of these areas. Any organic, silt or clay soils, or accumulations of sediment, encountered within the wetland area or the existing storm pond should be removed down to firm undisturbed soil, and backfilled with structural fill to the planned finish grades.

A representative of our firm should be present during all site clearing and grading operations to observe, test and evaluate earthwork construction. This testing and observation is an integral part of our service, as acceptance of earthwork construction is dependent upon compaction and stability of the material. The geotechnical engineer may reject any material that does not meet compaction and stability requirements. Further recommendations, contained in this report, are predicated upon the assumption that earthwork construction will conform to the recommendations set forth in this section and in the Structural Fill section below.

#### **Temporary Excavations**

The onsite soils have variable cohesion strengths, therefore the safe angles to which these materials may be cut for temporary excavations is limited, as the soils may be prone to caving and slope failures in temporary excavations. Temporary excavations in the loose to medium dense native soils should be sloped no steeper than 2H:1V (horizontal to vertical) where room permits.

All temporary cuts should be in accordance with Washington Administrative Code (WAC) Part N, Excavation, Trenching, and Shoring. The temporary slope cuts should be visually inspected daily by a qualified person during construction work activities and the results of the inspections should be included in daily reports. The contractor is responsible for maintaining the stability of the temporary cut slopes and minimizing slope erosion during construction. The temporary cut slopes should be covered with plastic sheeting to help minimize erosion during wet weather and the slopes should be closely monitored until the permanent retaining systems are complete. Materials should not be stored and equipment operated within 10 feet of the top of any temporary cut slope.

A Krazan & Associates geologist or geotechnical engineer should observe, at least periodically, the temporary cut slopes during the excavation work. The reasoning for this is that all soil conditions may not be fully delineated by the limited sampling of the site from the geotechnical explorations. In the case of temporary slope cuts, the existing soil conditions may not be fully revealed until the excavation work exposes the soil. Typically, as excavation work progresses the maximum inclination of the temporary slope will need to be evaluated by the geotechnical engineer so that supplemental recommendations can be made. Soil and groundwater conditions can be highly variable. Scheduling for soil work will need to be adjustable, to deal with unanticipated conditions, so that the project can proceed smoothly and required deadlines can be met. If any variations or undesirable conditions are

encountered during construction, Krazan & Associates should be notified so that supplemental recommendations can be made.

### **Structural Fill**

Fill placed beneath foundations, pavement, or other settlement-sensitive structures should be placed as structural fill. Structural fill, by definition, is placed in accordance with prescribed methods and standards, and is monitored by an experienced geotechnical professional. Field monitoring procedures would include the performance of a representative number of in-place density tests to document the attainment of the desired degree of relative compaction. The area to receive the fill should be suitably prepared as described in the Site Preparation subsection of this report prior to beginning fill placement.

Best Management Practices (BMP's) should be followed when considering the suitability of the existing materials for use as structural fill. The on-site soils are generally considered suitable for re-use as structural fill, provided the soil is free of organic material and debris, and it is within  $\pm 2$  percent of the optimum moisture content. If the native soils are stockpiled for later use as structural fill, the stockpiles should be covered to protect the soil from wet weather conditions. We recommend that a representative of Krazan & Associates be on site during the excavation work to determine which soils are suitable for use as structural fill.

Imported, all weather structural fill material should consist of well-graded gravel or a sand and gravel mixture with a maximum grain size of 3 inches and less than 5 percent fines (material passing the U.S. Standard No. 200 Sieve). All structural fill material should be submitted for approval to the geotechnical engineer at least 48 hours prior to delivery to the site.

Fill soils should be placed in horizontal lifts not exceeding 8 inches in thickness prior to compaction, moisture-conditioned as necessary (moisture content of soil shall not vary by more than  $\pm 2$  percent of optimum moisture), and the material should be compacted to at least 95 percent of the maximum dry density based on ASTM D1557 Test Method. In-place density tests should be performed on all structural fill to document proper moisture content and adequate compaction. Additional lifts should not be placed if the previous lift did not meet the compaction requirements or if soil conditions are not considered stable.

### **Foundations**

Our exploratory borings encountered loose to medium dense granular soils underlain by a 3-foot thick stratum of interbedded sandy silt and silty sand, followed by loose to very dense granular alluvial soils to the explored depths. Boring B-1, drilled at the proposed rain garden area in the northern end of the site, encountered a 3.5-foot thick layer of very soft silty clay at a depth of 7.5 feet bgs.

The very soft clay encountered in Boring B-1 between 7.5 and 11 feet below the existing ground surface is not considered suitable to support foundations and will need to be removed where it is encountered.

Further exploration of this area with test pits should be conducted during the planning phase to determine the aerial extent (i.e. lateral extent and depth) of this very soft clay layer. If the additional test pit exploration reveals that the soft clay layer extends into the footprint of the Clubhouse or Residential Building E, or any of the other structures, additional foundation recommendations will be necessary to address the effect of the very soft clays. If the very soft clay is encountered in building areas, a deep foundation system may be required for support of the structure(s).

Borings B-2 and B-3 and monitoring well W-2, drilled within the eastern, southern, and central portions of the site, encountered medium dense/stiff native soils at depths of approximately 5 and 7 feet bgs; however, deeper layers of loose/soft soils may be encountered in unexplored areas of the site.

Pending the findings of further explorations in the northern portion of the site, the proposed structures may be supported on a shallow foundation system. Where loose/soft soils are encountered at the planned footing elevations, the subgrade should be over-excavated to expose suitable bearing soil. The foundation excavations should be evaluated by Krazan & Associates prior to structural fill placement to verify that the foundations will bear on suitable material.

Building foundations should extend at least 18 inches below the lowest adjacent finished ground surface for frost protection and bearing capacity considerations. Footing widths should be based on the anticipated loads and allowable soil bearing pressure, and should conform to current International Building Code (IBC) guidelines. Water should not be allowed to accumulate in foundation excavations. All loose or disturbed soil should be removed from the foundation excavation prior to placing concrete.

For foundations constructed as outlined above, we recommend an allowable design bearing capacity of 2,000 pounds per square foot (psf) may be used for foundation design for this project. A representative of Krazan and Associates should evaluate the foundation bearing soil prior to footing form construction.

Resistance to lateral footing displacement can be computed using an allowable friction factor of 0.35 acting between the bases of foundations and the supporting subgrade. Lateral resistance for footings can alternatively be developed using an allowable equivalent fluid passive pressure of 150 pounds per cubic foot (pcf) acting against the appropriate vertical footing faces (neglecting the upper 12 inches). The allowable friction factor and allowable equivalent fluid passive pressure values include a factor of safety of 1.5. The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance. A 1/3 increase in the above values may be used for short duration wind and seismic loads.

For foundations constructed as recommended, the total static settlement is not expected to exceed 1-inch. Differential settlement, along a 20-foot exterior wall footing, or between adjoining column footings should be less than ½ inch. Most settlement is expected to occur during construction, as the loads are applied. However, additional post-construction settlement may occur if the foundation soils become flooded or saturated. It should be noted that the estimated settlement provided herewith is a

static settlement and does not include liquefaction induced settlement. Static settlement is induced by the applied dead load from the structures.

Up to 2 inches of total settlement and 1 inch of differential settlement could occur during and/or following a seismic event. The foundation elements, i.e. spread and wall footings, could be structurally tied together to create a stiffer structure. It should be noted that this measure would not mitigate the anticipated seismic settlement; however, it may reduce the damage associated with the anticipated seismic settlement, particularly the effects of differential settlement on a structure.

Seasonal rainfall, water run-off, and the normal practice of watering trees and landscaping areas around the proposed structures, should not be permitted to flood and or saturate foundation subgrade soils. To prevent the buildup of water within the footing areas, continuous footing drains (with cleanouts) should be provided at the bases of the footings. The footing drains should consist of a minimum 4-inch diameter rigid perforated PVC pipe, sloped to drain, with perforations placed near the bottom and enveloped in all directions by washed rock and wrapped with filter fabric to limit the migration of silt and clay into the drain.

#### **Lateral Earth Pressures and Retaining Walls**

We understand that a below grade stormwater vault is planned for this project. We have developed criteria for the design of retaining or below grade walls for the stormwater vault. Our design parameters are based on retention of the native soils. The parameters are also based on level, well-drained wall backfill conditions. Walls may be designed as “restrained” retaining walls based on “at-rest” earth pressures, plus any surcharge on top of the walls as described below, if the walls are braced to restrain movement and/or movement is not acceptable. Unrestrained walls may be designed based on “active” earth pressure, if the walls are not part of the buildings and some movement of the retaining walls is acceptable. Acceptable lateral movement equal to at least 0.2 percent of the wall height would warrant the use of “active” earth pressure values for design. We recommend that walls supporting horizontal backfill and not subjected to hydrostatic forces be designed using a triangular earth pressure distribution equivalent to that exerted by a fluid with a density of 38 pcf for yielding (active condition) walls, and 60 pcf for non-yielding (at-rest condition) walls.

The stated lateral earth pressures do not include the effects of hydrostatic pressure generated by water accumulation behind the retaining walls or loads imposed by construction equipment, foundations, back slopes or roadways (surcharge loads). Groundwater was encountered in each of the borings at 7 to 8 feet below the ground surface. Portions of the vault that will extend below the groundwater level will need to be designed to resist hydrostatic pressures and buoyant forces. Equivalent fluid densities for buoyant soil pressure under yielding conditions would be 20 pcf and 30 pcf for nonyielding conditions. The allowable buoyant passive pressure would be 100 pcf with a factor of safety of 2.0.

### **Floor Slabs and Exterior Flatwork**

Before the placement of concrete floors or pavements on the site, or before any floor supporting fill is placed, the loose soils and undocumented fill must be removed to expose medium dense or firmer undisturbed native soil. The subgrade should then be proof-rolled to confirm that the subgrade contains no soft or deflecting areas. Areas of yielding soils should be excavated and backfilled with structural fill.

Any additional fill used to increase the elevation of the floor slab should meet the requirements of structural fill. Fill soils should be placed in horizontal lifts not exceeding 8 inches loose thickness, moisture-conditioned as necessary, (moisture content of soil shall not vary by more than ±2 percent of optimum moisture) and the material should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557.

Floor slabs may be designed using a modulus of subgrade reaction value of  $k = 200$  pounds per cubic inch (pci) for slabs supported on medium dense or firmer native soils or on structural fill extending to medium dense or firmer native soil.

In areas where it is desired to reduce floor dampness, such as areas covered with moisture sensitive floor coverings, we recommend that concrete slab-on-grade floors be underlain by a water vapor retarder system. According to ASTM guidelines, the water vapor retarder should consist of a vapor retarder sheeting underlain by a minimum of 4-inches of compacted clean (less than 5 percent passing the U.S. Standard No. 200 Sieve), open-graded angular rock of ¾-inch maximum size. The vapor retarder sheeting should be protected from puncture damage.

It is recommended that the utility trenches within the building pads be compacted, as specified in our report, to minimize the transmission of moisture through the utility trench backfill. Special attention to the drainage and irrigation adjacent to the buildings is recommended. Grading should establish drainage away from the structures and this drainage pattern should be maintained. Water should not be allowed to collect adjacent to the structures. Excessive irrigation within landscaped areas adjacent to the structure should not be allowed to occur. In addition, ventilation of the structure may be prudent to reduce the accumulation of interior moisture.

### **Erosion and Sediment Control**

Erosion and sediment control (ESC) is used to minimize the transportation of sediment to wetlands, streams, lakes, drainage systems, and adjacent properties. Erosion and sediment control measures should be implemented and these measures should be in general accordance with local regulations. As a minimum, the following basic recommendations should be incorporated into the design of the erosion and sediment control features of the site:

- 1) Phase the soil, foundation, utility and other work, requiring excavation or the disturbance of the site soils, to take place during the dry season (generally May through September). However, provided precautions are taken using Best Management Practices (BMP's), grading activities can be undertaken during the wet season (generally October through April), but it should also be known that this may increase the overall cost of the project.
- 2) All site work should be completed and stabilized as quickly as possible.
- 3) Additional perimeter erosion and sediment control features may be required to reduce the possibility of sediment entering the surface water. This may include additional silt fences, silt fences with a higher Apparent Opening Size (AOS), construction of a berm, or other filtration systems.
- 4) Any runoff generated by dewatering discharge should be treated through construction of a sediment trap if there is sufficient space. If space is limited, other filtration methods will need to be incorporated.

#### **Groundwater Influence on Structures and Earthwork Construction**

The soil borings were checked for the presence of groundwater during exploratory operations. Groundwater was encountered in all of our borings at approximately 7 to 8 feet bgs. It should be recognized that groundwater elevations may fluctuate with time. The groundwater level will be dependent upon seasonal precipitation, irrigation, land use, and climatic conditions, as well as other factors. Therefore, groundwater levels at the time of the field investigation may be different from those encountered during the construction phase of the project. The evaluation of such factors is beyond the scope of this report.

If groundwater is encountered during construction, we should observe the conditions to determine if dewatering will be needed. Design of temporary dewatering systems to remove groundwater should be the responsibility of the contractor. If earthwork is performed during or soon after periods of precipitation, the subgrade soils may become saturated. These soils may "pump," and the materials may not respond to densification techniques. Typical remedial measures include: disk and aerating the soil during dry weather; mixing the soil with drier materials; removing and replacing the soil with an approved fill material. A qualified geotechnical engineering firm should be consulted prior to implementing remedial measures to observe the unstable subgrade conditions and provide appropriate recommendations.

#### **Drainage**

The ground surface should slope away from building pads and pavement areas, toward appropriate drop inlets or other surface drainage devices. It is recommended that adjacent exterior grades be sloped a

minimum of 2 percent for a minimum distance of 5 feet away from structures. Roof drains should be tightlined away from foundations. Roof drains should not be connected to the footing drains.

Pavement areas should be inclined at a minimum of 1 percent and drainage gradients should be maintained to carry all surface water to collection facilities and suitable outlets. These grades should be maintained for the life of the project.

Specific recommendations for and design of storm water disposal systems or septic disposal systems are beyond the scope of our services and should be prepared by other consultants that are familiar with design and discharge requirements.

### **Utility Trench Backfill**

Utility trenches should be excavated according to accepted engineering practices following OSHA (Occupational Safety and Health Administration) standards, by a contractor experienced in such work. The responsibility for the safety of open trenches should be borne by the contractor. Traffic and vibration adjacent to trench walls should be minimized; cyclic wetting and drying of excavation side slopes should be avoided.

All utility trench backfill should consist of suitable on-site material or imported granular material. Utility trench backfill placed in or adjacent to buildings and exterior slabs should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. The upper 5 feet of utility trench backfill placed in pavement areas should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Below 5 feet, utility trench backfill in pavement areas should be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. Pipe bedding should be in accordance with the pipe manufacturer's recommendations.

The contractor is responsible for removing all water-sensitive soils from the trenches regardless of the backfill location and compaction requirements. The contractor should use appropriate equipment and methods to avoid damage to the utilities and/or structures during fill placement and compaction.

### **Pavement Design**

Based on our explorations, the near surface soils at the site are interpreted as loose to medium dense silty sand and sand soils to depths of approximately 4.5 to 7.0 feet bgs. Due to the loose nature of the anticipated pavement subgrade soils, we recommend that subgrade modification techniques be considered. Subgrade modification typically includes the over-excavation of unsuitable materials, the placement of a geotextile fabric at the bottom of the over-excavated area, and then the placement of structural fill, with the structural fill consisting of clean crushed rock, rock spalls, or Controlled Density Fill (CDF). We recommend the use of a high-strength geotextile separation fabric, such as Mirafi 600X

or equivalent, for the geotextile. Subgrade modification such as this is intended to disperse surcharge loads and therefore aid in pavement performance.

Where loose soils are encountered in the pavement subgrade, we recommend over-excavation of the loose soil to at least 12 inches below the planned pavement subgrade elevation. The exposed grade after the over-excavation should be compacted to at least 95 percent of the maximum dry density as determined by ASTM Test Method D1557. We recommend that a high-strength geotextile separation fabric, such as Mirafi 600X or equivalent, then be placed over the compacted soil. After the fabric is placed, the area should be filled to the planned slab subgrade elevation with structural fill. The structural fill should be compacted to at least 95 percent of the maximum dry density as determined by ASTM Test Method D1557. In-place density tests should be performed to verify proper moisture content and adequate compaction.

In areas where the pavement subgrade soil consists of firm and unyielding native soils, a proof roll of the pavement subgrade soil may be performed in lieu of the compaction and in-place density tests. It should be noted that subgrade soils that have relatively high silt contents may be highly sensitive to moisture conditions. The subgrade strength and performance characteristics of a silty subgrade material may be dramatically reduced if this material becomes wet.

Traffic loads were not provided, however, based on our knowledge of the proposed project, we expect the traffic to range from light duty (passenger automobiles) to heavy duty (delivery and fire trucks). Pavement design life of 20 years was assumed for our analysis. Recommendations for an asphaltic concrete flexible pavement section and Portland Cement Concrete (PCC) rigid pavement section are provided in Tables 1 and 2 below.

**Table 1: ASPHALTIC CONCRETE (FLEXIBLE) PAVEMENT**

<b>Asphaltic Concrete</b>	<b>Aggregate Base</b>	<b>Compacted Subgrade**</b>
3.0 in.	6.0 in.	12.0 in.

**Table 2: PORTLAND CEMENT CONCRETE (RIGID) PAVEMENT  
4000 psi with FIBER MESH**

<b>Min. PCC Depth</b>	<b>Aggregate Base</b>	<b>Compacted Subgrade**</b>
6.0 in.	4.0 in.	12.0 in.

*\*\* A proof roll may be performed in lieu of in-place density tests*

The asphaltic concrete depth listed in Table 1 for the flexible pavement section should be a surface course type asphalt, such as Washington Department of Transportation (WSDOT) ½-inch Hot Mix Asphalt (HMA). The pavement specification in Appendix C provides additional recommendations, including aggregate base material.



### **Testing and Inspection**

A representative of Krazan & Associates, Inc. should be present at the site during the earthwork activities to confirm that actual subsurface conditions are consistent with the exploratory fieldwork. This activity is an integral part of our services as acceptance of earthwork construction is dependent upon compaction testing and stability of the material. This representative can also verify that the intent of these recommendations is incorporated into the project design and construction. We should also be present during the construction of stormwater management system to evaluate the soils. Krazan & Associates, Inc. will not be responsible for grades or staking, since this is the responsibility of the Prime Contractor. Furthermore, Krazan & Associates is not responsible for the contractor's procedures, methods, scheduling or management of the work site.

### **LIMITATIONS**

Geotechnical engineering is one of the newest divisions of Civil Engineering. This branch of Civil Engineering is constantly improving as new technologies and understanding of earth sciences improves. Although your site was analyzed using the most appropriate current techniques and methods, undoubtedly there will be substantial future improvements in this branch of engineering. In addition to improvements in the field of geotechnical engineering, physical changes in the site either due to excavation or fill placement, new agency regulations or possible changes in the proposed structure after the time of completion of the soils report may require the soils report to be professionally reviewed. In light of this, the owner should be aware that there is a practical limit to the usefulness of this report without critical review. Although the time limit for this review is strictly arbitrary, it is suggested that two years be considered a reasonable time for the usefulness of this report.

Foundation and earthwork construction is characterized by the presence of a calculated risk that soil and groundwater conditions have been fully revealed by the original foundation investigation. This risk is derived from the practical necessity of basing interpretations and design conclusions on limited sampling of the earth. Our report, design conclusions and interpretations should not be construed as a warranty of the subsurface conditions. Actual subsurface conditions may differ, sometimes significantly, from those indicated in this report. The recommendations made in this report are based on the assumption that soil conditions do not vary significantly from those disclosed during our field investigation. The findings and conclusions of this report can be affected by the passage of time, such as seasonal weather conditions, manmade influences, such as construction on or adjacent to the site, natural events such as earthquakes, slope instability, flooding, or groundwater fluctuations. If any variations or undesirable conditions are encountered during construction, the geotechnical engineer should be notified so that supplemental recommendations can be made.

The conclusions of this report are based on the information provided regarding the proposed construction. If the proposed construction is relocated or redesigned, the conclusions in this report may not be valid. The geotechnical engineer should be notified of any changes so that the recommendations can be reviewed and reevaluated.

Misinterpretations of this report by other design team members can result in project delays and cost overruns. These risks can be reduced by having Krazan & Associates, Inc. involved with the design teams' meetings and discussions after submitting the report. Krazan & Associates, Inc. should also be retained for reviewing pertinent elements of the design team's plans and specifications. Contractors can also misinterpret this report. To reduce this, risk Krazan & Associates, Inc. should participate in pre-bid and preconstruction meetings, and provide construction observations during the site work.

This report is a geotechnical engineering investigation with the purpose of evaluating the soil conditions in terms of foundation design. The scope of our services did not include any environmental site assessment for the presence or absence of hazardous and/or toxic materials in the soil, groundwater or atmosphere, or the presence of wetlands. Any statements or absence of statements, in this report or on any soils log regarding odors, unusual or suspicious items, or conditions observed are strictly for descriptive purposes and are not intended to convey engineering judgment regarding potential hazardous and/or toxic assessments.

The geotechnical information presented herein is based upon professional interpretation utilizing standard engineering practices and a degree of conservatism deemed proper for this project. It is not warranted that such information and interpretation cannot be superseded by future geotechnical developments. We emphasize that this report is valid for this project as outlined above, and should not be used for any other site. Our report is prepared for the exclusive use of our client. No other party may rely on the product of our services unless we agree in advance to such reliance in writing.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,  
**KRAZAN & ASSOCIATES, INC.**

04/11/19




**Michael D. Rundquist, P.E.**  
Senior Project Manager

*Theresa R. Nunan*

**Theresa R. Nunan**  
Project Engineer

TRN:MDR

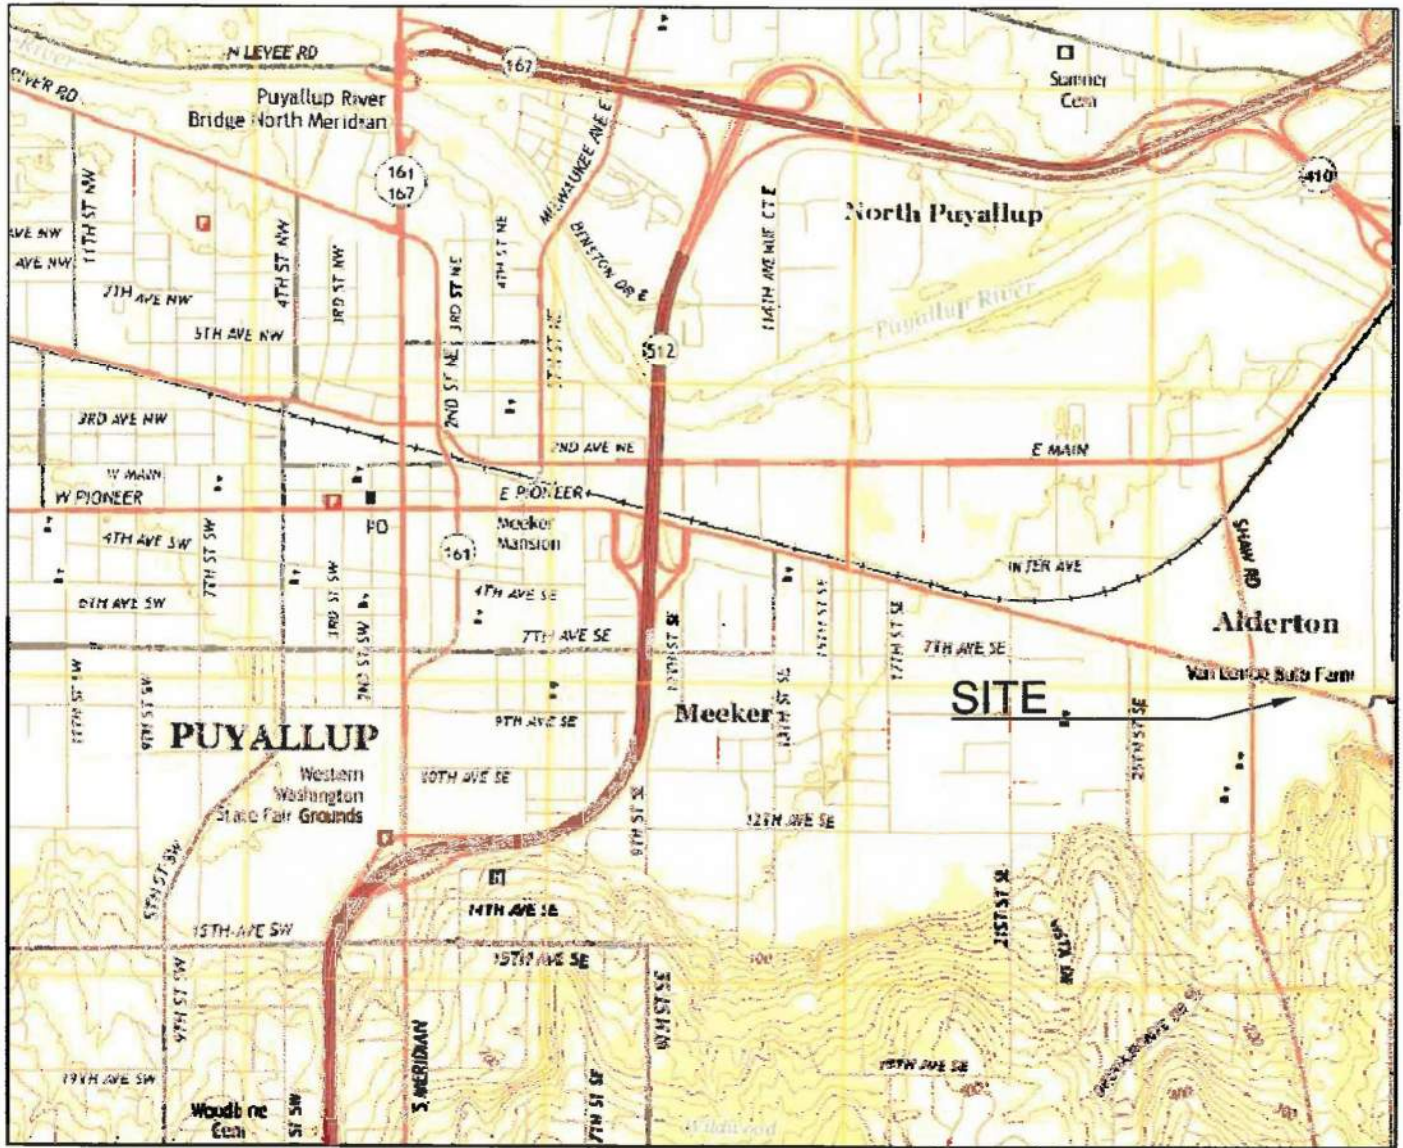

Reference: USGS topographic map website, Puyallup, WA, dated 2017.



### Vicinity Map

East Town Crossing

Shaw Rd & E Pioneer Way, Puyallup, WA

Project Number: 062-19007

 **Krazan** & ASSOCIATES, INC.

Figure 1

Drawn By: T. Nunan

Date: April 2019

Not to Scale



## **APPENDIX A**

### **FIELD INVESTIGATION AND LABORATORY TESTING**

#### **Field Investigation**

The field investigation consisted of a surface reconnaissance and a subsurface exploration program. Exploratory borings and monitoring wells were drilled and sampled for subsurface exploration at this site. The soil explorations reached depths of approximately 38.5 feet below the existing ground surface. The approximate exploratory boring locations are shown on the Site Plan (Figure 2). The logs of the soil explorations and monitoring wells are presented in this appendix. The depths shown on the attached logs are from the existing ground surface at the time of our exploration.

The drilled borings were advanced using a subcontracted drilling rig. Soil samples were obtained by using the Standard Penetration Test (SPT) as described in ASTM Test Method D1586. The Standard Penetration Test and sampling method consists of driving a standard 2-inch outside-diameter, split barrel sampler into the subsoil with a 140-pound hammer free falling a vertical distance of 30 inches. The summation of hammer-blows required to drive the sampler the final 12-inches of an 18-inch sample interval is defined as the Standard Penetration Resistance, or N-value. The blow count is presented graphically on the boring logs in this appendix. The resistance, or "N" value, provides a measure of the relative density of granular soils or of the relative consistency of cohesive soils.

The soils encountered were logged in the field during the exploration and are described in general accordance with the Unified Soil Classification System (USCS). All samples were returned to our laboratory for evaluation.

#### **Laboratory Testing**

The laboratory testing program was developed primarily to determine the index properties of the soils. Test results were used for soil classification and as criteria for determining the engineering suitability of the surface and subsurface materials encountered.

<b>Project:</b> East Town Crossing		<b>Project Number:</b> 062-19007		<b>Client:</b> Abbey Road Group		<b>Boring No.</b> <b>B-1</b>		
<b>Address, City, State:</b> SE Corner Shaw Road & E. Pioneer Way, Puyallup, WA				<b>Drilling Company:</b> Geologic Drill Partners				
<b>Project Manager:</b> Theresa Nunan		<b>Date</b>	<b>Started:</b> 3.11.2019		<b>Equipment:</b> Track Bobcat			
<b>Field Engineer:</b> Theresa Nunan			<b>Completed:</b> 3.11.2019		<b>Drilling Method:</b> Hollow Stem Augers			
<b>Notes:</b> Monitoring Well W-1 installed in borehole.			<b>Backfilled:</b> 3.11.2019		<b>Hammer Type:</b> 140-lb. Manual			
<b>Ground Surface Elevation:</b> 72 +/- feet MSL			<b>Groundwater Depth:</b> 8 feet		<b>Groundwater Elev.:</b>		<b>Total Depth of Boring:</b> 21.5 ft.	
Elev. (feet)	Depth (feet)	Sample Type	Sample ID	Blow Counts	N-Value (blows/ft)	Graphic Log	Classification	Lab Results
	5	SPT	1-1	6	15		Brown Silty SAND (SM), trace gravel and very thin roots, with occasional 6 to 8-inch thick stiff sandy clay layers, medium dense, moist	
		SPT	1-2A 1-2B	4 5	10		Brownish Grey Poorly Graded SAND (SP), fine grained, medium dense, moist	
	10	SPT	1-3A 1-3B	1 1/12"	1/12"		Alternating 4 to 12-inch thick layers of brown Sandy SILT (ML) and Silty SAND (SM), medium stiff/loose, moist to wet	% Si/Cl = 78.5 % MC = 35.4  LL = 35 PI = 1 % F. Sa = 19.8 % Si/Cl = 79.1 % MC = 51.2
		SPT	1-4	2	8		Dark Brownish Grey Silty CLAY (CL) with marsh grass, seams of peat and thin roots, very soft, wet	
		SPT	1-5	4	8		--- Becomes Clayey SILT (ML), with fine sand and thin roots, very soft	
	15	SPT	1-6	4	8		Dark Grey/Black Silty SAND (SM), fine to medium grained, loose, wet	
		SPT	1-6	12	24		--- Same	
	20	SPT	1-6	12	24		--- Becomes Poorly Graded SAND (SP-SM) with Silt, fine to medium grained, medium dense, wet	
25							<b>End of Boring at 21.5 Feet</b>	

<b>Project:</b> East Town Crossing		<b>Project Number:</b> 062-19007		<b>Client:</b> Abbey Roac Group		<b>Boring No.</b> <b>B-2</b>	
<b>Address, City, State:</b> SE Corner Shaw Road & E. Pioneer Way, Puyallup, WA				<b>Drilling Company:</b> Geologic Drill Partners			
<b>Project Manager:</b> Theresa Nunan		<b>Date</b>	<b>Started:</b> 3.11.2019		<b>Equipment:</b> Track Bobcat		
<b>Field Engineer:</b> Theresa Nunan			<b>Completed:</b> 3.11.2019		<b>Drilling Method:</b> Hollow Stem Augers		
<b>Notes:</b>			<b>Backfilled:</b> 3.11.2019		<b>Hammer Type:</b> 140-lb Manual		
<b>Ground Surface Elevation:</b> 73 +/- feet MSL			<b>Groundwater Depth:</b> 8 feet		<b>Groundwater Elev.:</b>		<b>Total Depth of Boring:</b> 38.5 ft.

Elev. (feet)	Depth (feet)	Sample Type	Sample ID	Blow Counts	N-Value (blows/ft)	Graphic Log	Classification	Lab Results
							5 inches Grass and Topsoil	
		SPT	2-1	2 2 5	7		Brown Silty SAND (SM), fine grained, with occasional sandy clay seams, loose, moist	
	5	SPT	2-2	3 4 2	6		--- Same	% Si/Cl = 42.9 % MC = 29.3
		SPT	2-3	4 8 11	19		Brownish Grey Sandy SILT (ML), fine grained, with occasional 1 to 2-inch thick seams dark grey fine sand, moist to wet, stiff	% Si/Cl = 88.2 % MC = 37.0
	10	SPT	2-4	5 8 8	16		Dark Grey/Black Silty SAND (SM), fine to medium grained, medium dense, wet	% Si/Cl = 14.5 % MC = 25.0
	15	SPT	2-5	28 12 12	24		--- Becomes Sand (SP-SM) with Silt, fine to medium grained, medium dense	% Grav = 0 % Sa = 90.8 % Si/Cl = 8.9 % MC = 22.6
							--- At 18 feet, drilling choppy due to lots of gravel	
	20	SPT	2-6	18 40 20/8"	60/8"		Dark Grey/Black Poorly Graded GRAVEL (GP-GM) with sand and silt, very dense, wet	
	25							


<b>Project:</b> East Town Crossing		<b>Project Number:</b> 062-19007		<b>Client:</b> Abbey Road Group		<b>Boring No.:</b> <b>B-2</b>		
<b>Address, City, State:</b> SE Corner Shaw Road & E. Pioneer Way, Puyallup, WA				<b>Drilling Company:</b> Geologic Drill Partners				
<b>Project Manager:</b> Theresa Nunan		<b>Date</b>	<b>Started:</b> 3.11.2019		<b>Equipment:</b> Track Bobcat			
<b>Field Engineer:</b> Theresa Nunan			<b>Completed:</b> 3.11.2019		<b>Drilling Method:</b> Hollow Stem Augers			
<b>Notes:</b>			<b>Backfilled:</b> 3.11.2019		<b>Hammer Type:</b> 140-lb. Manual			
<b>Ground Surface Elevation:</b> 73 +/- feet MSL			<b>Groundwater Depth:</b> 8 feet		<b>Groundwater Elev.:</b>		<b>Total Depth of Boring:</b> 38.5 ft	
Elev. (feet)	Depth (feet)	Sample Type	Sample ID	Blow Counts	N-Value (blows/ft)	Graphic Log	Classification	Lab Results
	25	SPT	2-7	10 9 14	23		Dark Grey SAND (SP-SM) with silt, trace gravel, fine to coarse grained, with occasional 3 to 4-inch thick seams gravel (GP-GM) with silt, medium dense, wet	
	30	SPT	2-8	4 4 15	19		--- Same	% Grav = 9.0 % Sa = 82.5 % Si/Cl = 8.5 % MC = 18.8
	35	SPT	2-9	6 5 10	15		At 33 feet, alternating 4 to 12-inch thick layers of Dark Grey/Black SAND (SP-SM) with gravel and silt AND Dark Grey/Black GRAVEL (GP-GM) with sand and silt, medium dense, wet	% Si/Cl = 5.6 % MC = 18.9
		SPT	2-10	37 20 17	37		--- Becomes dense	% Grav = 44.8 % Sa = 47.4 % Si/Cl = 7.8 % MC = 9.4
	40						<b>End of Boring at 38.5 Feet</b>	
	45							
	50							




<b>Project:</b> East Town Crossing	<b>Project Number:</b> 062-19007	<b>Client:</b> Abbey Road Group	<b>Boring No.</b> <b>B-3</b>
<b>Address, City, State:</b> SE Corner Shaw Road & E. Pioneer Way, Puyallup, WA		<b>Drilling Company:</b> Geologic Drill Partners	
<b>Project Manager:</b> Theresa Nunan	<b>Date</b>	<b>Started:</b> 3.11.2019	<b>Equipment:</b> Track Bobcat
<b>Field Engineer:</b> Theresa Nunan		<b>Completed:</b> 3.11.2019	<b>Drilling Method:</b> Hollow Stem Augers
<b>Notes:</b>		<b>Backfilled:</b> 3.11.2019	<b>Hammer Type:</b> 140-lb. Manual
<b>Ground Surface Elevation:</b> 74 +/- feet MSL	<b>Groundwater Depth:</b> 7 feet	<b>Total Depth of Boring:</b> 21.5 ft.	

Elev. (feet)	Depth (feet)	Sample Type	Sample ID	Blow Counts	N-Value (blows/ft)	Graphic Log	Classification	Lab Results
		SPT	3-1	2 4 5	9		Brown Silty SAND (SM), trace gravel and very thin roots, with occasional 2 to 3-inch thick stiff sandy clay layers, loose, moist	
	5	SPT	3-2	4 6 6	12		Brownish Grey Sandy SILT (ML), fine grained, with occasional 0.5 to 2-inch thick seams dark grey fine sand, stiff, moist to wet, stiff	
		SPT	3-3	5 5 5	10		Dark Grey/Black Silty SAND (SM), fine to medium grained, medium dense, wet  --- Becomes Sand (SP-SM) with Silt, fine to medium grained, medium dense, wet	
	10	SPT	3-4	3 5 7	12			
	15	SPT	3-5	6 10 7	17		Dark Grey/Black Silty SAND (SM), fine to medium grained, with a 4-inch thick seam of peat at 20 feet, medium dense, wet	
	20	SPT	3-6	4 6 8	14			
							<b>End of Boring at 21.5 Feet</b>	
25								


**Monitoring Well  
MW-1**

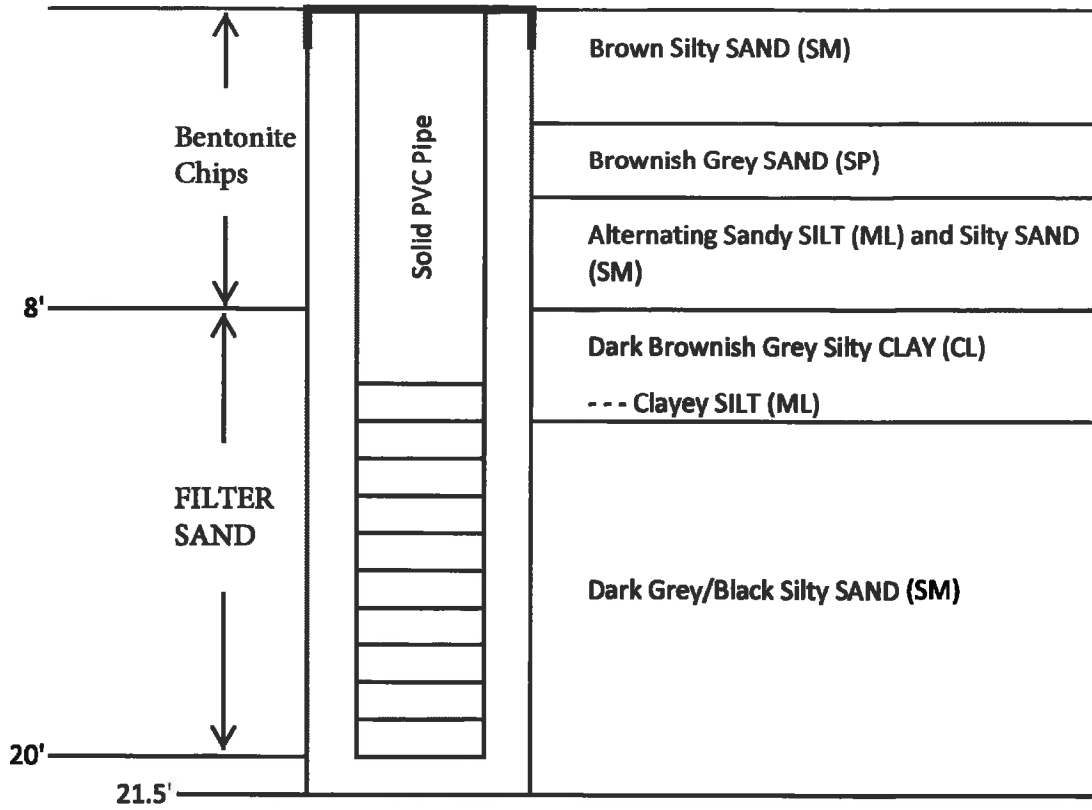

**Monitoring Well  
MW-2**

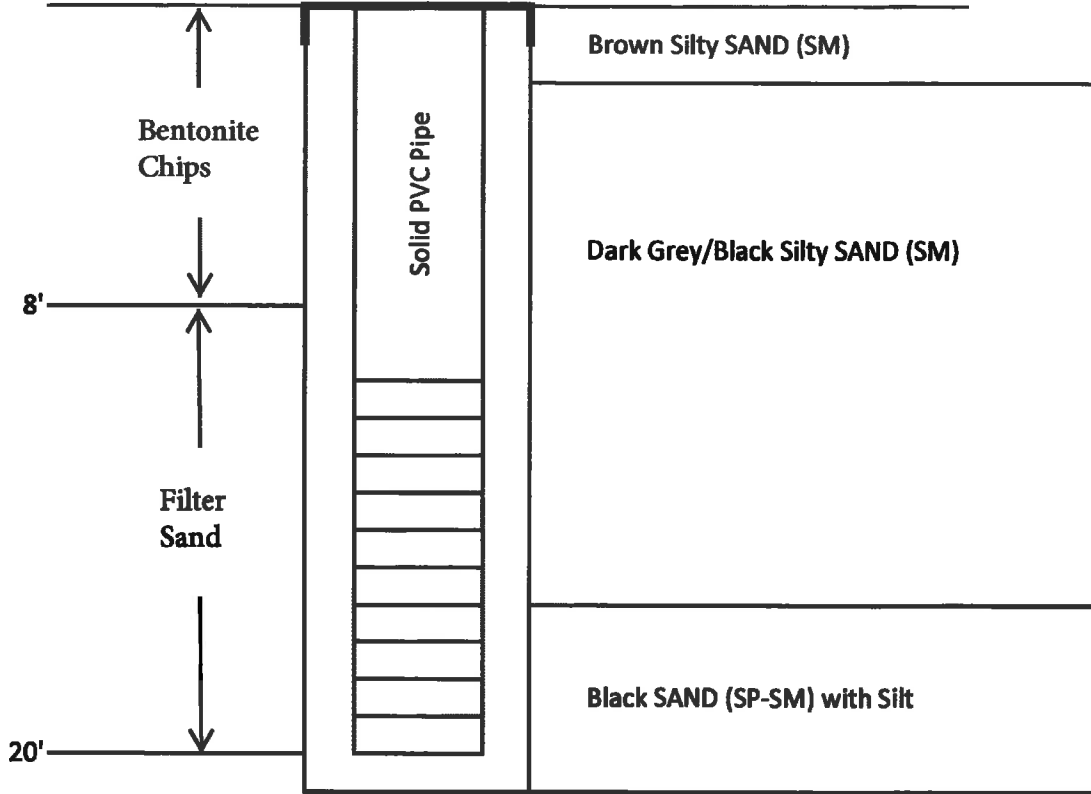

# Particle Size Distribution Report

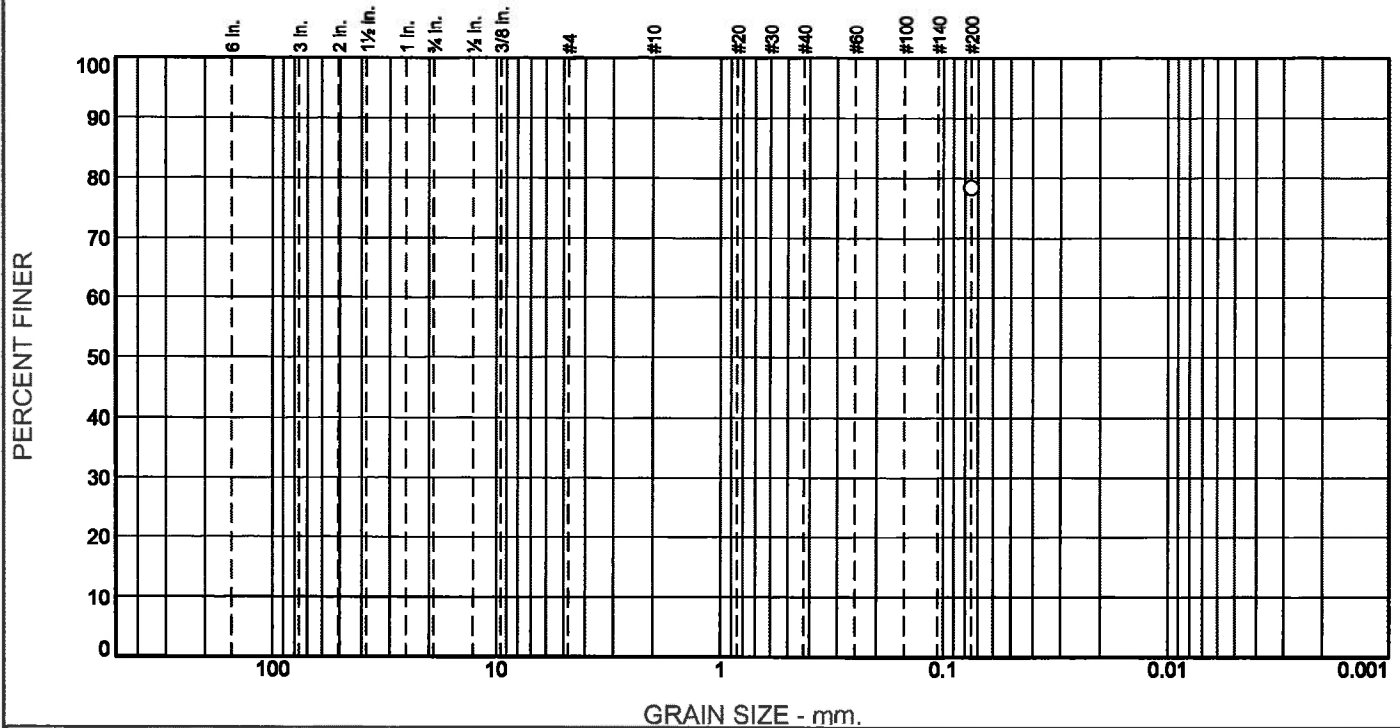

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						<b>78.5</b>

TEST RESULTS			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	78.5		

\* (no specification provided)

**Material Description**

Brown Sandy SILT

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= ML      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

**Remarks**

Sample ID: 19L131  
Sample Date: 3-11-19  
Moisture Content = 35.4 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-22-19

**Tested By:** M. Thomas

**Checked By:** M. Thomas

**Title:** Materials Laboratory Manager

**Location:** B-1 Sample 1-2B  
**Sample Number:** 19L131

**Depth:** 5'-6.5'

**Date Sampled:** 3-11-19




**Client:** Abbey Road Group Land Development Services Company.LLC.  
**Project:** East Town Crossing

**Project No:** 062-19007

**Figure**

# Particle Size Distribution Report

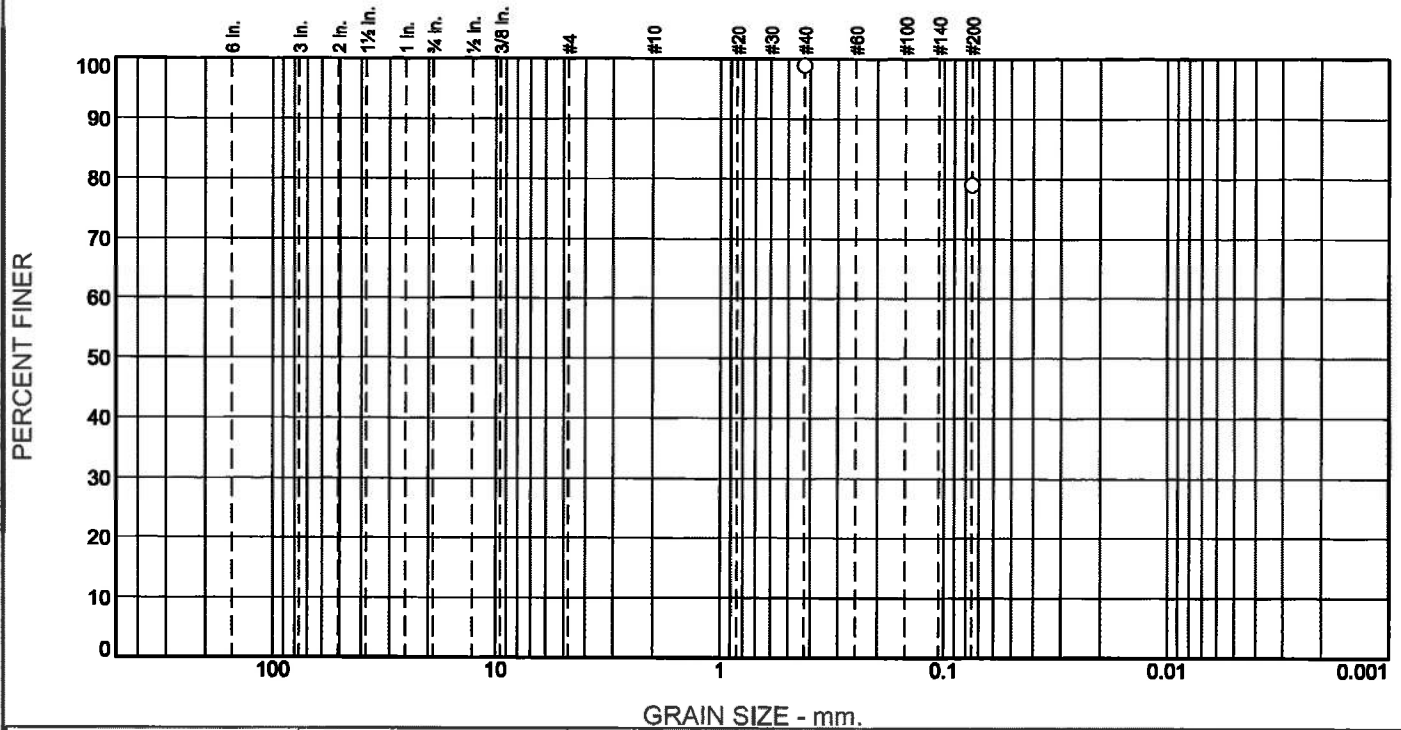

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
					19.8	79.1

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#40	98.9		
#200	79.1		

\* (no specification provided)

**Material Description**

**Grey Clayey SILT with fine sand**

**Atterberg Limits (ASTM D 4318)**

PL= 33.5      LL= 34.9      PI= 1.4

**Classification**

USCS (D 2487)= ML      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>= 0.1948      D<sub>85</sub>= 0.1258      D<sub>60</sub>=  
 D<sub>50</sub>=              D<sub>30</sub>=              D<sub>15</sub>=  
 D<sub>10</sub>=              C<sub>u</sub>=              C<sub>c</sub>=

**Remarks**

Sample ID: 19L120  
 Sample Date: 3-11-19  
 Moisture Content = 51.2 %

---

Date Received: 3-15-19      Date Tested: 3-15-19

Tested By: M.Thomas

Checked By: M.Thomas

Title: Materials Laboratory Manager

Location: B-1 Sample 1-3B  
 Sample Number: 19L120

Depth: 7.5'-9'

Date Sampled: 3-11-19




Client: Abbey Road Group Land Development Services Company.LLC.  
 Project: East Town Crossing

Project No: 062-19007

Figure

# Particle Size Distribution Report

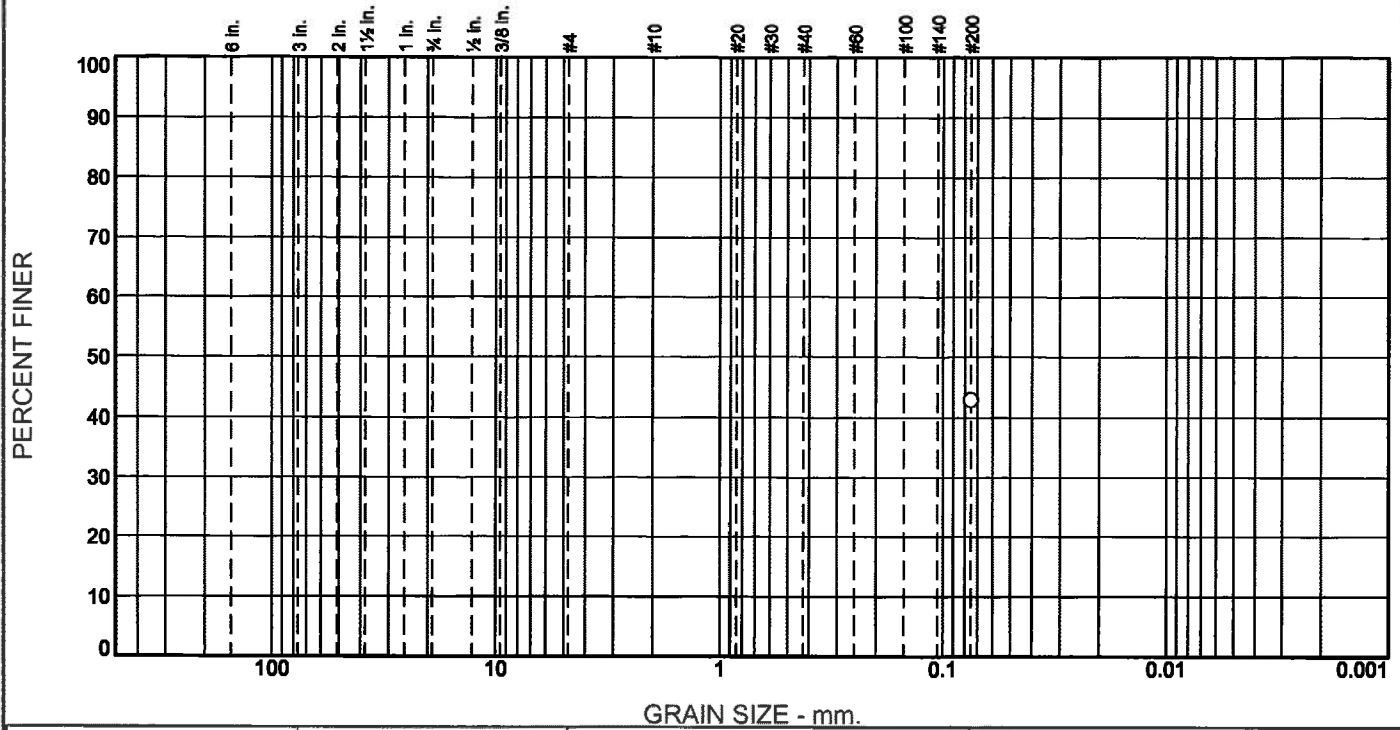

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						42.9

TEST RESULTS			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	42.9		

\* (no specification provided)

**Material Description**

Brown silty sand.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= SM                      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=                      D<sub>85</sub>=                      D<sub>60</sub>=  
D<sub>50</sub>=                      D<sub>30</sub>=                      D<sub>15</sub>=  
D<sub>10</sub>=                      C<sub>u</sub>=                      C<sub>c</sub>=

Remarks

Sample ID: 19L132  
Sample Date: 3-11-19  
Moisture Content = 29.3 %

---

Date Received: 3-15-19                      Date Tested: 3-22-19

Tested By: M.Thomas

Checked By: M.Thomas

Title: Materials Laboratory Manager

Location: B-2 Sample 2-2  
Sample Number: 19L132

Depth: 5'-6.5'

Date Sampled: 3-11-19




Client: Abbey Road Group Land Development Services Company, LLC.  
Project: East Town Crossing

Project No: 062-19007

Figure

# Particle Size Distribution Report

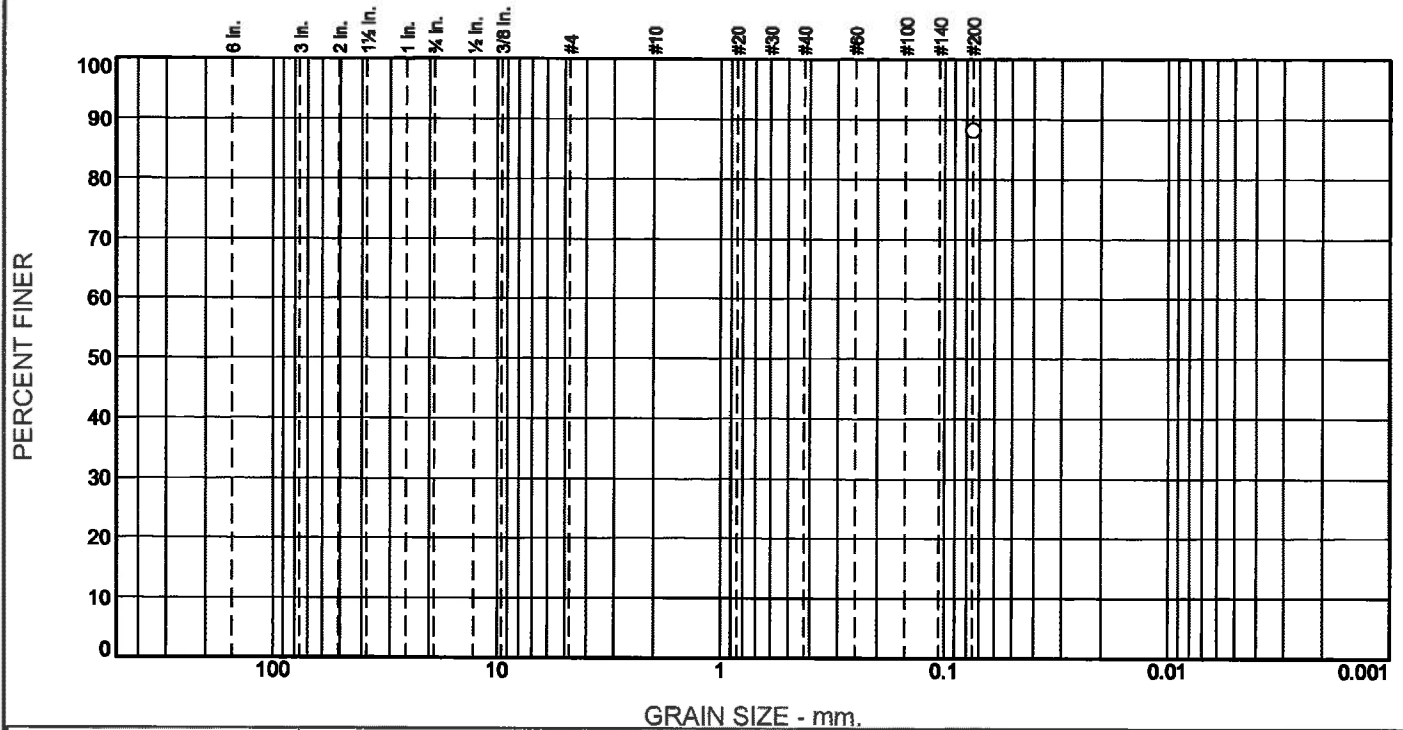

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						88.2

TEST RESULTS			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	88.2		

\* (no specification provided)

**Material Description**

**Brown sandy silt.**

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= ML      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
 D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
 D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

Remarks

Sample ID: 19L133  
 Sample Date: 3-11-19  
 Moisture Content = 37.0%

---

Date Received: 3-15-19      Date Tested: 3-22-19

Tested By: M. Thomas

Checked By: M. Thomas

Title: Materials Laboratory Manager

Location: B-2 Sample 2-3  
 Sample Number: 19L133

Depth: 7.5'-9'

Date Sampled: 3-11-19




Client: Abbey Road Group Land Development Services Company.LLC.  
 Project: East Town Crossing

Project No: 062-19007

Figure

# Particle Size Distribution Report

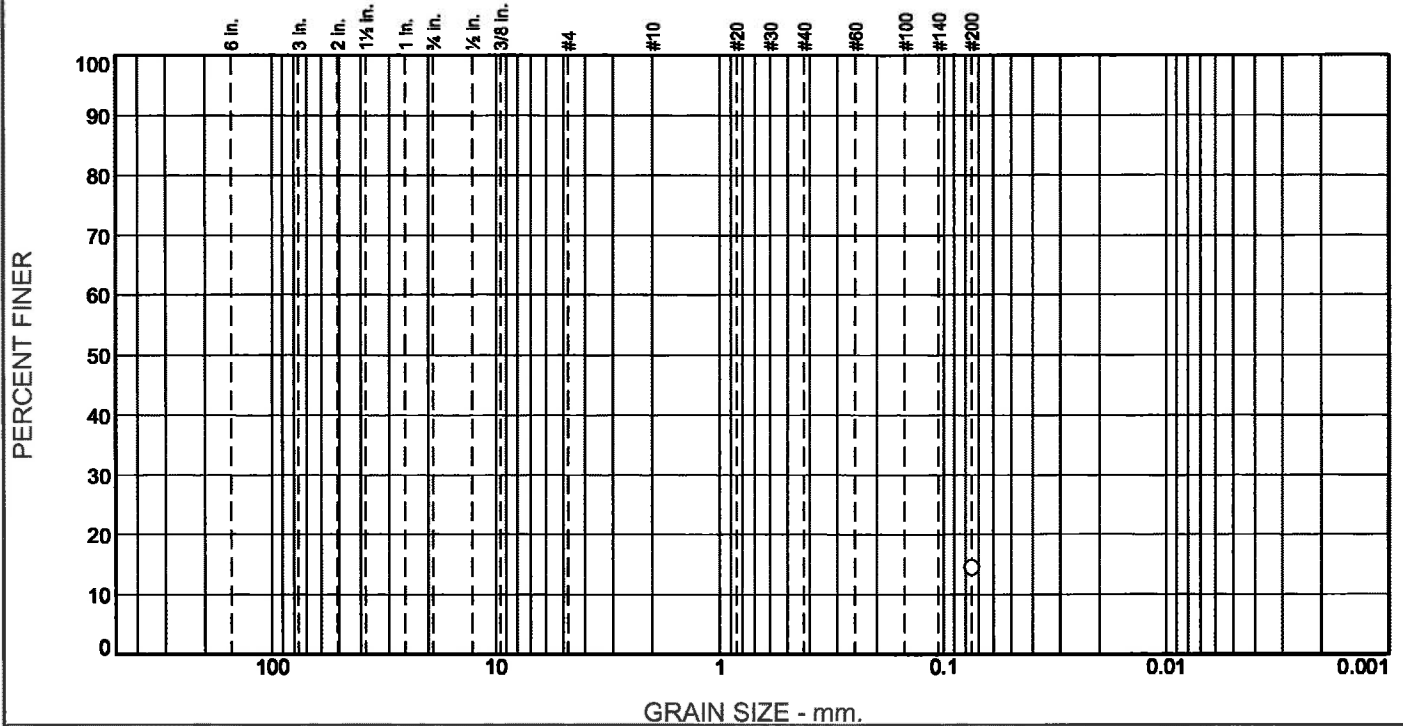

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						14.5

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	14.5		

\* (no specification provided)

**Material Description**

Dark Grey/Black silty sand.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SM      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

**Remarks**

Sample ID: 19L134  
sample Date: 3-11-19  
Moisture Content = 25.0 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-22-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas

**Title:** Materials Laboratory Manager

**Location:** B-2 Sample 2-4  
**Sample Number:** 19L134

**Depth:** 10'-11.5'

**Date Sampled:** 3-11-19




**Client:** Abbey Road Group Land Development Services Company, LLC.  
**Project:** East Town Crossing

**Project No:** 062-19007

**Figure**



# Particle Size Distribution Report

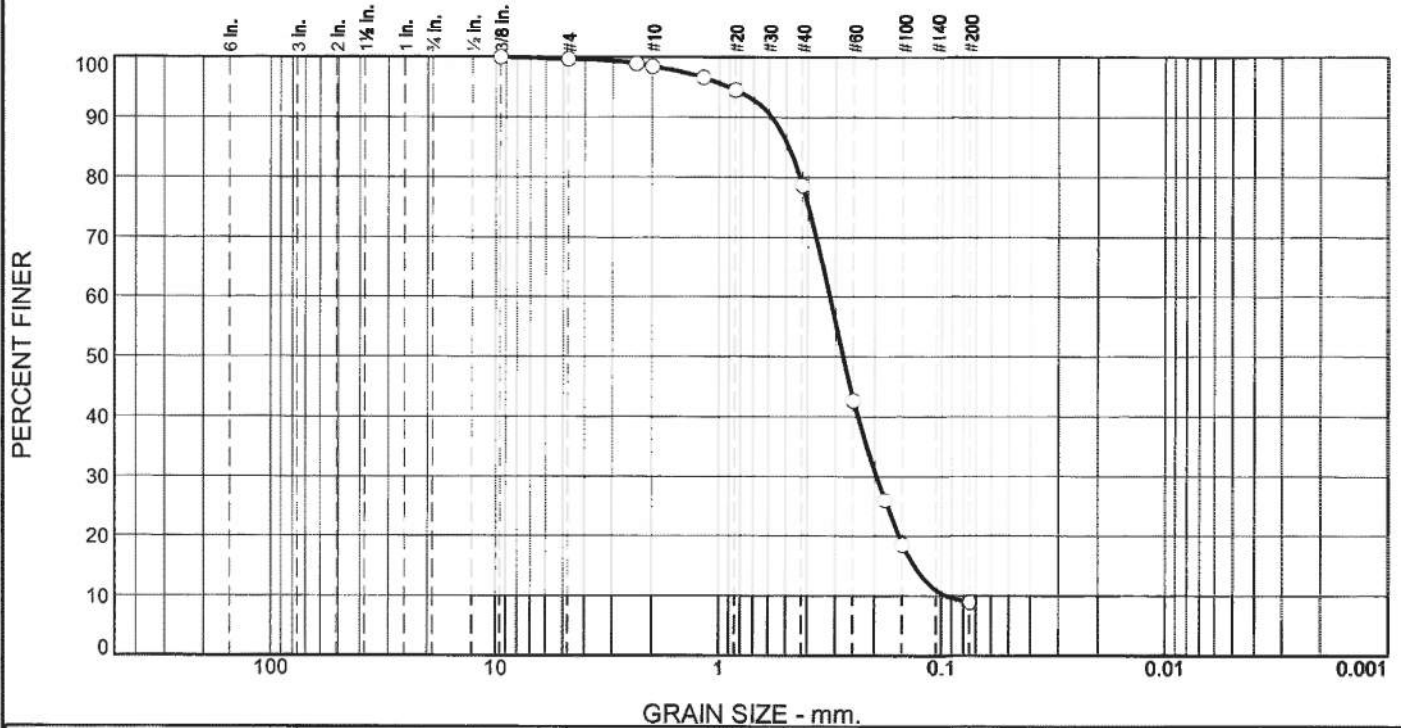

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
0.0	0.0	0.3	1.2	19.8	69.8	8.9

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
.375	100.0		
#4	99.7		
#8	98.9		
#10	98.5		
#16	96.6		
#20	94.5		
#40	78.7		
#60	42.7		
#80	26.0		
#100	18.5		
#200	8.9		

\* (no specification provided)

**Material Description**

Dark Grey/Black sand with silt

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SP-SM      AASHTO (M 145)= A-3

**Coefficients**

D <sub>90</sub> = 0.5827	D <sub>85</sub> = 0.4892	D <sub>60</sub> = 0.3205
D <sub>50</sub> = 0.2792	D <sub>30</sub> = 0.1966	D <sub>15</sub> = 0.1334
D <sub>10</sub> = 0.0956	C <sub>u</sub> = 3.35	C <sub>c</sub> = 1.26

**Remarks**

Sample ID: 19L121  
 Sample Date: 3-11-19  
 Moisture Content = 22.6 %

---

Date Received: 3-15-19      Date Tested: 3-22-19

Tested By: M. Thomas

Checked By: M. Thomas


Title: Materials laboratory Manager

Location: B-2 Sample 2-5      Sample Number: 19L121      Depth: 15'-16.5'      Date Sampled: 3-11-19



Client: Abbey Road Group Land Development Services Company.LLC.  
 Project: East Town Crossing  
 Project No: 062-19007      Figure

# Particle Size Distribution Report

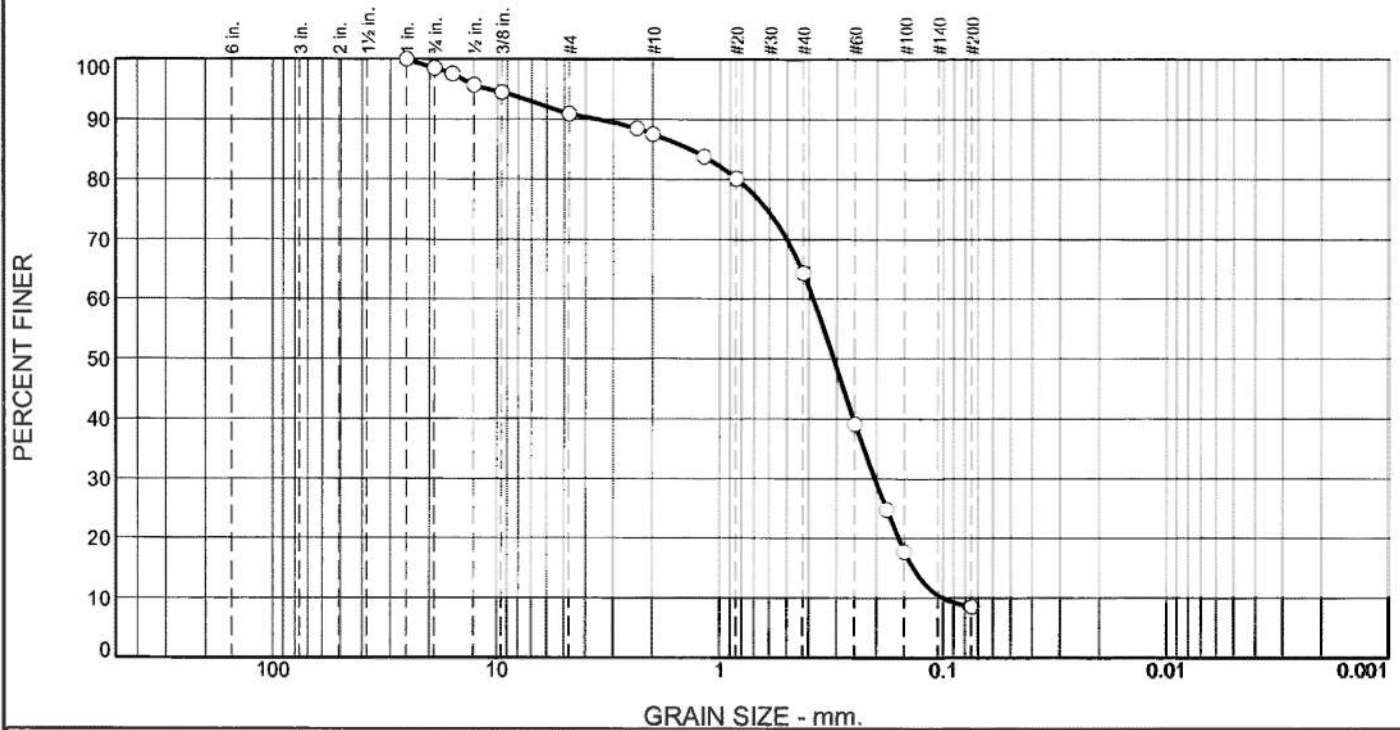

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
0.0	1.4	7.6	3.5	23.3	55.7	8.5

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1	100.0		
.75	98.6		
.625	97.6		
.5	95.7		
.375	94.5		
#4	91.0		
#8	88.5		
#10	87.5		
#16	83.8		
#20	80.2		
#40	64.2		
#60	39.1		
#80	24.7		
#100	17.7		
#200	8.5		

\* (no specification provided)

**Material Description**

Dark Grey/Black sand with silt.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SP-SM      AASHTO (M 145)= A-3

**Coefficients**

D<sub>90</sub>= 3.5671      D<sub>85</sub>= 1.3567      D<sub>60</sub>= 0.3839  
D<sub>50</sub>= 0.3115      D<sub>30</sub>= 0.2039      D<sub>15</sub>= 0.1371  
D<sub>10</sub>= 0.1011      C<sub>u</sub>= 3.80      C<sub>c</sub>= 1.07

**Remarks**

Sample ID: 19L122  
Sample Date: 3-11-19  
Moisture Content = 18.8 %

**Date Received:** 3-15-19      **Date Tested:** 3-22-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas

**Title:** Materials Laboratory Manager

**Location:** B-2 Sample 2-8      **Depth:** 30'-31.5'      **Date Sampled:** 3-11-19  
**Sample Number:** 19L122




**Client:** Abbey Road Group Land Development Services Company.LLC.  
**Project:** East Town Crossing

**Project No:** 062-19007

**Figure**

# Particle Size Distribution Report

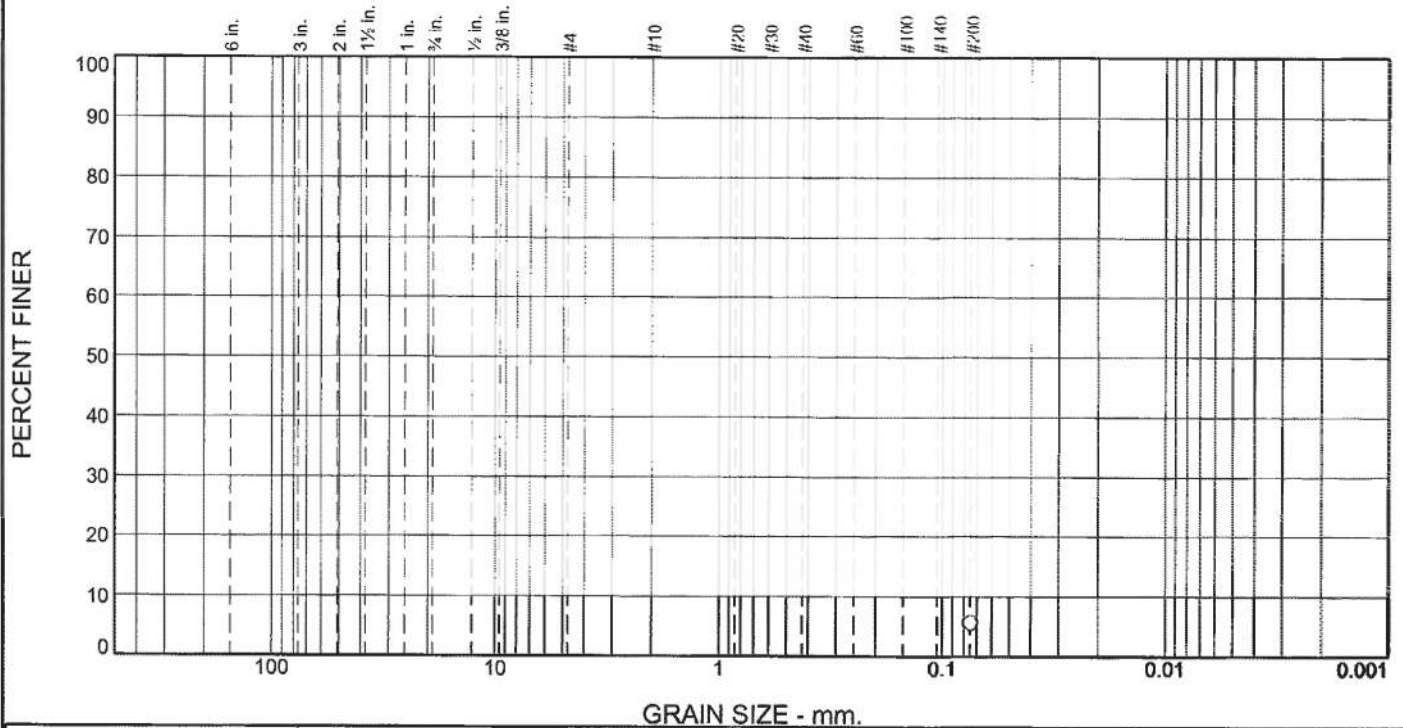

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						5.6

TEST RESULTS			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	5.6		

\* (no specification provided)

**Material Description**

Dark Grey/Black sand with silt.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SP-SM      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
 D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
 D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

**Remarks**

Sample ID: 19L135  
 Sample Date: 3-11-19  
 Moisture Content = 18.9 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-11-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas


**Title:** Materials Laboratory Manager

**Location:** B-2 Sample 2-9      **Depth:** 35'-36.5'      **Date Sampled:** 3-11-19  
**Sample Number:** 19L135



**Client:** Abbey Road Group Land Development Services Company.LLC.  
**Project:** East Town Crossing  
**Project No:** 062-19007      **Figure**

# Particle Size Distribution Report

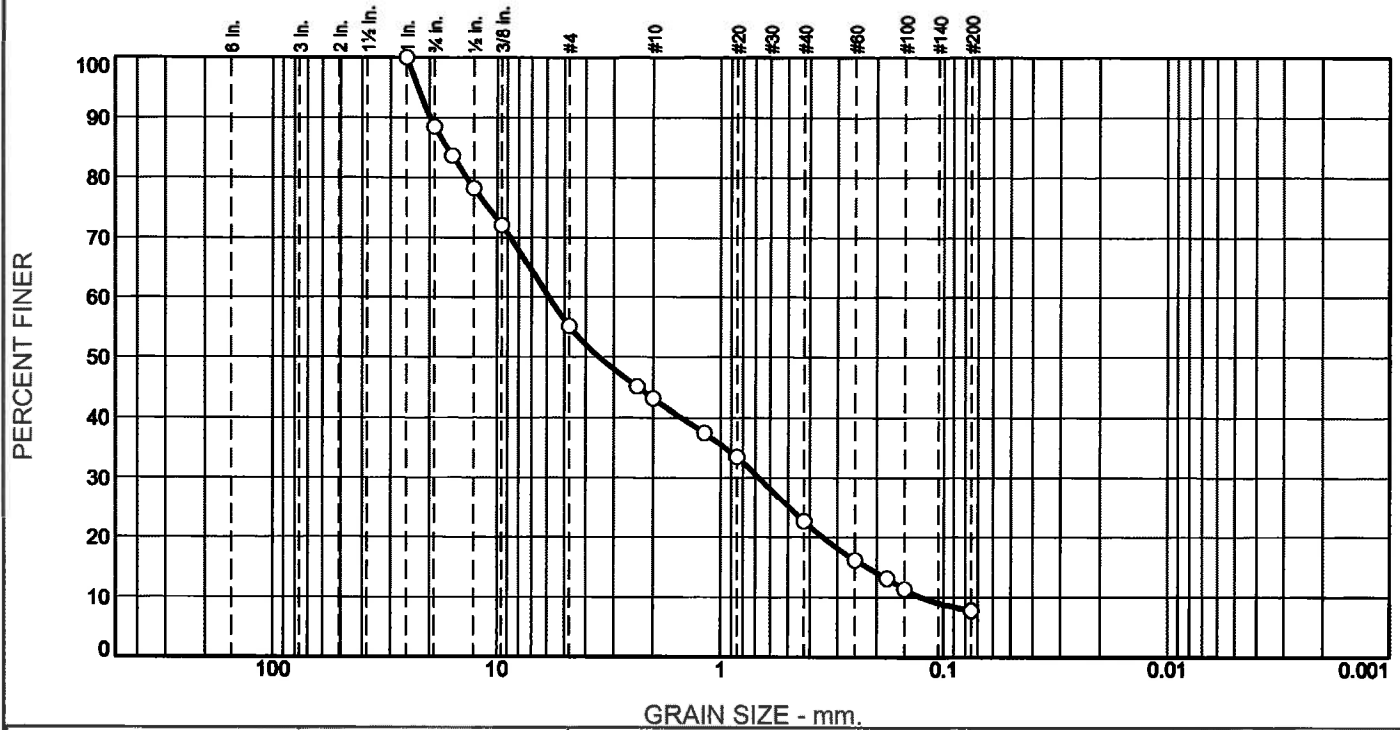

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
0.0	11.5	33.3	12.0	20.5	14.9	7.8

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1	100.0		
.75	88.5		
.625	83.7		
.5	78.3		
.375	72.1		
#4	55.2		
#8	45.1		
#10	43.2		
#16	37.5		
#20	33.5		
#40	22.7		
#60	16.2		
#80	13.2		
#100	11.4		
#200	7.8		

\* (no specification provided)

**Material Description**

Dark Grey/Black sand with silt and gravel.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SP-SM      AASHTO (M 145)= A-1-a

**Coefficients**

D<sub>90</sub>= 19.9452      D<sub>85</sub>= 16.7747      D<sub>60</sub>= 5.8717  
D<sub>50</sub>= 3.4968      D<sub>30</sub>= 0.6741      D<sub>15</sub>= 0.2194  
D<sub>10</sub>= 0.1253      C<sub>u</sub>= 46.85      C<sub>c</sub>= 0.62

**Remarks**

Sample ID: 19L123  
Sample Date: 3-11-19  
Moisture Content = 9.4 %

---

Date Received: 3-11-19      Date Tested: 3-11-19

Tested By: M.Thomas

Checked By: M.Thomas

Title: Materials Laboratory Manager

Location: B-2 Sample 2-10      Sample Number: 19L123      Depth: 37'-38.5'      Date Sampled: 3-11-19



Client: Abbey Road Group Land Development Services Company.LLC.  
Project: East Town Crossing  
Project No: 062-19007      Figure

## **APPENDIX B**

### **EARTHWORK SPECIFICATIONS**

#### **GENERAL**

When the text of the report conflicts with the general specifications in this appendix, **the recommendations in the report have precedence.**

**SCOPE OF WORK:** These specifications and applicable plans pertain to and include all earthwork associated with the site rough grading, including but not limited to the furnishing of all labor, tools, and equipment necessary for site clearing and grubbing, stripping, preparation of foundation materials for receiving fill, excavation, processing, placement and compaction of fill and backfill materials to the lines and grades shown on the project grading plans, and disposal of excess materials.

**PERFORMANCE:** The Contractor shall be responsible for the satisfactory completion of all earthwork in accordance with the project plans and specifications. This work shall be inspected and tested by a representative of Krazan and Associates, Inc., hereinafter known as the Geotechnical Engineer and/or Testing Agency. Attainment of design grades when achieved shall be certified by the project Civil Engineer. Both the Geotechnical Engineer and Civil Engineer are the Owner's representatives. If the contractor should fail to meet the technical or design requirements embodied in this document and on the applicable plans, he shall make the necessary readjustments until all work is deemed satisfactory as determined by both the Geotechnical Engineer and Civil Engineer. No deviation from these specifications shall be made except upon written approval of the Geotechnical Engineer, Civil Engineer, or project Architect.

No earthwork shall be performed without the physical presence or approval of the Geotechnical Engineer. The Contractor shall notify the Geotechnical Engineer at least 2 working days prior to the commencement of any aspect of the site earthwork.

The Contractor agrees that he shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety of all persons and property; that this requirement shall apply continuously and not be limited to normal working hours; and that the Contractor shall defend, indemnify and hold the Owner and the Engineers harmless from any and all liability, real or alleged, in connection with the performance of work on this project, except for liability arising from the sole negligence of the Owner or the Engineers.

**TECHNICAL REQUIREMENTS:** All compacted materials shall be densified to a density of not less than 95 percent of maximum dry density as determined by ASTM Test Method D1557 as specified in the technical portion of the Geotechnical Engineering Report. The results of these tests and compliance with these specifications shall be the basis upon which satisfactory completion of work will be judged by the Geotechnical Engineer.

**SOIL AND FOUNDATION CONDITIONS:** The Contractor is presumed to have visited the site and to have familiarized himself with existing site conditions and the contents of the data presented in the soil report.

The Contractor shall make his own interpretation of the data contained in said report, and the Contractor shall not be relieved of liability under the contract for any loss sustained as a result of any variance between conditions indicated by or deduced from said report and the actual conditions encountered during the progress of the work.

**DUST CONTROL:** The work includes dust control as required for the alleviation or prevention of any dust nuisance on or about the site or the borrow area, or off-site if caused by the Contractor's operation either during the performance of the earthwork or resulting from the conditions in which the Contractor leaves the site. The Contractor shall assume all liability, including Court costs of codefendants, for all claims related to dust or windblown materials attributable to his work.

### **SITE PREPARATION**

General site clearing should include removal of any organics, asphaltic concrete, abandoned utilities, structures including foundations, basement walls and floors, rubble, and rubbish. After stripping operations and removal of any loose and/or debris-laden fill, the exposed subgrade should be visually inspected and/or proof rolled to identify any soft/loose areas.

**SUBGRADE PREPARATION:** Subgrade should be prepared as described in our site preparation section of this report.

**EXCAVATION:** All excavation shall be accomplished to the tolerance normally defined by the Civil Engineer as shown on the project grading plans. All over excavation below the grades specified shall be backfilled at the Contractor's expense and shall be compacted in accordance with the applicable technical requirements.

**FILL AND BACKFILL MATERIAL:** No material shall be moved or compacted without the presence of the Geotechnical Engineer. Material from the required site excavation may be utilized for construction site fills provided prior approval is given by the Geotechnical Engineer. All materials utilized for constructing site fills shall be free from vegetable or other deleterious matter as determined by the Geotechnical Engineer.

**PLACEMENT, SPREADING, AND COMPACTION:** The placement and spreading of approved fill materials and the processing and compaction of approved fill and native materials shall be the responsibility of the Contractor. However, compaction of fill materials by flooding, ponding, or jetting shall not be permitted unless specifically approved by local code, as well as the Geotechnical Engineer.

Both cut and fill shall be surface compacted to the satisfaction of the Geotechnical Engineer prior to final acceptance.

**SEASONAL LIMITS:** No fill material shall be placed, spread, or rolled while it is frozen or thawing or during unfavorable wet weather conditions. When the work is interrupted by heavy rains, fill operations shall not be resumed until the Geotechnical Engineer indicates that the moisture content and density of previously placed fill are as specified.

## APPENDIX C

### PAVEMENT SPECIFICATIONS

**1. DEFINITIONS** – The term “pavement” shall include asphalt concrete surfacing, untreated aggregate base, and aggregate subbase. The term “subgrade” is that portion of the area on which surfacing, base, or subbase is to be placed.

**2. SCOPE OF WORK** – This portion of the work shall include all labor, materials, tools, and equipment necessary for and reasonably incidental to the completion of the pavement shown on the plans and as herein specified, except work specifically notes as “Work Not Included.”

**3. PREPARATION OF THE SUBGRADE** – Subgrade should be prepared as described in our site preparation and pavement design sections of this report.

**4. AGGREGATE BASE** – The aggregate base shall be spread and compacted on the prepared subgrade in conformity with the lines, grades, and dimensions shown on the plans. The aggregate base should conform to WSDOT Standard Specification for Crushed Surfacing Base Course or Top Course (Item 9-03.9(3)). The base material shall be compacted to a minimum compaction of 95% as determined by ASTM D1557. Each layer of subbase shall be tested and approved by the Geotechnical Engineer prior to the placement of successive layers.

**5. ASPHALTIC CONCRETE SURFACING** – Asphaltic concrete surfacing shall consist of a mixture of mineral aggregate and paving grade asphalt, mixed at a central mixing plant and spread and compacted on a prepared base in conformity with the lines, grades, and dimensions shown on the plans. The drying, proportioning, and mixing of the materials shall conform to WSDOT Specifications.

The prime coat, spreading and compaction equipment, as well as the process of spreading and compacting the mixture, shall conform to WSDOT Specifications, with the exception that no surface course shall be placed when the atmospheric temperature is below 50 degrees F. The surfacing shall be rolled with combination steel-wheel and pneumatic rollers, as described in WSDOT Specifications. The surface course shall be placed with an approved self-propelled mechanical spreading and finishing machine.

**6. TACK COAT** – The tack (mixing type asphaltic emulsion) shall conform to and be applied in accordance with the requirements of WSDOT Specifications.

# Steep Slope Addendum Letter



GEOTECHNICAL ENGINEERING • ENVIRONMENTAL ENGINEERING  
CONSTRUCTION TESTING & INSPECTION

July 31, 2020

KA Project No. 062-190007

Page 1 of 2

**Abbey Road Group Land Development Services Company, LLC**

PO Box 1224

Puyallup, Washington 98371

**Attn: Gil Hulsmann**

Email: [Gil.Hulsmann@AbbeyRoadGroup.com](mailto:Gil.Hulsmann@AbbeyRoadGroup.com)

Phone: (253) 435-3699 (ext. 101)

**Reference: Geotechnical Engineering Investigation Addendum Letter  
East Town Crossing**

Parcel Nos. 0420264053, 0420264054, 0420351066

SE Corner of E. Shaw Road and E. Pioneer Way

Puyallup, Washington 98371

Dear Mr. Hulsmann,

Per your request, we have prepared this letter to provide our opinion regarding the nearby steep slopes. We previously prepared a geotechnical report titled "Geotechnical Engineering Investigation – East Town Crossing – Parcel Nos. 0420264053, 0420264054, 0420351066 – SE Corner of E. Shaw Road & E. Pioneer Way – Puyallup, Washington", dated April 11, 2019.

Based on our communication with you, it is our understanding that the City of Puyallup has requested to provide our opinion on the hazards and risks to the site due to the site being within 300 feet of steep slopes.

We have reviewed Washington State Department of Natural Resources (DNR), City of Puyallup, and Pierce County published landslide hazard maps and web data. We have also reviewed the Landslide Inventory, Susceptibility, and Exposure Analysis of Pierce County, Washington (DNR), prepared by Katherine A. Mickelson et al., and dated July 2017.

Based on our review, we understand that steep slopes are located roughly 300 feet to the south and east from the site. These nearby slopes are mapped moderate to high for shallow landslide susceptibility, and moderate for deep susceptibility. However, there are no historic landslides or debris mapped at the nearby slopes. The closest landslide mapped is located roughly 1 mile southeast of the site.

There is an existing developed property between the nearby southern slope and the southern boundary of the site. There is a partially developed property between the nearby eastern slope and the eastern boundary of the site. In our opinion, these properties to the south and east create a buffer between the nearby slopes



and the site. Based on our review of available published documents and maps, it is our opinion that there is minimum to no risk to the planned development from the nearby slopes.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,

**KRAZAN & ASSOCIATES, INC.**

07/31/20



Vijay Chaudhary, P.E.  
Project Engineer

*Theresa Nunan*

Theresa R. Nunan  
Project Manager

**Attachments:** WA DNR Landslide Inventory Maps (Figures A, B, and C)

WADNR\_PUBLIC\_WGS\_Landslide\_Inventory

Shallow Susceptibility

- Moderate
- High



USDA FSA, GeoEye, Maxar | Esri Community Maps Contributors, King County, WA State Parks GIS, BuildingFootprintUSA, Esri, HERE, Garmin, SafeGraph, INCREMENT P, METI/NASA, USGS, Bureau of Land Management, EPA, NPS, US Census Bureau, USDA



East Town Crossing

Date: July 2020

Project Number: 062-19007

Drawn By: VC

Figure: A

Not to scale




USDA FSA, GeoEye, Maxar | Esri Community Maps Contributors, King County, WA State Parks GIS, BuildingFootprintUSA, Esri, HERE, Garmin, SafeGraph, INCREMENT P, METI/NASA, USGS, Bureau of Land Management, EPA, NPS, US Census Bureau, USDA



East Town Crossing		
Date: July 2020	Project Number: 062-19007	
Drawn By: VC	Figure: B	Not to scale

**WADNR\_PUBLIC\_WGS\_Landslide\_Inventory**

- Scarps
  -
- Scarps and Flanks
  -
- Landslide Deposit Labels
- Landslide Deposits
  - High (30-40)
  - Moderate (11-29)
  - Low (1-10)
- Fans
  - High (23-30)
  - Moderate (8-22)
  - Low (1-7)
- SLIP Fans
  - Low (1-7)
  - Moderate (8-22)
  - High (23-30)

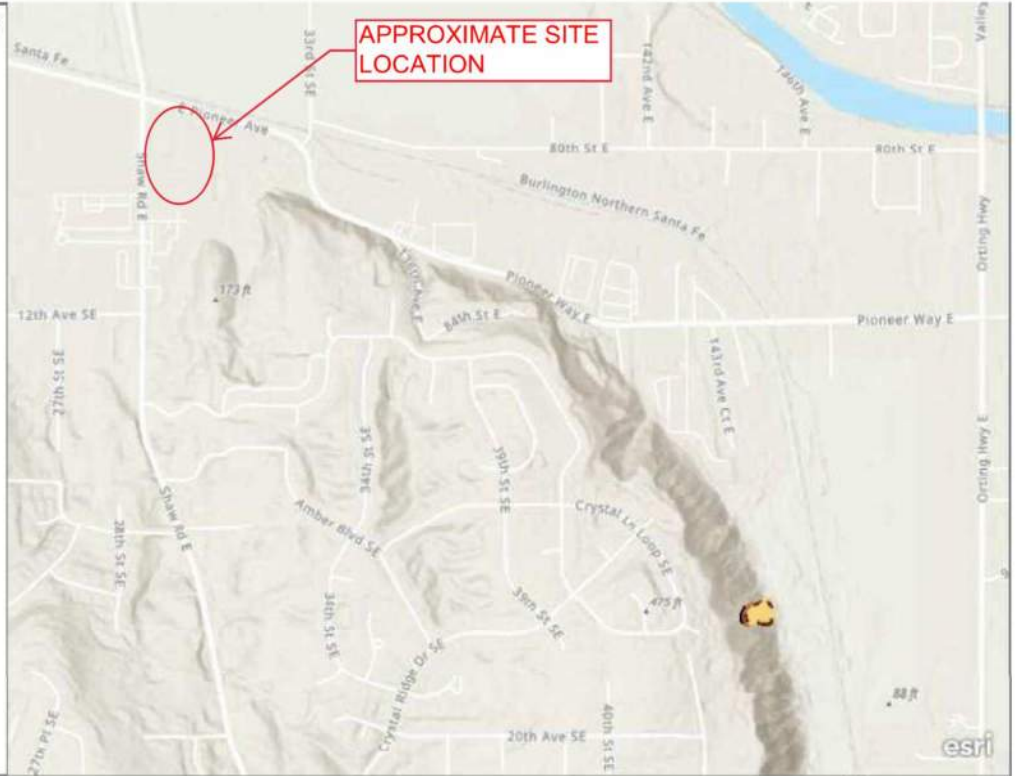

Esri, NASA, NGA, USGS, FEMA | Esri Community Maps Contributors, King County, WA State Parks GIS, Esri, HERE, Garmin, SafeGraph, INCREMENT P, METI/NASA, USGS, Bureau of Land Management, EPA, NPS, US Census Bureau, USDA



<b>Krazan</b>		
East Town Crossing		
Date: July 2020	Project Number: 062-19007	
Drawn By: VC	Figure: C	Not to scale

March 19, 2021

KA Project No. 062-190007

Page 1 of 3

**Abbey Road Group Land Development Services Company, LLC**

PO Box 1224

Puyallup, Washington 98371

**Attn: Gil Hulsmann**Email: [Gil.Hulsmann@AbbeyRoadGroup.com](mailto:Gil.Hulsmann@AbbeyRoadGroup.com)

Phone: (253) 435-3699 (ext. 101)

**Reference: Geotechnical Engineering Investigation Addendum Letter  
East Town Crossing**  
SE Corner of E. Shaw Road and E. Pioneer Way  
Puyallup, Washington

Dear Mr. Hulsmann,

Per your request, we have prepared this letter to provide the results of two (2) Large-Scale Pilot Infiltration Tests (PITs) we conducted at the above-referenced site. We previously prepared a geotechnical report titled “Geotechnical Engineering Investigation – East Town Crossing – Parcel Nos. 0420264053, 0420264054, 0420351066 – SE Corner of E. Shaw Road & E. Pioneer Way – Puyallup, Washington”, dated April 11, 2019, as well as an addendum letter dated July 31, 2020 that addressed the nearby steep slopes.

**Large-Scale PITs**

Two (2) test pits, designated P-1 and P-2, were excavated near Monitoring Wells MW-1 and MW-2, respectively, on March 4, 2021 at the approximate locations indicated on the Site Plan, Figure 1, in order to conduct large-scale infiltration tests in accordance with the 2014 Stormwater Management Manual for Western Washington (SWMWW). The infiltration test locations were selected in the field by the client and excavated using a client provided excavator and operator. The bottom of each pit was excavated 10-foot wide by 10-foot long, which met the minimum required horizontal surface area of 100 square feet (sf). Each test pit was initially excavated to a depth of 2 feet below the existing ground surface (bgs), which exposed silty sand (SM) soils at the pit bottom. Water was observed seeping from the sides of pit P-1 during excavation, and was observed ponded at the ground surface at several locations in the vicinity of pit P-1. Test pits P-1 and P-2 encountered undocumented fill to a depth of 1.8 feet and 0.5 feet bgs, respectively, followed by native brown silty sand (SM) with trace gravel and occasional sandy silt and sandy clay seams and layers to the bottom of the test pits. The soils exposed at the PIT test depth were similar to those encountered in the geotechnical borings conducted during our original exploration of the site.

The infiltration test procedure includes a pre-soak period, followed by steady-state and then falling head infiltration rate testing. Each pit was filled with water to a depth of 12 inches above the bottom of the pit for the pre-soak period. After two (2) hours of pre-soak, the water hose was turned off as even just a slight trickle caused the water level in the pit to continue to rise. Water level readings were obtained for an additional 4 hours in pit P-2 with no change in the water level, while the water level in pit P-1 increased  $\frac{3}{4}$ -inches which we attributed to seepage from the sides of this pit which were observed during its excavation. Since the water in pits P-1 and P-2 was not infiltrating, we left the pits open overnight, and returned to the site to record the water level. Since it had commenced to rain just prior to our leaving the site, a 5-gallon bucket was left at the location of pit P-2 to obtain an estimate of the amount of rain that fell overnight. We recorded 0.6 inches of rain in the bucket the following morning. On the morning of March 5, 2021, the water level in pit P-1 had risen another 1.2 inches, while the water level in pit P-2 rose about 0.3 inches. Figure 2 includes photos of pits P-1 and P-2 taken on March 5, 2021. The pits were not over-excavated due to the presence of water. The contractor had excavated three test pits within the northwestern corner of the site on March 4, 2021. We observed about 8 to 10 inches of water in the bottom of two of the test pits on March 5, 2021.

**Evaluation of Infiltration Feasibility:** One of the Site Suitability Criteria (SSC) presented in Section 3.3.7, Volume III, 2014 SWMMWW, SSC-5 Depth to Bedrock, Water Table, or Impermeable Layer, states that the base of all infiltration basins or trench systems shall be greater than or equal to 5 feet above the seasonal high-water mark, bedrock (or hardpan), or other low permeability layer. Based on the results of our field exploration and large-scale PITs, the soils at the site contain high silt content and are considered a very low to relatively impermeable layer. Based on the results of our general site assessment and field testing, the low permeability soils encountered at the site do not meet the requirements of Site Suitability Criteria SSC-5 and it is therefore our opinion that onsite infiltration of stormwater using basin or trench system is not considered feasible for the proposed development. **However**, consideration may be given to the use of permeable pavement and other Best Management Practices (BMPs), depending on the final site grading plan.

### **Limitations**

This letter has been prepared for the exclusive use of the Abbey Road Group and their assigns, for the specific application to the site. The geotechnical information presented herein is based upon professional interpretation utilizing standard engineering practices and a degree of conservatism deemed proper for this project. We emphasize that this letter is valid for this project as outlined above, and should not be used for any other site.

This letter does not include any environmental site assessment for the presence or absence of hazardous and/or toxic materials in the soil, groundwater or atmosphere, or the presence of wetlands or other biological conditions. The information presented herein is based upon professional interpretation using standard industry practices and engineering conservatism that we consider proper for this project. It is not warranted that such information and interpretation cannot be superseded by future geotechnical developments.


Within the limitations of scope, schedule and budget, our services have been performed in accordance with generally accepted geotechnical engineering practices in effect in this area at the time this letter was prepared. No other warranty, expressed or implied, is made.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,

**KRAZAN & ASSOCIATES, INC.**

3/19/21




Theresa R. Nunan  
Project Manager







Vijay Chaudhary, P.E.  
Assistant Regional Engineering Manager

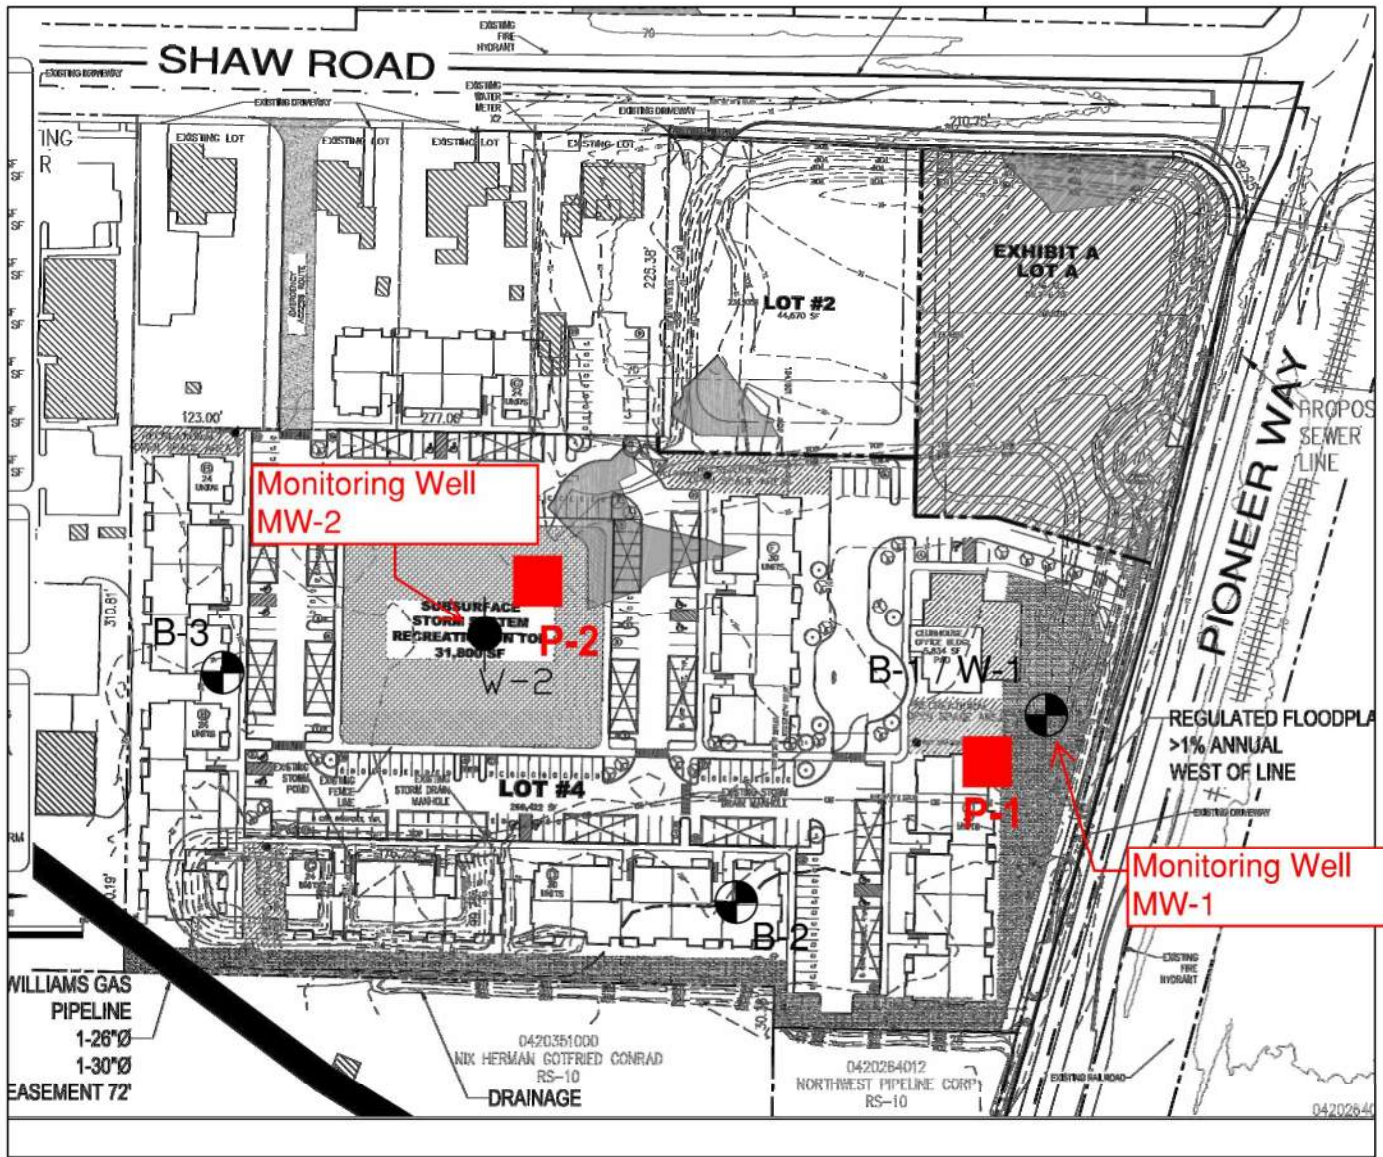**Attachments:** Figure 1 – Site Plan  
Figure 2 – Photos



### LEGEND

-  B-1 Number and Approximate Location of Borings
-  W-1 Approximate Location of Monitoring Well
-  P-1 Approximate Location of Pilot Infiltration Test



Reference: Plan Sheet titled "Overall Site Plan", prepared by Abbey Road Group dated December 7, 2018.

## Site Plan

East Town Crossing

Shaw Rd & E Pioneer Way, Puyallup, WA

Project Number: 062-19007

Figure 1

Drawn By: T. Nunan  
Date: March 2021

 **Krazan** & ASSOCIATES, INC.

Not to Scale





**Water in Pit P-1 on March 5, 2021.**



**Water in Pit P-2 on March 5, 2021.**



**Water in Test Pit on March 5, 2021. Test pit was excavated in NE portion of site on March 4, 2021.**

**Figure 2 - Photos (March 5, 2021)**

December 10, 2021

KA Project No. 062-21033

**Abbey Road Group, LLC**  
P.O. Box 11489  
Olympia, WA 98508

**Attn: Mr. Gil Hulsmann**  
Tel: 253-435-3699 x1510  
Email: gil.hulsmann@abbeyroadgroup.com

**Reference: Laboratory Testing – Recycled Glass  
East Town Crossing Project**  
SE Corner of E Shaw Road & E Pioneer Way  
Puyallup, Washington

Dear Mr. Hulsmann,

The gradation and proctor test results for the two recycled glass samples, one designated “clean” and the other designated “with fines”, supplied by Dan Lloyd Construction are attached to this letter. The gradation tests were conducted on the samples ‘as received’ and again after completing the Proctor compaction tests. As can be seen in the summary of test results, Table 1 attached to this letter, the glass pieces broke down significantly due to the compaction efforts.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,


**KRAZAN & ASSOCIATES, INC.**



Theresa R. Nunan  
Project Manager

**Attachments: Recycled Glass Gradation and Proctor Test Results – “Clean” Sample  
Recycled Glass Gradation and Proctor Test Results – “With Fines” Sample  
Table 1 – Summary of Recycled Glass Test Results**

# Particle Size Distribution Report

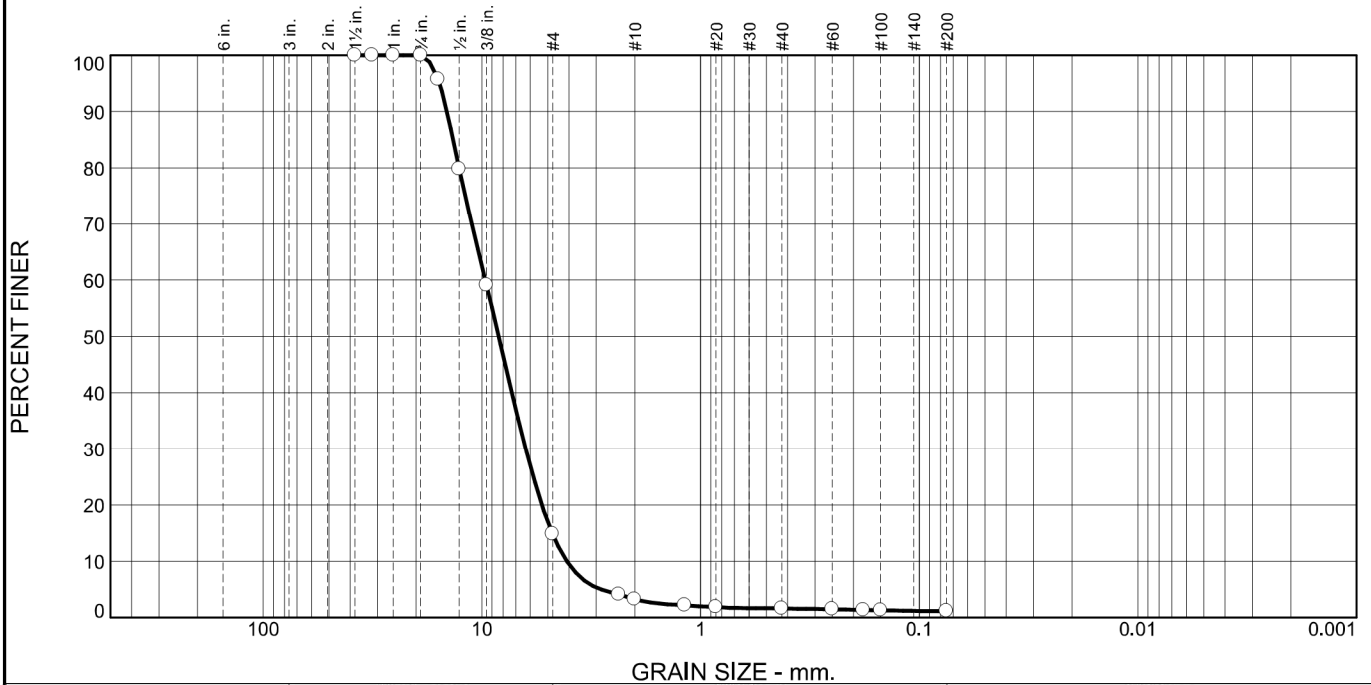

% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	85	12	1	1	1	

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1.5	100		
1.25	100		
1	100		
.75	100		
.625	96		
.5	80		
.375	59		
#4	15		
#8	4		
#10	3		
#16	2		
#20	2		
#40	2		
#60	1		
#80	1		
#100	1		
#200	1.2		

\* (no specification provided)

**Material Description**

Recycled Glass Clean - Before Compaction.  
Sampled by the supplier.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= GP                      AASHTO (M 145)= A-1-a

**Coefficients**

D <sub>90</sub> = 14.4630	D <sub>85</sub> = 13.5519	D <sub>60</sub> = 9.6467
D <sub>50</sub> = 8.3902	D <sub>30</sub> = 6.2995	D <sub>15</sub> = 4.7699
D <sub>10</sub> = 4.0959	C <sub>u</sub> = 2.36	C <sub>c</sub> = 1.00

**Remarks**

Sample ID: 21L892  
Sample Date: 11-29-21

---

**Date Received:** 11-29-21                      **Date Tested:** 12-1-21

**Tested By:** M.Thomas

**Checked By:** T.Nunan

**Title:** Project Manager

**Source of Sample:** Dan Lloyd Construction  
**Sample Number:** 21L892

**Date Sampled:** 11-29-21




**Client:** Abbey Road Group Land Development Services Company LLC  
**Project:** East Town Crossing Lab Testing - Recycled Glass

**Project No:** 062-21033


**Figure**

# COMPACTION TEST REPORT

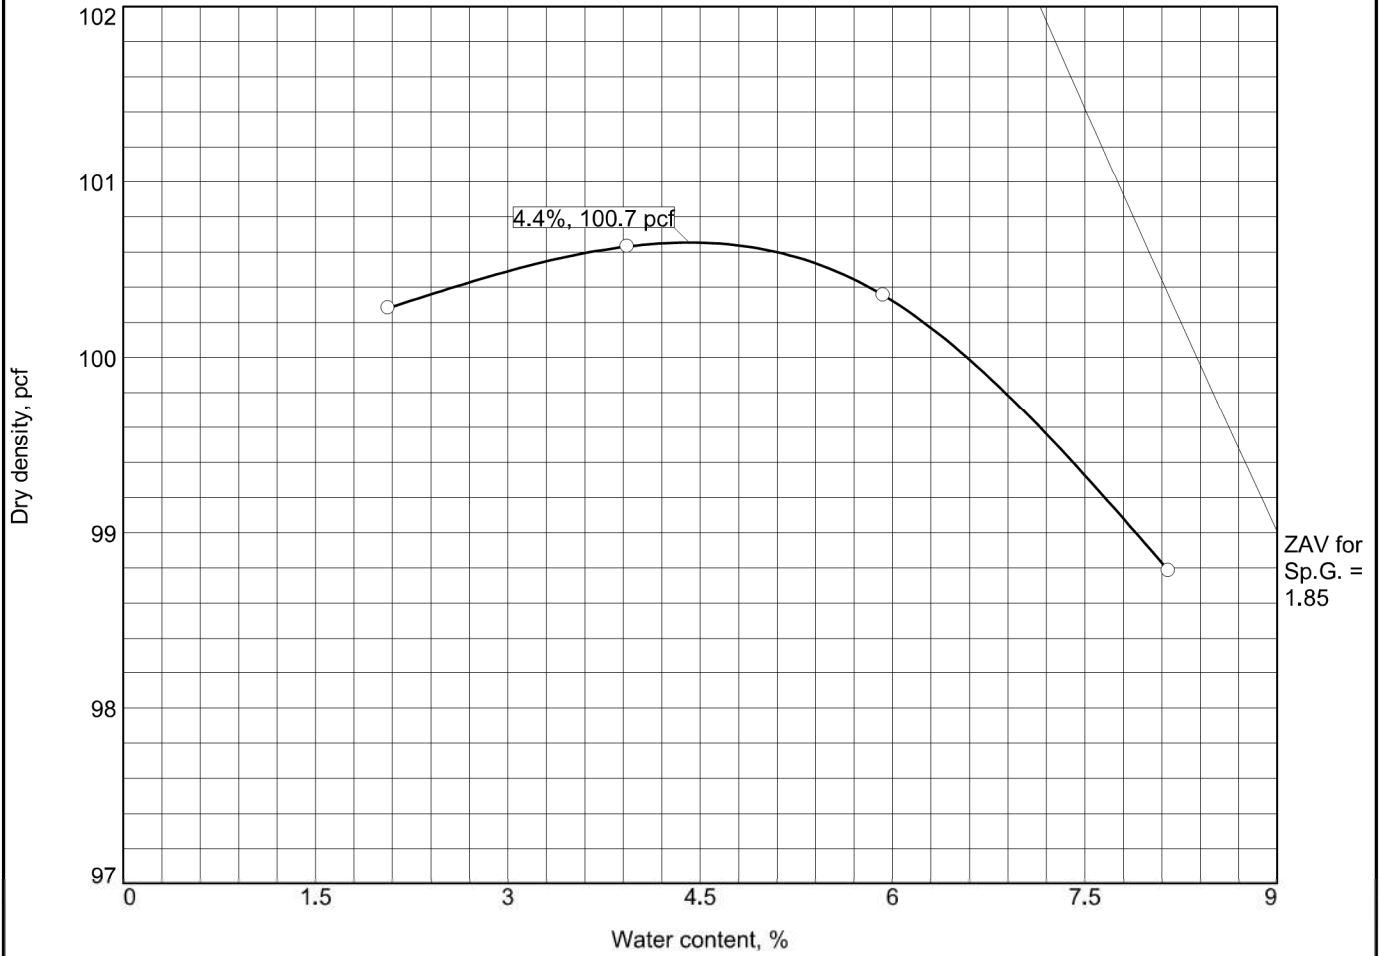

Test specification: ASTM D 1557 Method C Modified


Elev/ Depth	Classification		Nat. Moist.	Sp.G.	LL	PI	% > 3/4 in.	% < No.200
	USCS	AASHTO						
	GP	A-1-a		1.85	NV	NP	0	1.2

TEST RESULTS	MATERIAL DESCRIPTION
Maximum dry density = 100.7 pcf Optimum moisture = 4.4 %	Recycled Glass Clean. Sampled by the supplier.
<b>Project No.</b> 062-21033 <b>Client:</b> Abbey Road Group Land Development Services <b>Project:</b> East Town Crossing Lab Testing - Recycled Glass  <input type="checkbox"/> <b>Source of Sample:</b> Dan Lloyd Construction <b>Sample Number:</b> 21L892	<b>Remarks:</b> Sample ID:21L892 Sample Date:11-29-21 Void Ratio:0.14 Porosity:12%
	<b>Figure</b>

Tested By: M.Thomas

Checked By: T.Nunan.

# Particle Size Distribution Report

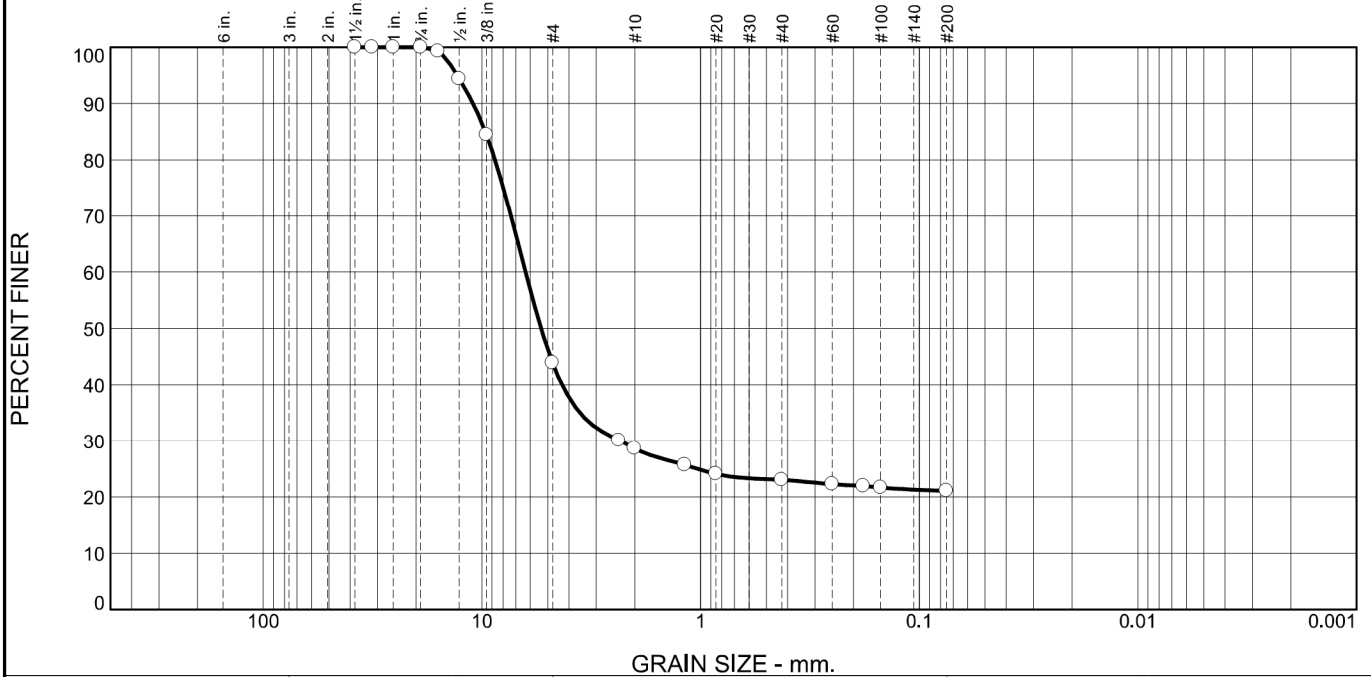

% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	56	15	6	2	21	

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1.5	100		
1.25	100		
1	100		
.75	100		
.625	99		
.5	94		
.375	84		
#4	44		
#8	30		
#10	29		
#16	26		
#20	24		
#40	23		
#60	22		
#80	22		
#100	22		
#200	21		

**Material Description**

Recycled Glass Clean - After Compaction  
Sampled by the supplier.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= GM                      AASHTO (M 145)= A-1-b

**Coefficients**

D<sub>90</sub>= 10.9683                      D<sub>85</sub>= 9.6367                      D<sub>60</sub>= 6.3112  
D<sub>50</sub>= 5.3536                      D<sub>30</sub>= 2.3352                      D<sub>15</sub>=  
D<sub>10</sub>=                      C<sub>u</sub>=                      C<sub>c</sub>=

**Remarks**

Sample ID: 21L893  
Sample Date: 11-29-21

---

**Date Received:** 11-29-21                      **Date Tested:** 12-1-21  
**Tested By:** M.Thomas  
**Checked By:** I.Teriong  
**Title:** Project Manager

\* (no specification provided)

**Source of Sample:** Dan Lloyd Construction  
**Sample Number:** 21L892

**Date Sampled:** 11-29-21




**Client:** Abbey Road Group Land Development Services Company LLC  
**Project:** East Town Crossing Lab Testing - Recycled Glass

**Project No:** 062-21033

**Figure**

# Particle Size Distribution Report

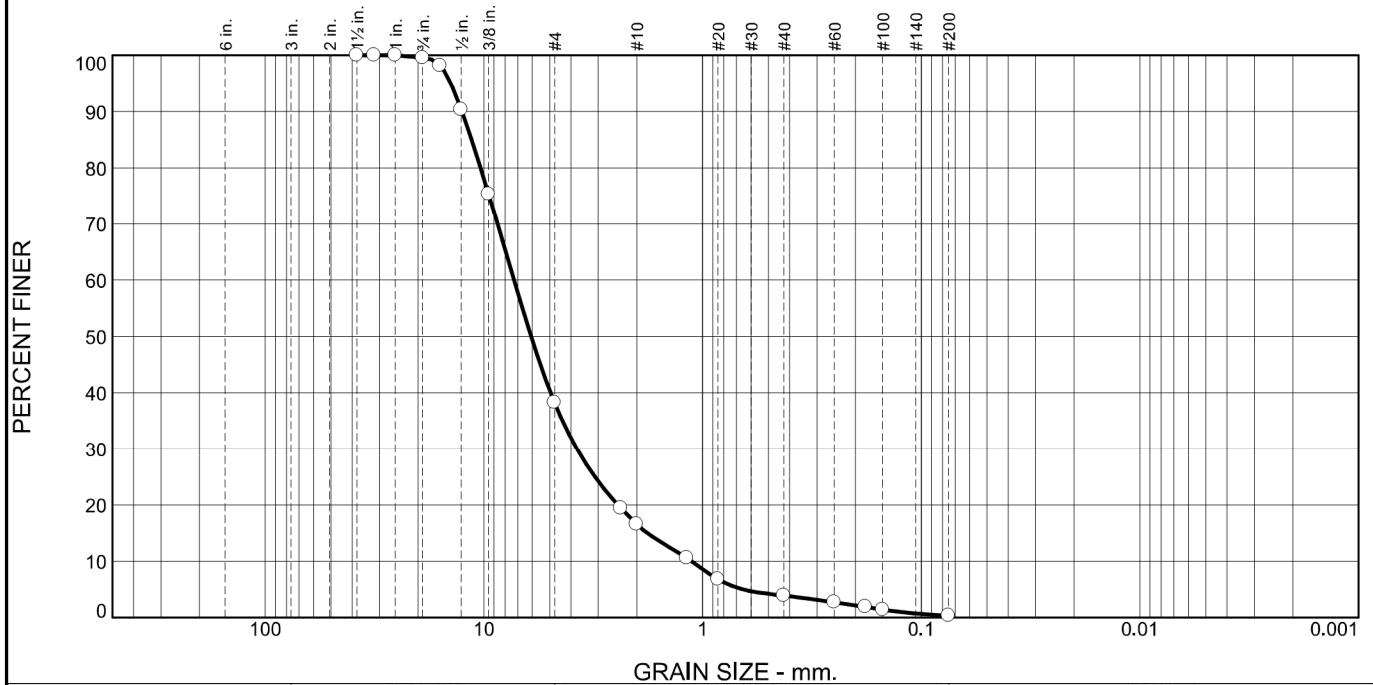

% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	62	21	13	4	0	0

Test Results (C-136 & c-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1.5	100		
1.25	100		
1	100		
.75	100		
.625	98		
.5	90		
.375	75		
#4	38		
#8	19		
#10	17		
#16	11		
#20	7		
#40	4		
#60	3		
#80	2		
#100	1		
#200	0.4		

\* (no specification provided)

**Material Description**

Recycled Glass With Fines - Before Compaction.  
Sampled by the supplier.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= GW                      AASHTO (M 145)= A-1-a

**Coefficients**

D<sub>90</sub>= 12.6020                      D<sub>85</sub>= 11.3802                      D<sub>60</sub>= 7.2823  
D<sub>50</sub>= 6.0733                      D<sub>30</sub>= 3.7592                      D<sub>15</sub>= 1.7859  
D<sub>10</sub>= 1.1229                      C<sub>u</sub>= 6.49                      C<sub>c</sub>= 1.73

**Remarks**

Sample ID: 21L893  
Sample Date: 11-29-21

---

**Date Received:** 11-29-21                      **Date Tested:** 12-1-21  
**Tested By:** M.Thomas  
**Checked By:** T.Nunan  
**Title:** Project Manager

**Source of Sample:** Dan Lloyd Construction  
**Sample Number:** 21L893

**Date Sampled:** 11-29-21




**Client:** Abbey Road Group Land Development Services Company LLC  
**Project:** East Town Crossing Lab Testing - Recycled Glass

**Project No:** 062-21033


**Figure**

# COMPACTION TEST REPORT

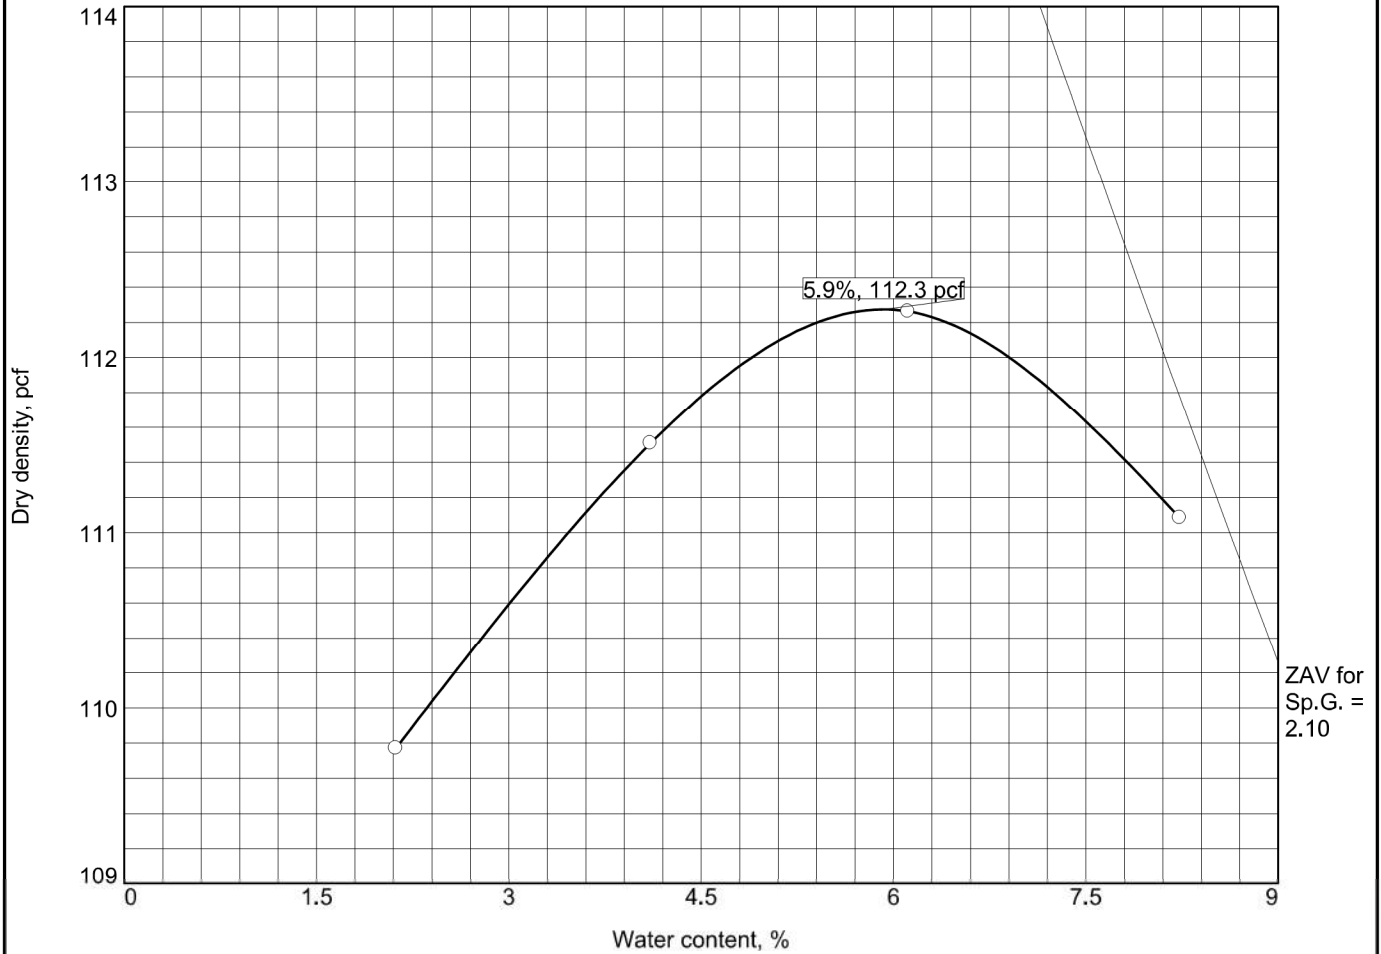

Test specification: ASTM D 1557 Method C Modified


Elev/ Depth	Classification		Nat. Moist.	Sp.G.	LL	PI	% > 3/4 in.	% < No.200
	USCS	AASHTO						
	GW	A-1-a		2.1	NV	NP	0	0.4

TEST RESULTS	MATERIAL DESCRIPTION
Maximum dry density = 112.3 pcf Optimum moisture = 5.9 %	Recycled Glass With Fines. Sampled by the supplier.
<b>Project No.</b> 062-21033 <b>Client:</b> Abbey Road Group Land Development Services <b>Project:</b> East Town Crossing Lab Testing - Recycled Glass ○ <b>Source of Sample:</b> Dan Lloyd Construction <b>Sample Number:</b> 21L893	<b>Remarks:</b> Sample ID: 21L893 Sample Date: 11-29-21 Void Ratio: 0.16 Porosity: 14%
	<b>Figure</b>

Tested By: M.Thomas

Checked By: T.Nunan.

# Particle Size Distribution Report

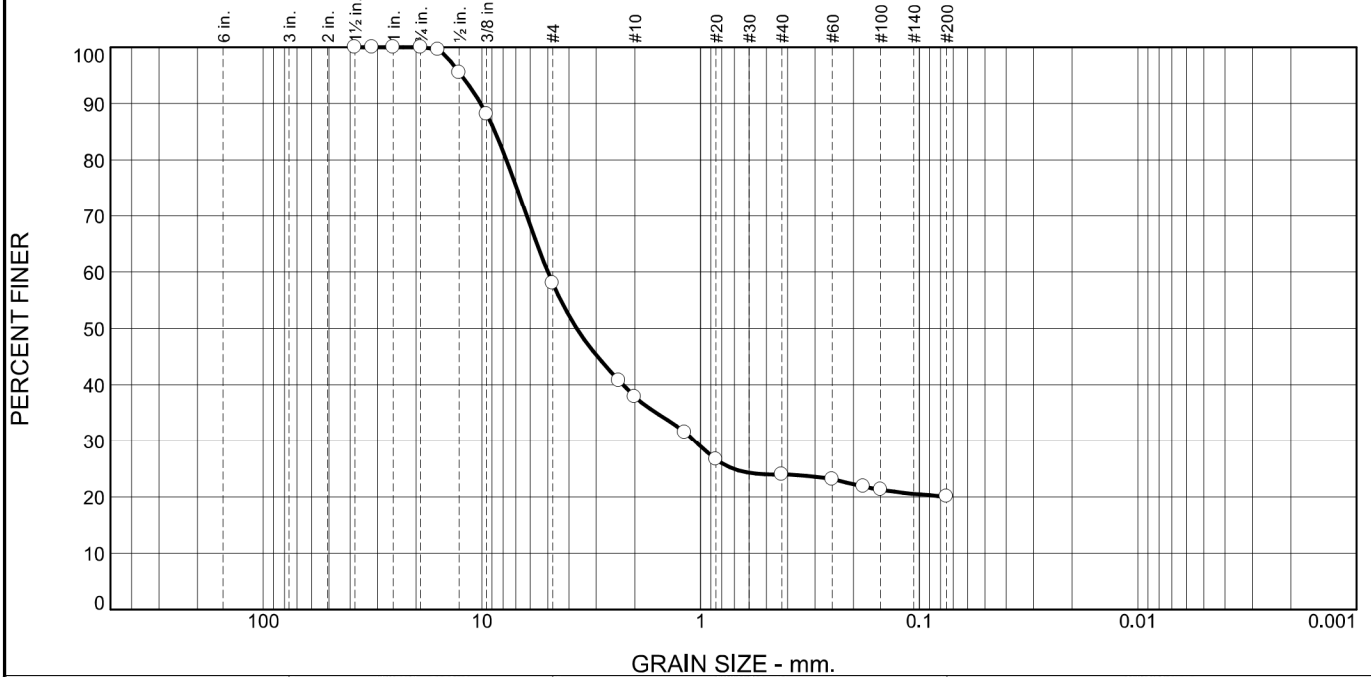

% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	42	20	14	4	20	

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1.5	100		
1.25	100		
1	100		
.75	100		
.625	100		
.5	95		
.375	88		
#4	58		
#8	41		
#10	38		
#16	32		
#20	27		
#40	24		
#60	23		
#80	22		
#100	21		
#200	20		

\* (no specification provided)

**Material Description**

Recycled Glass With Fines - After Compaction.  
Sampled by the Supplier.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= GM                      AASHTO (M 145)= A-1-b

**Coefficients**

D<sub>90</sub>= 10.1195                      D<sub>85</sub>= 8.7171                      D<sub>60</sub>= 4.9887  
D<sub>50</sub>= 3.6862                      D<sub>30</sub>= 1.0651                      D<sub>15</sub>=  
D<sub>10</sub>=                      C<sub>u</sub>=                      C<sub>c</sub>=

**Remarks**

Sample ID: 21L893  
Sample Date: 11-29-21

---

**Date Received:** 11-29-21                      **Date Tested:** 12-1-21  
**Tested By:** M.Thomas  
**Checked By:** T.Nunan  
**Title:** Project Manager

**Source of Sample:** Dan Lloyd Construction  
**Sample Number:** 21L893

**Date Sampled:** 11-29-21



**Client:** Abbey Road Group Land Development Services Company LLC  
**Project:** East Town Crossing Lab Testing - Recycled Glass

**Project No:** 062-21033

**Figure**



**MIGIZI GROUP, INC.**

PO Box 44840  
Tacoma, Washington 98448

PHONE (253) 537-9400  
FAX (253) 537-9401

August 25, 2023

Absher Construction  
1001 Shaw Road  
Puyallup, WA 98372

Attention: Greg Helle  
Executive VP, Operations

**Subject: Project Infiltration Feasibility Letter**  
Proposed East Town Crossing Development  
13102 East Pioneer Rd.  
Puyallup, WA 98372  
Parcel No. 0420264053, 0420264054, 0420351066

MGI Project Z0582

Dear Mr. Helle:

Migizi Group, Inc. (MGI) is pleased to submit this letter discussing the long-term feasibility of infiltration facilities and permeable pavement at the proposed East Town Crossing development along East Pioneer Road in Puyallup, WA. Previous geotechnical studies for this site were performed by Krazan & Associates and are attached. This includes a *Geotechnical Engineering Investigation* report, dated April 11, 2019, and a March 19, 2021, *Addendum Letter*.

The purpose of this letter is to summarize our geologic research for the project area and immediate region, our review of the previous site reconnaissance, geologic explorations, and infiltration testing performed by Krazan & Associates, and provide MGI's professional recommendations for infiltration feasibility at the site.

#### **SITE AND PROJECT DESCRIPTION**

The project site consists of three contiguous parcels, creating a roughly rectangular project area 10.00 acres in size, located along the south side of East Pioneer Road, just east of downtown Puyallup, WA, as shown on the enclosed Topographic and Location Map (Figure 1). The entire parcel is currently undeveloped. The vegetated property is bordered to the north by E Pioneer Rd., to the east by undeveloped land, to the west by Shaw Road, and to the south by a commercial property that houses Absher Construction Office.

The proposed improvements generally consist of eight three-story, wood framed, multi-family apartment buildings, with associated parking stalls, covered car ports, recreational and landscaping areas. A club house will also be constructed at the north end of the site. A total of 70 one-bedroom and 108 two-bedroom units will be created. Three underground storage stormwater facilities, called R-Tank modules, are planned for the detention of generated stormwater. ~~A modular wetland will provide treatment.~~

Several BioPods

In addition to the R-Tank modules, stormwater management procedures will also involve the implementation of Low Impact Development (LID) best management practices (BMPs) to facilitate treatment and infiltration of onsite generated stormwater. This could also include implementation of shallow-depth LID BMPs such as pervious pavement roadways and rain gardens, which are common in developments where deeper infiltration has been proven infeasible due to shallow groundwater tables and/or hydraulically restrictive soils.

## LOCAL GEOLOGY

The project area is located along the southern edge of the Puyallup River Valley and at the toe of the Puyallup Highlands slope, roughly between Sumner and Puyallup. The *Geologic Map of the Tacoma 1:100,000-scale Quadrangle, Washington (2015)*, identifies the project area as Qa – Holocene Alluvium. Deposits tend to vary from massive deposits of loose fluvial silts, sands, and gravels, and can locally include sandy to silty estuarine deposits. Puyallup River deposits typically contain local deposits of peat or larger woody debris at depth. An excerpt of the geologic map of the immediate project area (Figure 2) can be found below:

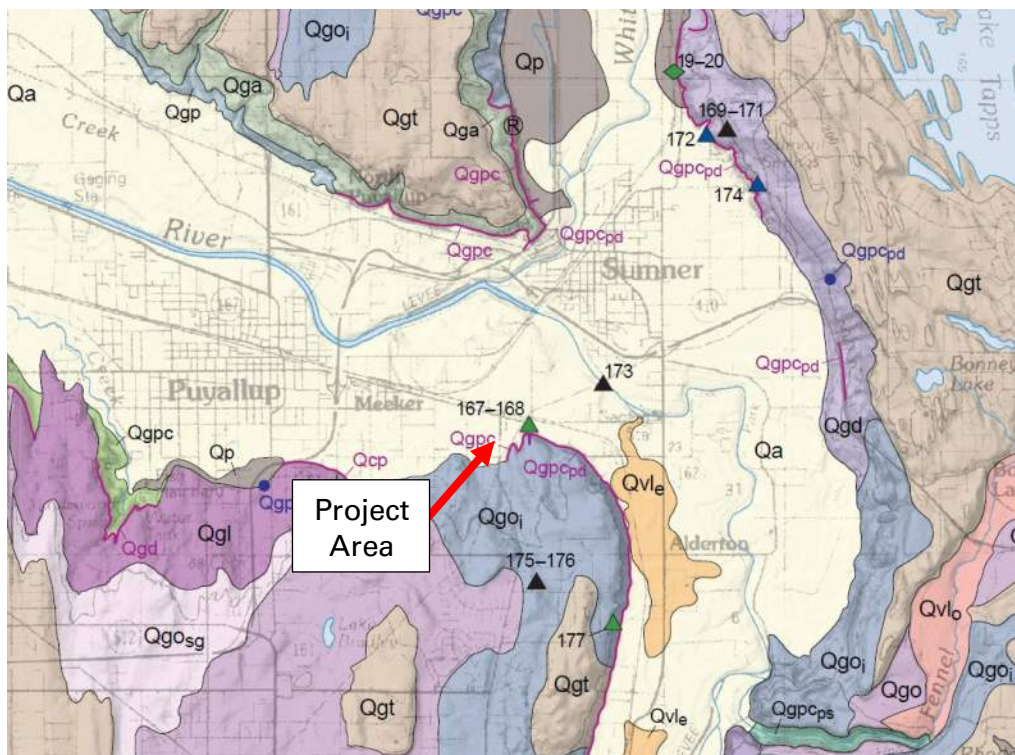


Figure 2: Immediate project area; excerpt of *Geologic Map of the Tacoma 1:100,000-scale Quadrangle, Washington*, WSDNR, Schuster et al. 2015.

## PREVIOUS PROJECT RECONNAISSANCE AND EXPLORATIONS

Previous explorations by Krazan & Associates included three hollow stem auger borings drilled across the site. In addition, two groundwater monitoring wells also installed at the same time. Drilling was conducted on March 11, 2019, which is within the wet season defined by Department of Ecology guidelines.

According to Krazan, shallow soils encountered in the borings are typical of alluvium deposits, ranging from poorly graded sand and silty sand to silty clay with interbedded seams of peat. Soils were generally observed to be moist to wet, and soft to medium dense or stiff. During drilling operations, groundwater was encountered at depths of between 7 to 8 feet below grade.

## PREVIOUS INFILTRATION TESTING

On March 4-5, 2021, Krazan conducted follow up infiltration testing of the project area adjacent to monitoring wells W-1 and W-2, as described in the attached *Addendum Letter*. Krazan elected to conduct two Large-Scale Pilot Infiltration Tests (PITs), labeled P-1 and P-2, with procedures outlined in the 2014 Stormwater Management Manual for Western Washington (SWMMWW). The excavations passed through shallow undocumented fill and into the native silty sand at approximately 2 feet below grade.

The Krazan *Addendum* indicates that field testing used the procedures listed in the 2014 SWMMWW. The two excavations were filled with water and allowed to presoak for the requisite timeframe. Water level measurements taken after presoak indicated that no head change was observed within P-2 and a head increase of 0.75 inches was measured in P-1. Due to a lack of infiltration during the testing period, tests were left open overnight, and measurements were taken the following morning. Measurements taken show that water levels had again risen, with 1.2 inches of head increase in P-1, and 0.3-inch head increase in P-2.

Based on these results, Krazan and Associates concluded that shallow soils of the upper three feet of the project area represented a hydraulic restrictive layer, with the calculated infiltration rate of **0 inches per hour**, based on Site Suitability Criteria of Vol. III, Section 3.3.7 of the 2014 SWMMWW.

## PERMEABLE PAVEMENT FEASIBILITY

Currently, the City of Puyallup's stormwater management has adopted the 2019 Washington State Department of Ecology's *Stormwater Management Manual for Western Washington* (SWMMWW). Volume V covers runoff treatment, flow control, and the low impact development (LID) best management practices (BMP) library. Beginning on Page 748 through 751, V-5.6 considers the BMP Permeable Pavements, the Applications and Limitations, and the Infeasibility Criteria. The manual states on page 748:

The following infeasibility criteria describe conditions that make permeable pavement infeasible when applying [The List Approach](#) within [I-3.4.5 MR5: On-Site Stormwater Management](#). If a project proponent wishes to use a permeable pavement BMP even though one of the infeasibility criteria within this section are met, they may propose a functional design to the local government.

These criteria also apply to impervious pavements that would employ stormwater collection from the surface of impervious pavement with redistribution below the pavement.

Any of the following circumstances allow the designer to determine permeable pavement as "infeasible" when applying the [The List Approach](#) within [I-3.4.5 MR5: On-Site Stormwater Management](#):

Specifically, three bullet points listed on page 750 of the manual note that:

- Where seasonal high ground water or an underlying impermeable/low permeable layer would create saturated conditions within one foot of the bottom of the permeable pavement BMP. The bottom of the permeable pavement BMP is the bottom of the lowest layer that has been designed to be part of the BMP, such as the lowest gravel base course or a sand layer used for treatment below the permeable pavement.
- Where underlying soils are unsuitable for supporting traffic loads when saturated. Soils meeting a California Bearing Ratio of 5% are considered suitable for residential access roads.
- Where appropriate field testing indicates soils have a measured (a.k.a., initial) native soil saturated hydraulic conductivity ( $K_{sat}$ ) less than 0.3 inches per hour. See [V-5.4 Determining the Design Infiltration Rate of the Native Soils](#). (Note: In these instances, unless other infeasibility restrictions apply, roads and parking lots may be built with an underdrain, preferably elevated within the base course, if Flow Control benefits are desired.)

Volume III Chapter 3 section 2, beginning on page 468 of the 2019 Dept. of Ecology *Stormwater Management Manual*, considers the steps of preparing a stormwater site plan. Step 1 – “Analyze Existing Site Conditions to Determine LID Feasibility” states that a **hydraulic restrictive layer** is “ground water, soil layer with less than 0.3 in/hr  $K_{sat}$ , bedrock, etc.” Field testing conducted by Krazan during the western Washington wet season, as described above, confirms that shallow onsite soils in the upper 3 feet are classified as a hydraulically restrictive layer and are therefore unsuitable for infiltration of site produced stormwater. These shallow soils would be the exposed subgrade base for any proposed pervious pavement subgrade reservoir in areas of pavement for the East Town Crossing development.

## CONCLUSIONS

Based on the infiltration testing information provided in the *Geotechnical Engineering Investigation* (April 11, 2019), and the *Addendum Letter* (March 19, 2021) written by Krazan & Associates, and the Criteria guidelines cited in Volumes III and V of the 2019 SWMMWW, it is our opinion that shallow infiltration through the use of permeable pavement is infeasible in the onsite native soils across the project area. Without significant improvement to the in-situ subgrade soils, which could seriously compromise the infiltration characteristics, soil-supported permeable asphalt would likely fail under long term dynamic load usage, such as HS20 loading conditions.

Based on the above, it is our opinion that any generated onsite stormwater should be directed to underground R-Tank modules for detention.

**CLOSURE**


We appreciate the opportunity to be of service on this project. If you have any questions regarding this letter or any aspects of the project, please feel free to contact our office.

Sincerely,

**MIGIZI GROUP, INC.**



Randall V. Conger-Best, L.G.  
Senior Staff Geologist

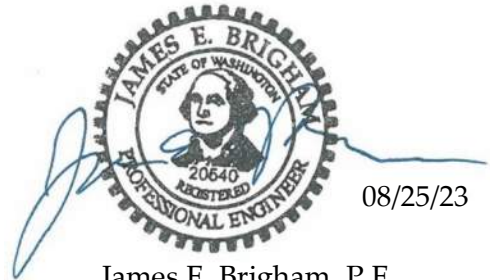

James E. Brigham, P.E.  
Senior Principal Engineer

08/25/23

Attachments: *Krazan and Associates, Geotechnical Engineering Investigation, April 11, 2019*  
*Krazan and Associates, Addendum Letter, March 19, 2021*



---

GEOTECHNICAL ENGINEERING • ENVIRONMENTAL ENGINEERING  
CONSTRUCTION TESTING & INSPECTION

April 11, 2019

KA Project No. 062-19005

**Abbey Road Group Land Development Services Company, LLC**  
PO Box 1224  
Puyallup, Washington 98371

**Attn: Mr. Gil Hulsmann**

Email: [Gil.Hulsmann@AbbeyRoadGroup.com](mailto:Gil.Hulsmann@AbbeyRoadGroup.com)

Tel: (253) 435-3699 (ext. 101)

**Reference: Geotechnical Engineering Investigation**  
**East Town Crossing**  
Parcel Nos. 0420264053, 0420264054, 0420351066  
SE Corner of E. Shaw Road and E. Pioneer Way  
Puyallup, Washington 98371

Dear Mr. Hulsmann,

In accordance with your request, we have completed a Geotechnical Engineering Investigation for the referenced site. The results of our investigation are presented in the attached report.

If you have any questions, or if we can be of further assistance, please do not hesitate to contact our office.

Respectfully submitted,  
**KRAZAN & ASSOCIATES, INC.**

*Theresa R. Nunan*

Theresa R. Nunan  
Project Engineer

TRN:MR

**GEOTECHNICAL ENGINEERING INVESTIGATION  
EAST TOWN CROSSING  
PARCEL NOS. 0420264053, 0420264054, 0420351066  
SE CORNER OF E. SHAW ROAD & E. PIONEER WAY  
PUYALLUP, WASHINGTON**

**PROJECT NO. 062-19005  
APRIL 11, 2019**

**Prepared for:**

**ABBAY ROAD GROUP LAND DEVELOPMENT  
SERVICES COMPANY, LLC  
ATTN: MR. GIL HULSMANN  
PO BOX 1224  
PUYALLUP, WA 98371**

**Prepared by:**

**KRAZAN & ASSOCIATES, INC.  
GEOTECHNICAL ENGINEERING DIVISION  
825 CENTER STREET, STE A  
TACOMA, WASHINGTON 98409  
(253) 939-2500**



GEOTECHNICAL ENGINEERING • ENVIRONMENTAL ENGINEERING  
CONSTRUCTION TESTING & INSPECTION

**TABLE OF CONTENTS**

**INTRODUCTION..... 1**

**PURPOSE AND SCOPE ..... 1**

**SITE LOCATION AND DESCRIPTION ..... 2**

**GEOLOGIC SETTING ..... 3**

**FIELD INVESTIGATION ..... 3**

**SOIL PROFILE AND SUBSURFACE CONDITIONS..... 4**

**GROUNDWATER ..... 5**

**GEOLOGIC HAZARDS..... 5**

    Erosion Concern/Hazard ..... 5

    Seismic Hazard..... 5

**CONCLUSIONS AND RECOMMENDATIONS..... 7**

    Site Preparation ..... 8

    Temporary Excavations ..... 9

    Structural Fill..... 10

    Foundations ..... 10

    Lateral Earth Pressures and Retaining Walls..... 12

    Floor Slabs and Exterior Flatwork..... 13

    Erosion and Sediment Control..... 13

    Groundwater Influence on Structures/Construction..... 14

    Drainage ..... 14

    Utility Trench Backfill..... 15

    Pavement Design ..... 15

    Testing and Inspection..... 17

**LIMITATIONS ..... 17**

**VICINITY MAP..... Figure 1**

**SITE PLAN ..... Figure 2**

**FIELD INVESTIGATION AND LABORATORY TESTING..... Appendix A**

**EARTHWORK SPECIFICATIONS ..... Appendix B**

**PAVEMENT SPECIFICATIONS..... Appendix C**

---

Offices Serving The Western United States

825 Center Street, Suite A • Tacoma, Washington 98409 • (253) 939-2500 • Fax: (253) 939-2556



April 11, 2019

KA Project No. 062-19005

**GEOTECHNICAL ENGINEERING INVESTIGATION  
EAST TOWN CROSSING  
PARCEL NOS. 0420264053, 0420264054, 0420351066  
SE CORNER OF EAST SHAW ROAD AND EAST PIONEER WAY  
PUYALLUP, WASHINGTON**

**INTRODUCTION**

This report presents the results of our Geotechnical Engineering Investigation for the proposed East Town Crossing project located near the southeast corner of East Shaw Road and East Pioneer Way in Puyallup, Washington, as shown on the Vicinity Map in Figure 1. Discussions regarding site conditions are presented in this report, together with conclusions and recommendations pertaining to site preparation, excavations, structural fill, utility trench backfill, drainage and landscaping, erosion control, foundations, concrete floor slabs and exterior flatwork, lateral earth pressures, and pavement.

A Site Plan showing the approximate exploratory boring and monitoring well locations is presented following the text of this report in Figure 2. Appendix A includes USCS Soil Classification information, as well as a description of the field investigation, exploratory boring logs, and the laboratory testing results. Appendix B contains a guide to aid in the development of earthwork specifications. Pavement design guidelines are presented in Appendix C. The recommendations in the main text of the report have precedence over the more general specifications in the appendices.

**PURPOSE AND SCOPE**

This investigation was conducted to evaluate the subsurface soil and groundwater conditions at the site, to develop geotechnical engineering recommendations for use in design of specific construction elements, and to provide criteria for site preparation and earthwork construction.

Our scope of services was performed in general accordance with our proposal for this project, dated January 25, 2019 (Proposal Number G19001WAT) and included the following:

- Exploration of the subsurface soil and groundwater conditions by conducting approximately three (3) geotechnical borings and installing two (2) groundwater level monitoring wells using a subcontracted drill rig;
- Provide a site plan showing the geotechnical boring and monitoring well locations;

- Provide comprehensive boring and monitoring well logs, including soil stratification and classification, and groundwater levels where applicable;
- Recommended foundation type for the proposed structures;
- Allowable foundation bearing pressure, anticipated settlements (both total and differential), coefficient of horizontal friction for footing design, and frost penetration depth;
- Recommendations for seismic design considerations including site coefficient and ground acceleration based on the 2015 IBC;
- Recommendations for structural fill materials, placement, and compaction;
- Recommendations for suitability of on-site soils as structural fill;
- Recommendations for temporary excavations;
- Recommendations for site drainage and erosion control;
- Recommendations for flexible and rigid pavements, as well as permeable pavement.

### **PROPOSED CONSTRUCTION**

Based on the Overall Site Plan prepared by Abbey Road Group Land Development Services, dated December 12, 2018, we understand that the proposed development will include construction of six residential structures (designated Buildings A through E) and a club house/office building. Site drainage systems will include a subsurface stormwater system located in the southern portion of the property, and a rain garden along the northern and eastern edges of the site. We have not been provided with details regarding construction of the subsurface stormwater system. The planned development will also include utility installation, and paved parking areas and driveways. For the purpose of our analyses, we have assumed that the residential buildings and club house will be 1- to 2-story structures with a slab-on-grade floor system. We have also assumed only minor grading up to 1 foot of cut or fill will be required to establish planned elevations for the site.

### **SITE LOCATION AND DESCRIPTION**

The site consists of three undeveloped parcels encompassing approximately 7 acres of land located south and east of the intersection of Shaw Road with East Pioneer Way. The site is bordered to the north by East Pioneer Way, to the south by commercial property, to the east by undeveloped land and a creek, and to the west by undeveloped land and abandoned residences. The site is roughly rectangular in shape and relatively level at approximately Elevation 72 to 74 feet. A dirt road runs north-south through the center of the site, and also extends from the center of the site westward towards Shaw Road. An existing storm pond is located in the southeast corner of the site, with the bottom at Elevation 69

feet. A wetland that has been field verified by others is located within the western central edge of the site. A creek runs along the eastern boundary of the site.

Most of the property is covered with seasonal vegetation, brambles, and a few trees located within the central portion of the site. Some trash and an abandoned trailer are located in the north central portion of the site. The southern portion of the site is currently being used by the adjacent business for container storage.

We understand that past construction activities for the undeveloped parcel to the west of the site that borders Shaw Road and East Pioneer Way consisted of the placement of fill material to raise the existing grades, based on the Geotechnical Evaluation and Additional Recommendations report prepared by Krazan & Associates, dated March 13, 2007. Those fill activities did not extend into this site.

### **GEOLOGIC SETTING**

The site lies within the central Puget Lowland. The lowland is part of a regional north-south trending trough that extends from southwestern British Columbia to near Eugene, Oregon. North of Olympia, Washington, this lowland is glacially carved, with a depositional and erosional history including at least four separate glacial advances and retreats. The Puget Lowland is bounded to the west by the Olympic Mountains and to the east by the Cascade Range. The lowland is filled with glacial and nonglacial sediments.

The Washington Division of Geology and Earth Resources, Geologic Map of the South Half of the Tacoma Quadrangle, Washington (Open File Report 87-3) indicates that the property is located in an area that is predominantly underlain by recent alluvium deposited by the Puyallup River. The recent alluvium consists of interbedded silt, sandy silt, silty sand, sand, gravel, local areas of peat and clay. The finer material represents overbank material and local lacustrine deposits, and the coarser materials most likely represent deposits in abandoned channels of the Puyallup River.

### **FIELD INVESTIGATION**

A field investigation consisting of three (3) exploratory soil borings and installation of two (2) monitoring wells was completed to evaluate the subsurface soil and groundwater conditions at the project location. The soil borings were completed on March 11, 2019 by a Krazan subcontractor utilizing a hollow stem auger drill rig. The soil borings were advanced to depths ranging from 21.5 to 38.5 feet below the existing ground surface (bgs). A geotechnical engineer from Krazan and Associates was present during the explorations, examined the soils and geologic conditions encountered, obtained samples of the different soil types, and maintained logs of the explorations.

Representative samples of the subsurface soils encountered in the borings were collected and sealed in plastic bags. These samples were transported to our laboratory for further examination and testing. The

soils encountered in the exploratory borings were continuously examined and visually classified in accordance with the Unified Soil Classification System (USCS).

### **SOIL PROFILE AND SUBSURFACE CONDITIONS**

The geotechnical subsurface exploration for this project consisted of soil borings and monitoring wells advanced to depths of approximately 21.5 to 38.5 feet bgs. The locations of the soil borings and monitoring wells are shown on the Site Plan in Figure 2.

Beneath 5 to 8 inches of surficial topsoil, the borings encountered alluvial soils to their explored depths. The topsoil was underlain by 4.5 to 7 feet of brown silty sand (SM) and poorly graded sand (SP) with relative densities in the loose to medium dense range. The sand soils were underlain by a 3-foot thick stratum of interbedded sandy silt (ML) that exhibited medium stiff to stiff consistencies and silty sand (SM) soils with relative densities in the loose to medium dense range.

Boring B-1 encountered a layer of silty clay and clayey silt beneath the sandy silt and silty sands from 7.5 to 11.0 feet bgs. The silty clay (CL) and clayey silt (ML) exhibited a very soft consistency with a Standard Penetration Test (SPT) resistance (N-value) of 1/12 inches and a moisture content of 51 percent.

The clayey silt in boring B-1 and the silty sand/sandy silt stratum in borings B-2 and B-3 were underlain by silty sand, sand, and gravel soils with varying silt contents to the termination depths of 21.5, 38.5, and 21.5 feet bgs, respectively. These granular soils exhibited relative densities in the loose to very dense range with N-values ranging from 8 to 60/8" blows per foot.

Gradation and Atterberg Limits tests were conducted on representative samples of the soils for classification purposes and for determination of engineering properties. The gradation and Atterberg Limits results are graphically depicted in Appendix A. For additional information about the soils encountered, please refer to the boring logs in Appendix A.

**Monitoring Wells:** Two monitoring wells, designated W-1 and W-2, were installed at the site on March 11, 2019 using a subcontracted driller and track mounted drill rig. Monitoring well W-1 was installed within borehole B-1. The boreholes for monitoring wells W-1 and W-2 were advanced to a depth of 21.5 feet and 20 feet below the existing ground surface, respectively, using 4¼-inch diameter hollow stem augers. A 10-foot long section of slotted PVC pipe attached to a 10-foot section of solid PVC pipe was inserted into the borehole, and the annular space between the pipe and the augers was backfilled with filter sand to a depth of 8 feet bgs followed by bentonite chips to the ground surface. A metal well cap was then installed over the pipe and cemented in-place to protect the well from unauthorized access. The installation log for monitoring wells W-1 and W-2 are included in Appendix A.

## **GROUNDWATER**

Groundwater was encountered during the drilling operations at a depth of about 7 to 8 feet below the existing ground surface. It should be recognized that groundwater elevations may fluctuate with time. The groundwater level will be dependent upon seasonal precipitation, irrigation, land use, climatic conditions, as well as other factors. Therefore, water levels at the time of the field investigation may be different from those encountered during the construction phase of the project. The evaluation of such factors is beyond the scope of this report.

## **GEOLOGIC HAZARDS**

### **Erosion Concern/Hazard**

The Natural Resources Conservation Services (NRCS) map for Pierce County Area, Washington, classifies the site area as Briscot loam. The NRCS classifies the Briscot loam as Hydrologic Soil Group B/D with low potential for erosion in a disturbed state.

It has been our experience that soil erosion can be minimized through landscaping and surface water runoff control. Typically, erosion of exposed soils will be most noticeable during periods of rainfall and may be controlled by the use of normal temporary erosion control measures, i.e., silt fences, hay bales, mulching, control ditches or diversion trenching, and contour furrowing. Erosion control measures should be in place before the onset of wet weather.

### **Seismic Hazard**

The 2015 International Building Code (IBC), Section 1613.3.2, refers to Chapter 20 of ASCE-7 for Site Class Definitions. It is our opinion that the overall soil profile corresponds to Site Class D as defined by Table 20.3-1 "Site Class Definitions," according to the 2010 ASCE-7 Standard. Site Class D applies to a "stiff soil" profile. The seismic site class is based on a soil profile extending to a depth of 100 feet. The soil borings on this site extended to a maximum depth of 38.5 feet and this seismic site class designation is based on the assumption that similar soil conditions continue below the depth explored.

We referred to the U.S. Geological Survey (USGS) Earthquake Hazards Program Website and 2012/2015 IBC to obtain values for  $S_S$ ,  $S_{MS}$ ,  $S_{DS}$ ,  $S_I$ ,  $S_{MI}$ ,  $S_{DI}$ ,  $F_a$ , and  $F_v$ . The USGS website includes the most updated published data on seismic conditions. The seismic design parameters for this site are as follows:

**Seismic Design Parameters**  
(Reference: 2015 IBC Section 1613.3.2, ASCE, and USGS)

Seismic Item	Value
Site Coefficient $F_a$	1.003
$S_s$	1.243 g
$S_{MS}$	1.247 g
$S_{DS}$	0.831 g
Site Coefficient $F_v$	1.524
$S_1$	0.476 g
$S_{M1}$	0.726 g
$S_{D1}$	0.484 g

Additional seismic considerations include liquefaction potential and amplification of ground motions by loose/soft soil deposits. The liquefaction potential is highest for loose sand with a high groundwater table. Soil liquefaction is a state where soil particles lose contact with each other and become suspended in a viscous fluid. This suspension of the soil grains results in a complete loss of strength as the effective stress drops to zero. Liquefaction normally occurs under saturated conditions in soils such as sand in which the strength is purely frictional. However, liquefaction has occurred in soils other than clean sand. Liquefaction usually occurs under vibratory conditions such as those induced by seismic events.

We have reviewed “Liquefaction Susceptibility Map of Pierce County, Washington” by Stephen P. Palmer et al., (WA DNR, 2004). The map indicates that the site area is located in a zone of high liquefaction susceptibility. At the request of our client, we have conducted a site-specific liquefaction analysis for this project.

To evaluate the liquefaction potential of the site, we analyzed the following factors:

- 1) Soil type
- 2) Groundwater depth
- 3) Relative soil density
- 4) Initial confining pressure
- 5) Maximum anticipated intensity and duration of ground shaking

**Liquefaction Analysis:** The commercially available liquefaction analysis software, LiquefyPro from CivilTech, was used to evaluate the liquefaction potential and the possible liquefaction induced settlement for the site soil and groundwater conditions based on our explorations. The analysis was performed using the information from the soil test boring and laboratory gradation analyses. Maximum

Considered Earthquake (MCE) was selected in accordance with the 2015 International Building Code (IBC) Chapter 16 and the U.S. Geological Survey (USGS) Earthquake Hazards Program website. For this analysis, a maximum earthquake magnitude of 7.11 and peak horizontal ground surface acceleration of 0.5g were used. Our analysis assumed a groundwater depth of 7.0 feet during the earthquake.

The maximum liquefaction induced settlement for this type of seismic event is estimated to be on the order of about 2 inches. The differential settlements are estimated to be on the order of about 1-inch.

## **CONCLUSIONS AND RECOMMENDATIONS**

### **General**

It is our opinion that the planned improvements at this site are feasible, provided that the geotechnical engineering recommendations presented in this report are included in the project design. Based on our explorations, it is our opinion that conventional spread foundations supported on medium dense/stiff or firmer native soil, or on structural fill extending to the medium dense/stiff or firmer native soil would be appropriate for the new buildings.

We recommend that organic topsoil, undocumented fill, and loose/soft soils be stripped to expose the underlying medium dense/stiff or firmer native soil. Footings should extend through any organic or loose soil and be founded on the underlying medium dense or firmer native soil, or structural fill extending to the competent native soils.

Exploration boring B-1 was drilled in the northern portion of the site, in the area of the planned rain garden between Pioneer Way and the Club House and Residential Building E. Boring B-1 encountered a layer of very soft silty clay between 7.5 and 11 feet below the existing ground surface. These materials are not considered suitable to support foundations and will need to be removed where they are encountered. Test pits should be conducted prior to the construction phase to determine the aerial extent (i.e. lateral extent and depth) of this very soft clay layer. If the additional test pit exploration reveals that the soft clay layer extends into the footprint of the Clubhouse or Residential Building E, or any of the other structures, additional foundation recommendations will be necessary to address the effect of the very soft clays. If the very soft clay is encountered in building areas, a deep foundation system may be required for support of the structure(s).

Borings B-2 and B-3 (drilled within the eastern and southern portions of the site) and monitoring well W-2 (installed within the central portion of the site) encountered medium dense/stiff native soils at depths of approximately 5 and 7 feet bgs, respectively; however, deeper layers of loose/soft soils may be encountered in unexplored areas of the site.

The soils encountered on this site are considered moisture-sensitive and will be easily disturbed and difficult to compact when wet. We recommend that construction take place during the drier summer months, if possible. If construction is to take place during wet weather, additional expenses and delays

should be expected due to the wet conditions. Additional expenses could include the need for placing a blanket of rock spalls to protect exposed subgrades and construction traffic areas.

### **Site Preparation**

General site clearing should include removal of any undocumented fill, organics, asphaltic concrete, abandoned utilities, structures including foundations, basement walls and floors, rubble, and rubbish. After stripping operations and removal of any loose and/or debris-laden fill, the exposed subgrade should be visually inspected and/or proof rolled to identify any soft/loose areas. Additional recommendations for preparation of specific areas are provided in the **Foundations**, **Pavement Design** and **Exterior Flatwork** subsections of this report.

The soils that will be encountered during site development are considered extremely moisture-sensitive and may disturb easily in wet conditions. The prepared subgrade should be protected from construction traffic and surface water should be diverted around prepared subgrade. We recommend that the site be developed only during extended periods of dry weather.

During wet weather conditions, subgrade stability problems and grading difficulties may develop due to excess moisture, disturbance of sensitive soils and/or the presence of perched groundwater. Construction during the extended periods of wet weather could result in the need to remove wet disturbed soils if they cannot be suitably compacted due to elevated moisture contents. The onsite soils have significant silt content in the explored areas and are moisture sensitive, and can be easily disturbed when wet. If over-excavation is necessary, it should be confirmed through continuous monitoring and testing by a qualified geotechnical engineer or geologist. Soils that have become unstable may require drying to near their optimal moisture content before compaction is feasible. Selective drying may be accomplished by scarifying or windrowing surficial material during extended periods of dry, warm weather (typically during the summer months). If the soils cannot be dried back to a workable moisture condition, remedial measures may be required. General project site winterization should consist of the placement of aggregate base and the protection of exposed soils during the construction phase. It should be understood that even if Best Management Practices (BMP's) for wintertime soil protection are implemented and followed there is a significant chance that moisture disturbed soil mitigation work will still be required.

Any buried structures encountered during construction should be properly removed and backfilled. Excavations, depressions, or soft and pliant areas extending below the planned finish subgrade levels should be excavated to expose firm undisturbed soil, and backfilled with structural fill. In general, any septic tanks, underground storage tanks, debris pits, cesspools, or similar structures should be completely removed. Concrete footings should be removed to an equivalent depth of at least 3 feet below proposed footing elevations or as recommended by the geotechnical engineer. The resulting excavations should be backfilled with structural fill.



We understand that backfilling of the wetland in the central western edge of the site that has been field identified by others will be permitted for construction of the paved parking area and subsurface storm system. We also understand that proposed Residential Building C will be constructed within the area currently occupied by an existing storm pond. Our field explorations were not specifically conducted within either of these areas. Any organic, silt or clay soils, or accumulations of sediment, encountered within the wetland area or the existing storm pond should be removed down to firm undisturbed soil, and backfilled with structural fill to the planned finish grades.

A representative of our firm should be present during all site clearing and grading operations to observe, test and evaluate earthwork construction. This testing and observation is an integral part of our service, as acceptance of earthwork construction is dependent upon compaction and stability of the material. The geotechnical engineer may reject any material that does not meet compaction and stability requirements. Further recommendations, contained in this report, are predicated upon the assumption that earthwork construction will conform to the recommendations set forth in this section and in the Structural Fill section below.

#### **Temporary Excavations**

The onsite soils have variable cohesion strengths, therefore the safe angles to which these materials may be cut for temporary excavations is limited, as the soils may be prone to caving and slope failures in temporary excavations. Temporary excavations in the loose to medium dense native soils should be sloped no steeper than 2H:1V (horizontal to vertical) where room permits.

All temporary cuts should be in accordance with Washington Administrative Code (WAC) Part N, Excavation, Trenching, and Shoring. The temporary slope cuts should be visually inspected daily by a qualified person during construction work activities and the results of the inspections should be included in daily reports. The contractor is responsible for maintaining the stability of the temporary cut slopes and minimizing slope erosion during construction. The temporary cut slopes should be covered with plastic sheeting to help minimize erosion during wet weather and the slopes should be closely monitored until the permanent retaining systems are complete. Materials should not be stored and equipment operated within 10 feet of the top of any temporary cut slope.

A Krazan & Associates geologist or geotechnical engineer should observe, at least periodically, the temporary cut slopes during the excavation work. The reasoning for this is that all soil conditions may not be fully delineated by the limited sampling of the site from the geotechnical explorations. In the case of temporary slope cuts, the existing soil conditions may not be fully revealed until the excavation work exposes the soil. Typically, as excavation work progresses the maximum inclination of the temporary slope will need to be evaluated by the geotechnical engineer so that supplemental recommendations can be made. Soil and groundwater conditions can be highly variable. Scheduling for soil work will need to be adjustable, to deal with unanticipated conditions, so that the project can proceed smoothly and required deadlines can be met. If any variations or undesirable conditions are

encountered during construction, Krazan & Associates should be notified so that supplemental recommendations can be made.

### **Structural Fill**

Fill placed beneath foundations, pavement, or other settlement-sensitive structures should be placed as structural fill. Structural fill, by definition, is placed in accordance with prescribed methods and standards, and is monitored by an experienced geotechnical professional. Field monitoring procedures would include the performance of a representative number of in-place density tests to document the attainment of the desired degree of relative compaction. The area to receive the fill should be suitably prepared as described in the Site Preparation subsection of this report prior to beginning fill placement.

Best Management Practices (BMP's) should be followed when considering the suitability of the existing materials for use as structural fill. The on-site soils are generally considered suitable for re-use as structural fill, provided the soil is free of organic material and debris, and it is within  $\pm 2$  percent of the optimum moisture content. If the native soils are stockpiled for later use as structural fill, the stockpiles should be covered to protect the soil from wet weather conditions. We recommend that a representative of Krazan & Associates be on site during the excavation work to determine which soils are suitable for use as structural fill.

Imported, all weather structural fill material should consist of well-graded gravel or a sand and gravel mixture with a maximum grain size of 3 inches and less than 5 percent fines (material passing the U.S. Standard No. 200 Sieve). All structural fill material should be submitted for approval to the geotechnical engineer at least 48 hours prior to delivery to the site.

Fill soils should be placed in horizontal lifts not exceeding 8 inches in thickness prior to compaction, moisture-conditioned as necessary (moisture content of soil shall not vary by more than  $\pm 2$  percent of optimum moisture), and the material should be compacted to at least 95 percent of the maximum dry density based on ASTM D1557 Test Method. In-place density tests should be performed on all structural fill to document proper moisture content and adequate compaction. Additional lifts should not be placed if the previous lift did not meet the compaction requirements or if soil conditions are not considered stable.

### **Foundations**

Our exploratory borings encountered loose to medium dense granular soils underlain by a 3-foot thick stratum of interbedded sandy silt and silty sand, followed by loose to very dense granular alluvial soils to the explored depths. Boring B-1, drilled at the proposed rain garden area in the northern end of the site, encountered a 3.5-foot thick layer of very soft silty clay at a depth of 7.5 feet bgs.

The very soft clay encountered in Boring B-1 between 7.5 and 11 feet below the existing ground surface is not considered suitable to support foundations and will need to be removed where it is encountered.

Further exploration of this area with test pits should be conducted during the planning phase to determine the aerial extent (i.e. lateral extent and depth) of this very soft clay layer. If the additional test pit exploration reveals that the soft clay layer extends into the footprint of the Clubhouse or Residential Building E, or any of the other structures, additional foundation recommendations will be necessary to address the effect of the very soft clays. If the very soft clay is encountered in building areas, a deep foundation system may be required for support of the structure(s).

Borings B-2 and B-3 and monitoring well W-2, drilled within the eastern, southern, and central portions of the site, encountered medium dense/stiff native soils at depths of approximately 5 and 7 feet bgs; however, deeper layers of loose/soft soils may be encountered in unexplored areas of the site.

Pending the findings of further explorations in the northern portion of the site, the proposed structures may be supported on a shallow foundation system. Where loose/soft soils are encountered at the planned footing elevations, the subgrade should be over-excavated to expose suitable bearing soil. The foundation excavations should be evaluated by Krazan & Associates prior to structural fill placement to verify that the foundations will bear on suitable material.

Building foundations should extend at least 18 inches below the lowest adjacent finished ground surface for frost protection and bearing capacity considerations. Footing widths should be based on the anticipated loads and allowable soil bearing pressure, and should conform to current International Building Code (IBC) guidelines. Water should not be allowed to accumulate in foundation excavations. All loose or disturbed soil should be removed from the foundation excavation prior to placing concrete.

For foundations constructed as outlined above, we recommend an allowable design bearing capacity of 2,000 pounds per square foot (psf) may be used for foundation design for this project. A representative of Krazan and Associates should evaluate the foundation bearing soil prior to footing form construction.

Resistance to lateral footing displacement can be computed using an allowable friction factor of 0.35 acting between the bases of foundations and the supporting subgrade. Lateral resistance for footings can alternatively be developed using an allowable equivalent fluid passive pressure of 150 pounds per cubic foot (pcf) acting against the appropriate vertical footing faces (neglecting the upper 12 inches). The allowable friction factor and allowable equivalent fluid passive pressure values include a factor of safety of 1.5. The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance. A 1/3 increase in the above values may be used for short duration wind and seismic loads.

For foundations constructed as recommended, the total static settlement is not expected to exceed 1-inch. Differential settlement, along a 20-foot exterior wall footing, or between adjoining column footings should be less than ½ inch. Most settlement is expected to occur during construction, as the loads are applied. However, additional post-construction settlement may occur if the foundation soils become flooded or saturated. It should be noted that the estimated settlement provided herewith is a

static settlement and does not include liquefaction induced settlement. Static settlement is induced by the applied dead load from the structures.

Up to 2 inches of total settlement and 1 inch of differential settlement could occur during and/or following a seismic event. The foundation elements, i.e. spread and wall footings, could be structurally tied together to create a stiffer structure. It should be noted that this measure would not mitigate the anticipated seismic settlement; however, it may reduce the damage associated with the anticipated seismic settlement, particularly the effects of differential settlement on a structure.

Seasonal rainfall, water run-off, and the normal practice of watering trees and landscaping areas around the proposed structures, should not be permitted to flood and/or saturate foundation subgrade soils. To prevent the buildup of water within the footing areas, continuous footing drains (with cleanouts) should be provided at the bases of the footings. The footing drains should consist of a minimum 4-inch diameter rigid perforated PVC pipe, sloped to drain, with perforations placed near the bottom and enveloped in all directions by washed rock and wrapped with filter fabric to limit the migration of silt and clay into the drain.

#### **Lateral Earth Pressures and Retaining Walls**

We understand that a below grade stormwater vault is planned for this project. We have developed criteria for the design of retaining or below grade walls for the stormwater vault. Our design parameters are based on retention of the native soils. The parameters are also based on level, well-drained wall backfill conditions. Walls may be designed as “restrained” retaining walls based on “at-rest” earth pressures, plus any surcharge on top of the walls as described below, if the walls are braced to restrain movement and/or movement is not acceptable. Unrestrained walls may be designed based on “active” earth pressure, if the walls are not part of the buildings and some movement of the retaining walls is acceptable. Acceptable lateral movement equal to at least 0.2 percent of the wall height would warrant the use of “active” earth pressure values for design. We recommend that walls supporting horizontal backfill and not subjected to hydrostatic forces be designed using a triangular earth pressure distribution equivalent to that exerted by a fluid with a density of 38 pcf for yielding (active condition) walls, and 60 pcf for non-yielding (at-rest condition) walls.

The stated lateral earth pressures do not include the effects of hydrostatic pressure generated by water accumulation behind the retaining walls or loads imposed by construction equipment, foundations, back slopes or roadways (surcharge loads). Groundwater was encountered in each of the borings at 7 to 8 feet below the ground surface. Portions of the vault that will extend below the groundwater level will need to be designed to resist hydrostatic pressures and buoyant forces. Equivalent fluid densities for buoyant soil pressure under yielding conditions would be 20 pcf and 30 pcf for nonyielding conditions. The allowable buoyant passive pressure would be 100 pcf with a factor of safety of 2.0.

### **Floor Slabs and Exterior Flatwork**

Before the placement of concrete floors or pavements on the site, or before any floor supporting fill is placed, the loose soils and undocumented fill must be removed to expose medium dense or firmer undisturbed native soil. The subgrade should then be proof-rolled to confirm that the subgrade contains no soft or deflecting areas. Areas of yielding soils should be excavated and backfilled with structural fill.

Any additional fill used to increase the elevation of the floor slab should meet the requirements of structural fill. Fill soils should be placed in horizontal lifts not exceeding 8 inches loose thickness, moisture-conditioned as necessary, (moisture content of soil shall not vary by more than  $\pm 2$  percent of optimum moisture) and the material should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557.

Floor slabs may be designed using a modulus of subgrade reaction value of  $k = 200$  pounds per cubic inch (pci) for slabs supported on medium dense or firmer native soils or on structural fill extending to medium dense or firmer native soil.

In areas where it is desired to reduce floor dampness, such as areas covered with moisture sensitive floor coverings, we recommend that concrete slab-on-grade floors be underlain by a water vapor retarder system. According to ASTM guidelines, the water vapor retarder should consist of a vapor retarder sheeting underlain by a minimum of 4-inches of compacted clean (less than 5 percent passing the U.S. Standard No. 200 Sieve), open-graded angular rock of  $\frac{3}{4}$ -inch maximum size. The vapor retarder sheeting should be protected from puncture damage.

It is recommended that the utility trenches within the building pads be compacted, as specified in our report, to minimize the transmission of moisture through the utility trench backfill. Special attention to the drainage and irrigation adjacent to the buildings is recommended. Grading should establish drainage away from the structures and this drainage pattern should be maintained. Water should not be allowed to collect adjacent to the structures. Excessive irrigation within landscaped areas adjacent to the structure should not be allowed to occur. In addition, ventilation of the structure may be prudent to reduce the accumulation of interior moisture.

### **Erosion and Sediment Control**

Erosion and sediment control (ESC) is used to minimize the transportation of sediment to wetlands, streams, lakes, drainage systems, and adjacent properties. Erosion and sediment control measures should be implemented and these measures should be in general accordance with local regulations. As a minimum, the following basic recommendations should be incorporated into the design of the erosion and sediment control features of the site:

- 1) Phase the soil, foundation, utility and other work, requiring excavation or the disturbance of the site soils, to take place during the dry season (generally May through September). However, provided precautions are taken using Best Management Practices (BMP's), grading activities can be undertaken during the wet season (generally October through April), but it should also be known that this may increase the overall cost of the project.
- 2) All site work should be completed and stabilized as quickly as possible.
- 3) Additional perimeter erosion and sediment control features may be required to reduce the possibility of sediment entering the surface water. This may include additional silt fences, silt fences with a higher Apparent Opening Size (AOS), construction of a berm, or other filtration systems.
- 4) Any runoff generated by dewatering discharge should be treated through construction of a sediment trap if there is sufficient space. If space is limited, other filtration methods will need to be incorporated.

#### **Groundwater Influence on Structures and Earthwork Construction**

The soil borings were checked for the presence of groundwater during exploratory operations. Groundwater was encountered in all of our borings at approximately 7 to 8 feet bgs. It should be recognized that groundwater elevations may fluctuate with time. The groundwater level will be dependent upon seasonal precipitation, irrigation, land use, and climatic conditions, as well as other factors. Therefore, groundwater levels at the time of the field investigation may be different from those encountered during the construction phase of the project. The evaluation of such factors is beyond the scope of this report.

If groundwater is encountered during construction, we should observe the conditions to determine if dewatering will be needed. Design of temporary dewatering systems to remove groundwater should be the responsibility of the contractor. If earthwork is performed during or soon after periods of precipitation, the subgrade soils may become saturated. These soils may "pump," and the materials may not respond to densification techniques. Typical remedial measures include: disk and aerating the soil during dry weather; mixing the soil with drier materials; removing and replacing the soil with an approved fill material. A qualified geotechnical engineering firm should be consulted prior to implementing remedial measures to observe the unstable subgrade conditions and provide appropriate recommendations.

#### **Drainage**

The ground surface should slope away from building pads and pavement areas, toward appropriate drop inlets or other surface drainage devices. It is recommended that adjacent exterior grades be sloped a

minimum of 2 percent for a minimum distance of 5 feet away from structures. Roof drains should be tightlined away from foundations. Roof drains should not be connected to the footing drains.

Pavement areas should be inclined at a minimum of 1 percent and drainage gradients should be maintained to carry all surface water to collection facilities and suitable outlets. These grades should be maintained for the life of the project.

Specific recommendations for and design of storm water disposal systems or septic disposal systems are beyond the scope of our services and should be prepared by other consultants that are familiar with design and discharge requirements.

### **Utility Trench Backfill**

Utility trenches should be excavated according to accepted engineering practices following OSHA (Occupational Safety and Health Administration) standards, by a contractor experienced in such work. The responsibility for the safety of open trenches should be borne by the contractor. Traffic and vibration adjacent to trench walls should be minimized; cyclic wetting and drying of excavation side slopes should be avoided.

All utility trench backfill should consist of suitable on-site material or imported granular material. Utility trench backfill placed in or adjacent to buildings and exterior slabs should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. The upper 5 feet of utility trench backfill placed in pavement areas should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Below 5 feet, utility trench backfill in pavement areas should be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. Pipe bedding should be in accordance with the pipe manufacturer's recommendations.

The contractor is responsible for removing all water-sensitive soils from the trenches regardless of the backfill location and compaction requirements. The contractor should use appropriate equipment and methods to avoid damage to the utilities and/or structures during fill placement and compaction.

### **Pavement Design**

Based on our explorations, the near surface soils at the site are interpreted as loose to medium dense silty sand and sand soils to depths of approximately 4.5 to 7.0 feet bgs. Due to the loose nature of the anticipated pavement subgrade soils, we recommend that subgrade modification techniques be considered. Subgrade modification typically includes the over-excavation of unsuitable materials, the placement of a geotextile fabric at the bottom of the over-excavated area, and then the placement of structural fill, with the structural fill consisting of clean crushed rock, rock spalls, or Controlled Density Fill (CDF). We recommend the use of a high-strength geotextile separation fabric, such as Mirafi 600X

or equivalent, for the geotextile. Subgrade modification such as this is intended to disperse surcharge loads and therefore aid in pavement performance.

Where loose soils are encountered in the pavement subgrade, we recommend over-excavation of the loose soil to at least 12 inches below the planned pavement subgrade elevation. The exposed grade after the over-excavation should be compacted to at least 95 percent of the maximum dry density as determined by ASTM Test Method D1557. We recommend that a high-strength geotextile separation fabric, such as Mirafi 600X or equivalent, then be placed over the compacted soil. After the fabric is placed, the area should be filled to the planned slab subgrade elevation with structural fill. The structural fill should be compacted to at least 95 percent of the maximum dry density as determined by ASTM Test Method D1557. In-place density tests should be performed to verify proper moisture content and adequate compaction.

In areas where the pavement subgrade soil consists of firm and unyielding native soils, a proof roll of the pavement subgrade soil may be performed in lieu of the compaction and in-place density tests. It should be noted that subgrade soils that have relatively high silt contents may be highly sensitive to moisture conditions. The subgrade strength and performance characteristics of a silty subgrade material may be dramatically reduced if this material becomes wet.

Traffic loads were not provided, however, based on our knowledge of the proposed project, we expect the traffic to range from light duty (passenger automobiles) to heavy duty (delivery and fire trucks). Pavement design life of 20 years was assumed for our analysis. Recommendations for an asphaltic concrete flexible pavement section and Portland Cement Concrete (PCC) rigid pavement section are provided in Tables 1 and 2 below.

**Table 1: ASPHALTIC CONCRETE (FLEXIBLE) PAVEMENT**

Asphaltic Concrete	Aggregate Base	Compacted Subgrade**
3.0 in.	6.0 in.	12.0 in.

**Table 2: PORTLAND CEMENT CONCRETE (RIGID) PAVEMENT  
 4000 psi with FIBER MESH**

Min. PCC Depth	Aggregate Base	Compacted Subgrade**
6.0 in.	4.0 in.	12.0 in.

*\*\* A proof roll may be performed in lieu of in-place density tests*

The asphaltic concrete depth listed in Table 1 for the flexible pavement section should be a surface course type asphalt, such as Washington Department of Transportation (WSDOT) ½-inch Hot Mix Asphalt (HMA). The pavement specification in Appendix C provides additional recommendations, including aggregate base material.



### **Testing and Inspection**

A representative of Krazan & Associates, Inc. should be present at the site during the earthwork activities to confirm that actual subsurface conditions are consistent with the exploratory fieldwork. This activity is an integral part of our services as acceptance of earthwork construction is dependent upon compaction testing and stability of the material. This representative can also verify that the intent of these recommendations is incorporated into the project design and construction. We should also be present during the construction of stormwater management system to evaluate the soils. Krazan & Associates, Inc. will not be responsible for grades or staking, since this is the responsibility of the Prime Contractor. Furthermore, Krazan & Associates is not responsible for the contractor's procedures, methods, scheduling or management of the work site.

### **LIMITATIONS**

Geotechnical engineering is one of the newest divisions of Civil Engineering. This branch of Civil Engineering is constantly improving as new technologies and understanding of earth sciences improves. Although your site was analyzed using the most appropriate current techniques and methods, undoubtedly there will be substantial future improvements in this branch of engineering. In addition to improvements in the field of geotechnical engineering, physical changes in the site either due to excavation or fill placement, new agency regulations or possible changes in the proposed structure after the time of completion of the soils report may require the soils report to be professionally reviewed. In light of this, the owner should be aware that there is a practical limit to the usefulness of this report without critical review. Although the time limit for this review is strictly arbitrary, it is suggested that two years be considered a reasonable time for the usefulness of this report.

Foundation and earthwork construction is characterized by the presence of a calculated risk that soil and groundwater conditions have been fully revealed by the original foundation investigation. This risk is derived from the practical necessity of basing interpretations and design conclusions on limited sampling of the earth. Our report, design conclusions and interpretations should not be construed as a warranty of the subsurface conditions. Actual subsurface conditions may differ, sometimes significantly, from those indicated in this report. The recommendations made in this report are based on the assumption that soil conditions do not vary significantly from those disclosed during our field investigation. The findings and conclusions of this report can be affected by the passage of time, such as seasonal weather conditions, manmade influences, such as construction on or adjacent to the site, natural events such as earthquakes, slope instability, flooding, or groundwater fluctuations. If any variations or undesirable conditions are encountered during construction, the geotechnical engineer should be notified so that supplemental recommendations can be made.

The conclusions of this report are based on the information provided regarding the proposed construction. If the proposed construction is relocated or redesigned, the conclusions in this report may not be valid. The geotechnical engineer should be notified of any changes so that the recommendations can be reviewed and reevaluated.

Misinterpretations of this report by other design team members can result in project delays and cost overruns. These risks can be reduced by having Krazan & Associates, Inc. involved with the design teams' meetings and discussions after submitting the report. Krazan & Associates, Inc. should also be retained for reviewing pertinent elements of the design team's plans and specifications. Contractors can also misinterpret this report. To reduce this, risk Krazan & Associates, Inc. should participate in pre-bid and preconstruction meetings, and provide construction observations during the site work.

This report is a geotechnical engineering investigation with the purpose of evaluating the soil conditions in terms of foundation design. The scope of our services did not include any environmental site assessment for the presence or absence of hazardous and/or toxic materials in the soil, groundwater or atmosphere, or the presence of wetlands. Any statements or absence of statements, in this report or on any soils log regarding odors, unusual or suspicious items, or conditions observed are strictly for descriptive purposes and are not intended to convey engineering judgment regarding potential hazardous and/or toxic assessments.

The geotechnical information presented herein is based upon professional interpretation utilizing standard engineering practices and a degree of conservatism deemed proper for this project. It is not warranted that such information and interpretation cannot be superseded by future geotechnical developments. We emphasize that this report is valid for this project as outlined above, and should not be used for any other site. Our report is prepared for the exclusive use of our client. No other party may rely on the product of our services unless we agree in advance to such reliance in writing.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,  
**KRAZAN & ASSOCIATES, INC.**

04/11/19




Michael D. Rundquist, P.E.  
Senior Project Manager

*Theresa R. Nunan*

Theresa R. Nunan  
Project Engineer

TRN:MDR

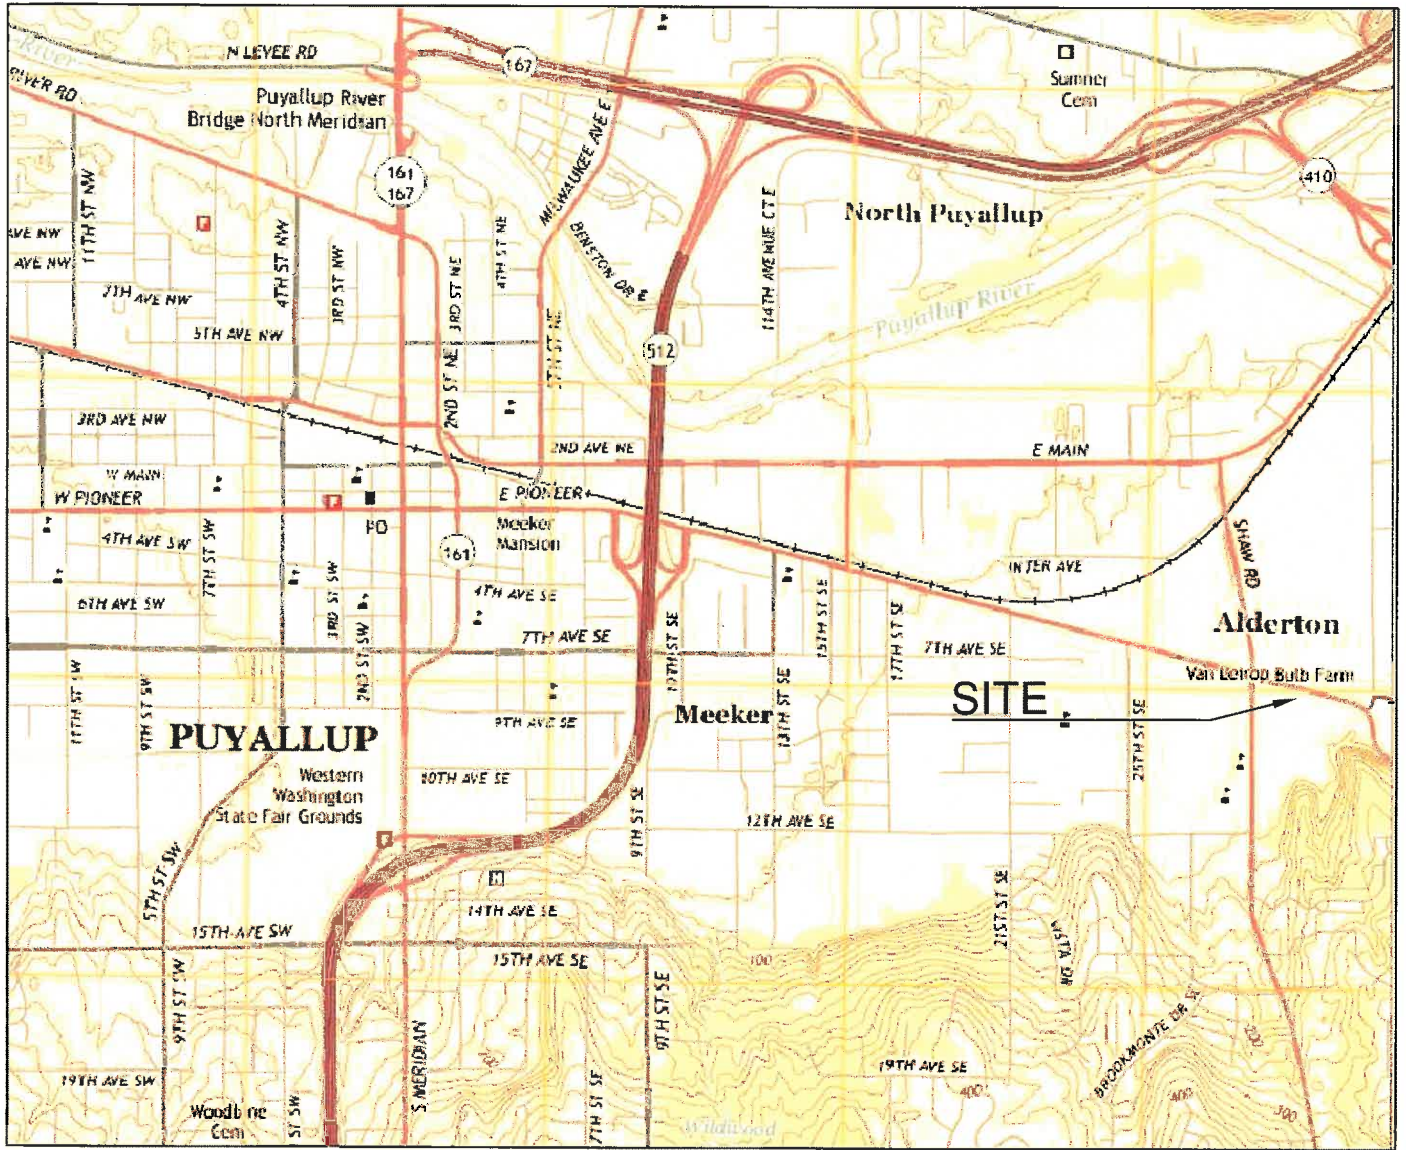

Reference: USGS topographic map website, Puyallup, WA, dated 2017.



### Vicinity Map

East Town Crossing

Shaw Rd & E Pioneer Way, Puyallup, WA

Project Number: 062-19007

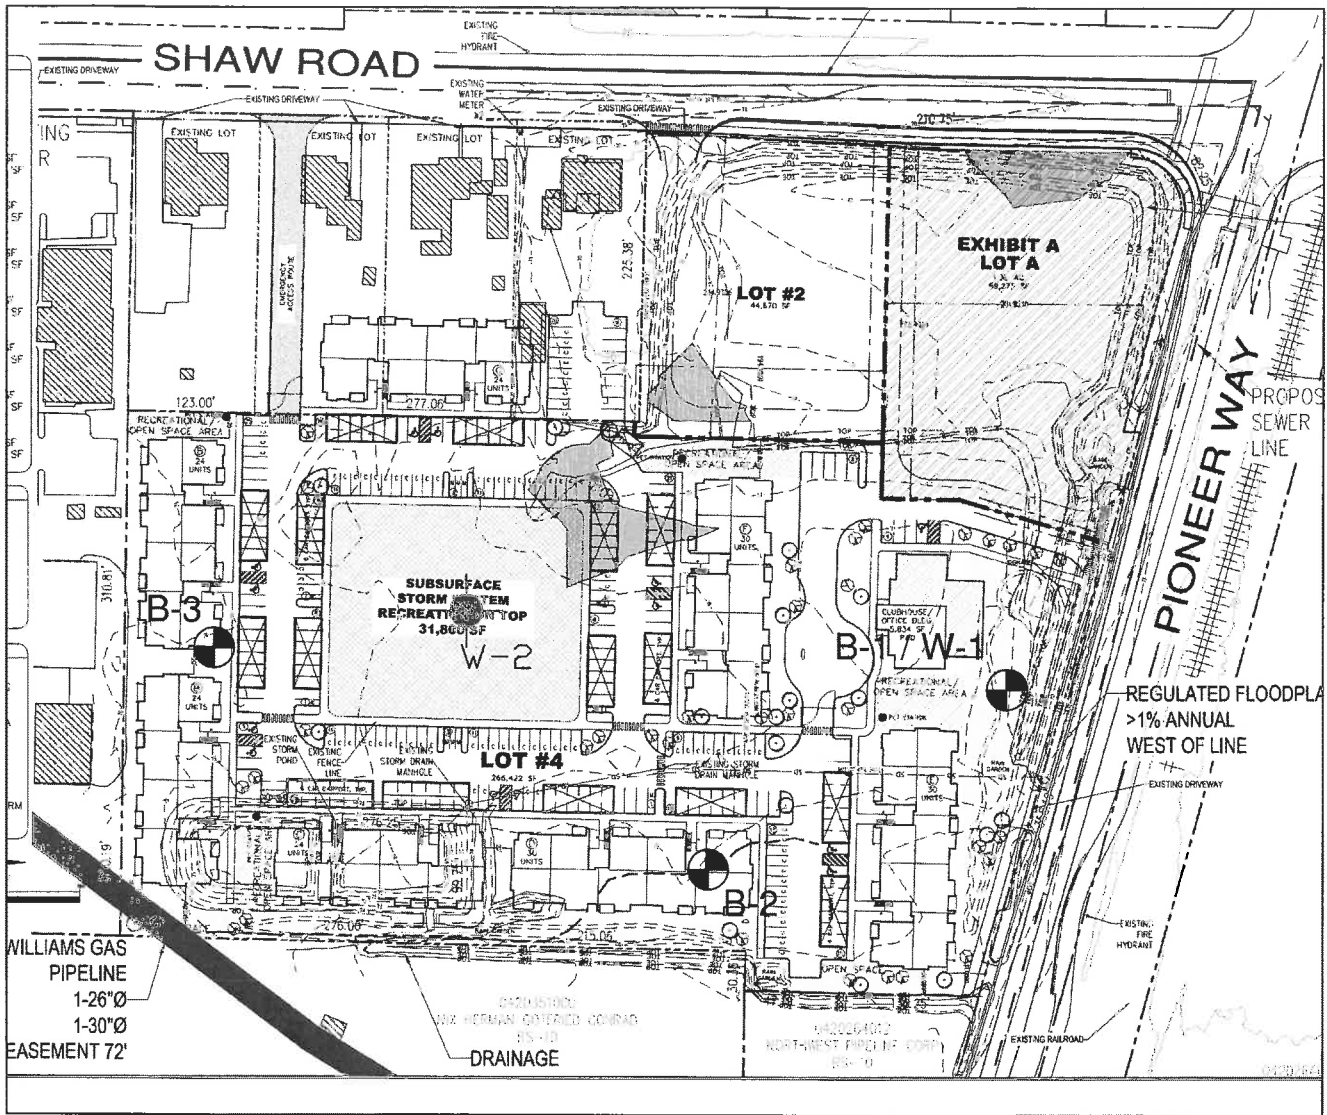
 **Krazan** & ASSOCIATES, INC.

Figure 1



Drawn By: T. Nunan


Date: April 2019

Not to Scale




**LEGEND**

-  B-1 Number and Approximate Location of Borings
-  W-1 Approximate Location of Monitoring Well



Reference: Plan Sheet titled "Overall Site Plan", prepared by Abbey Road Group dated December 7, 2018.

Site Plan

East Town Crossing	Figure 2
Shaw Rd & E Pioneer Way, Puyallup, WA	
Project Number: 062-19007	
	Drawn By: T. Nunan Date: April 2019 Not to Scale

## **APPENDIX A**

### **FIELD INVESTIGATION AND LABORATORY TESTING**

#### **Field Investigation**

The field investigation consisted of a surface reconnaissance and a subsurface exploration program. Exploratory borings and monitoring wells were drilled and sampled for subsurface exploration at this site. The soil explorations reached depths of approximately 38.5 feet below the existing ground surface. The approximate exploratory boring locations are shown on the Site Plan (Figure 2). The logs of the soil explorations and monitoring wells are presented in this appendix. The depths shown on the attached logs are from the existing ground surface at the time of our exploration.

The drilled borings were advanced using a subcontracted drilling rig. Soil samples were obtained by using the Standard Penetration Test (SPT) as described in ASTM Test Method D1586. The Standard Penetration Test and sampling method consists of driving a standard 2-inch outside-diameter, split barrel sampler into the subsoil with a 140-pound hammer free falling a vertical distance of 30 inches. The summation of hammer-blows required to drive the sampler the final 12-inches of an 18-inch sample interval is defined as the Standard Penetration Resistance, or N-value. The blow count is presented graphically on the boring logs in this appendix. The resistance, or "N" value, provides a measure of the relative density of granular soils or of the relative consistency of cohesive soils.

The soils encountered were logged in the field during the exploration and are described in general accordance with the Unified Soil Classification System (USCS). All samples were returned to our laboratory for evaluation.

#### **Laboratory Testing**

The laboratory testing program was developed primarily to determine the index properties of the soils. Test results were used for soil classification and as criteria for determining the engineering suitability of the surface and subsurface materials encountered.

<b>Project:</b> East Town Crossing		<b>Project Number:</b> 062-19007		<b>Client:</b> Abbey Road Group		<b>Boring No.</b> <b>B-1</b>	
<b>Address, City, State:</b> SE Corner Shaw Road & E. Pioneer Way, Puyallup, WA				<b>Drilling Company:</b> Geologic Drill Partners			
<b>Project Manager:</b> Theresa Nunan		<b>Date</b>	<b>Started:</b> 3.11.2019		<b>Equipment:</b> Track Bobcat		
<b>Field Engineer:</b> Theresa Nunan			<b>Completed:</b> 3.11.2019		<b>Drilling Method:</b> Hollow Stem Augers		
<b>Notes:</b> Monitoring Well W-1 installed in borehole.			<b>Backfilled:</b> 3.11.2019		<b>Hammer Type:</b> 140-lb. Manual		
<b>Ground Surface Elevation:</b> 72 +/- feet MSL			<b>Groundwater Depth:</b> 8 feet		<b>Groundwater Elev.:</b>		<b>Total Depth of Boring:</b> 21.5 ft.

Elev. (feet)	Depth (feet)	Sample Type	Sample ID	Blow Counts	N-Value (blows/ft)	Graphic Log	Classification	Lab Results
		SPT	1-1	6	15		Brown Silty SAND (SM), trace gravel and very thin roots, with occasional 6 to 8-inch thick stiff sandy clay layers, medium dense, moist	
	5	SPT	1-2A 1-2B	4 5	10		Brownsih Grey Poorly Graded SAND (SP), fine grained, medium dense, moist	
		SPT	1-3A 1-3B	1 1/12"	1/12"		Alternating 4 to 12-inch thick layers of brown Sandy SILT (ML) and Silty SAND (SM), medium stiff/loose, moist to wet	% Si/Cl = 78.5 % MC = 35.4
	10	SPT	1-4	2 6	8		Dark Brownish Grey Silty CLAY (CL) with marsh grass, seams of peat and thin roots, very soft, wet	LL = 35 PI = 1 % F. Sa = 19.8 % Si/Cl = 79.1 % MC = 51.2
		SPT	1-5	4 4	8		--- Becomes Clayey SILT (ML), with fine sand and thin roots, very soft	
	15	SPT	1-6	5 4	8		Dark Grey/Black Silty SAND (SM), fine to medium grained, loose, wet	
		SPT	1-6	12 12	24		--- Same	
	20	SPT	1-6	4	24		--- Becomes Poorly Graded SAND (SP-SM) with Silt, fine to medium grained, medium dense, wet	
25							<b>End of Boring at 21.5 Feet</b>	

<b>Project:</b> East Town Crossing		<b>Project Number:</b> 062-19007		<b>Client:</b> Abbey Road Group		<b>Boring No.</b> <b>B-2</b>	
<b>Address, City, State:</b> SE Corner Shaw Road & E. Pioneer Way, Puyallup, WA				<b>Drilling Company:</b> Geologic Drill Partners			
<b>Project Manager:</b> Theresa Nunan		<b>Date</b>	<b>Started:</b> 3.11.2019		<b>Equipment:</b> Track Bobcat		
<b>Field Engineer:</b> Theresa Nunan			<b>Completed:</b> 3.11.2019		<b>Drilling Method:</b> Hollow Stem Augers		
<b>Notes:</b>			<b>Backfilled:</b> 3.11.2019		<b>Hammer Type:</b> 140-lb. Manual		
<b>Ground Surface Elevation:</b> 73 +/- feet MSL			<b>Groundwater Depth:</b> 8 feet		<b>Groundwater Elev.:</b>		<b>Total Depth of Boring:</b> 38.5 ft.

Elev. (feet)	Depth (feet)	Sample Type	Sample ID	Blow Counts	N-Value (blows/ft)	Graphic Log	Classification	Lab Results
							5 inches Grass and Topsoil	
		SPT	2-1	2 2 5	7		Brown Silty SAND (SM), fine grained, with occassional sandy clay seams, loose, moist	
	5	SPT	2-2	3 4 2	6		--- Same	% Si/Cl = 42.9 % MC = 29.3
		SPT	2-3	4 8 11	19		Brownish Grey Sandy SILT (ML), fine grained, with occasional 1 to 2-inch thick seams dark grey fine sand, moist to wet, stiff	% Si/Cl = 88.2 % MC = 37.0
	10	SPT	2-4	5 8 8	16		Dark Grey/Black Silty SAND (SM), fine to medium grained, medium dense, wet	% Si/Cl = 14.5 % MC = 25.0
	15	SPT	2-5	28 12 12	24		--- Becomes Sand (SP-SM) with Silt, fine to medium grained, medium dense	% Grav = 0 % Sa = 90.8 % Si/Cl = 8.9 % MC = 22.6
							--- At 18 feet, drilling choppy due to lots of gravel	
	20	SPT	2-6	18 40 20/8"	60/8"		Dark Grey/Black Poorly Graded GRAVEL (GP-GM) with sand and silt, very dense, wet	
	25							


<b>Project:</b> East Town Crossing		<b>Project Number:</b> 062-19007		<b>Client:</b> Abbey Road Group		<b>Boring No.</b> <b>B-2</b>		
<b>Address, City, State:</b> SE Corner Shaw Road & E. Pioneer Way, Puyallup, WA				<b>Drilling Company:</b> Geologic Drill Partners				
<b>Project Manager:</b> Theresa Nunan		<b>Date</b>	<b>Started:</b> 3.11.2019		<b>Equipment:</b> Track Bobcat			
<b>Field Engineer:</b> Theresa Nunan			<b>Completed:</b> 3.11.2019		<b>Drilling Method:</b> Hollow Stem Augers			
<b>Notes:</b>			<b>Backfilled:</b> 3.11.2019		<b>Hammer Type:</b> 140-lb. Manual			
<b>Ground Surface Elevation:</b> 73 +/- feet MSL			<b>Groundwater Depth:</b> 8 feet		<b>Groundwater Elev.:</b>		<b>Total Depth of Boring:</b> 38.5 ft.	
Elev. (feet)	Depth (feet)	Sample Type	Sample ID	Blow Counts	N-Value (blows/ft)	Graphic Log	Classification	Lab Results
	25	SPT	2-7	10 9 14	23		Dark Grey SAND (SP-SM) with Silt, trace gravel, fine to coarse grained, with occasional 3 to 4-inch thick seams gravel (GP-GM) with silt, medium dense, wet	
	30	SPT	2-8	4 4 15	19		--- Same	% Grav = 9.0 % Sa = 82.5 % Si/Cl = 8.5 % MC = 18.8
	35	SPT	2-9	6 5 10	15		At 33 feet, alternating 4 to 12-inch thick layers of Dark Grey/Black SAND (SP-SM) with gravel and silt <b>AND</b> Dark Grey/Black GRAVEL (GP-GM) with sand and silt, medium dense, wet	% Si/Cl = 5.6 % MC = 18.9
		SPT	2-10	37 20 17	37		--- Becomes dense	% Grav = 44.8 % Sa = 47.4 % Si/Cl = 7.8 % MC = 9.4
	40						<b>End of Boring at 38.5 Feet</b>	
	45							
	50							




<b>Project:</b> East Town Crossing	<b>Project Number:</b> 062-19007	<b>Client:</b> Abbey Road Group	<b>Boring No.</b> <b>B-3</b>
<b>Address, City, State:</b> SE Corner Shaw Road & E. Pioneer Way, Puyallup, WA		<b>Drilling Company:</b> Geologic Drill Partners	
<b>Project Manager:</b> Theresa Nunan	<b>Date</b>	<b>Started:</b> 3.11.2019	<b>Equipment:</b> Track Bobcat
<b>Field Engineer:</b> Theresa Nunan		<b>Completed:</b> 3.11.2019	<b>Drilling Method:</b> Hollow Stem Augers
<b>Notes:</b>		<b>Backfilled:</b> 3.11.2019	<b>Hammer Type:</b> 140-lb. Manual
<b>Ground Surface Elevation:</b> 74 +/- feet MSL	<b>Groundwater Depth:</b> 7 feet	<b>Total Depth of Boring:</b> 21.5 ft.	

Elev. (feet)	Depth (feet)	Sample Type	Sample ID	Blow Counts	N-Value (blows/ft)	Graphic Log	Classification	Lab Results
		SPT	3-1	2 4 5	9		Brown Silty SAND (SM), trace gravel and very thin roots, with occasional 2 to 3-inch thick stiff sandy clay layers, loose, moist	
	5	SPT	3-2	4 6 6	12		Brownish Grey Sandy SILT (ML), fine grained, with occasional 0.5 to 2-inch thick seams dark grey fine sand, stiff, moist to wet, stiff	
		SPT	3-3	5 5 5	10		Dark Grey/Black Silty SAND (SM), fine to medium grained, medium dense, wet  --- Becomes Sand (SP-SM) with Silt, fine to medium grained, medium dense, wet	
	10	SPT	3-4	3 5 7	12			
	15	SPT	3-5	6 10 7	17		Dark Grey/Black Silty SAND (SM), fine to medium grained, with a 4-inch thick seam of peat at 20 feet, medium dense, wet	
	20	SPT	3-6	4 6 8	14			
							<b>End of Boring at 21.5 Feet</b>	
25								


Monitoring Well  
MW-1

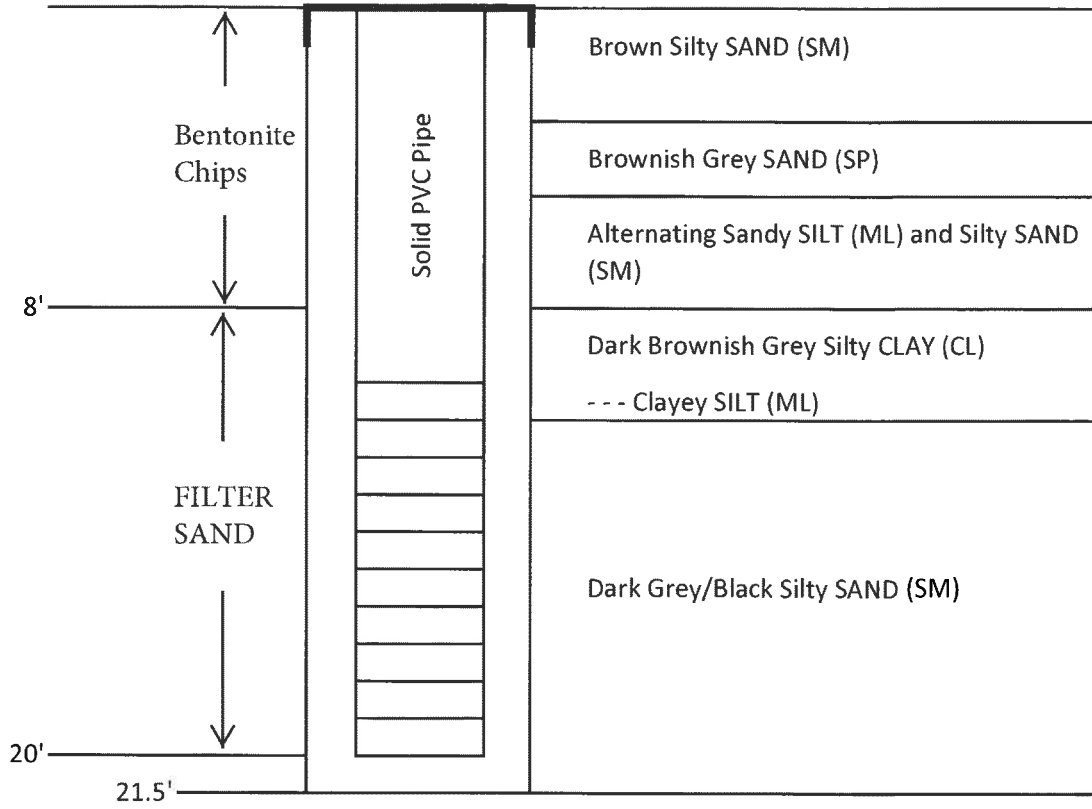

Monitoring Well  
MW-2

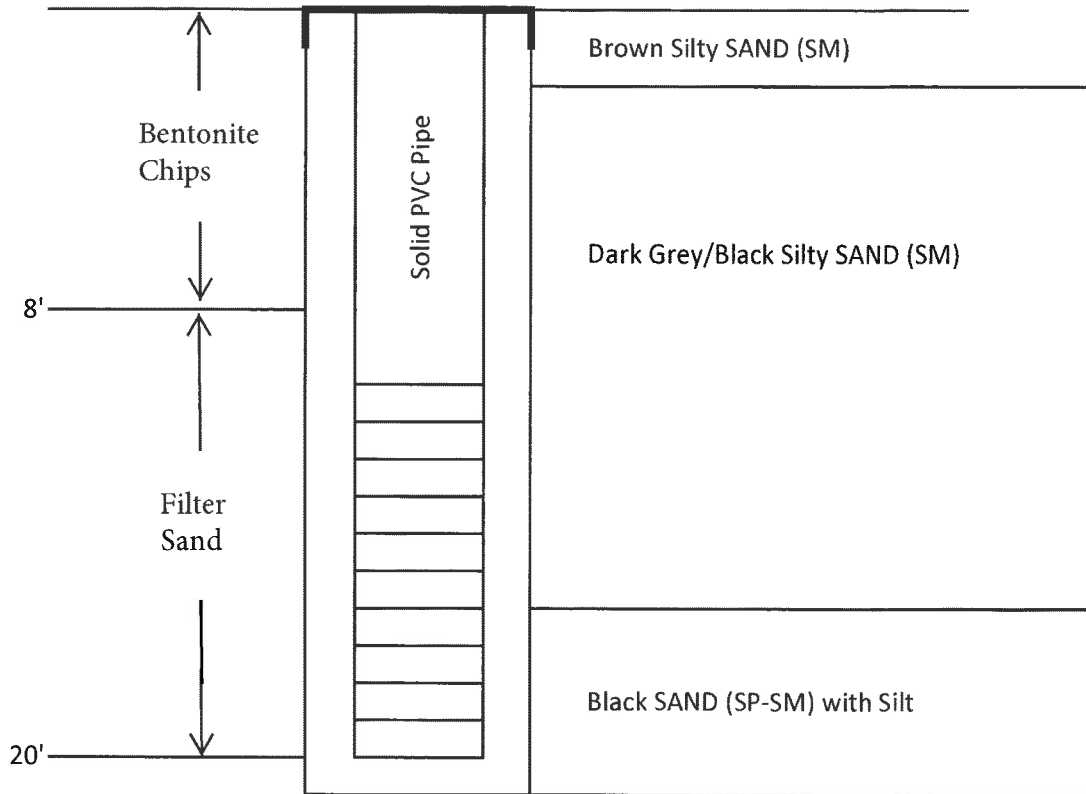

# Particle Size Distribution Report

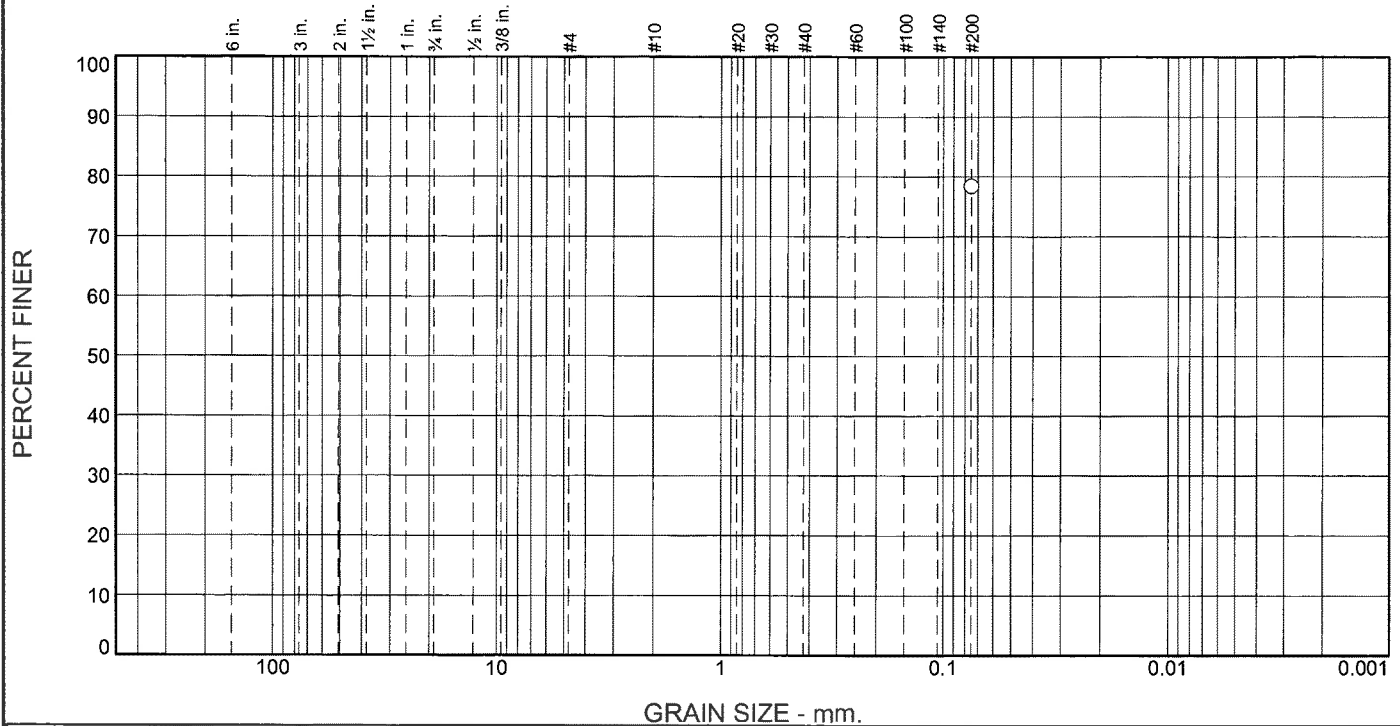

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						78.5

TEST RESULTS			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	78.5		

\* (no specification provided)

**Material Description**

Brown Sandy SILT

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= ML      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

**Remarks**

Sample ID: 19L131  
Sample Date: 3-11-19  
Moisture Content = 35.4 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-22-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas

**Title:** Materials Laboratory Manager

**Location:** B-1 Sample 1-2B  
**Sample Number:** 19L131      **Depth:** 5'-6.5'

**Date Sampled:** 3-11-19




**Client:** Abbey Road Group Land Development Services Company.LLC.  
**Project:** East Town Crossing

**Project No:** 062-19007

**Figure**

# Particle Size Distribution Report

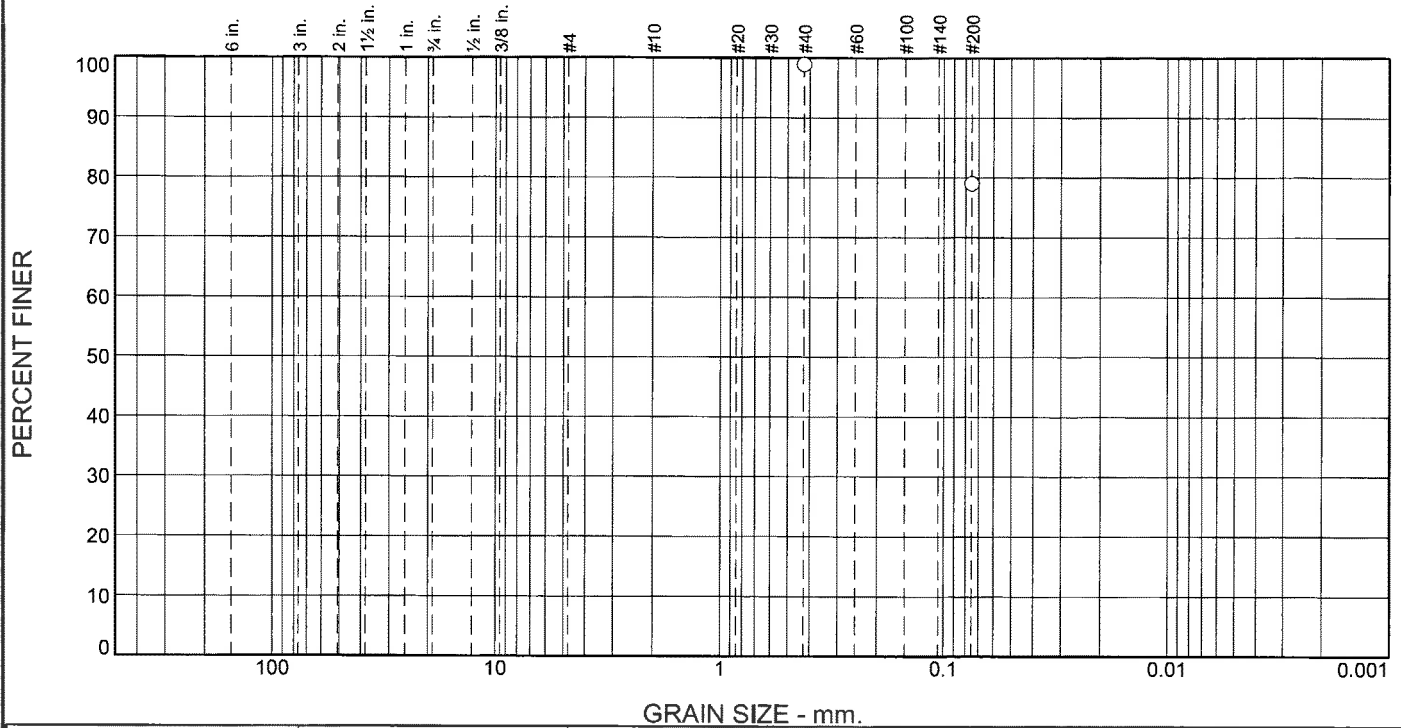

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
					19.8	79.1

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#40	98.9		
#200	79.1		

\* (no specification provided)

**Material Description**

Grey Clayey SILT with fine sand

**Atterberg Limits (ASTM D 4318)**

PL= 33.5      LL= 34.9      PI= 1.4

**Classification**

USCS (D 2487)= ML      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>= 0.1948      D<sub>85</sub>= 0.1258      D<sub>60</sub>=  
D<sub>50</sub>=              D<sub>30</sub>=              D<sub>15</sub>=  
D<sub>10</sub>=              C<sub>u</sub>=              C<sub>c</sub>=

**Remarks**

Sample ID: 19L120  
Sample Date: 3-11-19  
Moisture Content = 51.2 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-15-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas

**Title:** Materials Laboratory Manager

**Location:** B-1 Sample 1-3B  
**Sample Number:** 19L120

**Depth:** 7.5'-9'

**Date Sampled:** 3-11-19




**Client:** Abbey Road Group Land Development Services Company.LLC.  
**Project:** East Town Crossing

**Project No:** 062-19007

**Figure**

# Particle Size Distribution Report

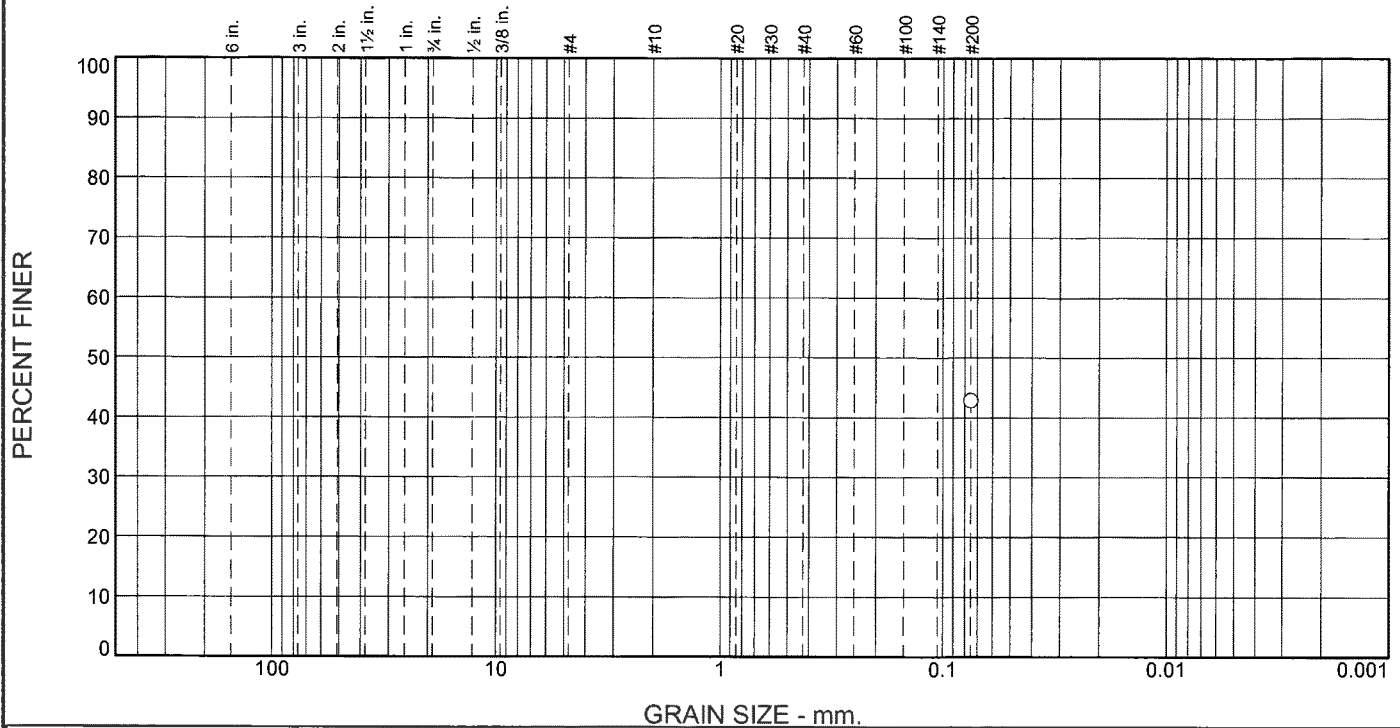

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						42.9

TEST RESULTS			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	42.9		

\* (no specification provided)

**Material Description**

Brown silty sand.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SM      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

**Remarks**

Sample ID: 19L132  
Sample Date: 3-11-19  
Moisture Content = 29.3 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-22-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas


**Title:** Materials Laboratory Manager

**Location:** B-2 Sample 2-2      **Depth:** 5'-6.5'      **Date Sampled:** 3-11-19  
**Sample Number:** 19L132



**Client:** Abbey Road Group Land Development Services Company, LLC.  
**Project:** East Town Crossing  
**Project No:** 062-19007      **Figure**

# Particle Size Distribution Report

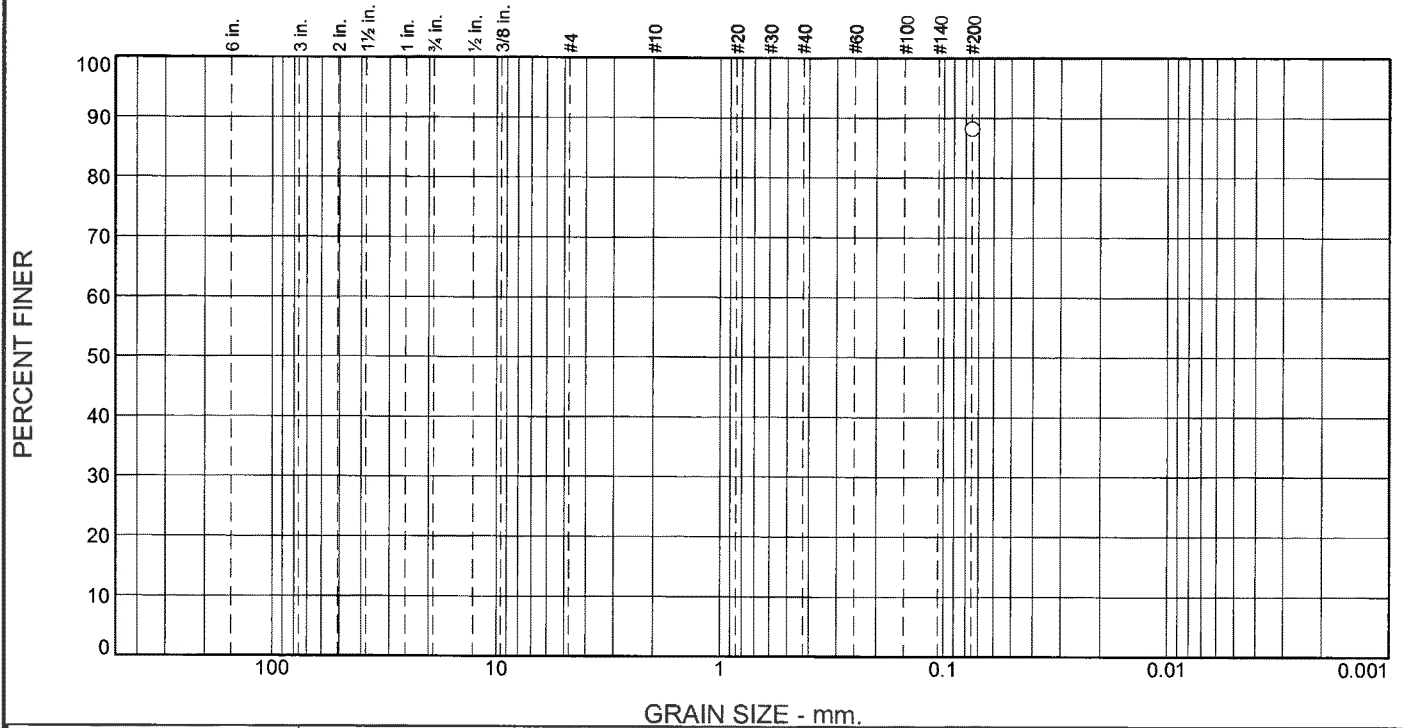

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						88.2

TEST RESULTS			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	88.2		

\* (no specification provided)

**Material Description**

Brown sandy silt.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= ML      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

**Remarks**

Sample ID: 19L133  
Sample Date: 3-11-19  
Moisture Content = 37.0%

---

Date Received: 3-15-19      Date Tested: 3-22-19

Tested By: M.Thomas

Checked By: M.Thomas

Title: Materials Laboratory Manager

Location: B-2 Sample 2-3  
Sample Number: 19L133

Depth: 7.5'-9'

Date Sampled: 3-11-19




Client: Abbey Road Group Land Development Services Company.LLC.  
Project: East Town Crossing

Project No: 062-19007

Figure

# Particle Size Distribution Report

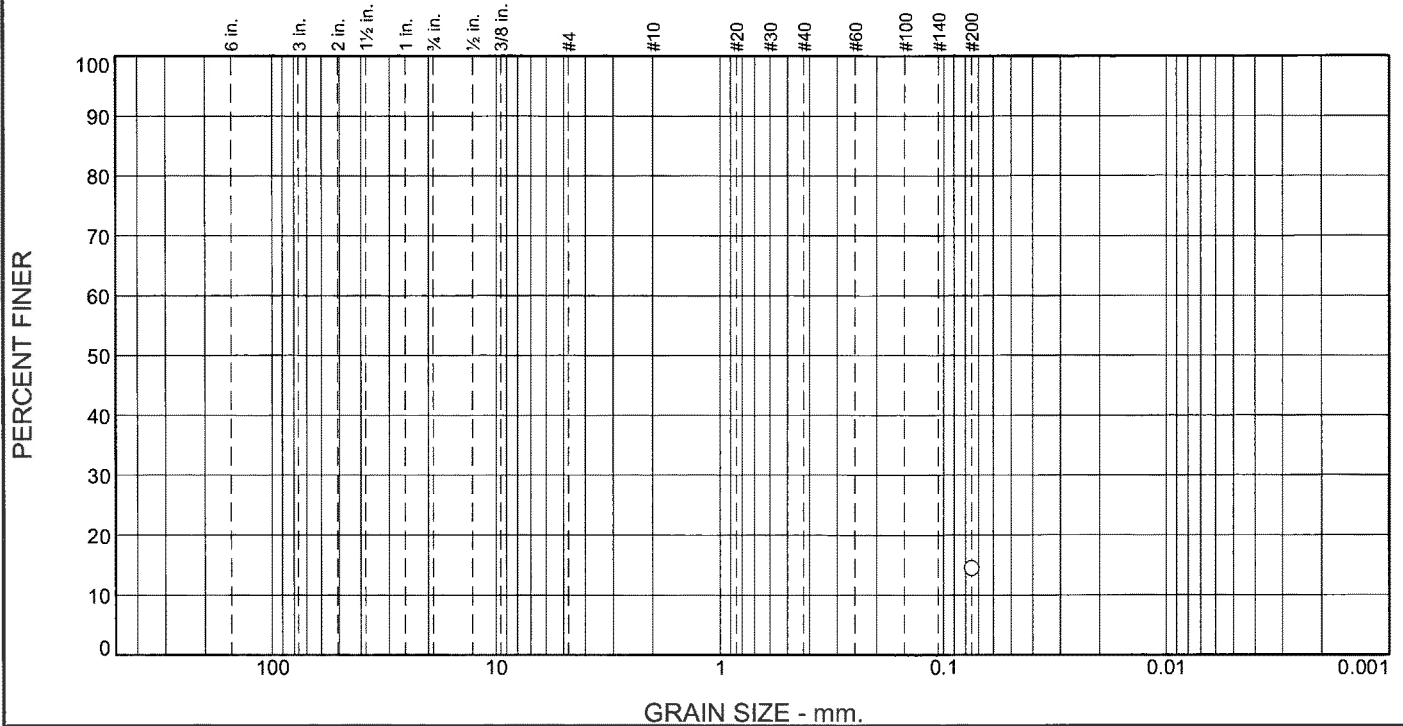

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
						14.5

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	14.5		

\* (no specification provided)

**Material Description**

Dark Grey/Black silty sand.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SM      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
 D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
 D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

**Remarks**

Sample ID: 19L134  
 sample Date: 3-11-19  
 Moisture Content = 25.0 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-22-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas

**Title:** Materials Laboratory Manager

**Location:** B-2 Sample 2-4  
**Sample Number:** 19L134

**Depth:** 10'-11.5'

**Date Sampled:** 3-11-19




**Client:** Abbey Road Group Land Development Services Company, LLC.  
**Project:** East Town Crossing

**Project No:** 062-19007

**Figure**



# Particle Size Distribution Report

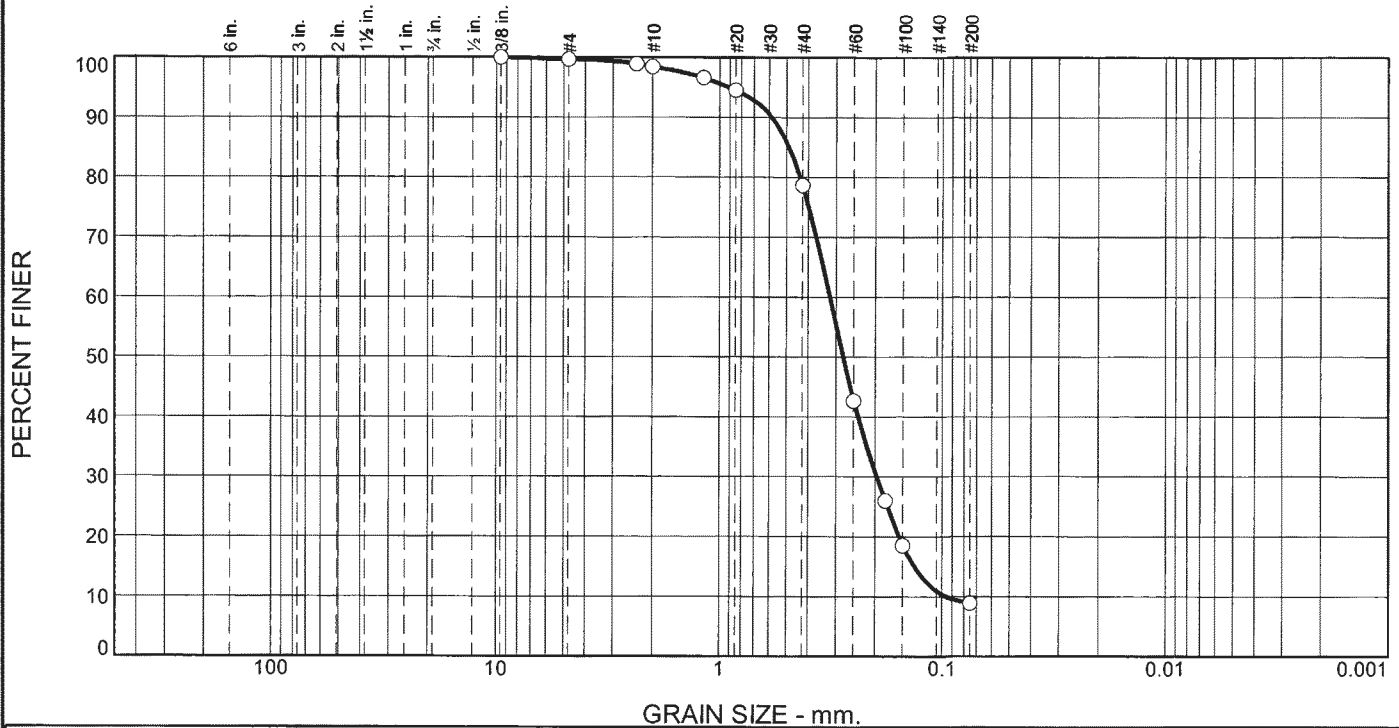

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
0.0	0.0	0.3	1.2	19.8	69.8	8.9

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
.375	100.0		
#4	99.7		
#8	98.9		
#10	98.5		
#16	96.6		
#20	94.5		
#40	78.7		
#60	42.7		
#80	26.0		
#100	18.5		
#200	8.9		

\* (no specification provided)

**Material Description**

Dark Grey/Black sand with silt

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= SP-SM      AASHTO (M 145)= A-3

**Coefficients**

D<sub>90</sub>= 0.5827      D<sub>85</sub>= 0.4892      D<sub>60</sub>= 0.3205  
D<sub>50</sub>= 0.2792      D<sub>30</sub>= 0.1966      D<sub>15</sub>= 0.1334  
D<sub>10</sub>= 0.0956      C<sub>u</sub>= 3.35              C<sub>c</sub>= 1.26

**Remarks**

Sample ID: 19L121  
Sample Date: 3-11-19  
Moisture Content = 22.6 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-22-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas

**Title:** Materials laboratory Manager

**Location:** B-2 Sample 2-5  
**Sample Number:** 19L121

**Depth:** 15'-16.5'

**Date Sampled:** 3-11-19




**Client:** Abbey Road Group Land Development Services Company.LLC.  
**Project:** East Town Crossing

**Project No:** 062-19007

**Figure**

# Particle Size Distribution Report

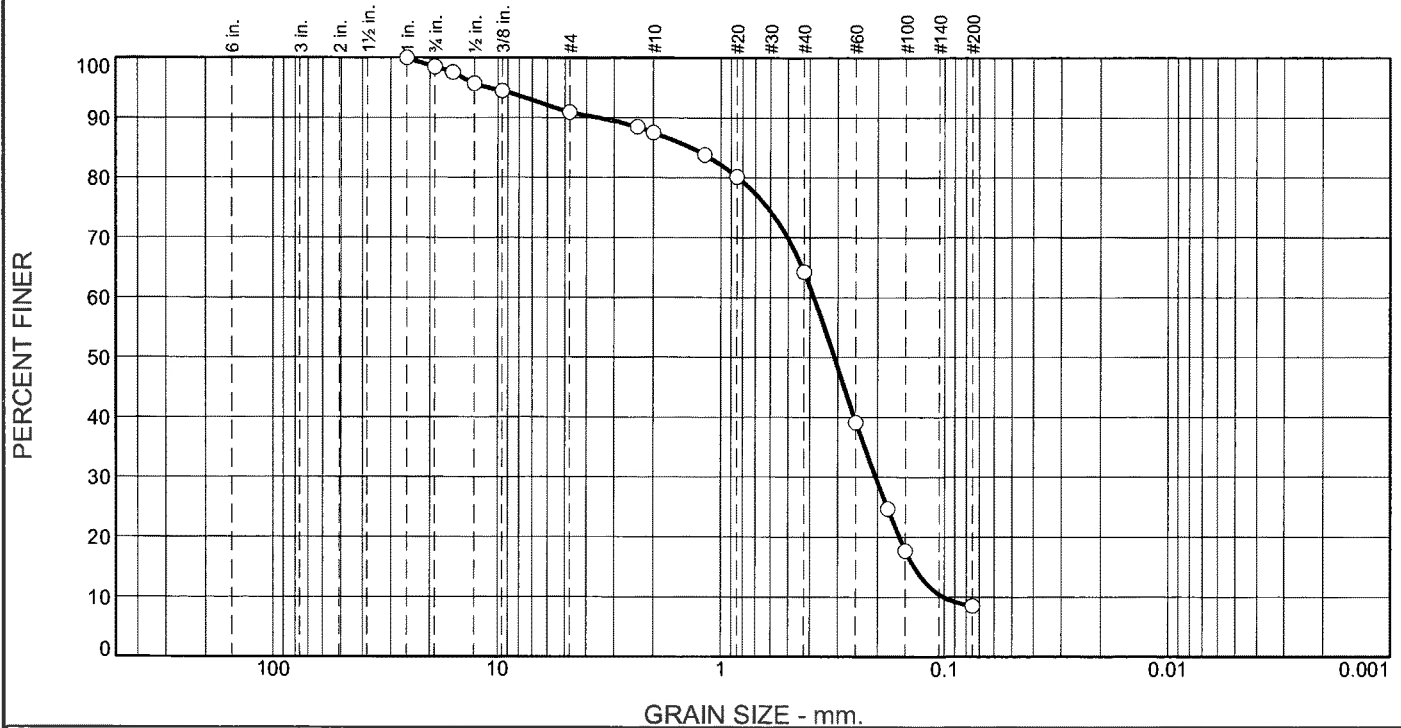

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
0.0	1.4	7.6	3.5	23.3	55.7	8.5

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1	100.0		
.75	98.6		
.625	97.6		
.5	95.7		
.375	94.5		
#4	91.0		
#8	88.5		
#10	87.5		
#16	83.8		
#20	80.2		
#40	64.2		
#60	39.1		
#80	24.7		
#100	17.7		
#200	8.5		

\* (no specification provided)

**Material Description**

Dark Grey/Black sand with silt.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SP-SM      AASHTO (M 145)= A-3

**Coefficients**

D<sub>90</sub>= 3.5671      D<sub>85</sub>= 1.3567      D<sub>60</sub>= 0.3839  
D<sub>50</sub>= 0.3115      D<sub>30</sub>= 0.2039      D<sub>15</sub>= 0.1371  
D<sub>10</sub>= 0.1011      C<sub>u</sub>= 3.80      C<sub>c</sub>= 1.07

**Remarks**

Sample ID: 19L122  
Sample Date: 3-11-19  
Moisture Content = 18.8 %

---

Date Received: 3-15-19      Date Tested: 3-22-19

Tested By: M.Thomas

Checked By: M.Thomas

Title: Materials Laboratory Manager

Location: B-2 Sample 2-8  
Sample Number: 19L122

Depth: 30'-31.5'

Date Sampled: 3-11-19




Client: Abbey Road Group Land Development Services Company.LLC.  
Project: East Town Crossing

Project No: 062-19007

Figure

# Particle Size Distribution Report

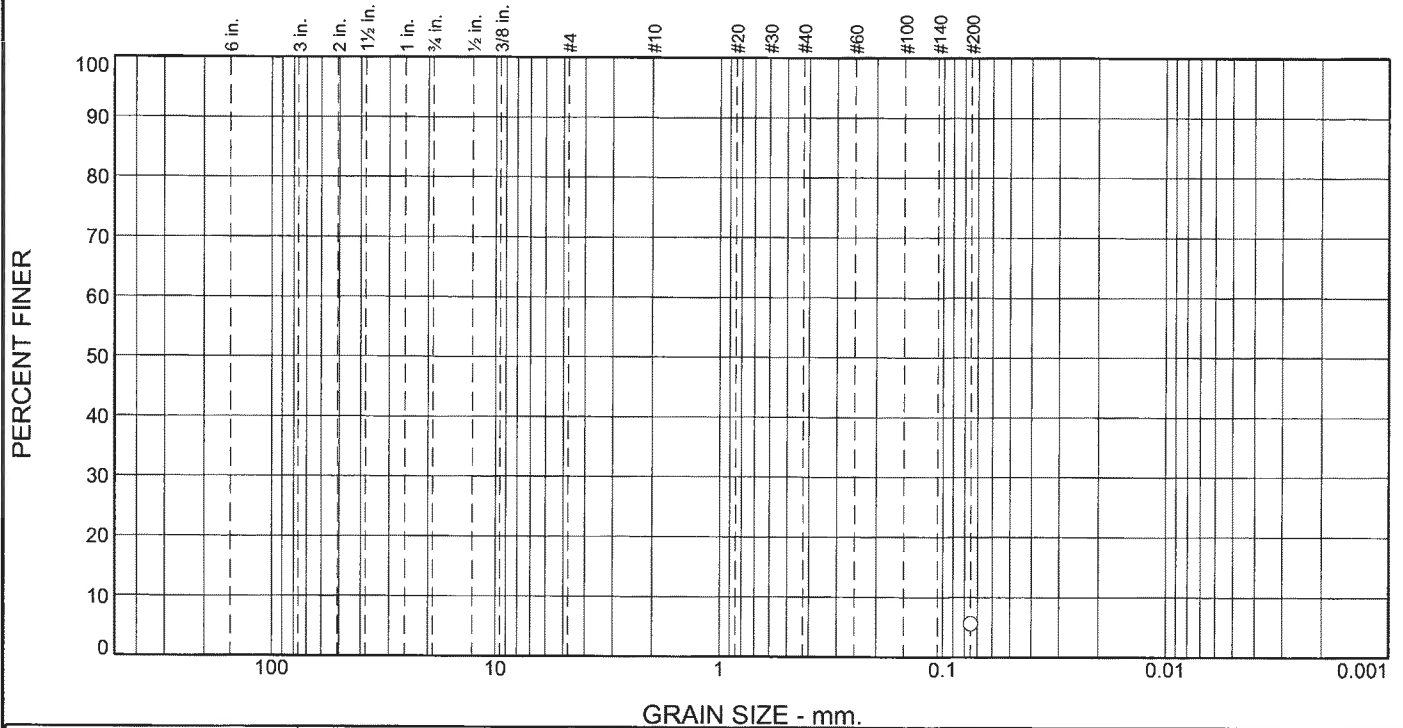

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	5.6

TEST RESULTS			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
#200	5.6		

\* (no specification provided)

**Material Description**

Dark Grey/Black sand with silt.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SP-SM      AASHTO (M 145)=

**Coefficients**

D<sub>90</sub>=      D<sub>85</sub>=      D<sub>60</sub>=  
 D<sub>50</sub>=      D<sub>30</sub>=      D<sub>15</sub>=  
 D<sub>10</sub>=      C<sub>u</sub>=      C<sub>c</sub>=

**Remarks**

Sample ID: 19L135  
 Sample Date: 3-11-19  
 Moisture Content = 18.9 %

---

**Date Received:** 3-15-19      **Date Tested:** 3-11-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas


**Title:** Materials Laboratory Manager

**Location:** B-2 Sample 2-9      **Depth:** 35'-36.5'      **Date Sampled:** 3-11-19  
**Sample Number:** 19L135



**Client:** Abbey Road Group Land Development Services Company.LLC.  
**Project:** East Town Crossing  
**Project No:** 062-19007      **Figure**

# Particle Size Distribution Report

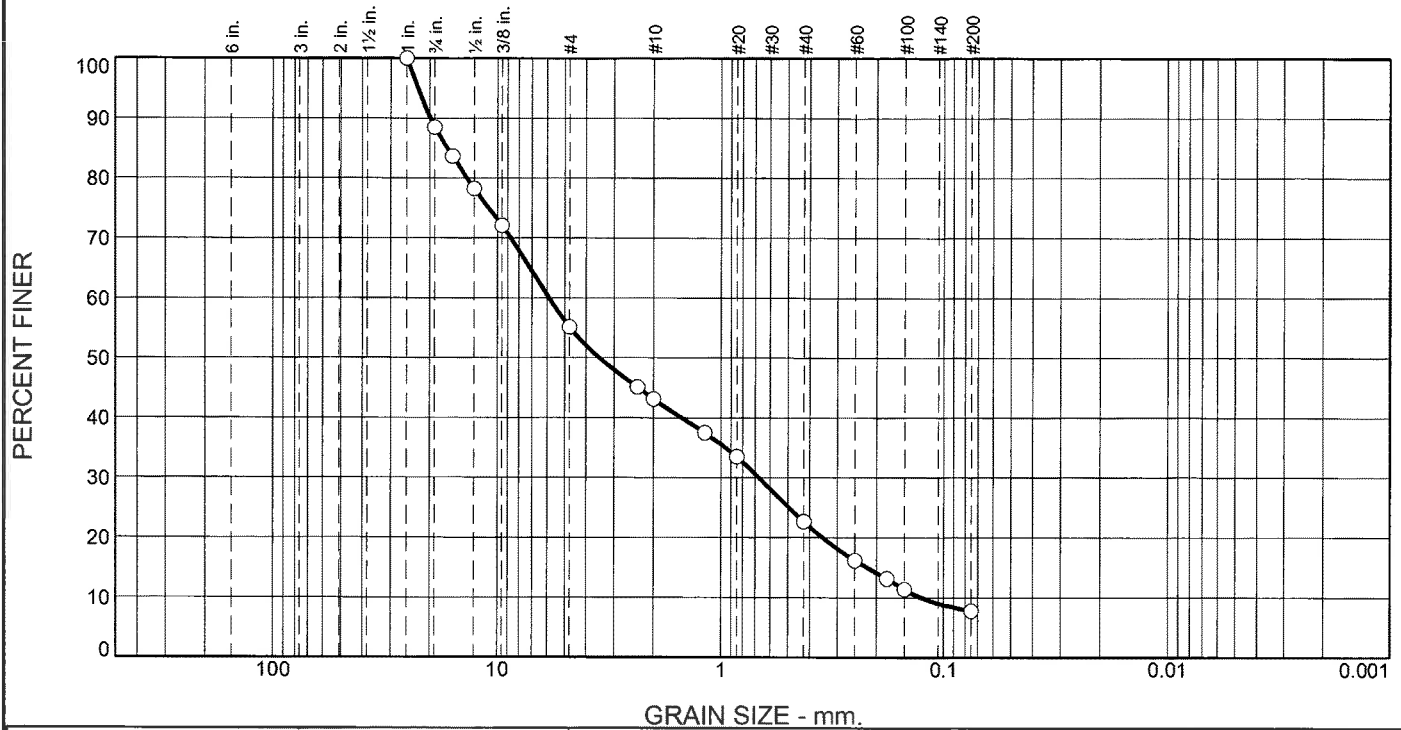

% +3"	% Gravel		% Sand			% Fines
	Coarse	Fine	Coarse	Medium	Fine	
0.0	11.5	33.3	12.0	20.5	14.9	7.8

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1	100.0		
.75	88.5		
.625	83.7		
.5	78.3		
.375	72.1		
#4	55.2		
#8	45.1		
#10	43.2		
#16	37.5		
#20	33.5		
#40	22.7		
#60	16.2		
#80	13.2		
#100	11.4		
#200	7.8		

\* (no specification provided)

**Material Description**

Dark Grey/Black sand with silt and gravel.

**Atterberg Limits (ASTM D 4318)**

PL= NP      LL= NV      PI= NP

**Classification**

USCS (D 2487)= SP-SM      AASHTO (M 145)= A-1-a

**Coefficients**

D <sub>90</sub> = 19.9452	D <sub>85</sub> = 16.7747	D <sub>60</sub> = 5.8717
D <sub>50</sub> = 3.4968	D <sub>30</sub> = 0.6741	D <sub>15</sub> = 0.2194
D <sub>10</sub> = 0.1253	C <sub>u</sub> = 46.85	C <sub>c</sub> = 0.62

**Remarks**

Sample ID: 19L123  
 Sample Date: 3-11-19  
 Moisture Content = 9.4 %

---

**Date Received:** 3-11-19      **Date Tested:** 3-11-19

**Tested By:** M.Thomas

**Checked By:** M.Thomas

**Title:** Materials Laboratory Manager

**Location:** B-2 Sample 2-10  
**Sample Number:** 19L123

**Depth:** 37'-38.5'

**Date Sampled:** 3-11-19



**Client:** Abbey Road Group Land Development Services Company.LLC.  
**Project:** East Town Crossing

**Project No:** 062-19007

**Figure**

## **APPENDIX B**

### **EARTHWORK SPECIFICATIONS**

#### **GENERAL**

When the text of the report conflicts with the general specifications in this appendix, **the recommendations in the report have precedence.**

**SCOPE OF WORK:** These specifications and applicable plans pertain to and include all earthwork associated with the site rough grading, including but not limited to the furnishing of all labor, tools, and equipment necessary for site clearing and grubbing, stripping, preparation of foundation materials for receiving fill, excavation, processing, placement and compaction of fill and backfill materials to the lines and grades shown on the project grading plans, and disposal of excess materials.

**PERFORMANCE:** The Contractor shall be responsible for the satisfactory completion of all earthwork in accordance with the project plans and specifications. This work shall be inspected and tested by a representative of Krazan and Associates, Inc., hereinafter known as the Geotechnical Engineer and/or Testing Agency. Attainment of design grades when achieved shall be certified by the project Civil Engineer. Both the Geotechnical Engineer and Civil Engineer are the Owner's representatives. If the contractor should fail to meet the technical or design requirements embodied in this document and on the applicable plans, he shall make the necessary readjustments until all work is deemed satisfactory as determined by both the Geotechnical Engineer and Civil Engineer. No deviation from these specifications shall be made except upon written approval of the Geotechnical Engineer, Civil Engineer, or project Architect.

No earthwork shall be performed without the physical presence or approval of the Geotechnical Engineer. The Contractor shall notify the Geotechnical Engineer at least 2 working days prior to the commencement of any aspect of the site earthwork.

The Contractor agrees that he shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety of all persons and property; that this requirement shall apply continuously and not be limited to normal working hours; and that the Contractor shall defend, indemnify and hold the Owner and the Engineers harmless from any and all liability, real or alleged, in connection with the performance of work on this project, except for liability arising from the sole negligence of the Owner or the Engineers.

**TECHNICAL REQUIREMENTS:** All compacted materials shall be densified to a density of not less than 95 percent of maximum dry density as determined by ASTM Test Method D1557 as specified in the technical portion of the Geotechnical Engineering Report. The results of these tests and compliance with these specifications shall be the basis upon which satisfactory completion of work will be judged by the Geotechnical Engineer.

**SOIL AND FOUNDATION CONDITIONS:** The Contractor is presumed to have visited the site and to have familiarized himself with existing site conditions and the contents of the data presented in the soil report.

The Contractor shall make his own interpretation of the data contained in said report, and the Contractor shall not be relieved of liability under the contractor for any loss sustained as a result of any variance between conditions indicated by or deduced from said report and the actual conditions encountered during the progress of the work.

**DUST CONTROL:** The work includes dust control as required for the alleviation or prevention of any dust nuisance on or about the site or the borrow area, or off-site if caused by the Contractor's operation either during the performance of the earthwork or resulting from the conditions in which the Contractor leaves the site. The Contractor shall assume all liability, including Court costs of codefendants, for all claims related to dust or windblown materials attributable to his work.

### **SITE PREPARATION**

General site clearing should include removal of any organics, asphaltic concrete, abandoned utilities, structures including foundations, basement walls and floors, rubble, and rubbish. After stripping operations and removal of any loose and/or debris-laden fill, the exposed subgrade should be visually inspected and/or proof rolled to identify any soft/loose areas.

**SUBGRADE PREPARATION:** Subgrade should be prepared as described in our site preparation section of this report.

**EXCAVATION:** All excavation shall be accomplished to the tolerance normally defined by the Civil Engineer as shown on the project grading plans. All over excavation below the grades specified shall be backfilled at the Contractor's expense and shall be compacted in accordance with the applicable technical requirements.

**FILL AND BACKFILL MATERIAL:** No material shall be moved or compacted without the presence of the Geotechnical Engineer. Material from the required site excavation may be utilized for construction site fills provided prior approval is given by the Geotechnical Engineer. All materials utilized for constructing site fills shall be free from vegetable or other deleterious matter as determined by the Geotechnical Engineer.

**PLACEMENT, SPREADING, AND COMPACTION:** The placement and spreading of approved fill materials and the processing and compaction of approved fill and native materials shall be the responsibility of the Contractor. However, compaction of fill materials by flooding, ponding, or jetting shall not be permitted unless specifically approved by local code, as well as the Geotechnical Engineer.

Both cut and fill shall be surface compacted to the satisfaction of the Geotechnical Engineer prior to final acceptance.

**SEASONAL LIMITS:** No fill material shall be placed, spread, or rolled while it is frozen or thawing or during unfavorable wet weather conditions. When the work is interrupted by heavy rains, fill operations shall not be resumed until the Geotechnical Engineer indicates that the moisture content and density of previously placed fill are as specified.

## APPENDIX C

### PAVEMENT SPECIFICATIONS

**1. DEFINITIONS** – The term “pavement” shall include asphalt concrete surfacing, untreated aggregate base, and aggregate subbase. The term “subgrade” is that portion of the area on which surfacing, base, or subbase is to be placed.

**2. SCOPE OF WORK** – This portion of the work shall include all labor, materials, tools, and equipment necessary for and reasonably incidental to the completion of the pavement shown on the plans and as herein specified, except work specifically notes as “Work Not Included.”

**3. PREPARATION OF THE SUBGRADE** – Subgrade should be prepared as described in our site preparation and pavement design sections of this report.

**4. AGGREGATE BASE** – The aggregate base shall be spread and compacted on the prepared subgrade in conformity with the lines, grades, and dimensions shown on the plans. The aggregate base should conform to WSDOT Standard Specification for Crushed Surfacing Base Course or Top Course (Item 9-03.9(3)). The base material shall be compacted to a minimum compaction of 95% as determined by ASTM D1557. Each layer of subbase shall be tested and approved by the Geotechnical Engineer prior to the placement of successive layers.

**5. ASPHALTIC CONCRETE SURFACING** – Asphaltic concrete surfacing shall consist of a mixture of mineral aggregate and paving grade asphalt, mixed at a central mixing plant and spread and compacted on a prepared base in conformity with the lines, grades, and dimensions shown on the plans. The drying, proportioning, and mixing of the materials shall conform to WSDOT Specifications.

The prime coat, spreading and compaction equipment, as well as the process of spreading and compacting the mixture, shall conform to WSDOT Specifications, with the exception that no surface course shall be placed when the atmospheric temperature is below 50 degrees F. The surfacing shall be rolled with combination steel-wheel and pneumatic rollers, as described in WSDOT Specifications. The surface course shall be placed with an approved self-propelled mechanical spreading and finishing machine.

**6. TACK COAT** – The tack (mixing type asphaltic emulsion) shall conform to and be applied in accordance with the requirements of WSDOT Specifications.

# Steep Slope Addendum Letter



GEOTECHNICAL ENGINEERING • ENVIRONMENTAL ENGINEERING  
CONSTRUCTION TESTING & INSPECTION

July 31, 2020

KA Project No. 062-190007

Page 1 of 2

**Abbey Road Group Land Development Services Company, LLC**

PO Box 1224

Puyallup, Washington 98371

**Attn: Gil Hulsmann**

Email: [Gil.Hulsmann@AbbeyRoadGroup.com](mailto:Gil.Hulsmann@AbbeyRoadGroup.com)

Phone: (253) 435-3699 (ext. 101)

**Reference: Geotechnical Engineering Investigation Addendum Letter**

**East Town Crossing**

Parcel Nos. 0420264053, 0420264054, 0420351066

SE Corner of E. Shaw Road and E. Pioneer Way

Puyallup, Washington 98371

Dear Mr. Hulsmann,

Per your request, we have prepared this letter to provide our opinion regarding the nearby steep slopes. We previously prepared a geotechnical report titled "Geotechnical Engineering Investigation – East Town Crossing – Parcel Nos. 0420264053, 0420264054, 0420351066 – SE Corner of E. Shaw Road & E. Pioneer Way – Puyallup, Washington", dated April 11, 2019.

Based on our communication with you, it is our understanding that the City of Puyallup has requested to provide our opinion on the hazards and risks to the site due to the site being within 300 feet of steep slopes.

We have reviewed Washington State Department of Natural Resources (DNR), City of Puyallup, and Pierce County published landslide hazard maps and web data. We have also reviewed the Landslide Inventory, Susceptibility, and Exposure Analysis of Pierce County, Washington (DNR), prepared by Katherine A. Mickelson et al., and dated July 2017.

Based on our review, we understand that steep slopes are located roughly 300 feet to the south and east from the site. These nearby slopes are mapped moderate to high for shallow landslide susceptibility, and moderate for deep susceptibility. However, there are no historic landslides or debris mapped at the nearby slopes. The closest landslide mapped is located roughly 1 mile southeast of the site.

There is an existing developed property between the nearby southern slope and the southern boundary of the site. There is a partially developed property between the nearby eastern slope and the eastern boundary of the site. In our opinion, these properties to the south and east create a buffer between the nearby slopes



and the site. Based on our review of available published documents and maps, it is our opinion that there is minimum to no risk to the planned development from the nearby slopes.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,

**KRAZAN & ASSOCIATES, INC.**

07/31/20



Vijay Chaudhary, P.E.  
Project Engineer

*Theresa Nunan*

Theresa R. Nunan  
Project Manager


**Attachments:** WA DNR Landslide Inventory Maps (Figures A, B, and C)



300ft

USDA FSA, GeoEye, Maxar | Esri Community Maps Contributors, King County, WA State Parks GIS, BuildingFootprintUSA, Esri, HERE, Garmin, SafeGraph, INCREMENT P, METI/NASA, USGS, Bureau of Land Management, EPA, NPS, US Census Bureau, USDA




		
East Town Crossing		
Date: July 2020	Project Number: 062-19007	
Drawn By: VC	Figure: A	Not to scale



300ft


USDA FSA, GeoEye, Maxar | Esri Community Maps Contributors, King County, WA State Parks GIS, BuildingFootprintUSA, Esri, HERE, Garmin, SafeGraph, INCREMENT P, METI/NASA, USGS, Bureau of Land Management, EPA, NPS, US Census Bureau, USDA



		
East Town Crossing		
Date: July 2020	Project Number: 062-19007	
Drawn By: VC	Figure: B	Not to scale

**WADNR\_PUBLIC\_WGS\_Landslide\_Inventory**

- Scarps
  -
- Scarps and Flanks
  -
- Landslide Deposit Labels
- Landslide Deposits
  - High (30-40)
  - Moderate (11-29)
  - Low (1-10)
- Fans
  - High (23-30)
  - Moderate (8-22)
  - Low (1-7)
- SLIP Fans
  - Low (1-7)
  - Moderate (8-22)
  - High (23-30)

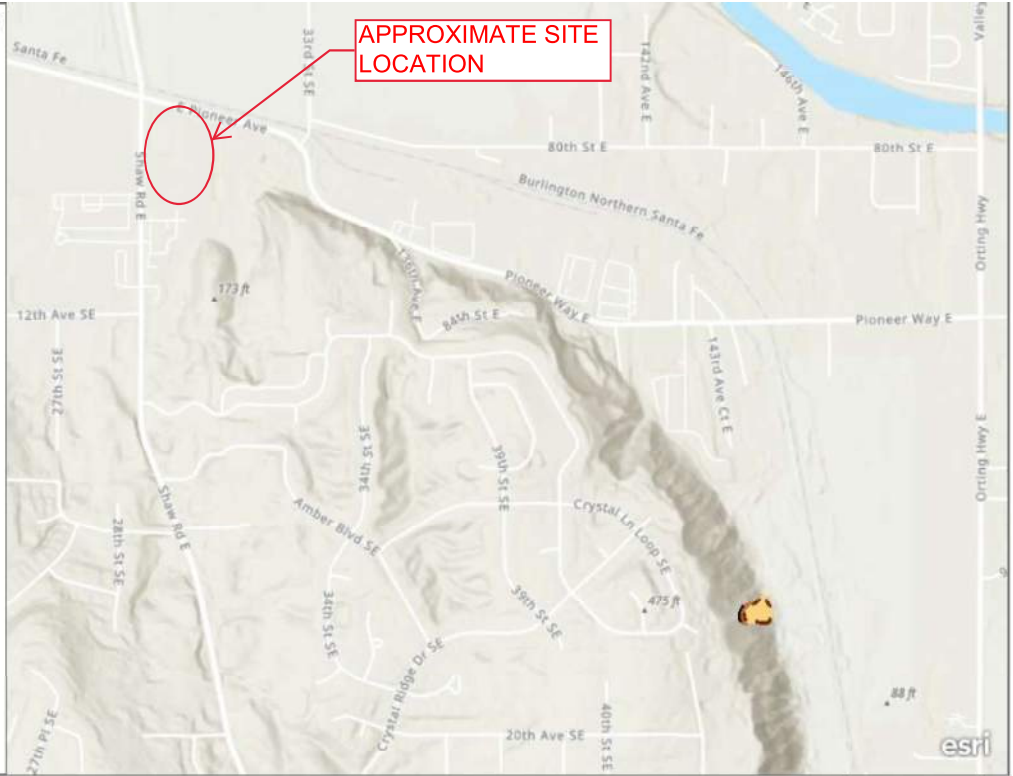

0.2mi

Esri, NASA, NGA, USGS, FEMA | Esri Community Maps Contributors, King County, WA State Parks GIS, Esri, HERE, Garmin, SafeGraph, INCREMENT P, METI/NASA, USGS, Bureau of Land Management, EPA, NPS, US Census Bureau, USDA



East Town Crossing

Date: July 2020		Project Number: 062-19007	
Drawn By: VC		Figure: C	
Not to scale			

# Figure A6 - Geo-technical Infiltration Report



GEOTECHNICAL ENGINEERING • ENVIRONMENTAL ENGINEERING  
CONSTRUCTION TESTING & INSPECTION

March 19, 2021

KA Project No. 062-190007

Page 1 of 3

**Abbey Road Group Land Development Services Company, LLC**  
PO Box 1224  
Puyallup, Washington 98371

**Attn: Gil Hulsmann**

Email: [Gil.Hulsmann@AbbeyRoadGroup.com](mailto:Gil.Hulsmann@AbbeyRoadGroup.com)

Phone: (253) 435-3699 (ext. 101)

**Reference: Geotechnical Engineering Investigation Addendum Letter  
East Town Crossing**  
SE Corner of E. Shaw Road and E. Pioneer Way  
Puyallup, Washington

Dear Mr. Hulsmann,

Per your request, we have prepared this letter to provide the results of two (2) Large-Scale Pilot Infiltration Tests (PITs) we conducted at the above-referenced site. We previously prepared a geotechnical report titled “Geotechnical Engineering Investigation – East Town Crossing – Parcel Nos. 0420264053, 0420264054, 0420351066 – SE Corner of E. Shaw Road & E. Pioneer Way – Puyallup, Washington”, dated April 11, 2019, as well as an addendum letter dated July 31, 2020 that addressed the nearby steep slopes.

## **Large-Scale PITs**

Two (2) test pits, designated P-1 and P-2, were excavated near Monitoring Wells MW-1 and MW-2, respectively, on March 4, 2021 at the approximate locations indicated on the Site Plan, Figure 1, in order to conduct large-scale infiltration tests in accordance with the 2014 Stormwater Management Manual for Western Washington (SMMMWW). The infiltration test locations were selected in the field by the client and excavated using a client provided excavator and operator. The bottom of each pit was excavated 10-foot wide by 10-foot long, which met the minimum required horizontal surface area of 100 square feet (sf). Each test pit was initially excavated to a depth of 2 feet below the existing ground surface (bgs), which exposed silty sand (SM) soils at the pit bottom. Water was observed seeping from the sides of pit P-1 during excavation, and was observed ponded at the ground surface at several locations in the vicinity of pit P-1. Test pits P-1 and P-2 encountered undocumented fill to a depth of 1.8 feet and 0.5 feet bgs, respectively, followed by native brown silty sand (SM) with trace gravel and occasional sandy silt and sandy clay seams and layers to the bottom of the test pits. The soils exposed at the PIT test depth were similar to those encountered in the geotechnical borings conducted during our original exploration of the site.

The infiltration test procedure includes a pre-soak period, followed by steady-state and then falling head infiltration rate testing. Each pit was filled with water to a depth of 12 inches above the bottom of the pit for the pre-soak period. After two (2) hours of pre-soak, the water hose was turned off as even just a slight trickle caused the water level in the pit to continue to rise. Water level readings were obtained for an additional 4 hours in pit P-2 with no change in the water level, while the water level in pit P-1 increased  $\frac{3}{4}$ -inches which we attributed to seepage from the sides of this pit which were observed during its excavation. Since the water in pits P-1 and P-2 was not infiltrating, we left the pits open overnight, and returned to the site to record the water level. Since it had commenced to rain just prior to our leaving the site, a 5-gallon bucket was left at the location of pit P-2 to obtain an estimate of the amount of rain that fell overnight. We recorded 0.6 inches of rain in the bucket the following morning. On the morning of March 5, 2021, the water level in pit P-1 had risen another 1.2 inches, while the water level in pit P-2 rose about 0.3 inches. Figure 2 includes photos of pits P-1 and P-2 taken on March 5, 2021. The pits were not over-excavated due to the presence of water. The contractor had excavated three test pits within the northwestern corner of the site on March 4, 2021. We observed about 8 to 10 inches of water in the bottom of two of the test pits on March 5, 2021.

**Evaluation of Infiltration Feasibility:** One of the Site Suitability Criteria (SSC) presented in Section 3.3.7, Volume III, 2014 SWMMWW, SSC-5 Depth to Bedrock, Water Table, or Impermeable Layer, states that the base of all infiltration basins or trench systems shall be greater than or equal to 5 feet above the seasonal high-water mark, bedrock (or hardpan), or other low permeability layer. Based on the results of our field exploration and large-scale PITs, the soils at the site contain high silt content and are considered a very low to relatively impermeable layer. Based on the results of our general site assessment and field testing, the low permeability soils encountered at the site do not meet the requirements of Site Suitability Criteria SSC-5 and it is therefore our opinion that onsite infiltration of stormwater using basin or trench system is not considered feasible for the proposed development. **However**, consideration may be given to the use of permeable pavement and other Best Management Practices (BMPs), depending on the final site grading plan.

### **Limitations**

This letter has been prepared for the exclusive use of the Abbey Road Group and their assigns, for the specific application to the site. The geotechnical information presented herein is based upon professional interpretation utilizing standard engineering practices and a degree of conservatism deemed proper for this project. We emphasize that this letter is valid for this project as outlined above, and should not be used for any other site.

This letter does not include any environmental site assessment for the presence or absence of hazardous and/or toxic materials in the soil, groundwater or atmosphere, or the presence of wetlands or other biological conditions. The information presented herein is based upon professional interpretation using standard industry practices and engineering conservatism that we consider proper for this project. It is not warranted that such information and interpretation cannot be superseded by future geotechnical developments.

Within the limitations of scope, schedule and budget, our services have been performed in accordance with generally accepted geotechnical engineering practices in effect in this area at the time this letter was prepared. No other warranty, expressed or implied, is made.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,

**KRAZAN & ASSOCIATES, INC.**

3/19/21




Theresa R. Nunan  
Project Manager







Vijay Chaudhary, P.E.  
Assistant Regional Engineering Manager

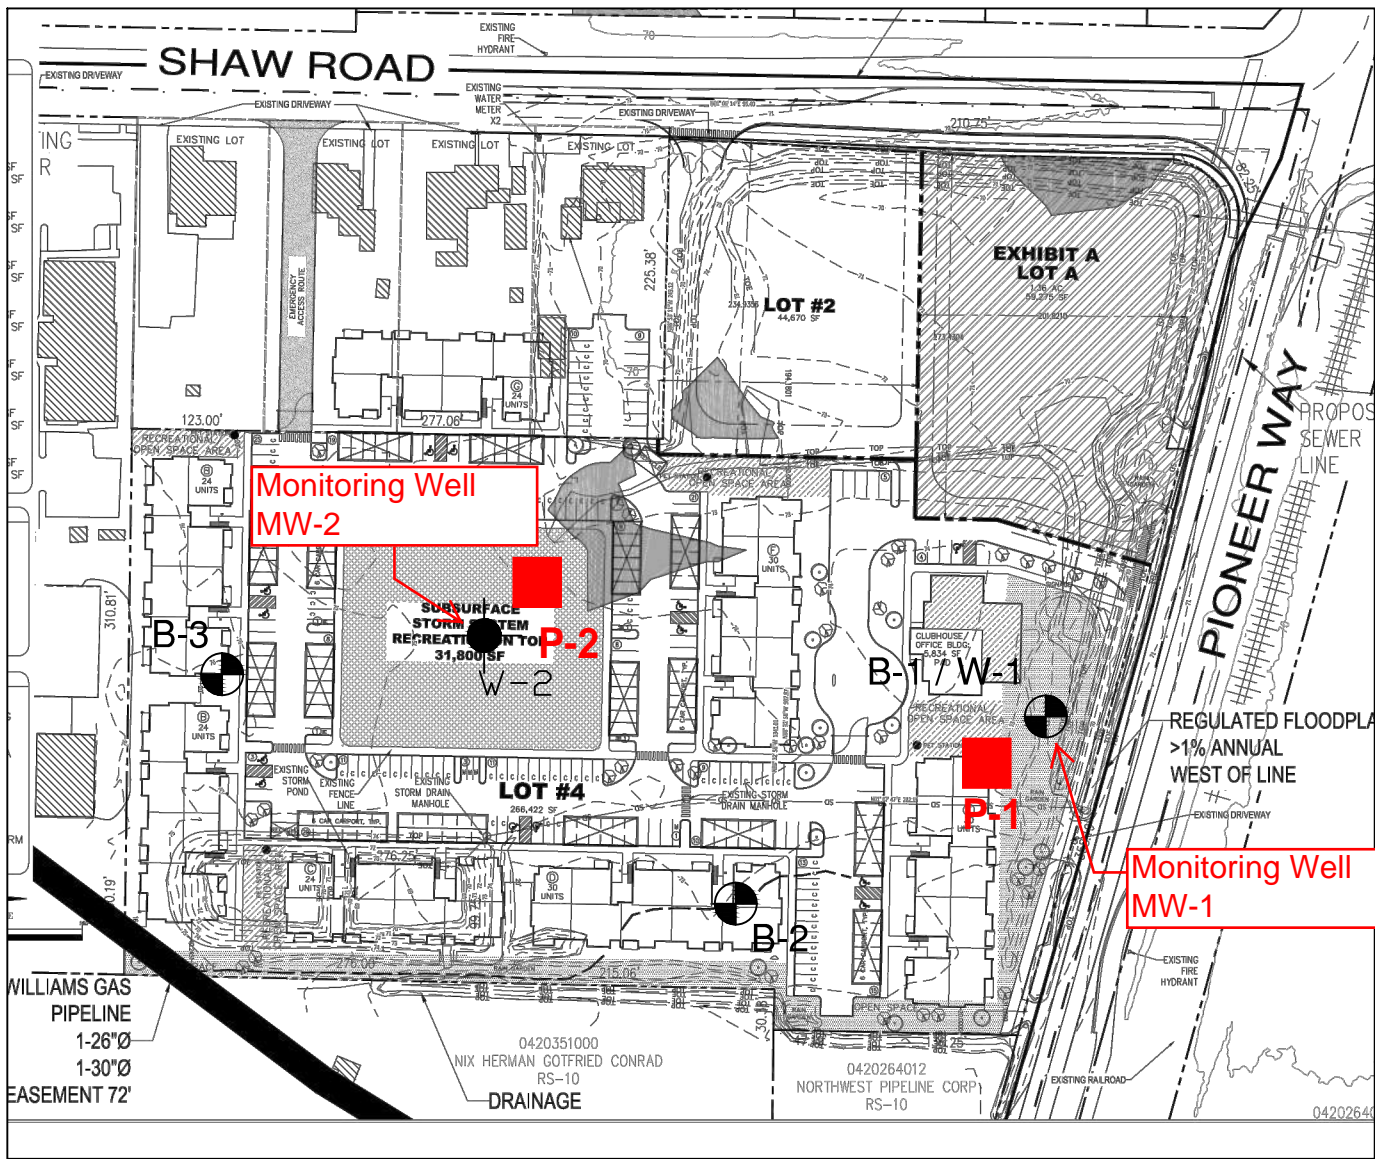**Attachments:** Figure 1 – Site Plan  
Figure 2 – Photos



**LEGEND**

-  B-1 Number and Approximate Location of Borings
-  W-1 Approximate Location of Monitoring Well
-  P-1 Approximate Location of Pilot Infiltration Test



Reference: Plan Sheet titled "Overall Site Plan", prepared by Abbey Road Group dated December 7, 2018.

Site Plan

East Town Crossing

Shaw Rd & E Pioneer Way, Puyallup, WA

Project Number: 062-19007

Figure 1

Drawn By: T. Nunan  
Date: March 2021





Water in Pit P-1 on March 5, 2021.



Water in Pit P-2 on March 5, 2021.



Water in Test Pit on March 5, 2021. Test pit was excavated in NE portion of site on March 4, 2021.

**Figure 2 - Photos (March 5, 2021)**

# Figure A7 - Geo-technical Glass Proctor Report



GEOTECHNICAL ENGINEERING • ENVIRONMENTAL ENGINEERING  
CONSTRUCTION TESTING & INSPECTION

December 10, 2021

KA Project No. 062-21033

**Abbey Road Group, LLC**  
P.O. Box 11489  
Olympia, WA 98508

**Attn: Mr. Gil Hulsmann**  
Tel: 253-435-3699 x1510  
Email: gil.hulsmann@abbeyroadgroup.com

**Reference: Laboratory Testing – Recycled Glass  
East Town Crossing Project**  
SE Corner of E Shaw Road & E Pioneer Way  
Puyallup, Washington

Dear Mr. Hulsmann,

The gradation and proctor test results for the two recycled glass samples, one designated “clean” and the other designated “with fines”, supplied by Dan Lloyd Construction are attached to this letter. The gradation tests were conducted on the samples ‘as received’ and again after completing the Proctor compaction tests. As can be seen in the summary of test results, Table 1 attached to this letter, the glass pieces broke down significantly due to the compaction efforts.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,


**KRAZAN & ASSOCIATES, INC.**

A handwritten signature in blue ink that reads "Theresa R. Nunan".

Theresa R. Nunan  
Project Manager

**Attachments: Recycled Glass Gradation and Proctor Test Results – “Clean” Sample  
Recycled Glass Gradation and Proctor Test Results – “With Fines” Sample  
Table 1 – Summary of Recycled Glass Test Results**

# Particle Size Distribution Report

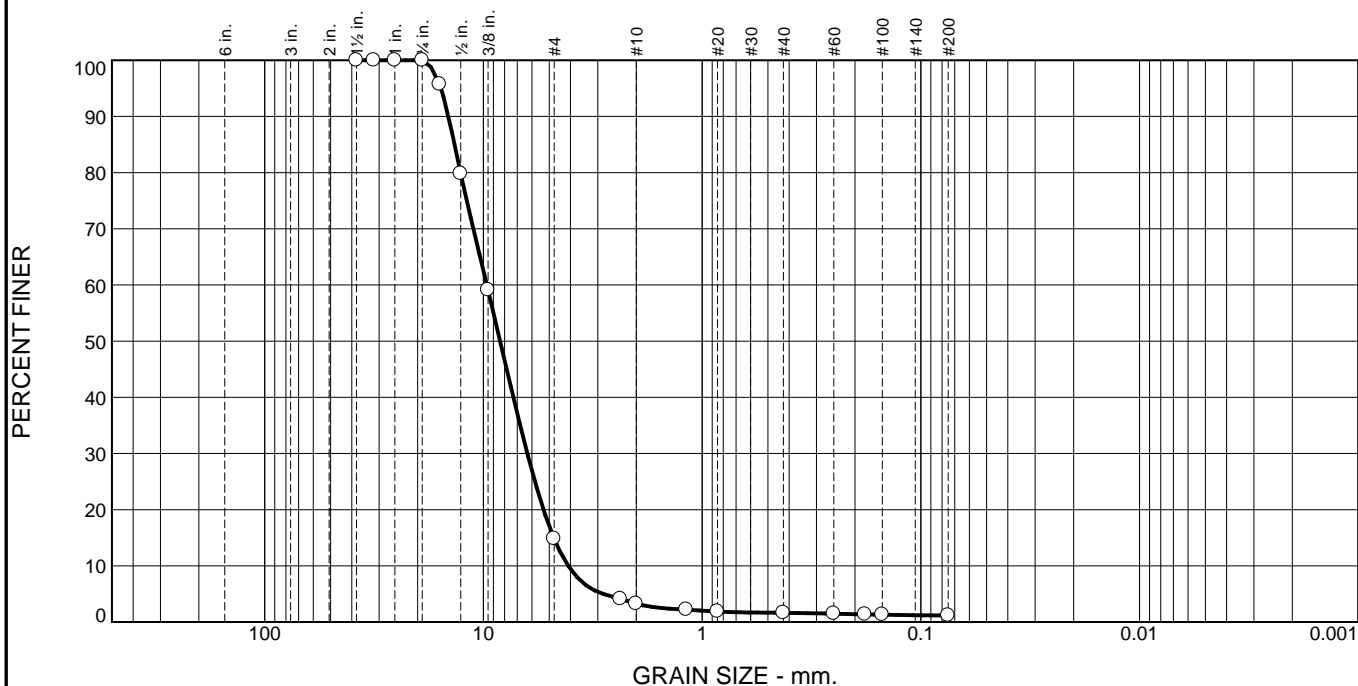

% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	85	12	1	1	1	

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1.5	100		
1.25	100		
1	100		
.75	100		
.625	96		
.5	80		
.375	59		
#4	15		
#8	4		
#10	3		
#16	2		
#20	2		
#40	2		
#60	1		
#80	1		
#100	1		
#200	1.2		

\* (no specification provided)

**Material Description**

Recycled Glass Clean - Before Compaction.  
Sampled by the supplier.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= GP                      AASHTO (M 145)= A-1-a

**Coefficients**

D<sub>90</sub>= 14.4630                      D<sub>85</sub>= 13.5519                      D<sub>60</sub>= 9.6467  
D<sub>50</sub>= 8.3902                      D<sub>30</sub>= 6.2995                      D<sub>15</sub>= 4.7699  
D<sub>10</sub>= 4.0959                      C<sub>u</sub>= 2.36                      C<sub>c</sub>= 1.00

**Remarks**

Sample ID: 21L892  
Sample Date: 11-29-21

---

**Date Received:** 11-29-21                      **Date Tested:** 12-1-21  
**Tested By:** M.Thomas  
**Checked By:** T.Nunan  
**Title:** Project Manager

**Source of Sample:** Dan Lloyd Construction  
**Sample Number:** 21L892

**Date Sampled:** 11-29-21




**Client:** Abbey Road Group Land Development Services Company LLC  
**Project:** East Town Crossing Lab Testing - Recycled Glass

**Project No:** 062-21033

**Figure**



# Particle Size Distribution Report

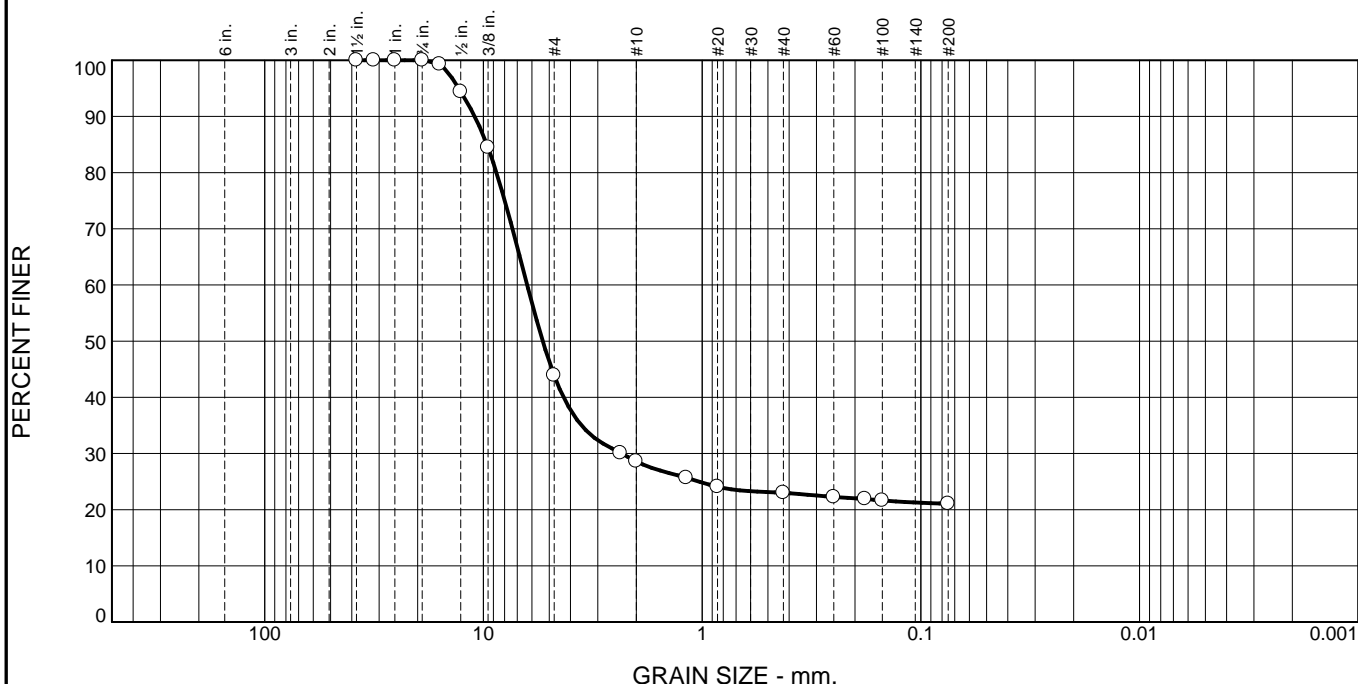

% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	56	15	6	2	21	

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1.5	100		
1.25	100		
1	100		
.75	100		
.625	99		
.5	94		
.375	84		
#4	44		
#8	30		
#10	29		
#16	26		
#20	24		
#40	23		
#60	22		
#80	22		
#100	22		
#200	21		

\* (no specification provided)

**Material Description**

Recycled Glass Clean - After Compaction  
Sampled by the supplier.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= GM                      AASHTO (M 145)= A-1-b

**Coefficients**

D<sub>90</sub>= 10.9683                      D<sub>85</sub>= 9.6367                      D<sub>60</sub>= 6.3112  
D<sub>50</sub>= 5.3536                      D<sub>30</sub>= 2.3352                      D<sub>15</sub>=  
D<sub>10</sub>=                      C<sub>u</sub>=                      C<sub>c</sub>=

**Remarks**

Sample ID: 21L893  
Sample Date: 11-29-21

---

**Date Received:** 11-29-21                      **Date Tested:** 12-1-21  
**Tested By:** M.Thomas  
**Checked By:** I.Teriong  
**Title:** Project Manager

**Source of Sample:** Dan Lloyd Construction  
**Sample Number:** 21L892

**Date Sampled:** 11-29-21




**Client:** Abbey Road Group Land Development Services Company LLC  
**Project:** East Town Crossing Lab Testing - Recycled Glass

**Project No:** 062-21033

**Figure**

# Particle Size Distribution Report

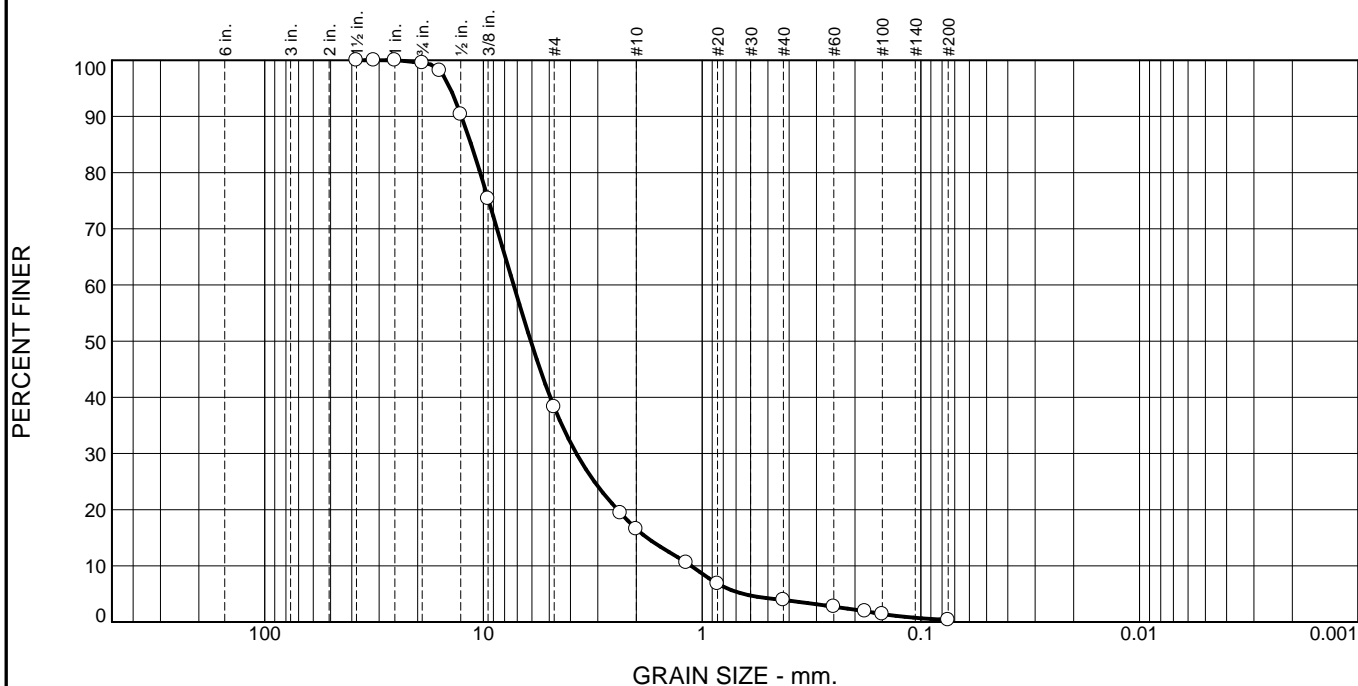

% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	62	21	13	4	0	

Test Results (C-136 & c-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1.5	100		
1.25	100		
1	100		
.75	100		
.625	98		
.5	90		
.375	75		
#4	38		
#8	19		
#10	17		
#16	11		
#20	7		
#40	4		
#60	3		
#80	2		
#100	1		
#200	0.4		

\* (no specification provided)

**Material Description**

Recycled Glass With Fines - Before Compaction.  
Sampled by the supplier.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= GW                      AASHTO (M 145)= A-1-a

**Coefficients**

D<sub>90</sub>= 12.6020                      D<sub>85</sub>= 11.3802                      D<sub>60</sub>= 7.2823  
D<sub>50</sub>= 6.0733                      D<sub>30</sub>= 3.7592                      D<sub>15</sub>= 1.7859  
D<sub>10</sub>= 1.1229                      C<sub>u</sub>= 6.49                      C<sub>c</sub>= 1.73

**Remarks**

Sample ID: 21L893  
Sample Date: 11-29-21

---

**Date Received:** 11-29-21                      **Date Tested:** 12-1-21  
**Tested By:** M.Thomas  
**Checked By:** T.Nunan  
**Title:** Project Manager

**Source of Sample:** Dan Lloyd Construction  
**Sample Number:** 21L893

**Date Sampled:** 11-29-21




**Client:** Abbey Road Group Land Development Services Company LLC  
**Project:** East Town Crossing Lab Testing - Recycled Glass

**Project No:** 062-21033

**Figure**

# COMPACTION TEST REPORT

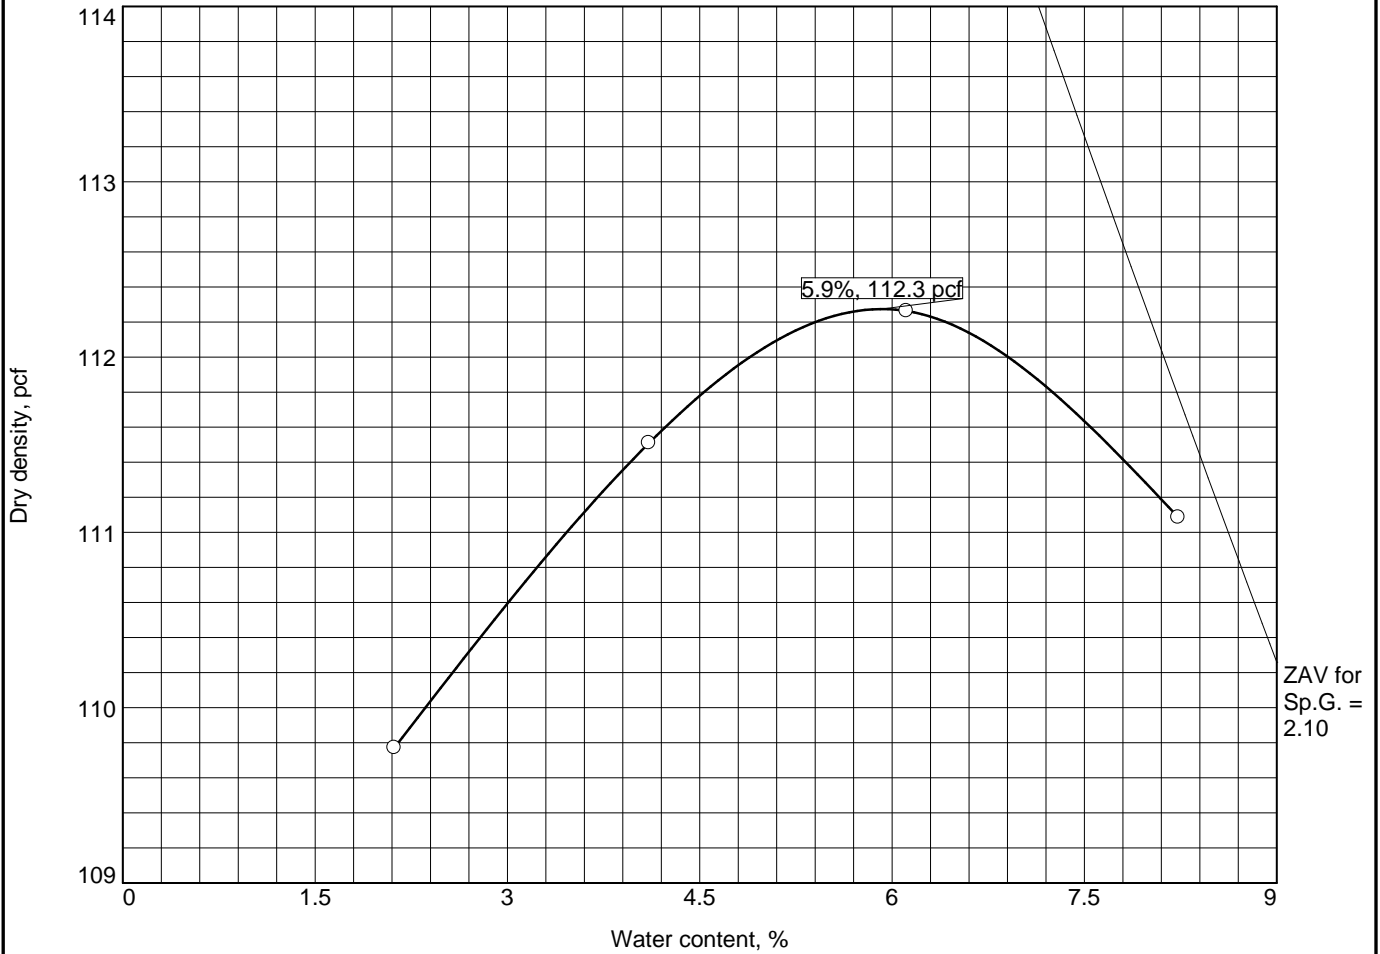

Test specification: ASTM D 1557 Method C Modified


Elev/ Depth	Classification		Nat. Moist.	Sp.G.	LL	PI	% > 3/4 in.	% < No.200
	USCS	AASHTO						
	GW	A-1-a		2.1	NV	NP	0	0.4

TEST RESULTS	MATERIAL DESCRIPTION
Maximum dry density = 112.3 pcf Optimum moisture = 5.9 %	Recycled Glass With Fines. Sampled by the supplier.
<b>Project No.</b> 062-21033 <b>Client:</b> Abbey Road Group Land Development Services <b>Project:</b> East Town Crossing Lab Testing - Recycled Glass <input type="radio"/> <b>Source of Sample:</b> Dan Lloyd Construction <b>Sample Number:</b> 21L893	<b>Remarks:</b> Sample ID:21L893 Sample Date:11-29-21 Void Ratio:0.16 Porosity:14%

Figure

**Tested By:** M.Thomas                      **Checked By:** T.Nunan.

# Particle Size Distribution Report

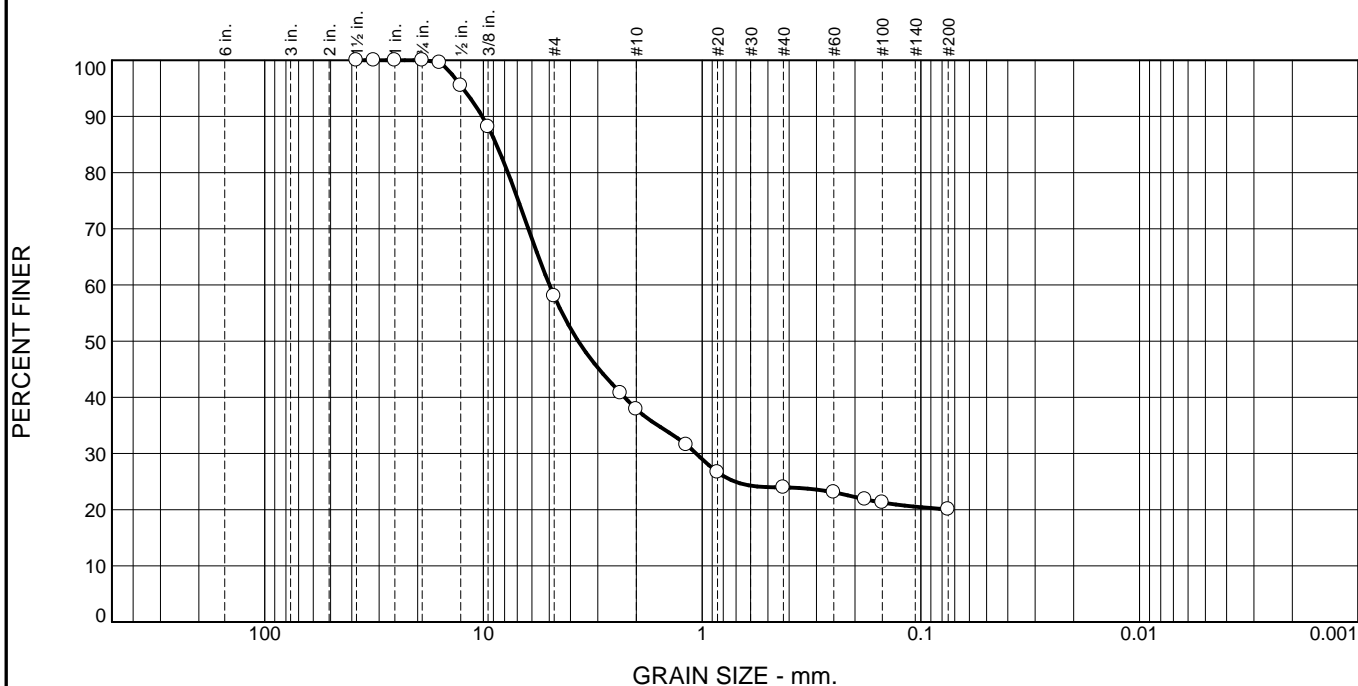

% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	42	20	14	4	20	

Test Results (C-136 & C-117)			
Opening Size	Percent Finer	Spec.* (Percent)	Pass? (X=Fail)
1.5	100		
1.25	100		
1	100		
.75	100		
.625	100		
.5	95		
.375	88		
#4	58		
#8	41		
#10	38		
#16	32		
#20	27		
#40	24		
#60	23		
#80	22		
#100	21		
#200	20		

\* (no specification provided)

**Material Description**

Recycled Glass With Fines - After Compaction.  
Sampled by the Supplier.

**Atterberg Limits (ASTM D 4318)**

PL= NP                      LL= NV                      PI= NP

**Classification**

USCS (D 2487)= GM                      AASHTO (M 145)= A-1-b

**Coefficients**

D<sub>90</sub>= 10.1195                      D<sub>85</sub>= 8.7171                      D<sub>60</sub>= 4.9887  
D<sub>50</sub>= 3.6862                      D<sub>30</sub>= 1.0651                      D<sub>15</sub>=  
D<sub>10</sub>=                                      C<sub>u</sub>=                                      C<sub>c</sub>=

**Remarks**

Sample ID: 21L893  
Sample Date: 11-29-21

---

**Date Received:** 11-29-21                      **Date Tested:** 12-1-21  
**Tested By:** M.Thomas  
**Checked By:** T.Nunan  
**Title:** Project Manager

**Source of Sample:** Dan Lloyd Construction  
**Sample Number:** 21L893

**Date Sampled:** 11-29-21



**Client:** Abbey Road Group Land Development Services Company LLC  
**Project:** East Town Crossing Lab Testing - Recycled Glass

**Project No:** 062-21033

**Figure**



March 19, 2021

KA Project No. 062-190007

Page 1 of 3

**Abbey Road Group Land Development Services Company, LLC**  
PO Box 1224  
Puyallup, Washington 98371

**Attn: Gil Hulsmann**Email: [Gil.Hulsmann@AbbeyRoadGroup.com](mailto:Gil.Hulsmann@AbbeyRoadGroup.com)

Phone: (253) 435-3699 (ext. 101)

**Reference: Geotechnical Engineering Investigation Addendum Letter  
East Town Crossing**  
SE Corner of E. Shaw Road and E. Pioneer Way  
Puyallup, Washington

Dear Mr. Hulsmann,

Per your request, we have prepared this letter to provide the results of two (2) Large-Scale Pilot Infiltration Tests (PITs) we conducted at the above-referenced site. We previously prepared a geotechnical report titled “Geotechnical Engineering Investigation – East Town Crossing – Parcel Nos. 0420264053, 0420264054, 0420351066 – SE Corner of E. Shaw Road & E. Pioneer Way – Puyallup, Washington”, dated April 11, 2019, as well as an addendum letter dated July 31, 2020 that addressed the nearby steep slopes.

**Large-Scale PITs**

Two (2) test pits, designated P-1 and P-2, were excavated near Monitoring Wells MW-1 and MW-2, respectively, on March 4, 2021 at the approximate locations indicated on the Site Plan, Figure 1, in order to conduct large-scale infiltration tests in accordance with the 2014 Stormwater Management Manual for Western Washington (SMMMWW). The infiltration test locations were selected in the field by the client and excavated using a client provided excavator and operator. The bottom of each pit was excavated 10-foot wide by 10-foot long, which met the minimum required horizontal surface area of 100 square feet (sf). Each test pit was initially excavated to a depth of 2 feet below the existing ground surface (bgs), which exposed silty sand (SM) soils at the pit bottom. Water was observed seeping from the sides of pit P-1 during excavation, and was observed ponded at the ground surface at several locations in the vicinity of pit P-1. Test pits P-1 and P-2 encountered undocumented fill to a depth of 1.8 feet and 0.5 feet bgs, respectively, followed by native brown silty sand (SM) with trace gravel and occasional sandy silt and sandy clay seams and layers to the bottom of the test pits. The soils exposed at the PIT test depth were similar to those encountered in the geotechnical borings conducted during our original exploration of the site.

The infiltration test procedure includes a pre-soak period, followed by steady-state and then falling head infiltration rate testing. Each pit was filled with water to a depth of 12 inches above the bottom of the pit for the pre-soak period. After two (2) hours of pre-soak, the water hose was turned off as even just a slight trickle caused the water level in the pit to continue to rise. Water level readings were obtained for an additional 4 hours in pit P-2 with no change in the water level, while the water level in pit P-1 increased  $\frac{3}{4}$ -inches which we attributed to seepage from the sides of this pit which were observed during its excavation. Since the water in pits P-1 and P-2 was not infiltrating, we left the pits open overnight, and returned to the site to record the water level. Since it had commenced to rain just prior to our leaving the site, a 5-gallon bucket was left at the location of pit P-2 to obtain an estimate of the amount of rain that fell overnight. We recorded 0.6 inches of rain in the bucket the following morning. On the morning of March 5, 2021, the water level in pit P-1 had risen another 1.2 inches, while the water level in pit P-2 rose about 0.3 inches. Figure 2 includes photos of pits P-1 and P-2 taken on March 5, 2021. The pits were not over-excavated due to the presence of water. The contractor had excavated three test pits within the northwestern corner of the site on March 4, 2021. We observed about 8 to 10 inches of water in the bottom of two of the test pits on March 5, 2021.

**Evaluation of Infiltration Feasibility:** One of the Site Suitability Criteria (SSC) presented in Section 3.3.7, Volume III, 2014 SWMMWW, SSC-5 Depth to Bedrock, Water Table, or Impermeable Layer, states that the base of all infiltration basins or trench systems shall be greater than or equal to 5 feet above the seasonal high-water mark, bedrock (or hardpan), or other low permeability layer. Based on the results of our field exploration and large-scale PITs, the soils at the site contain high silt content and are considered a very low to relatively impermeable layer. Based on the results of our general site assessment and field testing, the low permeability soils encountered at the site do not meet the requirements of Site Suitability Criteria SSC-5 and it is therefore our opinion that onsite infiltration of stormwater using basin or trench system is not considered feasible for the proposed development. **However**, consideration may be given to the use of permeable pavement and other Best Management Practices (BMPs), depending on the final site grading plan.

### **Limitations**

This letter has been prepared for the exclusive use of the Abbey Road Group and their assigns, for the specific application to the site. The geotechnical information presented herein is based upon professional interpretation utilizing standard engineering practices and a degree of conservatism deemed proper for this project. We emphasize that this letter is valid for this project as outlined above, and should not be used for any other site.

This letter does not include any environmental site assessment for the presence or absence of hazardous and/or toxic materials in the soil, groundwater or atmosphere, or the presence of wetlands or other biological conditions. The information presented herein is based upon professional interpretation using standard industry practices and engineering conservatism that we consider proper for this project. It is not warranted that such information and interpretation cannot be superseded by future geotechnical developments.

Within the limitations of scope, schedule and budget, our services have been performed in accordance with generally accepted geotechnical engineering practices in effect in this area at the time this letter was prepared. No other warranty, expressed or implied, is made.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (253) 939-2500.

Respectfully submitted,

**KRAZAN & ASSOCIATES, INC.**

3/19/21




Theresa R. Nunan  
Project Manager







Vijay Chaudhary, P.E.  
Assistant Regional Engineering Manager

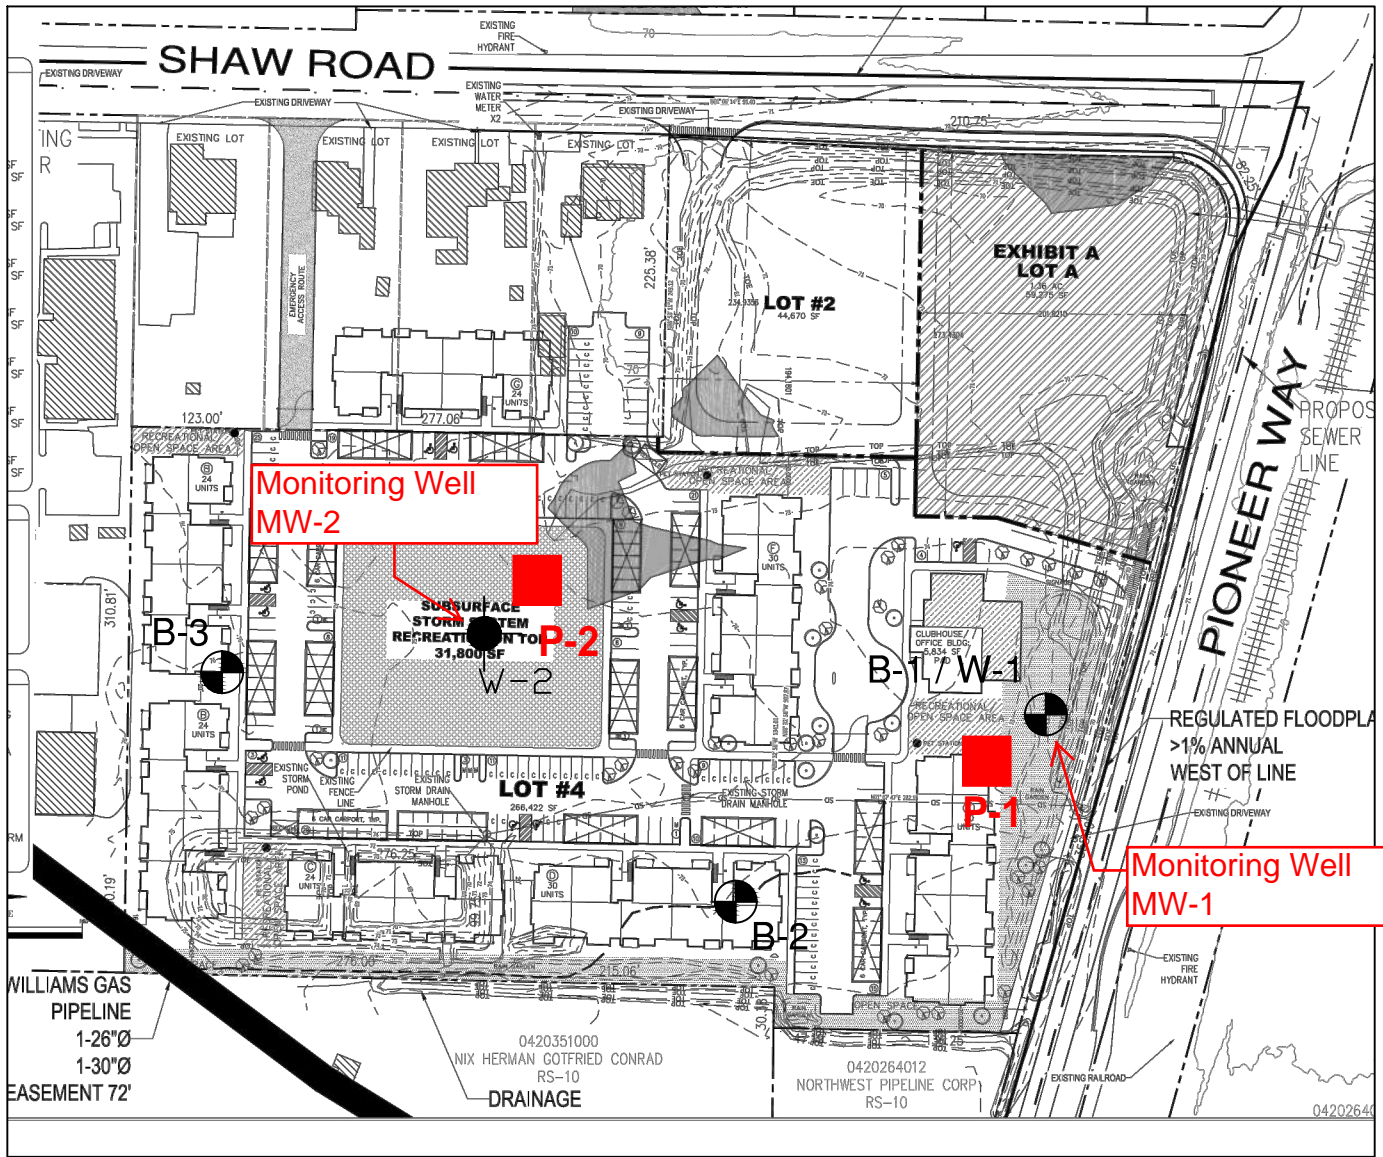**Attachments:** Figure 1 – Site Plan  
Figure 2 – Photos



**LEGEND**

-  B-1 Number and Approximate Location of Borings
-  W-1 Approximate Location of Monitoring Well
-  P-1 Approximate Location of Pilot Infiltration Test



Reference: Plan Sheet titled "Overall Site Plan", prepared by Abbey Road Group dated December 7, 2018.

Site Plan

East Town Crossing

Shaw Rd & E Pioneer Way, Puyallup, WA

Project Number: 062-19007

Figure 1

Drawn By: T. Nunan  
Date: March 2021



Water in Pit P-1 on March 5, 2021.




Water in Pit P-2 on March 5, 2021.



Water in Test Pit on March 5, 2021. Test pit was excavated in NE portion of site on March 4, 2021.

**Figure 2 - Photos (March 5, 2021)**



Service Disabled Veteran Owned Small Business

**Job #:** 06-171

**Project Name:** East Town Crossing

**As Of Date:** 1/17/2023

**Subject:** Water Monitoring Information for the East Town Crossing Site

**Special Notes:**

On Site Average Elevation: 70 Elevation

Max Boring Depth for the Shaw / Pioneer Crossing: 51.75 IE sloping to 60.60 IE

Shaw / Pioneer Intersection Elevation: 69.9 Top Surface


East Town Crossing Monitoring Well Information:

Well # 1 (B-1/W-1): 72.84, Rim IE

Well # 2 (W-2) 74.13 Rim IE

**Water Monitoring Information (Well #1):**


<u>Date</u>	<u>Location</u>	<u>Boring Site #</u>	<u>Water Elevation</u>	<u>Depth</u>	<u>Source</u>	<u>Comments</u>
3/18/2019	East Town Crossing	B-1/W-1	64.64	8.20	Krazans Report	Water Monitoring Well Testing
3/26/2019	East Town Crossing	B-1/W-1	64.94	7.90	Krazans Report	Water Monitoring Well Testing
4/2/2019	East Town Crossing	B-1/W-1	64.84	8.00	Krazans Report	Water Monitoring Well Testing
4/10/2019	East Town Crossing	B-1/W-1	64.54	8.30	Krazans Report	Water Monitoring Well Testing
4/19/2019	East Town Crossing	B-1/W-1	64.54	8.30	Krazans Report	Water Monitoring Well Testing
4/24/2019	East Town Crossing	B-1/W-1	64.64	8.20	Krazans Report	Water Monitoring Well Testing
4/28/2019	East Town Crossing	B-1/W-1	64.64	8.20	Krazans Report	Water Monitoring Well Testing
12/27/2019	East Town Crossing	B-1/W-1	69.14	3.70	Krazans Report	Water Monitoring Well Testing
1/31/2020	East Town Crossing	B-1/W-1	69.84	3.00	Krazans Report	Water Monitoring Well Testing
2/17/2020	East Town Crossing	B-1/W-1	66.44	6.40	Krazans Report	Water Monitoring Well Testing
3/16/2020	East Town Crossing	B-1/W-1	65.54	7.30	Krazans Report	Water Monitoring Well Testing
8/21/2020	East Town Crossing	B-1/W-1	63.94	8.90	Abbey Road Group	Water Monitoring Well Testing
8/28/2020	East Town Crossing	B-1/W-1	63.99	8.85	Abbey Road Group	Water Monitoring Well Testing
9/4/2020	East Town Crossing	B-1/W-1	63.84	9.00	Abbey Road Group	Water Monitoring Well Testing
9/11/2020	East Town Crossing	B-1/W-1	63.68	9.16	Abbey Road Group	Water Monitoring Well Testing
9/21/2020	East Town Crossing	B-1/W-1	63.72	9.12	Abbey Road Group	Water Monitoring Well Testing
9/25/2020	East Town Crossing	B-1/W-1	64.36	8.48	Abbey Road Group	Water Monitoring Well Testing
10/2/2020	East Town Crossing	B-1/W-1	64.27	8.57	Abbey Road Group	Water Monitoring Well Testing
10/9/2020	East Town Crossing	B-1/W-1	64.25	8.59	Abbey Road Group	Water Monitoring Well Testing



Service Disabled Veteran Owned Small Business

Water Monitoring Information (Well #1):

<u>Date</u>	<u>Location</u>	<u>Boring Site #</u>	<u>Water Elevation</u>	<u>Depth</u>	<u>Source</u>	<u>Comments</u>
10/16/2020	East Town Crossing	B-1/W-1	64.82	8.02	Abbey Road Group	Water Monitoring Well Testing
10/23/2020	East Town Crossing	B-1/W-1	64.81	8.03	Abbey Road Group	Water Monitoring Well Testing
11/6/2020	East Town Crossing	B-1/W-1	65.59	7.25	Abbey Road Group	Water Monitoring Well Testing
11/13/2020	East Town Crossing	B-1/W-1	65.49	7.35	Abbey Road Group	Water Monitoring Well Testing
11/19/2020	East Town Crossing	B-1/W-1	65.89	6.95	Abbey Road Group	Water Monitoring Well Testing
12/4/2020	East Town Crossing	B-1/W-1	65.67	7.17	Abbey Road Group	Water Monitoring Well Testing
12/11/2020	East Town Crossing	B-1/W-1	66.64	6.20	Abbey Road Group	Water Monitoring Well Testing
12/21/2020	East Town Crossing	B-1/W-1	67.28	5.56	Abbey Road Group	Water Monitoring Well Testing
12/28/2020	East Town Crossing	B-1/W-1	67.09	5.75	Abbey Road Group	Water Monitoring Well Testing
1/4/2021	East Town Crossing	B-1/W-1	68.44	4.40	Abbey Road Group	Water Monitoring Well Testing
1/11/2021	East Town Crossing	B-1/W-1	67.84	5.00	Abbey Road Group	Water Monitoring Well Testing
1/18/2021	East Town Crossing	B-1/W-1	67.89	4.95	Abbey Road Group	Water Monitoring Well Testing
2/1/2021	East Town Crossing	B-1/W-1	67.24	5.60	Abbey Road Group	Water Monitoring Well Testing
2/8/2021	East Town Crossing	B-1/W-1	66.96	5.88	Abbey Road Group	Water Monitoring Well Testing
2/16/2021	East Town Crossing	B-1/W-1	67.79	5.05	Abbey Road Group	Water Monitoring Well Testing
2/22/2021	East Town Crossing	B-1/W-1	68.09	4.75	Abbey Road Group	Water Monitoring Well Testing
3/1/2021	East Town Crossing	B-1/W-1	67.43	5.41	Abbey Road Group	Water Monitoring Well Testing
3/5/2021	East Town Crossing	B-1/W-1	67.11	5.73	Abbey Road Group	Water Monitoring Well Testing
3/15/2021	East Town Crossing	B-1/W-1	66.54	6.30	Abbey Road Group	Water Monitoring Well Testing
3/22/2021	East Town Crossing	B-1/W-1	66.36	6.48	Abbey Road Group	Water Monitoring Well Testing
4/5/2021	East Town Crossing	B-1/W-1	66.28	6.56	Abbey Road Group	Water Monitoring Well Testing
4/13/2021	East Town Crossing	B-1/W-1	66.01	6.83	Abbey Road Group	Water Monitoring Well Testing
4/19/2021	East Town Crossing	B-1/W-1	65.82	7.02	Abbey Road Group	Water Monitoring Well Testing
4/22/2021	East Town Crossing	B-1/W-1	65.73	7.11	Abbey Road Group	Water Monitoring Well Testing
4/30/2021	East Town Crossing	B-1/W-1	65.77	7.07	Abbey Road Group	Water Monitoring Well Testing
5/07/2021	East Town Crossing	B-1/W-1	65.66	7.18	Abbey Road Group	Water Monitoring Well Testing
5/17/2021	East Town Crossing	B-1/W-1	65.39	7.45	Abbey Road Group	Water Monitoring Well Testing
5/24/2021	East Town Crossing	B-1/W-1	65.39	7.45	Abbey Road Group	Water Monitoring Well Testing
5/28/2021	East Town Crossing	B-1/W-1	65.34	7.50	Abbey Road Group	Water Monitoring Well Testing
6/4/2021	East Town Crossing	B-1/W-1	65.19	7.65	Abbey Road Group	Water Monitoring Well Testing
6/14/2021	East Town Crossing	B-1/W-1	65.49	7.35	Abbey Road Group	Water Monitoring Well Testing
6/22/2021	East Town Crossing	B-1/W-1	65.29	7.55	Abbey Road Group	Water Monitoring Well Testing
6/29/2021	East Town Crossing	B-1/W-1	65.03	7.81	Abbey Road Group	Water Monitoring Well Testing
7/8/2021	East Town Crossing	B-1/W-1	64.79	8.05	Abbey Road Group	Water Monitoring Well Testing
7/12/2021	East Town Crossing	B-1/W-1	64.64	8.20	Abbey Road Group	Water Monitoring Well Testing




Service Disabled Veteran Owned Small Business

**Water Monitoring Information (Well #1):**

<u>Date</u>	<u>Location</u>	<u>Boring Site #</u>	<u>Water Elevation</u>	<u>Depth</u>	<u>Source</u>	<u>Comments</u>
7/20/2021	East Town Crossing	B-1/W-1	64.42	8.42	Abbey Road Group	Water Monitoring Well Testing
7/27/2021	East Town Crossing	B-1/W-1	64.21	8.63	Abbey Road Group	Water Monitoring Well Testing
8/2/2021	East Town Crossing	B-1/W-1	64.05	8.79	Abbey Road Group	Water Monitoring Well Testing
8/10/2021	East Town Crossing	B-1/W-1	63.89	8.95	Abbey Road Group	Water Monitoring Well Testing
8/16/2021	East Town Crossing	B-1/W-1	63.82	9.02	Abbey Road Group	Water Monitoring Well Testing
8/23/2021	East Town Crossing	B-1/W-1	63.73	9.11	Abbey Road Group	Water Monitoring Well Testing
8/30/2021	East Town Crossing	B-1/W-1	63.69	9.15	Abbey Road Group	Water Monitoring Well Testing
9/9/2021	East Town Crossing	B-1/W-1	63.59	9.25	Abbey Road Group	Water Monitoring Well Testing
9/13/2021	East Town Crossing	B-1/W-1	63.54	9.30	Abbey Road Group	Water Monitoring Well Testing
9/20/2021	East Town Crossing	B-1/W-1	63.73	9.11	Abbey Road Group	Water Monitoring Well Testing
9/27/2021	East Town Crossing	B-1/W-1	63.89	8.95	Abbey Road Group	Water Monitoring Well Testing
10/4/2021	East Town Crossing	B-1/W-1	64.20	8.64	Abbey Road Group	Water Monitoring Well Testing
10/18/2021	East Town Crossing	B-1/W-1	64.20	8.64	Abbey Road Group	Water Monitoring Well Testing
10/25/2021	East Town Crossing	B-1/W-1	64.44	8.40	Abbey Road Group	Water Monitoring Well Testing
11/1/2021	East Town Crossing	B-1/W-1	65.34	7.50	Abbey Road Group	Water Monitoring Well Testing
11/8/2021	East Town Crossing	B-1/W-1	66.29	6.55	Abbey Road Group	Water Monitoring Well Testing
11/17/2021	East Town Crossing	B-1/W-1	66.29	6.55	Abbey Road Group	Water Monitoring Well Testing
11/22/2021	East Town Crossing	B-1/W-1	66.29	6.55	Abbey Road Group	Water Monitoring Well Testing
11/29/2021	East Town Crossing	B-1/W-1	66.52	6.32	Abbey Road Group	Water Monitoring Well Testing
12/6/2021	East Town Crossing	B-1/W-1	66.33	6.51	Abbey Road Group	Water Monitoring Well Testing
12/13/2021	East Town Crossing	B-1/W-1	67.49	5.35	Abbey Road Group	Water Monitoring Well Testing
1/3/2022	East Town Crossing	B-1/W-1	67.44	5.40	Abbey Road Group	Water Monitoring Well Testing
1/25/2022	East Town Crossing	B-1/W-1	63.80	9.04	Abbey Road Group	Water Monitoring Well Testing-Onsite Dewatering
1/28/2022	East Town Crossing	B-1/W-1	63.08	9.76	Abbey Road Group	Water Monitoring Well Testing-Onsite Dewatering (2 Pumps Running)
2/4/2022	East Town Crossing	B-1/W-1	65.01	7.83	Abbey Road Group	Water Monitoring Well Testing-Onsite Dewatering ended 2/03/2022
2/8/2022	East Town Crossing	B-1/W-1	65.54	7.30	Abbey Road Group	Water Monitoring Well Testing
2/16/2022	East Town Crossing	B-1/W-1	65.55	7.29	Abbey Road Group	Water Monitoring Well Testing
3/9/2022	East Town Crossing	B-1/W-1	66.94	5.90	Abbey Road Group	Water Monitoring Well Testing
3/22/2022	East Town Crossing	B-1/W-1	67.09	5.75	Abbey Road Group	Water Monitoring Well Testing
3/31/2022	East Town Crossing	B-1/W-1	66.33	6.51	Abbey Road Group	Water Monitoring Well Testing
4/12/2022	East Town Crossing	B-1/W-1	66.16	6.68	Abbey Road Group	Water Monitoring Well Testing
4/19/2022	East Town Crossing	B-1/W-1	66.06	6.78	Abbey Road Group	Water Monitoring Well Testing
4/25/2022	East Town Crossing	B-1/W-1	65.94	6.90	Abbey Road Group	Water Monitoring Well Testing
5/3/2022	East Town Crossing	B-1/W-1	66.08	6.76	Abbey Road Group	Water Monitoring Well Testing
5/10/2022	East Town Crossing	B-1/W-1	66.27	6.57	Abbey Road Group	Water Monitoring Well Testing






Service Disabled Veteran Owned Small Business

Water Monitoring Information (Well #1):

<u>Date</u>	<u>Location</u>	<u>Boring Site #</u>	<u>Water Elevation</u>	<u>Depth</u>	<u>Source</u>	<u>Comments</u>
5/18/2022	East Town Crossing	B-1/W-1	66.29	6.55	Abbey Road Group	Water Monitoring Well Testing
5/25/2022	East Town Crossing	B-1/W-1	66.84	6.00	Abbey Road Group	Water Monitoring Well Testing
6/1/2022	East Town Crossing	B-1/W-1	65.94	6.90	Abbey Road Group	Water Monitoring Well Testing
6/6/2022	East Town Crossing	B-1/W-1	66.14	6.70	Abbey Road Group	Water Monitoring Well Testing
6/16/2022	East Town Crossing	B-1/W-1	66.46	6.38	Abbey Road Group	Water Monitoring Well Testing
6/20/2022	East Town Crossing	B-1/W-1	66.14	6.70	Abbey Road Group	Water Monitoring Well Testing
6/30/2022	East Town Crossing	B-1/W-1	65.54	7.30	Abbey Road Group	Water Monitoring Well Testing
7/6/2022	East Town Crossing	B-1/W-1	65.44	7.40	Abbey Road Group	Water Monitoring Well Testing
7/11/2022	East Town Crossing	B-1/W-1	65.14	7.70	Abbey Road Group	Water Monitoring Well Testing
7/19/2022	East Town Crossing	B-1/W-1	64.84	8.00	Abbey Road Group	Water Monitoring Well Testing
7/28/2022	East Town Crossing	B-1/W-1	64.59	8.25	Abbey Road Group	Water Monitoring Well Testing
8/1/2022	East Town Crossing	B-1/W-1	64.49	8.35	Abbey Road Group	Water Monitoring Well Testing
8/10/2022	East Town Crossing	B-1/W-1	64.24	8.60	Abbey Road Group	Water Monitoring Well Testing
8/15/2022	East Town Crossing	B-1/W-1	64.19	8.65	Abbey Road Group	Water Monitoring Well Testing
8/25/2022	East Town Crossing	B-1/W-1	64.04	8.80	Abbey Road Group	Water Monitoring Well Testing
8/30/2022	East Town Crossing	B-1/W-1	63.89	8.95	Abbey Road Group	Water Monitoring Well Testing
9/6/2022	East Town Crossing	B-1/W-1	63.86	8.98	Abbey Road Group	Water Monitoring Well Testing
9/12/2022	East Town Crossing	B-1/W-1	63.69	9.15	Abbey Road Group	Water Monitoring Well Testing
9/19/2022	East Town Crossing	B-1/W-1	63.68	9.16	Abbey Road Group	Water Monitoring Well Testing
9/28/2022	East Town Crossing	B-1/W-1	63.64	9.20	Abbey Road Group	Water Monitoring Well Testing
10/7/2022	East Town Crossing	B-1/W-1	63.61	9.23	Abbey Road Group	Water Monitoring Well Testing
10/12/2022	East Town Crossing	B-1/W-1	63.68	9.16	Abbey Road Group	Water Monitoring Well Testing
10/17/2022	East Town Crossing	B-1/W-1	63.62	9.22	Abbey Road Group	Water Monitoring Well Testing
10/24/2022	East Town Crossing	B-1/W-1	63.84	9.00	Abbey Road Group	Water Monitoring Well Testing
10/31/2022	East Town Crossing	B-1/W-1	64.16	8.68	Abbey Road Group	Water Monitoring Well Testing
11/7/2022	East Town Crossing	B-1/W-1	65.04	7.80	Abbey Road Group	Water Monitoring Well Testing
11/14/2022	East Town Crossing	B-1/W-1	64.80	8.04	Abbey Road Group	Water Monitoring Well Testing
11/29/2022	East Town Crossing	B-1/W-1	65.12	7.72	Abbey Road Group	Water Monitoring Well Testing
12/5/2022	East Town Crossing	B-1/W-1	65.71	7.13	Abbey Road Group	Water Monitoring Well Testing
12/16/2022	East Town Crossing	B-1/W-1	65.73	7.11	Abbey Road Group	Water Monitoring Well Testing
12/20/2022	East Town Crossing	B-1/W-1	65.75	7.09	Abbey Road Group	Water Monitoring Well Testing
12/27/2022	East Town Crossing	B-1/W-1	67.19	5.65	Abbey Road Group	Water Monitoring Well Testing
1/3/2023	East Town Crossing	B-1/W-1	66.60	6.24	Abbey Road Group	Water Monitoring Well Testing
1/9/2023	East Town Crossing	B-1/W-1	66.61	6.23	Abbey Road Group	Water Monitoring Well Testing
1/17/2023	East Town Crossing	B-1/W-1	66.68	6.16	Abbey Road Group	Water Monitoring Well Testing



Service Disabled Veteran Owned Small Business

**Job #:** 06-171

**Project Name:** East Town Crossing

**As Of Date:** 1/17/2023

**Subject:** Water Monitoring Information for the East Town Crossing Site

**Special Notes:**

On Site Average Elevation: 70 Elevation

Max Boring Depth for the Shaw / Pioneer Crossing: 51.75 IE sloping to 60.60 IE

Shaw / Pioneer Intersection Elevation: 69.9 Top Surface


East Town Crossing Monitoring Well Information:

Well # 1 (B-1/W-1): 72.84, Rim IE

Well # 2 (W-2) 74.13 Rim IE

**Water Monitoring Information (Well #2):**


<u>Date</u>	<u>Location</u>	<u>Boring Site #</u>	<u>Water Elevation</u>	<u>Depth</u>	<u>Source</u>	<u>Comments</u>
3/18/2019	East Town Crossing	W-2	66.63	7.50	Krazans Report	Water Monitoring Well Testing
3/26/2020	East Town Crossing	W-2	66.83	7.30	Krazans Report	Water Monitoring Well Testing
4/2/2019	East Town Crossing	W-2	66.83	7.30	Krazans Report	Water Monitoring Well Testing
4/10/2019	East Town Crossing	W-2	66.33	7.80	Krazans Report	Water Monitoring Well Testing
4/19/2019	East Town Crossing	W-2	66.33	7.80	Krazans Report	Water Monitoring Well Testing
4/24/2019	East Town Crossing	W-2	66.33	7.80	Krazans Report	Water Monitoring Well Testing
4/28/2019	East Town Crossing	W-2	66.33	7.80	Krazans Report	Water Monitoring Well Testing
12/27/2019	East Town Crossing	W-2	70.03	4.10	Krazans Report	Water Monitoring Well Testing
1/31/2020	East Town Crossing	W-2	70.63	3.50	Krazans Report	Water Monitoring Well Testing
2/17/2020	East Town Crossing	W-2	68.33	5.80	Krazans Report	Water Monitoring Well Testing
3/16/2020	East Town Crossing	W-2	67.33	6.80	Krazans Report	Water Monitoring Well Testing
8/21/2020	East Town Crossing	W-2	66.08	8.05	Abbey Road Group	Water Monitoring Well Testing
8/28/2020	East Town Crossing	W-2	65.98	8.15	Abbey Road Group	Water Monitoring Well Testing
9/4/2020	East Town Crossing	W-2	65.81	8.32	Abbey Road Group	Water Monitoring Well Testing
9/11/2020	East Town Crossing	W-2	65.68	8.45	Abbey Road Group	Water Monitoring Well Testing
9/21/2020	East Town Crossing	W-2	65.58	8.55	Abbey Road Group	Water Monitoring Well Testing
9/25/2020	East Town Crossing	W-2	65.79	8.34	Abbey Road Group	Water Monitoring Well Testing
10/2/2020	East Town Crossing	W-2	65.82	8.31	Abbey Road Group	Water Monitoring Well Testing
10/9/2020	East Town Crossing	W-2	65.82	8.31	Abbey Road Group	Water Monitoring Well Testing
10/16/2020	East Town Crossing	W-2	66.27	7.86	Abbey Road Group	Water Monitoring Well Testing
10/23/2020	East Town Crossing	W-2	66.27	7.86	Abbey Road Group	Water Monitoring Well Testing
11/6/2020	East Town Crossing	W-2	66.88	7.25	Abbey Road Group	Water Monitoring Well Testing
11/13/2020	East Town Crossing	W-2	66.68	7.45	Abbey Road Group	Water Monitoring Well Testing



Service Disabled Veteran Owned Small Business

**Water Monitoring Information (Well #2):**


<u>Date</u>	<u>Location</u>	<u>Boring Site #</u>	<u>Water Elevation</u>	<u>Water Depth</u>	<u>Source</u>	<u>Comments</u>
11/19/2020	East Town Crossing	W-2	67.08	7.05	Abbey Road Group	Water Monitoring Well Testing
12/4/2020	East Town Crossing	W-2	67.18	6.95	Abbey Road Group	Water Monitoring Well Testing
12/11/2020	East Town Crossing	W-2	68.10	6.03	Abbey Road Group	Water Monitoring Well Testing
12/21/2020	East Town Crossing	W-2	68.56	5.57	Abbey Road Group	Water Monitoring Well Testing
12/28/2020	East Town Crossing	W-2	68.73	5.40	Abbey Road Group	Water Monitoring Well Testing
1/4/2021	East Town Crossing	W-2	69.98	4.15	Abbey Road Group	Water Monitoring Well Testing
1/11/2021	East Town Crossing	W-2	69.73	4.40	Abbey Road Group	Water Monitoring Well Testing
1/18/2021	East Town Crossing	W-2	70.13	4.00	Abbey Road Group	Water Monitoring Well Testing
2/1/2021	East Town Crossing	W-2	69.31	4.82	Abbey Road Group	Water Monitoring Well Testing
2/8/2021	East Town Crossing	W-2	69.10	5.03	Abbey Road Group	Water Monitoring Well Testing
2/16/2021	East Town Crossing	W-2	69.48	4.65	Abbey Road Group	Water Monitoring Well Testing
2/22/2021	East Town Crossing	W-2	69.73	4.40	Abbey Road Group	Water Monitoring Well Testing
3/1/2021	East Town Crossing	W-2	69.52	4.61	Abbey Road Group	Water Monitoring Well Testing
3/5/2021	East Town Crossing	W-2	69.13	5.00	Abbey Road Group	Water Monitoring Well Testing
3/15/2021	East Town Crossing	W-2	68.60	5.53	Abbey Road Group	Water Monitoring Well Testing
3/22/2021	East Town Crossing	W-2	68.32	5.81	Abbey Road Group	Water Monitoring Well Testing
4/5/2021	East Town Crossing	W-2	68.15	5.98	Abbey Road Group	Water Monitoring Well Testing
4/13/2021	East Town Crossing	W-2	67.91	6.22	Abbey Road Group	Water Monitoring Well Testing
4/19/2021	East Town Crossing	W-2	67.75	6.38	Abbey Road Group	Water Monitoring Well Testing
4/22/2021	East Town Crossing	W-2	67.62	6.51	Abbey Road Group	Water Monitoring Well Testing
4/30/2021	East Town Crossing	W-2	67.67	6.46	Abbey Road Group	Water Monitoring Well Testing
5/7/2021	East Town Crossing	W-2	67.63	6.50	Abbey Road Group	Water Monitoring Well Testing
5/17/2021	East Town Crossing	W-2	67.48	6.65	Abbey Road Group	Water Monitoring Well Testing
5/24/2021	East Town Crossing	W-2	67.51	6.62	Abbey Road Group	Water Monitoring Well Testing
5/28/2021	East Town Crossing	W-2	67.49	6.64	Abbey Road Group	Water Monitoring Well Testing
6/4/2021	East Town Crossing	W-2	67.17	6.96	Abbey Road Group	Water Monitoring Well Testing
6/14/2021	East Town Crossing	W-2	67.51	6.62	Abbey Road Group	Water Monitoring Well Testing
6/22/2021	East Town Crossing	W-2	67.50	6.63	Abbey Road Group	Water Monitoring Well Testing
6/29/2021	East Town Crossing	W-2	67.18	6.95	Abbey Road Group	Water Monitoring Well Testing
7/8/2021	East Town Crossing	W-2	67.08	7.05	Abbey Road Group	Water Monitoring Well Testing
7/12/2021	East Town Crossing	W-2	66.95	7.18	Abbey Road Group	Water Monitoring Well Testing
7/12/2021	East Town Crossing	W-2	66.73	7.40	Abbey Road Group	Water Monitoring Well Testing
7/12/2021	East Town Crossing	W-2	66.45	7.68	Abbey Road Group	Water Monitoring Well Testing
8/2/2021	East Town Crossing	W-2	66.39	7.74	Abbey Road Group	Water Monitoring Well Testing
8/10/2021	East Town Crossing	W-2	66.18	7.95	Abbey Road Group	Water Monitoring Well Testing



Service Disabled Veteran Owned Small Business

Water Monitoring Information (Well #2):

Date	Location	Boring Site #	Water Elevation	Depth	Source	Comments
8/16/2021	East Town Crossing	W-2	66.02	8.11	Abbey Road Group	Water Monitoring Well Testing
8/23/2021	East Town Crossing	W-2	65.87	8.26	Abbey Road Group	Water Monitoring Well Testing
8/30/2021	East Town Crossing	W-2	65.72	8.41	Abbey Road Group	Water Monitoring Well Testing
9/9/2021	East Town Crossing	W-2	65.58	8.55	Abbey Road Group	Water Monitoring Well Testing
9/13/2021	East Town Crossing	W-2	65.55	8.58	Abbey Road Group	Water Monitoring Well Testing
9/20/2021	East Town Crossing	W-2	65.66	8.47	Abbey Road Group	Water Monitoring Well Testing
9/27/2021	East Town Crossing	W-2	65.63	8.50	Abbey Road Group	Water Monitoring Well Testing
10/4/2021	East Town Crossing	W-2	65.70	8.43	Abbey Road Group	Water Monitoring Well Testing
10/18/2021	East Town Crossing	W-2	65.81	8.32	Abbey Road Group	Water Monitoring Well Testing
10/25/2021	East Town Crossing	W-2	65.98	8.15	Abbey Road Group	Water Monitoring Well Testing
11/1/2021	East Town Crossing	W-2	66.53	7.60	Abbey Road Group	Water Monitoring Well Testing
11/8/2021	East Town Crossing	W-2	67.23	6.90	Abbey Road Group	Water Monitoring Well Testing
11/17/2021	East Town Crossing	W-2	68.93	5.20	Abbey Road Group	Water Monitoring Well Testing
11/22/2021	East Town Crossing	W-2	68.98	5.15	Abbey Road Group	Water Monitoring Well Testing
11/29/2021	East Town Crossing	W-2	69.17	4.96	Abbey Road Group	Water Monitoring Well Testing
12/6/2021	East Town Crossing	W-2	68.92	5.21	Abbey Road Group	Water Monitoring Well Testing
12/13/2021	East Town Crossing	W-2	69.35	4.78	Abbey Road Group	Water Monitoring Well Testing
1/3/2022	East Town Crossing	W-2	69.30	4.83	Abbey Road Group	Water Monitoring Well Testing
1/25/2022	East Town Crossing	W-2	65.88	8.25	Abbey Road Group	Water Monitoring Well Testing-Onsite Dewatering
1/28/2022	East Town Crossing	W-2	65.05	9.08	Abbey Road Group	Water Monitoring Well Testing-Onsite Dewatering (2 Pumps Running)
2/4/2022	East Town Crossing	W-2	64.98	9.15	Abbey Road Group	Water Monitoring Well Testing-Onsite Dewatering ended 2/03/2022
2/8/2022	East Town Crossing	W-2	66.23	7.90	Abbey Road Group	Water Monitoring Well Testing
2/16/2022	East Town Crossing	W-2	67.13	7.00	Abbey Road Group	Water Monitoring Well Testing
3/9/2022	East Town Crossing	W-2	68.53	5.60	Abbey Road Group	Water Monitoring Well Testing
3/22/2022	East Town Crossing	W-2	68.43	5.70	Abbey Road Group	Water Monitoring Well Testing
3/31/2022	East Town Crossing	W-2	68.05	6.08	Abbey Road Group	Water Monitoring Well Testing
4/12/2022	East Town Crossing	W-2	67.97	6.16	Abbey Road Group	Water Monitoring Well Testing
4/19/2022	East Town Crossing	W-2	67.97	6.16	Abbey Road Group	Water Monitoring Well Testing
4/25/2022	East Town Crossing	W-2	67.73	6.40	Abbey Road Group	Water Monitoring Well Testing
5/3/2022	East Town Crossing	W-2	67.68	6.45	Abbey Road Group	Water Monitoring Well Testing
5/10/2022	East Town Crossing	W-2	67.83	6.30	Abbey Road Group	Water Monitoring Well Testing
5/18/2022	East Town Crossing	W-2	68.10	6.03	Abbey Road Group	Water Monitoring Well Testing
5/25/2022	East Town Crossing	W-2	68.43	5.70	Abbey Road Group	Water Monitoring Well Testing
6/1/2022	East Town Crossing	W-2	67.63	6.50	Abbey Road Group	Water Monitoring Well Testing
6/6/2022	East Town Crossing	W-2	67.85	6.28	Abbey Road Group	Water Monitoring Well Testing
6/16/2022	East Town Crossing	W-2	68.13	6.00	Abbey Road Group	Water Monitoring Well Testing
6/20/2022	East Town Crossing	W-2	68.03	6.10	Abbey Road Group	Water Monitoring Well Testing
6/30/2022	East Town Crossing	W-2	67.43	6.70	Abbey Road Group	Water Monitoring Well Testing



Service Disabled Veteran Owned Small Business

Water Monitoring Information (Well #2):

Date	Location	Boring Site #	Water Elevation	Depth	Source	Comments
7/6/2022	East Town Crossing	W-2	67.33	6.80	Abbey Road Group	Water Monitoring Well Testing
7/11/2022	East Town Crossing	W-2	67.03	7.10	Abbey Road Group	Water Monitoring Well Testing
7/19/2022	East Town Crossing	W-2	66.85	7.28	Abbey Road Group	Water Monitoring Well Testing
7/28/2022	East Town Crossing	W-2	66.88	7.25	Abbey Road Group	Water Monitoring Well Testing
8/1/2022	East Town Crossing	W-2	66.68	7.45	Abbey Road Group	Water Monitoring Well Testing
8/10/2022	East Town Crossing	W-2	66.48	7.65	Abbey Road Group	Water Monitoring Well Testing
8/15/2022	East Town Crossing	W-2	66.38	7.75	Abbey Road Group	Water Monitoring Well Testing
8/25/2022	East Town Crossing	W-2	66.28	7.85	Abbey Road Group	Water Monitoring Well Testing
8/30/2022	East Town Crossing	W-2	66.18	7.95	Abbey Road Group	Water Monitoring Well Testing
9/6/2022	East Town Crossing	W-2	66.15	7.98	Abbey Road Group	Water Monitoring Well Testing
9/12/2022	East Town Crossing	W-2	65.88	8.25	Abbey Road Group	Water Monitoring Well Testing
9/19/2022	East Town Crossing	W-2	65.86	8.27	Abbey Road Group	Water Monitoring Well Testing
9/28/2022	East Town Crossing	W-2	65.85	8.28	Abbey Road Group	Water Monitoring Well Testing
10/7/2022	East Town Crossing	W-2	65.76	8.37	Abbey Road Group	Water Monitoring Well Testing
10/12/2022	East Town Crossing	W-2	65.66	8.47	Abbey Road Group	Water Monitoring Well Testing
10/17/2022	East Town Crossing	W-2	65.49	8.64	Abbey Road Group	Water Monitoring Well Testing
10/24/2022	East Town Crossing	W-2	65.70	8.43	Abbey Road Group	Water Monitoring Well Testing
10/31/2022	East Town Crossing	W-2	65.97	8.16	Abbey Road Group	Water Monitoring Well Testing
11/7/2022	East Town Crossing	W-2	66.83	7.30	Abbey Road Group	Water Monitoring Well Testing
11/14/2022	East Town Crossing	W-2	66.85	7.28	Abbey Road Group	Water Monitoring Well Testing
11/29/2022	East Town Crossing	W-2	66.46	7.67	Abbey Road Group	Water Monitoring Well Testing
12/5/2022	East Town Crossing	W-2	66.88	7.25	Abbey Road Group	Water Monitoring Well Testing
12/16/2022	East Town Crossing	W-2	66.85	7.28	Abbey Road Group	Water Monitoring Well Testing
12/20/2022	East Town Crossing	W-2	66.61	7.52	Abbey Road Group	Water Monitoring Well Testing
12/27/2022	East Town Crossing	W-2	68.00	6.13	Abbey Road Group	Water Monitoring Well Testing
1/3/2023	East Town Crossing	W-2	68.26	5.87	Abbey Road Group	Water Monitoring Well Testing
1/9/2023	East Town Crossing	W-2	68.23	5.90	Abbey Road Group	Water Monitoring Well Testing
1/17/2023	East Town Crossing	W-2	67.44	6.69	Abbey Road Group	Water Monitoring Well Testing

# MITIGATION PLAN

---

## EAST TOWN CROSSING STREAM RESTORATION AND MIXED-USE DEVELOPMENT

SEPTEMBER 2023



# MITIGATION PLAN

---

## EAST TOWN CROSSING STREAM RESTORATION AND MIXED-USE DEVELOPMENT

SEPTEMBER 22, 2023

### PROJECT LOCATION

2902, 13102, & 3104 EAST PIONEER AVENUE  
813, 901, & 911 SHAW ROAD EAST  
PUYALLUP, WASHINGTON 98374

### PREPARED FOR

#### ASH DEVELOPMENT

1001 SHAW ROAD  
PUYALLUP, WASHINGTON 98371

### PREPARED BY

#### SOUNDVIEW CONSULTANTS LLC

2907 HARBORVIEW DRIVE  
GIG HARBOR, WASHINGTON 98335  
(253) 514-8952



## Executive Summary

Soundview Consultants LLC (SVC) has been assisting Ash Development (Applicant) with a Mitigation Plan for the proposed stream restoration and mixed-use development of a 10.93-acre site located at 2902, 13102, and 3104 East Pioneer Avenue and 813, 901, and 911 Shaw Road East in the City of Puyallup, Pierce County, Washington. The subject property consists of seven parcels situated in the Southeast ¼ of Section 26 and the Northeast ¼ of Section 35, Township 20 North, Range 4 East, W.M. (Pierce County Tax Parcel Numbers 0420264021, 0420264053, 0420264054, 0420351030, 0420351029, 0420351026 & 0420351066).

The subject property was previously investigated by John Comis Associates, LLC in 2008, 2009, and 2020 for the presence of potentially regulated wetlands, waterbodies, and fish and wildlife habitat conservation areas, with follow-up investigations in 2020 to verify initial findings. More recently, Habitat Technologies investigated the site in 2021 and again in 2022. Using current methodology, John Comis Associates (2020) and Habitat Technologies (2021) confirmed the absence of onsite wetlands. However, Habitat Technologies identified two streams on the eastern and northern portions of the site and one potential wetland offsite to the east of the site. Habitat Technologies later treated the potential wetland offsite to the east of the site as a wetland; however, no wetland hydrology indicators were observed during a summer site investigation (Habitat Technologies, 2022). The east stream (herein referred to as Stream Y) is classified as a Type IV water and the north stream (herein referred to as Stream Z) is classified as a Type III water per Puyallup Municipal Code (PMC) 21.06.1010(3)(a). Type III streams are subject to a standard 50-foot buffer, and Type IV streams are subject to a standard 35-foot buffer per PMC 21.06.1050(2). The wetland identified offsite to the east was preliminarily classified as a Category III wetland with an associated 80-foot buffer under PMC 21.06.930(2). In addition, John Comis Associates identified and delineated one wetland (previously Wetland A, herein referred to as Wetland 1) offsite to the south, as previously delineated by Herrera Environmental Consultants in 2000. Wetland 1 was classified as a Category II wetland subject to a standard 100-foot buffer per PMC 21.06.930(2).

SVC investigated the area offsite to the east for the presence of potentially-regulated wetlands, waterbodies, fish and wildlife habitat, and/or priority habitats or species in February 2023. Using current methodology, the site investigation confirmed the absence of wetlands in the area of Habitat Technologies' preliminary wetland determination in 2022. No areas met all three required wetland delineation criteria (a predominance of hydrophytic vegetation, hydric soils, and wetland hydrology). Specifically, no wetland hydrology was observed under normal hydrologic conditions during the winter wet season when groundwater was fully recharged. No other potentially-regulated wetlands, waterbodies, or priority habitats or species were identified within 300 feet of the site. Offsite wetland determinations will be discussed in detail under separate cover. SVC conducted a joint site investigation with Washington State Department of Fish and Wildlife (WDFW) on July 19, 2023. During the site investigation, WDFW concluded that Streams Y and Z are Type F (fish habitat) streams.

The Applicant proposes a phased project to construct a mixed-use development. Phase I will include development of residential and commercial buildings, parking, utilities, stormwater infrastructure, and frontage improvements along Shaw Road East. Phase II of the project will implement the required frontage improvements along East Pioneer Avenue and expand the mixed-use development onsite. The proposed project has been carefully designed to avoid and minimize impacts to the greatest extent



feasibly by utilizing the existing disturbed upland areas onsite. During Phase I, buildings and parking areas will be developed outside of the existing critical areas, and work within the critical area buffers will be limited to the utility crossings of the Stream Z buffer necessary to connect to existing infrastructure, the relocation of a power pole within the Stream Z buffer necessary to support required frontage improvements along East Pioneer Avenue, and the work needed to maintain site drainage patterns. Stormwater discharge locations are proposed to be located landward of OHW. During Phase II of the project, required frontage improvements and the proposed Stream Z crossing for site access cannot avoid critical area impacts. Given the location of Stream Z within the existing right-of-way (ROW) of East Pioneer Avenue, shifting Stream Z south is necessary and unavoidable to provide updated sidewalk, curb gutters, and landscaping to meet current City requirements. Given the proposed mixed-use development with several apartment buildings and commercial space, one site access point from Shaw Road East is not practicable. Therefore, the existing crossing from East Pioneer Avenue will need to be upgraded and widened to provide safe site access for the new development across the realigned Stream Z; the upgraded crossing will alleviate traffic issues by aiding in vehicle circulation and splitting use between two arterials and will also allow multiple access points for safety vehicles. The crossing will be designed as a bottomless culvert to allow for fish passage. Due to the realignment of Stream Z, the onsite buffer width for the new Stream Z channel is proposed to be less than the standard 50-foot buffer for a Type III stream required per PMC 21.06.1050(2), resulting in 11,267 square feet of buffer decrease. PMC 21.06.1030(1) states that relocation of Type II, III, and IV streams are permitted when the action will result in equal or better habitat and water quality and will not diminish the flow capacity of the stream. The mitigation actions described herein demonstrate how the project is anticipated to increase ecological functions when compared to the existing degraded conditions of the streams.

Temporary impacts to existing critical area buffers (approximately 1,248 square feet) resulting from utility installations and the relocation of a power pole during Phase I will be restored. To offset the necessary and unavoidable direct impacts to Stream Z during Phase II, the project proposes to restore and realign Stream Z within a reestablished, riparian corridor on the northern portion of the project area. In the existing linear, ditched alignment, Stream Z is extremely degraded as the system lacks riparian cover, habitat complexity, and floodplain function and is situated in a roadside ditch with several piped segments. The proposal will provide a highly functional stream with large woody debris, flood benches, and dense riparian plantings that will all increase the complexity and functionality of the stream system. In addition, the Applicant proposes to voluntarily restore Stream Y in a new stream channel near the eastern property boundary and to enhance buffer areas surrounding the new stream channel during Phase II. In its existing alignment, Stream Y is diverted into a stormwater pond and then piped for approximately 471 feet before discharging into Stream Z along East Pioneer Avenue. Therefore, in its current alignment, Stream Y is extremely degraded and restoring the stream channel and providing buffer enhancement will increase stream habitat availability and functions. Habitat Technologies previously described Stream Z and Stream Y as seasonal streams. The streams are tributaries to Deer Creek, which provides habitats for a number of fish species. However, prior assessments by Habitat Technologies and the Puyallup Tribe did not document fish utilization within the ditch system associated with the Pioneer Way East Corridor east of the confluence with Deer Creek (Habitat Technologies, 2022). WDFW has classified the streams as Type F (fish habitat). The proposed project will restore and enhance 78,347 square feet of buffer surrounding Streams Y and Z. The proposed buffer restoration and enhancement will provide 15,001 square feet of additional buffer in excess of the buffer areas that would be required under the standard 50-foot buffer required for Type III stream and a standard 35-foot buffer required for a Type IV stream.

The mitigation plan will provide a comprehensive stream restoration approach with watershed-level benefits to significantly increase stream functions of two tributaries that drain to Upper Deer Creek approximately 0.25-mile offsite to the west. Upper Deer Creek drains to the Puyallup River and is a gradient accessible stream for coho, Chinook, chum, pink and steelhead and also has known trout populations. In addition, Upper Deer Creek has documented water quality issues due to the 4A listing for high levels of bacteria from fecal coliform. Downgradient of the site, the Puyallup River also has documented water quality issues due to the 303d listings for high levels of bacteria from fecal coliform, high water temperatures, and high levels of mercury; these 303d listings resulted in the development of Puyallup River Watershed Fecal Coliform Total Maximum Daily Load (TMDL) Water Quality Report and Implementation Plan (WSDOE, 2011). The Puyallup River TMDL identifies Deer Creek in the Shaw Road area near the project site as an ideal area to restore riparian habitat. Further, both streams are within mapped FEMA 100-year floodplain but currently provide de minimis flood functions due to the straightened, ditched conditions. Restoring stream and riparian habitat will improve usable fish habitat within Stream Z over time, increase sediment and pollutant filtration to improve documented water quality issues, and provide flood benches to increase hydrologic functions and flow capacity that will reduce local flooding. Therefore, the project is aligned with the Puyallup River TMDL and is anticipated to result in a net gain in ecological functions in the watershed when compared to the existing degraded conditions of the stream that will be impacted from the frontage improvements and upgraded crossing. A Conceptual Mitigation Plan is provided in Chapter 2 of this report.

The City issued a Mitigated Determination of Non-Significance (MDNS) dated June 27, 2023 (City of Puyallup, 2023b) for the proposed project Conceptual Mitigation Plan dated April 7, 2023 and provided conditions of approval in a Final Development Review Team Letter dated June 20, 2023 (City of Puyallup, 2023a). In addition, the City issues Civil Review Comments for the proposed site plan August 31, 2023 (City of Puyallup, 2023c). The proposed site plan and mitigation plan have been updated based on the City’s conditions of approval provided in the Final Development Review Team Letter, the coordination with WDFW, and the civil review comments. Most recent changes to the site plan include a reduction in the number of proposed parking stalls and relocation of two buildings to impacts to the buffer of Stream Z, and the relocation of a power pole along East Pioneer Avenue further within the buffer of Stream Z to support frontage improvements along the road.

The table below identifies the critical areas and summarizes the potential regulatory status by local, state, and federal agencies.

Wetland/ Waterbody Name	City Category/ Type <sup>1</sup>	State Category/Type <sup>2</sup>	Regulated Under PMC Chapter 21.06	Regulated Under RCW 90.48	Regulated Under Clean Water Act
Wetland 1	II	II	Yes	Yes	Likely
Stream Y	Type IV	F	Yes	Yes	Likely
Stream Z	Type III	F	Yes	Yes	Likely

**Note:**

1. Current Washington State Department of Ecology (WSDOE) wetland rating system (Hruby, 2014) per PMC 21.06.910(3); stream definitions per PMC 21.06.1010(3)(a) and Habitat Technologies (2021).
2. Current Washington State Department of Ecology (WSDOE) wetland rating system (Hruby, 2014) per PMC 21.06.910(3); stream classifications per Washington Administrative Code (WAC) 222-16-030.

The table below identifies the proposed stream impacts.

Stream	City Type <sup>1</sup>	State Type <sup>2</sup>	Impact Type	Impact Area
Z	Type III	Type F	Direct	592 LF

Note:

1. Stream definitions per PMC 21.06.1010(3)(a) and Habitat Technologies (2021).
2. Stream classification per Washington Administrative Code (WAC) 222-16-030.


The summary table below identifies linear feet of stream segments in the project area pre- and post-development.

Stream	City Type <sup>1</sup>	State Type <sup>2</sup>	Condition	Existing	Proposed
Y	IV	F	Open Channel	110 LF	463 LF
			Culvert	471 LF	0 LF
			<b>Total</b>	<b>581 LF</b>	<b>463 LF</b>
Z	III	F	Open Channel	465 LF	497 LF
			Culvert	127 LF	117 LF
			<b>Total</b>	<b>592 LF</b>	<b>614 LF</b>

Note:

1. Stream definitions per PMC 21.06.1010(3)(a) and Habitat Technologies (2021).
2. Stream classification per Washington Administrative Code (WAC) 222-16-030.

# Site Map

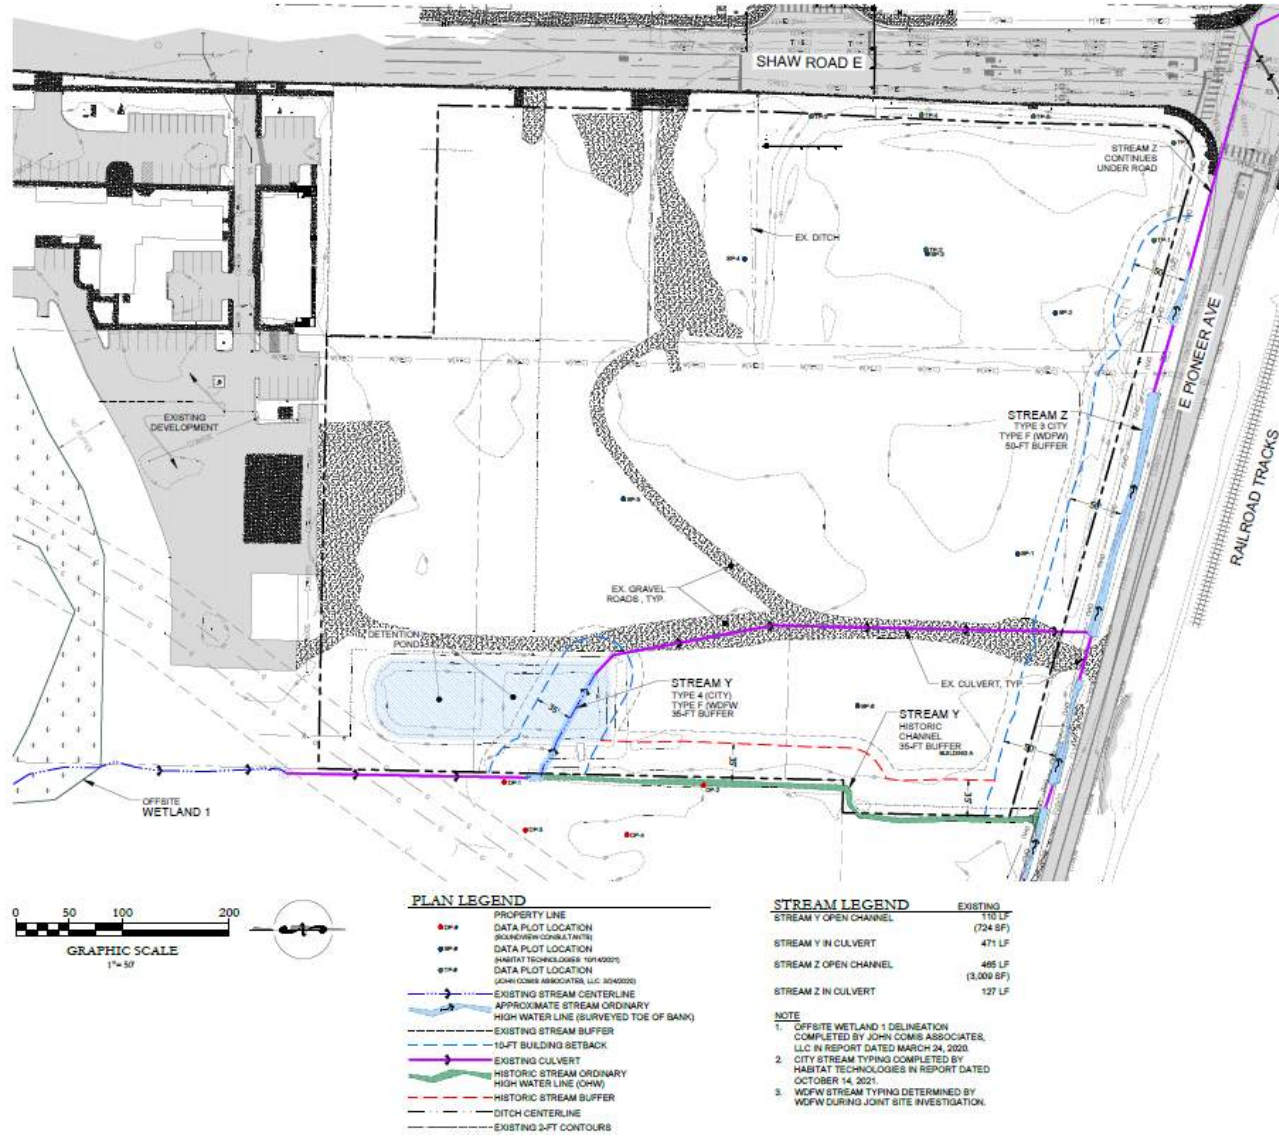

# Table of Contents

Chapter 1. Regulatory Considerations .....	1
1.1 Local Considerations .....	1
1.2 State Considerations .....	6
1.3 Federal Considerations.....	6
Chapter 2. Conceptual Mitigation Plan .....	8
2.1 Purpose and Need.....	8
2.2 Description of Impacts .....	8
2.3 Stream and Riparian Mitigation Strategy .....	10
2.4 Approach and Best Management Practices.....	13
2.5 Mitigation Implementation.....	13
2.6 Goals, Objectives, and Performance Standards .....	15
2.7 Plant Materials and Installation.....	17
2.8 Maintenance & Monitoring Plan .....	19
2.9 Reporting.....	20
2.10 Contingency Plan and Long-Term Management Plan .....	20
Chapter 3. Closure .....	22
Chapter 4. References .....	23

## Tables

Table 1. Stream Impact Summary.....	9
Table 2. Summary of Stream Segments Pre- and Post-Development.....	11

## Appendices

- Appendix A – Proposed Site Plan Exhibits
- Appendix B – Photographs
- Appendix C – Qualifications

# Chapter 1. Regulatory Considerations

---

The proposed project utilizes a combination of prior referenced critical area reports and current site investigations for a complete determination of identified critical areas. John Comis Associates (2020) established the presence of offsite Wetland 1 (previously referred to as Wetland A) south of the subject property. Most recently, Habitat Technologies (2021) confirmed the absence of onsite wetlands and the presence of two onsite streams (Streams Y and Z) on the eastern and northern portions of the site, respectively. A copy of the prior referenced critical areas report is provided under separate cover. In addition, SVC's site investigation in February 2023 confirmed the absence of offsite wetlands to the east of the subject property. No other potentially-regulated wetlands, waterbodies, fish and wildlife habitat, or priority habitats or species were identified within 300 feet of the site during the site investigations.

## 1.1 Local Considerations

### 1.1.1 Buffer Standards

PMC 21.06.910(3) has adopted the current wetland rating system for western Washington (Hruby, 2014). Category II wetlands provide a high level of function and ecological characteristics. Wetland 1 was identified offsite to the south of the subject property by John Comis Associates (2020). Wetland 1 was classified as a Category II wetland subject to a standard 100-foot buffer per PMC 21.06.930(2). The buffer associated with Wetland 1 does not project onsite.

Habitat Technologies (2021) identified two streams on the eastern and northern portions of the site. The east stream (Stream Y) is classified as a Type IV water and the north stream (Stream Z) is classified as a Type III water per PMC 21.06.1010(3)(a). Type III streams are subject to a standard 50-foot buffer, and Type IV streams are subject to a standard 35-foot buffer per PMC 21.06.1050(2).

A building setback of 10 feet is required for all buildings and structures from the edges of all critical area buffers per PMC 21.06.840.

### 1.1.2 Mitigation Sequencing

The Applicant proposes necessary and unavoidable direct impacts to Stream Z. Under PMC 21.06.1020(1) and PMC 21.06.1080, adverse impacts to riparian and non-riparian habitats shall be fully mitigated in accordance with the standards set forth in PMC 21.06.610. Per PMC 21.06.610(1), when an alteration to a critical area is proposed, the applicant shall demonstrate that all reasonable efforts have been taken to avoid, minimize, or compensate for impacts in that order with the mitigation definition contain in PMC 21.06.210(84).

a) *Avoiding the impact altogether by not taking a certain action or parts of actions.*

The Applicant proposes a phased project to construct a mixed-use development. Phase I will include development of residential and commercial buildings, parking, utilities, stormwater infrastructure, and frontage improvements along Shaw Road East. Phase II of the project will implement the required frontage improvements along East Pioneer Avenue and Stream Z crossing and expand the mixed-use development onsite.

The proposed project has been carefully designed to avoid and minimize impacts to the greatest extent feasibly by utilizing the existing disturbed upland areas onsite. During Phase I, buildings and parking areas will be developed outside of the existing critical areas and buffers, and work within the critical area buffers will be limited to the utility crossings of the Stream Z buffer necessary to connect to existing infrastructure and to ensure that stormwater is discharged from the site. No work below OHW is proposed during Phase I.

During Phase II of the project, required frontage improvements and the proposed stream crossing for site access cannot avoid critical area impacts. Given the location of Stream Z within the exiting right-of-way (ROW) of East Pioneer Avenue, shifting Stream Z south is also necessary and unavoidable to provide updated sidewalk, curb gutters, and landscaping to meet current City requirements. Due to the shifting of Stream Z to the south, the proposed site layout will result in a variable buffer width along the new Stream Z channel that is less than the standard 50-foot buffer width for a Type III stream specified under PMC 21.06.1050(2).

Given the proposed mixed-use development with several apartment buildings and commercial space, one site access point from Shaw Road East is not practicable. Therefore, the existing crossing from East Pioneer Avenue will need to be upgraded and widened to provide safe site access for the new development; this site access will alleviate traffic issues by aiding in vehicle circulation and splitting use between two arterials and will also allow multiple access points for safety vehicles. PMC 21.06.1030(1) states that relocation of Type II, III, and IV streams are permitted when the action will result in equal or better habitat and water quality and will not diminish the flow capacity of the stream; the mitigation actions described herein demonstrate how the project is anticipated to increase ecological functions when compared to the existing degraded conditions of the streams.

The project avoids direct impacts and take of listed threatened or endangered species per PMC 21.06.1020(4) as no threatened or endangered species are present in the project area.

*b) Minimizing impacts by limiting the degree or magnitude of the action and its implementation.*

During Phase I, the proposed project has minimized impacts by locating buildings and parking areas outside of standard buffer widths for the existing stream alignments and incorporating an underground stormwater vault that avoids the need for an above ground detention facility. The site plan has also been revised to reduce the number of proposed parking stalls and relocated two buildings in proximity to Stream Z, reducing stream buffer impacts and allowing for an increased buffer width between Stream Z and the proposed development on the northwest portion of the subject property. During Phase II, the proposed direct impacts to Stream Z are the minimum necessary to provide the required frontage improvements and upgrade the existing crossing from East Pioneer Avenue for safe site access. The upgraded crossing will consist of a bottomless, fish-passable, culvert. To accommodate future potential fish passage along Stream Z at the request of WDFW, the project proposes to install a box culvert to connect the new Stream Z channel to the existing downgradient piped Stream Z. Appropriate BMPs and TESC measures will be implemented for the duration of project activities to minimize potential construction impacts. The stream relocation work will be completed in the dry season when hydrology is either absent or minimal to limit temporary turbidity.

c) *Rectifying impacts by repairing, rehabilitating, or restoring the affected environment.*

During Phase I, the proposed project will rectify the temporary impacts of utility installation and power pole relocation within the existing Stream Z buffer by replanting temporarily impacted areas with a native seed mix.

To offset the necessary and unavoidable direct impacts to Stream Z during Phase II, the project proposes to restore and realign Stream Z within a reestablished riparian corridor on the northern portion of the project area. In the existing linear, ditched alignment, Stream Z is extremely degraded as the system lacks riparian cover, habitat complexity, and floodplain function and is situated in a roadside ditch with several piped segments. The proposal will provide a protected riparian corridor with a highly functional stream with large woody debris, flood benches, and dense riparian plantings that will all increase the complexity and functionality of the stream system. In addition, the Applicant proposes to voluntarily restore Stream Y to a new, offsite stream channel near the east property boundary and to enhance and restore the surrounding buffer during Phase II. In its existing alignment, Stream Y is diverted into a stormwater pond and then piped for approximately 471 feet before discharging into Stream Z along East Pioneer Avenue. Therefore, in its current alignment, Stream Y is extremely degraded and daylighting and creating a new stream channel will increase stream habitat availability and functions. The restored stream channels are proposed to be protected by 78,347 square feet of buffer, exceeding the buffer area that would result from a standard application of a 35-foot buffer to a Type IV stream and 50-foot buffer to a Type III stream by 15,001 square feet.

The mitigation plan will provide a comprehensive stream restoration approach with watershed-level benefits to significantly increase stream functions of two tributaries that drain to Upper Deer Creek approximately 0.25-mile offsite to the west. Upper Deer Creek drains to the Puyallup River and is a gradient accessible stream for coho, Chinook, chum, pink and steelhead and also has known trout populations. In addition, Upper Deer Creek has documented water quality issues due to the 4A listing for high levels of bacteria from fecal coliform. Downgradient of the site, the Puyallup River also has documented water quality issues due to the 303d listings for high levels of bacteria from fecal coliform, high water temperatures, and high levels of mercury; these 303d listings resulted in the development of Puyallup River Watershed Fecal Coliform Total Maximum Daily Load (TMDL) Water Quality Report and Implementation Plan (WSDOE, 2011). The Puyallup River TMDL identifies Deer Creek in the Shaw Road area near the project site as an ideal area to restore riparian habitat. Further, both streams are within mapped FEMA 100-year floodplain but currently provide de minimis flood functions due to the straightened, ditched conditions. Restoring stream and riparian habitat will improve usable fish habitat within Stream Z over time, increase sediment and pollutant filtration to improve documented water quality issues, and provide flood benches to increase hydrologic functions and flow capacity that will reduce local flooding. Therefore, the project is aligned with the Puyallup River TMDL, will result in equal or better habitat and water quality per PMC 21.06.1030(1), and is anticipated to result in a net gain in ecological functions in the watershed per PMC 21.06.1080(3) when compared to the existing degraded conditions of the stream that will be impacted from the frontage improvements and upgraded crossing.

d) *Reducing or eliminating an impact over time by preservation and maintenance operations during the life of the action.*



The stream restoration areas created during Phase II will be monitored for a period of up to 10 years to ensure success of the mitigation actions over time. In addition, the mitigation areas will be placed in a separate tract or dedicated to the City as a permanent protective mechanism per PMC 21.06.610(7) and PMC 21.06.830. Fencing and signage will also be provided per PMC 21.06.810 to reduce intrusion into the critical areas and prevent future impacts to the critical areas.

e) *Compensating for an impact by replacing or providing substitute resources or environments.*

See response to criterion C above. The unavoidable direct stream impacts will be compensated through onsite and offsite, in-kind stream creation mitigation measures. The project will ensure no net loss of area under PMC 21.06.1080(3) and PMC 21.06.610(2) by providing buffer enhancement and a minimum 1:1 ratio of creation to impacts to achieve equivalent or greater functions for Stream Z per PMC 21.06.1080(2). The mitigation will result in no net loss of ecological functions when compared to the existing degraded condition of the stream proposed to be impacted.

f) *Monitoring the mitigation and taking remedial action when necessary.*

The stream mitigation and voluntary restoration areas created during Phase II will be monitored for a period of 10 years to ensure success of the actions over time, consistent with PMC 21.06.630. Appropriate contingency measures will be implemented if monitoring indicates that goals and performance standards of the mitigation plan are not being met.

### **1.1.3 Performance Standards – Alteration of Streams and Riparian Habitats**

PMC 21.06.1030 outlines standards for allowed alterations to streams and associated riparian habitats. Necessary and unavoidable stream impacts are required for frontage improvements, upgrading an existing crossing from East Pioneer Avenue for additional site access, and providing power to the property.

PMC 21.06.1030(2) states the following for proposed bridges/culverts:

*Bridges are the preferred crossing for fish-bearing streams. Culverts are allowed only in Type II, III, and IV streams; provided, that they are designed according to the Washington Department of Fish and Wildlife criteria for fish passage, are necessary for utility crossings, road crossings, or other limited access situations, and are in accordance with a state Hydraulic Project Approval permit. The applicant or property owner shall keep any culvert free of debris and sediment at all times to allow free passage of water and, if applicable, fish. The city may require that a stream be removed from a culvert as a condition of approval, unless the culvert is not detrimental to fish habitat or water quality, or removal would be detrimental to fish or wildlife habitat or water quality.*

The proposed crossing will be in accordance with the most recent WDFW crossing design criteria for fish passage, and the Applicant will apply for a Hydraulic Project Approval (HPA) from WDFW. The crossing is essential for providing necessary site access. Having two site access points is required by City development standards and will alleviate traffic issues by aiding in vehicle circulation and splitting use between two arterials and will also allow multiple access points for safety vehicles. The new/upgraded crossing will be bottomless to allow free passage of water. The bottomless crossing will be monitored to ensure that it functions as intended over time.

PMC 21.06.1030(6) states that utility lines may be permitted to cross streams and riparian habitat areas subject to the following standards:

- a) *Impacts to fish and wildlife shall be avoided to the maximum extent possible;*

The proposed utility installations are necessary to connect to existing infrastructure and to maintain existing site drainage patterns. In addition, the relocation of an existing power pole adjacent to Stream Z further within the stream buffer is necessary to support frontage improvements. During Phase I, the project proposes to install a new power drop, consisting of a transformer box and electrical line within the existing Stream Z buffer. The new power drop will connect to an existing power line along East Pioneer Avenue; the proposed transformer box and electrical line will be located as near to an existing power pole as feasible to minimize the length of electrical line in the buffer. As documented in the Conceptual Mitigation Plan dated April 7, 2023, the project previously proposed to install a stormwater line in the Stream Z buffer during Phase I to connect to an existing pipe adjacent to East Pioneer Avenue using a manhole. The proposed stormwater discharge from the site has been redesigned to avoid the manhole connection as requested by WDFW. The proposed stormwater discharge will release treated and detained runoff into the Stream Z buffer. The discharge infrastructure is anticipated to consist of temporary release points during Phase I that will be replaced with a permanent discharge infrastructure during Phase II. The power pole proposed to be relocated is an existing impact within the stream buffer and will result only in new temporary impacts that will be fully restored.

- b) *Installation shall be accomplished by boring beneath the scour depth and hyporheic zone of the water body and channel migration zone, where feasible;*

The proposed stormwater discharge location and power pole relocation will be located landward of the Stream Z OHW. The proposed transformer box will be located within the existing Stream Z buffer; the proposed electrical line will cross a piped section of the existing and proposed Stream Z alignments. Due to the presence of piped stream sections, boring beneath the scour depth and hyporheic zone of the water body is not applicable.

- c) *The utilities shall cross at an angle greater than 60 degrees to the centerline of the channel in streams or perpendicular to the channel centerline whenever boring under the channel is not feasible;*

No stormwater crossing of the stream channel is proposed. The proposed transformer box and relocated power pole will be located within the existing Stream Z buffer; the proposed electrical line will cross a piped section of the existing and proposed Stream Z alignments.

- d) *Crossings shall be contained within the footprint of an existing road or utility crossing where possible;*

The proposed stormwater discharge location has been revised as requested by WDFW to avoid a manhole connection to an existing pipe conveying Stream Z waters downgradient of the site. The proposed stormwater discharge location will be located landward of the Stream Z OHW and is designed to maintain existing site drainage patterns given the site grading.

No power crossings currently existing along East Pioneer Avenue and crossing location is limited by the proximity of adjacent power poles.

- e) *The utility route shall avoid paralleling the stream or following a down-valley course near the channel where feasible; and*

The proposed stormwater discharge and electric utilities will be perpendicular to the stream to the extent feasible. In addition, the existing buffer conditions are degraded and temporary impacts are proposed to be restored using a native seed mix.

f) *The utility installation shall not increase or decrease the natural rate of channel migration.*

The proposed utility crossings will not disturb the new stream channel and will not increase or decrease the rate of channel migration.

## 1.2 State Considerations

The identified streams and offsite wetland are also likely to be regulated as natural surface waters by the WSDOE under the Revised Code of Washington (RCW) 90.48.

RCW 77.55 requires that in-water work requires Hydraulic Project Approval (HPA) from WDFW. WDFW conducted a joint site investigation with SVC on July 19, 2023. During the joint site investigation, WDFW determined that Streams Z and Y were Type F (fish habitat) streams based on the field observations and prior WDFW fish passage inventory assessment notes.

## 1.3 Federal Considerations

On January 18, 2023, USACE and EPA published a revised definition of “Waters of the United States.” The revised rule becomes effective on March 20, 2023. Under the 2023 revised rule, Waters of the United States is described as follows (USACE and EPA, 2023):

*(a) Waters of the United States means:*

*(1) Waters which are: (i) Currently used, or were used in the past, or may be susceptible to use in interstate or foreign commerce, including all waters which are subject to the ebb and flow of the tide; (ii) The territorial seas; or (iii) Interstate waters, including interstate wetlands;*

*(2) Impoundments of waters otherwise defined as waters of the United States under this definition, other than impoundments of waters identified under paragraph (a)(5) of this section;*

*(3) Tributaries of waters identified in paragraph (a)(1) or (2) of this section: (i) That are relatively permanent, standing or continuously flowing bodies of water; or (ii) That either alone or in combination with similarly situated waters in the region, significantly affect the chemical, physical, or biological integrity of waters identified in paragraph (a)(1) of this section;*

*(4) Wetlands adjacent to the following waters: (i) Waters identified in paragraph (a)(1) of this section; or (ii) Relatively permanent, standing or continuously flowing bodies of water identified in paragraph (a)(2) or (a)(3)(i) of this section and with a continuous surface connection to those waters; or (iii) Waters identified in paragraph (a)(2) or (3) of this section when the wetlands either alone or in combination with similarly situated waters in the region, significantly affect the chemical, physical, or biological integrity of waters identified in paragraph (a)(1) of this section;*

*(5) Intrastate lakes and ponds, streams, or wetlands not identified in paragraphs (a)(1) through (4) of this section: (i) That are relatively permanent, standing or continuously flowing bodies of water with a continuous surface connection to the waters identified in paragraph (a)(1) or (a)(3)(i) of this section; or (ii) That either alone or in combination with*

*similarly situated waters in the region, significantly affect the chemical, physical, or biological integrity of waters identified in paragraph (a)(1) of this section.*

Wetland 1 appears hydrologically connected to Stream Y. Streams Y and Z are relatively permanent tributaries that discharge into Upper Deer Creek and eventually the Puyallup River, a traditional navigable water. Therefore, the identified critical areas are likely jurisdictional under the Clean Water Act. The project proposal assumes that the USACE will assert jurisdiction over the identified streams and wetland. On May 25, 2023, the U.S. Supreme Court issued a decision affecting the definition of Waters of the United States in *Sackett Et Ux. V Environmental Protection Agency Et Al.* While USACE is in receipt of the Supreme Court decision, no formal, revised definition of Waters of the United States has been issued at the time of this report drafting. The proposed project therefore continues to assume that the identified streams and wetland are considered Waters of the United States.

## Chapter 2. Conceptual Mitigation Plan

---

The proposed compensatory mitigation actions for the project attempt to strike a balance between achieving project goals as well as a positive ecological result. In general, joint USACE and EPA rules have been established that require more careful mitigation planning efforts utilizing a watershed approach in site selection (USACE & EPA, 2008). The proposed impacts and mitigation actions attempt to closely adhere to these rules and to the local critical areas regulations specified in PMC Chapter 21.06 and local watershed planning and restoration documents. This chapter presents the mitigation details for the proposed mixed-use project.

The Applicant will submit any proposed substantial changes to the project or mitigation plan, such as significant changes to the amount, location, or design of mitigation; the goals, benchmarks, or performance standards; the monitoring or adaptive management provisions, to WSDOE for review and approval prior to implementation. Minor changes, such as alterations to the species listed in the planting plan, will be documented in the as-built report.

### 2.1 Purpose and Need

The purpose of the proposed project is to provide a mixed-use development that will help alleviate the shortage of housing in the greater Seattle area and expand the local economy by providing new services to the area through available commercial space.

### 2.2 Description of Impacts

The Applicant proposes a phased project to construct a mixed-use development. Phase I will include development of residential and commercial buildings, parking, utilities, stormwater infrastructure, and frontage improvements along Shaw Road East. Phase II of the project will implement the required frontage improvements along East Pioneer Avenue and expand the mixed-use development onsite. The proposed project has been carefully designed to avoid and minimize impacts to the greatest extent feasibly by utilizing the existing disturbed upland areas onsite. During Phase I, buildings and parking areas will be developed outside of the existing critical areas and buffers, and work within the critical area buffers will be limited to the utility crossings of the Stream Z buffer necessary to connect to existing infrastructure. During Phase II of the project, required frontage improvements and the proposed Stream Z crossing for site access cannot avoid critical area impacts. Mitigation sequencing for the proposed project is provided under Section 1.1.2 Mitigation Sequencing.

Under Phase I, approximately 1,248 square feet of temporary impacts to the existing Stream Z buffer are proposed are anticipated to install the power drop, which will consist of a transformer box and electrical line, and to relocate an existing power pole adjacent to East Pioneer Avenue to support required frontage improvements.

Under Phase II, the project requires the complete fill and relocation of 592 linear feet of the Stream Z channel to provide City-required frontage improvements. An approximately 56-foot-wide crossing of the proposed, realigned Stream Z channel is required to provide safe site access, allow multiple points of access for emergency vehicles, and alleviate traffic congestion by aiding in vehicle circulation and splitting use between two arterials. Due to the realignment of Stream Z, the onsite buffer width for the new stream channel will be less than the standard 50-foot buffer for a Type III stream required

per PMC 21.06.1050(2), resulting in 5,341 square feet of buffer decrease. The site plan has recently been revised to reduce the number of proposed parking stalls and relocate two buildings on the northwest portion of the subject property, minimizing the proposed buffer decrease. Temporary construction impacts may also occur but will be minimized to the greatest extent feasible with the implementation of all appropriate BMPs and TESC measures. The Applicant proposes to voluntarily restore Stream Y within a new stream channel near the east property boundary and to enhance and restore a buffer surrounding the stream channel. The proposed beneficial realignment of Stream Y may also result in temporary stream impacts. Habitat Technologies previously described Stream Z and Stream Y as seasonal streams. The streams are tributaries to Deer Creek, which provides habitats for a number of fish species. However, prior assessments by Habitat Technologies and the Puyallup Tribe did not document fish utilization within the ditch system associated with the Pioneer Way East Corridor east of the confluence with Deer Creek (Habitat Technologies, 2022). During the joint site investigation with WDFW, WDFW characterized Streams Y and Z as Type F (fish habitat) streams.

### 2.2.1 Permanent Stream Impacts

In the existing linear, ditched alignment, Stream Z is extremely degraded as the system is situated in a roadside ditch with several piped segments and lacks riparian cover, habitat complexity, and floodplain function. The stream consists of one long run that lacks pool and riffle sequences. The stream along the majority of its length is choked with non-native, invasive reed canarygrass, which reduces water velocity and creates low levels of dissolved oxygen due to the stagnant conditions and die-off of vegetative material. The majority of the onsite stream channel will be permanently filled, and portions of the stream piped will be modified pre- and post-development based on frontage improvement requirements and existing conditions. The proposed stream relocation will result in a permanent loss of existing degraded habitat. Refer to Appendix C for photographs of Stream Z in its existing degraded condition.

A summary of impacted streams is provided in Table 1 below.

**Table 1. Stream Impact Summary**

Stream	City Type <sup>1</sup>	State Type <sup>2</sup>	Impact Type	Impact Area
Z	Type III	Type F	Direct	592 LF

Notes:

1. Stream definitions per PMC 21.06.1010(3)(a) and Habitat Technologies (2021).
2. Stream typing per Washington Administrative Code (WAC) 222-16-030.

### 2.2.1 Temporary Stream Impacts

To minimize temporary impacts, stream relocation activities will occur in the summer during low stream flow or dry conditions. Dewatering activities associated with the realignment of Stream Z and restoration of Stream Y are not anticipated to significantly impact fish and other aquatic vertebrate species potentially present in the channels at the time of construction given the timeline of construction in the summer months when hydrology is minimal and with all appropriate BMPs and TESC measures in place.

If water is present in the existing stream channels prior to realignment, then fish exclusion, capture and relocation actions and water quality monitoring actions will be implemented. Temporary turbidity

increases within the new stream channels of Streams Y and Z are likely to occur during the rewatering of the new stream channels. Rewatering within the new channels is not anticipated to be completed in more than one segment for each stream separately. The Washington Administrative Code (WAC) 173-201A-200(1)(e) makes allowances for a temporary area of mixing during and immediately after in-water construction activities subject to the constraints of WAC 173-201A-400(4) and (6). For waters less than or equal to 10 cfs flow at the time of construction, the point of compliance shall be 100 feet downstream of the action. Water quality monitoring will be completed to evaluate compliance during rewatering, and fish exclusion nets will remain in place until suspended sediment levels match the point of compliance. The proposed fish exclusion and sediment controls are anticipated to lead to an avoidance or significant reduction in direct fish exposure to elevated suspended sediments if fish are present in the streams. A Water Quality Monitoring Plan has been prepared under separate cover. A Fish Protection and Exclusion Plan will be prepared under separate cover if requested by regulatory agencies.

## **2.3 Stream and Riparian Mitigation Strategy**

### **2.3.1 Phase I**

1,248 square feet of temporary impacts to the existing Stream Z buffer resulting from the power drop (e.g. transformer box and electric line) will be restored through reseeding of the existing degraded buffer using a native seed mix.

### **2.3.2 Phase II**

The compensatory mitigation actions outlined herein are intended to compensate for lost stream functions and values by providing an overall improvement in water quality, hydrologic, and habitat functions according to the needs of the site, local sub-basin, and overall Puyallup River watershed. The unavoidable direct stream impacts will be compensated through onsite and offsite, in-kind stream creation mitigation measures. The project will ensure no net loss of area under PMC 21.06.1080(3) and PMC 21.06.610(2) by providing a minimum 1:1 stream creation to impact ratio to achieve equivalent or greater Stream Z functions per PMC 21.06.1080(2) (Table 2). To offset the necessary and unavoidable direct impacts to Stream Z, the project proposes to restore and realign Stream Z within a reestablished riparian corridor on the northern portion of the project area. Voluntary restoration of Stream Y will occur through realignment of the stream through a new stream channel that is located immediately offsite adjacent to the eastern property boundary and buffer restoration and enhancement. 78,347 square feet of buffer enhancement and restoration is proposed to protect the realigned Streams Y and Z.

In the existing linear, ditched alignment, Stream Z is extremely degraded as the system lacks riparian cover, habitat complexity, and floodplain function and is situated in a roadside ditch with several piped segments. The proposal will provide a protected riparian corridor with a highly functional stream with large woody debris, flood benches, and dense riparian plantings that will all increase the complexity and functionality of the stream system. In addition, the Applicant proposes to restore Stream Y to a new stream channel immediately offsite adjacent to the eastern property boundary and restore and enhance the stream buffer. In its existing alignment, Stream Y overflows into a stormwater pond and is then piped for approximately 471 feet before discharging into Stream Z along East Pioneer Avenue. The proposed realignment of Stream Y will daylight the stream, increasing functional stream habitat

(Table 2). Table 2 quantifies the length and condition of stream segments onsite pre- and post-development.

**Table 2. Summary of Stream Segments Pre- and Post-Development**

Stream	City Type <sup>1</sup>	State Type <sup>2</sup>	Condition	Existing	Proposed
Y	IV	F	Open Channel	110 LF	463 LF
			Culvert	471 LF	0 LF
			<b>Total</b>	<b>581 LF</b>	<b>463 LF</b>
Z	III	F	Open Channel	465 LF	497 LF
			Culvert	127 LF	117 LF
			<b>Total</b>	<b>592 LF</b>	<b>614 LF</b>

Notes:

1. Stream definitions per PMC 21.06.1010(3)(a) and Habitat Technologies (2021).
2. Stream typing per Washington Administrative Code (WAC) 222-16-030.

The mitigation plan will provide a comprehensive stream restoration approach with watershed-level benefits to significantly increase stream functions of two tributaries that drain to Upper Deer Creek approximately 0.25-mile offsite to the west. Upper Deer Creek drains to the Puyallup River and is a gradient accessible stream for coho, Chinook, chum, pink and steelhead and also has known trout populations. In addition, Upper Deer Creek has documented water quality issues due to the 4A listing for high levels of bacteria from fecal coliform. Downgradient of the site, the Puyallup River also has documented water quality issues due to the 303d listings for high levels of bacteria from fecal coliform, high water temperatures, and high levels of mercury; these 303d listings resulted in the development of Puyallup River Watershed Fecal Coliform Total Maximum Daily Load (TMDL) Water Quality Report and Implementation Plan (WSDOE, 2011). The Puyallup River TMDL identifies Deer Creek in the Shaw Road area near the project site as an ideal area to restore riparian habitat. Further, both streams are within mapped FEMA 100-year floodplain but currently provide de minimis flood functions due to the straightened, ditched conditions. Restoring stream and riparian habitat will improve usable fish habitat within the streams over time, increase sediment and pollutant filtration to improve documented water quality issues, and provide flood benches to increase hydrologic functions and flow capacity that will reduce local flooding. Therefore, the project is aligned with the Puyallup River TMDL, will result in equal or better habitat and water quality per PMC 21.06.1030(1), and is anticipated to result in a net gain in ecological functions in the watershed per PMC 21.06.1080(3) when compared to the existing degraded conditions of the stream that will be impacted from the frontage improvements and upgraded crossing.

“Pilot channels” will be created for the new Streams Z and Y that will naturally scour to create a sinuous stream with pool and riffle structure. Creating a pilot channel allows the stream to naturally form within the constructed bankfull width. The restored Stream Z channel will connect to the existing downgradient piped stream infrastructure with a box culvert. The restored stream channels will consist of meandering channels with connected flood terrace habitats within a riparian corridor containing native forest, shrub, and herbaceous plant communities. The stream creation will provide gradual side slopes above the OHWM and created flood terraces. Large woody debris will be incorporated along the realigned and restored stream channels for additional habitat complexity and provide cover for aquatic wildlife. The proposed Stream Z and Stream Y upland buffers will also be restored and enhanced to provide sediment and pollutant filtration, reduction of surface flows, and



habitat interspersed and complexity beneficial to urban fauna. Once established, the riparian habitat corridor will provide immediate and long-term benefits for terrestrial and aquatic wildlife and provide cool, clean, and clear water from the native plantings, which will increase stream shading, stormwater filtration, and wood recruitment as well as decreased streambank erosion.

The proposed native plant communities will be established according to location relative to the stream channels and topographic position within the remaining riparian corridor buffer areas. Tree and shrub plantings are proposed. Willows (*Salix* spp.) will dominate the banks of the stream channels to provide bank stability and shading. The proposed native species have been carefully selected according to indicator status and local vegetation observations to ensure the plants take root and thrive in the newly created riparian corridor. Given the limited space within the riparian corridor, smaller trees will be proposed to maximize use and plant quantities within the area to ensure dense screening and protections to Streams Y and Z. With establishment of the protective riparian corridor, fencing and signage around the entire sensitive areas tracts, and implementation of the required monitoring and maintenance actions, the mitigation areas are projected to be highly functional, persistent, and successful.

The proposed actions include, but are not limited to, the following:

- Install bottomless culvert crossing of the new Stream Z channel and box culvert to connect the new Stream Z channel to the existing piped stream infrastructure;
- Realign and restore Stream Z within a new riparian corridor;
- Realign and restore Stream Y within a new riparian corridor;
- Pre-treat invasive plants with an herbicide approved by the Washington State Department of Agriculture for use in aquatic areas. After pre-treatment, grub to remove the invasive plants and replant all cleared areas with native trees, shrubs, and ground covers listed in Appendix A; Pre-treatment of the invasive plants should occur a minimum of two weeks prior to removal;
- Replant all impacted areas with native trees, shrubs, and groundcovers listed in Appendix A, or substitutes approved by the responsible Project Scientist, to help retain soils, filter stormwater, and increase biodiversity;
- Install large woody debris habitat features within the realigned Stream Z channel and restored Stream Y channel;
- An approved native seed mix will be used to seed the disturbed mitigation areas after planting to reduce short-term erosion potential;
- Maintain and control invasive plants annually, at a minimum, or more frequently if necessary. Maintenance to reduce the growth and spread of invasive plants is not restricted to chemical applications but may include hand removal, if warranted;
- Provide dry-season irrigation as necessary to ensure native plant survival;
- Install split-rail fencing and critical area signage at the locations indicated in Appendix A;
- Store all construction equipment and materials outside of the critical areas and associated buffers;
- Direct exterior lights away from the streams and buffers wherever possible; and
- Place all activities that generate excessive noise (e.g., generators and air conditioning equipment) away from the streams and buffers where feasible.

## 2.4 Approach and Best Management Practices

Planting or seeding will occur immediately after grading is complete to the extent practicable. TESC measures will be implemented that consists of high-visibility fencing (HVF) installed around native vegetation along existing stream areas not proposed to be impacted, silt fencing between the graded areas and buffers, plastic sheeting on stockpiled materials, and seeding of disturbed soils. These TESC measures will be installed prior to the start of development or mitigation actions and actively managed for the duration of the project.

Equipment used will be typical for land clearing, grading, and excavation activities and will be kept in good working conditions and free of leaks. Equipment to be used will likely include excavators, backhoes, bulldozers, dump trucks, graders, et cetera. All equipment staging and materials stockpiles will be kept out of the critical areas and regulated buffers avoided by the proposed project, and the area will be kept free of spills and/or hazardous materials using a SPCCC prepared and implemented by the contractor. All clean fill material for site preparation will be sourced from upland areas onsite or from approved suppliers and will be free of pollutants and hazardous materials.

All equipment staging and materials stockpiles will be kept out of the identified critical areas and associated buffer areas, and the areas will need to be kept free of spills and/or hazardous materials. Construction materials along with all construction waste and debris will be effectively managed and stockpiled on paved surfaces and kept free of the critical areas and associated buffers. Following completion of the development, the entire site will be cleaned and detail graded using hand tools wherever necessary, and TESC measures will be removed.

Additional BMPs for the proposed in-water work are provided under separate cover in the Water Quality Monitoring Plan.

## 2.5 Mitigation Implementation

Compensatory mitigation and voluntary restoration actions will occur concurrently with the development of Phase II of the project. Initial actions will include excavation and grading required for Streams Z and Y realignment. Minor portions of the mitigation site may initially remain ungraded to ensure the separation of the proposed stream channels from the existing channels. Realignment of the streams should occur during the summer during low flow conditions and shall occur during in-water work windows approved by the regulatory agencies. Following the initial excavation and grading, native plants may be installed following consultation with the Project Scientist to determine feasibility given summer hydrology conditions. Streams Y and Z will then be realigned; minor excavation and grading work will be necessary in order to provide the connections between the new and existing stream channels. Native plants are anticipated to be fully installed during the fall or early winter (September 1– December 31) following the realignment of Streams Y and Z during the summer season. The mitigation site should be seeded prior to the beginning of the wet season to minimize erosion.

TESC measures will be implemented according to the TESC plan prepared for the proposed project. Typical TESC measures include silt fencing where appropriate to protect potential offsite critical areas, plastic sheeting on stockpiled materials, and seeding of disturbed soils which will be actively managed for the duration of the project.

The Project Scientist should be consulted prior and during the mitigation actions to ensure that mitigation actions are conducted according to the intent of the mitigation plan. The Project Scientist will inspect and approve the planting stock and review the planting plans with the landscaping contractor to ensure clear understanding of the plan prior to installation of plant materials. The Project Scientist will assist the landscape contractor in making any final adjustments in the planting schedule as needed, in response to field conditions.

The proposed actions will include the excavation of material to create the new Stream Z and Stream Y channels. Mitigation and restoration actions may be completed separately from clearing and grading actions in the rest of the Project Area. The new stream channels will be entirely excavated prior to the stream relocation, with a berm left on the upstream end of each channel to prevent the streams from immediately diverting into the new channel. Large woody debris will be installed following channel excavation. Soil amendments will be installed as needed throughout the riparian corridor. The onsite soil amendments may be sourced from scraped topsoil. Imported topsoil or soil amendments may be used at the discretion of the landscape contractor.

Re-watering of the streams should occur during in-water work windows approved by regulatory agencies. If water is present in the stream channels immediately prior to the realignment, then nets will be installed at the upstream and downstream ends of existing stream sections to be de-watered and fish capture and relocation efforts will proceed as needed. The fish protection efforts will be completed using netting to capture fish and relocate them to non-impacted areas. The realigned stream channels will then be re-watered. Sediment control structures may be installed within the new stream channels to address water quality issues. The existing stream channels may be filled immediately following the re-watering of the realigned stream channels.

The project sequencing is anticipated to as follows:

- Pre-construction conferences and regulatory notifications;
- Pre-treatment of non-native invasive plant species;
- Install TESC measures;
- Remove debris and invasive plant material from the mitigation areas;
- Rough grade the stream restoration areas according to the approved grading plan;
- Remove existing culverts within the mitigation site, install new bottomless crossing;
- Rough grade inspection;
- Finish grade and prepare grounds for planting in all mitigation areas;
- Install LWD;
- Install streambed substrates;
- Install new box culvert connection between new Stream Z channel and existing, downgradient, piped Stream Z;
- Dewater existing stream channel and rewater new stream channel;
- Monitor site hydrology;
- Plant inspections;
- Install plant materials and seed disturbed soils for erosion control;
- Post-construction inspection and as-built survey; and
- Post-construction maintenance, monitoring, and annual reporting.

### 2.5.1 Pre-Construction Meetings and Post-Construction Inspection

Two pre-construction meetings are recommended to be held involving representatives from the Applicant, Project Manager or Contractor, and Project Scientist. The first pre-construction meeting should occur prior to commencement of mitigation actions, and the second meeting should occur onsite after construction staking has been placed by professional surveyors. The overall purpose of the first pre-construction meeting should be to discuss the primary intent of the stream relocation and regulatory requirements; identify points of contact; establish communication lines between the Project Scientist, Project Manager or Contractor and landscaping personnel; review project scheduling; and address any questions or issues associated with the mitigation plan. The overall purpose of the second pre-construction meeting should be to discuss project implementation, protection of onsite habitat, construction BMPs, and identify invasive species management actions.

Post-construction inspection of all mitigation areas will be necessary to verify the installation conforms to the approved plan. This post-construction inspection effort will occur after completion of the stream relocation and all appropriate seeding and planting actions. The post-construction inspection will be documented in an As-Built (Year 0) Report. Any significant changes to the mitigation design will also be coordinated with regulatory staff as specified in regulatory approvals and presented in the As-Built Report. During the post-construction inspection, the Project Scientist will identify and mark long-term monitoring plots and photographic stations in the field that represent representative conditions of the stream relocation and other mitigation areas. The long-term monitoring locations will be GPS located and included in the As-Built Report.

## 2.6 Goals, Objectives, and Performance Standards

The goals and objectives for the proposed onsite and offsite, in-kind mitigation actions are based on establishing and enhancing stream areas to compensate for the loss of stream areas. Non-compensatory mitigation actions are proposed to provide additional ecological benefits at the mitigation site. These non-compensatory mitigation actions include the replacement of one undersized culvert with an upgraded culvert to improve fish passage, and enhancement of all onsite buffer areas. In addition, the stream relocation will significantly improve overall habitat conditions. The goals and objectives of the proposed mitigation actions are as follows.

“Cover” is used in this Mitigation Plan to mean the proportion of the ground surface that is covered by vegetation when viewed from above. Native recruits will be utilized in assessing performance standards unless otherwise specified for a particular performance standard. Dead or dying plants may be replaced, and replacement plants may be utilized in assessing performance standards, unless otherwise specified for a particular performance standard.

**Goal 1** – Compensate for the loss of 592 linear feet the existing Stream Z channel by realigning Stream Z.

**Objective 1.1** – Create 614 linear feet of new Stream Z channel.

**Performance Standard 1.1.1** – The new Stream Z channel will be created according to the final approved design and documented in the As-Built Report.

**Performance Standard 1.1.2** – Large woody debris in the new Stream Z channel will be installed according to the final approved design and documented in the As-Built Report.

**Goal 2** – Voluntarily restore 463 linear feet of Stream Y channel by restoring Stream Y into a new stream channel.

**Objective 2.1** – Restore 463 linear feet of Stream Y channel.

**Performance Standard 2.1.1** – The new Stream Y channel will be created according to the final approved design and documented in the As-Built Report.

**Performance Standard 2.1.2** – Large woody debris in the new Stream Y channel will be installed according to the final approved design and documented in the As-Built Report.

**Goal 3** – Establish and enhance 70,998 square feet (1.62 acres) of riparian buffers for the newly restored Streams Y and Z to protect the streams and to provide improvements in buffer functions over existing degraded buffer conditions.

**Objective 3.1** – Establish 70,998 square feet (1.62 acres) of riparian buffer that is vegetated with native woody plant cover to create diverse horizontal and vertical vegetation structure and wildlife habitat.

**Performance Standard 3.1.1** – In Year 1, survival of installed woody vegetation will be 100 percent in the riparian buffer areas.

**Performance Standard 3.1.2** – Native woody plant species will cover at least 15 percent of the mitigation areas at the end of Year 2, 25 percent cover at the end of Year 3, 35 percent cover at the end of Year 5, 50 percent cover at the end of Year 7, and 65 percent by the end of Year 10.

**Performance Standard 3.1.3** – In all monitoring years, the riparian buffer area will contain at least 2 species of native trees and 3 species of native shrubs.

**Objective 3.2** – Effectively control and/or eliminate non-native invasive species in riparian buffer areas.

**Performance Standard 3.2.1** – Non-native invasive plants will not make up more than 20 percent cover during all monitoring years. Non-native invasive plants are plants listed by the Washington State Noxious Weed Board.

**Goal 4** – Protect stream processes and fish passage within the new Stream Z channel.

**Objective 4.1** – Ensure the new bottomless culvert crossing of Stream Z and the new box culvert connection between the new Stream Z and the existing piped Stream Z allow for unobstructed flows.

**Performance Standard 4.1.1** – The bottomless culvert crossing of Stream Z and the box culvert connection to the existing piped Stream Z will be installed according to the final approved design and documented in the As-Built Report.

**Performance Standard 4.1.2** – Unobstructed streamflow conveyance through the bottomless culvert crossing of Stream Z will be observed in all monitoring years.

## **2.7 Plant Materials and Installation**

### **2.7.1 Plant Materials**

All plant materials to be used for the restoration actions will be nursery grown stock from a reputable, local source. Only native species are to be used; no hybrids or cultivars will be allowed. Plant material provided will be typical of their species or variety; if not cuttings they will exhibit normal, densely developed branches and vigorous, fibrous root systems. Plants will be sound, healthy, vigorous plants free from defects, and all forms of disease and infestation.

Container stock shall have been grown in its delivery container for not less than six months but not more than two years. Plants shall not exhibit rootbound conditions. Under no circumstances shall container stock be handled by their trunks, stems, or tops. Seed mixture used for hand or hydroseeding shall contain fresh, clean, and new crop seed mixed by an approved method. The mixture is specified in the plan set.

Fertilizer will be in the form of Agriform plant tabs or an approved like form. Mulch or coir rings may be installed around woody vegetation as determined to be necessary for plant survivability by the landscape contractor.

### **2.7.2 Plant Scheduling, Species, Density, and Location**

Plant installation should occur as close to conclusion of clearing and grading activities as possible to limit erosion and limit the temporal loss of function provided by the onsite habitat. All plantings should occur between September 1 and May 1 to ensure plants do not dry out after installation, or temporary irrigation measures may be necessary. All plantings will be installed according to the procedures detailed in the following subsections and as outlined on the site plans in Appendix A.

### **2.7.3 Quality Control for Planting Plan**

All plant material should be inspected by the landscape contractor or Project Biologist upon delivery. Plant material not conforming to the specifications above will be rejected and replaced by the landscape contractor. Rejected plant materials shall be immediately removed from the site.

The landscape contractor should provide the Project Biologist with documentation of plant material that includes the supplying nursery contact information, location of genetic source, plant species, plant quantities, and plant sizes.

### **2.7.4 Product Handling, Delivery, and Storage**

All seed should be delivered in original, unopened, and undamaged containers showing weight, analysis, and name of manufacturer. This material should be stored in a manner to prevent wetting and deterioration. All precautions customary in good trade practice shall be taken in preparing plants for moving. Workmanship that fails to meet industry standards will be rejected. Plants will be packed, transported, and handled with care to ensure protection against injury and from drying out. If plants

cannot be planted immediately upon delivery they should be protected with soil, wet peat moss, or in a manner acceptable to the Project Biologist. Plants and mulch not installed immediately upon delivery shall be secured on the site to prevent theft or tampering. No plant shall be bound with rope or wire in a manner that could damage or break the branches. Plants transported on open vehicles should be secured with a protective covering to prevent windburn.

### **2.7.5 Preparation and Installation of Plant Materials**

The landscape contractor shall verify the location of all elements of the mitigation plan with the responsible Project Biologist prior to installation. The responsible Project Biologist reserves the right to adjust the locations of landscape elements during the installation period as appropriate. If obstructions are encountered that are not shown on the drawings, planting operations will cease until alternate plant locations have been selected by and/or approved by the Project Biologist.

Circular plant pits with vertical sides will be excavated for all container stock. The pits should be at least 2 times the width of the rootball, and the depth of the pit should accommodate the entire root system. Please refer to planting detail in Appendix A.

Broken roots should be pruned with a sharp instrument and rootballs should be thoroughly soaked prior to installation. Set plant material upright in the planting pit to proper grade and alignment. Water plants thoroughly midway through backfilling and add Agriform tablets or similar. Water pits again upon completion of backfilling. No filling should occur around trunks or stems. Do not use frozen or muddy mixtures for backfilling. Form a ring of soil around the edge of each planting pit to retain water and install a 3- to 4-inch layer of mulch around the base of each container plant if determined to be necessary by the landscape contractor.

Topsoil, mulch, compost, or other amendments may be installed to ensure plant survivability at the discretion of the landscape contractor.

### **2.7.6 Temporary Irrigation Specifications**

While the native species selected for the habitat restoration actions are hardy and typically thrive in northwest conditions and the proposed actions are planned in areas with sufficient hydroperiods for the species selected, some individual plants might perish due to dry conditions. Therefore, irrigation or regular watering may be provided as necessary for the duration of the first two growing seasons while the native plantings become established. If used, irrigation will be discontinued after two growing seasons. Irrigation is recommended two times per week. Frequency and amount of irrigation will be dependent upon climatic conditions and may require more or less frequency watering than two times per week.

### **2.7.7 Invasive Plant Control and Removal**

Invasive species to be removed include reed canarygrass and all listed noxious weeds. To ensure non-native invasive species do not expand following the habitat restoration actions, non-native invasive plants within the entire mitigation area will be pretreated with a root-killing herbicide approved for use in aquatic sites (i.e., Rodeo) a minimum of two weeks prior to being cleared and grubbed from the restoration areas. A second application is strongly recommended in areas with dense cover of non-native, invasive species. The pre-treatment with herbicide should occur prior to all planned restoration actions, and spot treatment of surviving non-native invasive vegetation should be performed again each fall prior to senescence for a minimum of five years.

## 2.8 Maintenance & Monitoring Plan

Conceptual Maintenance and Monitoring Plans are described below in accordance with PMC 21.06.630 and anticipated conditions from other regulatory agencies. The Applicant is committed to compliance with the conceptual mitigation plan and overall success of the project. As such, the Applicant will continue to maintain the project, keeping the site free from non-native invasive vegetation and trash. Maintenance frequency may be altered depending on the success of the mitigation site as evaluated during the monitoring visits.

The mitigation actions will require continued monitoring and maintenance to ensure the mitigation actions are successful. Therefore, the mitigation site will be monitored for a period of 10 years with formal inspections by a qualified Project Scientist. An As-Built (Year 0) inspection will occur within 30 days of the completion of plant installation. The maintenance/monitoring period will begin upon completion of an as-built plan and certification from the Project Scientist certifying the mitigation was installed per the mitigation plan. Formal monitoring events will be scheduled during Years 1, 2, 3, 5, 7, and 10. Close-out assessment will also be conducted in Year 10.

Monitoring will consist of percent cover measurements and stem counts at permanent monitoring stations, walk-through surveys to identify invasive species presence and dead or dying enhancement plantings, photographs taken at fixed photo points, wildlife observations, and general qualitative habitat and wetland function observations. Data collected during monitoring visits will be appropriate for the performance standards of the relevant monitoring year. The permanent monitoring stations will be established such that the mitigation site is representatively sampled. Circular sample plots, approximately 30 feet in diameter (706 square feet), will be centered at each monitoring station. Sample plots will be located entirely within the proposed mitigation site. Sample plot shapes may need to be adjusted to ensure that sample plots do not cross the mitigation site boundaries; adjusted sample plot shapes should maintain the same area as the 30-foot-diameter circular sample plots. Mean survivorship and percent cover measurements from the sample plots will be used to estimate survivorship and percent cover across the mitigation site.

To determine survivorship, individual tree and shrub stems within the relevant circular sampling plots will be counted. Plants which grow several stems from a single base will be counted as one individual plant. These trees and shrubs will then be recorded as dead/dying or alive. To determine percent cover and species richness of woody vegetation, each species of tree or shrub within the approximately 30-foot-diameter circular sampling plots will be recorded and identified as native or invasive. Plants may be recorded by genus if species is unable to be determined at the time of the monitoring visit. Herbaceous vegetation will be sampled from a 10-foot diameter (78.5 square feet), established at the same location as the center of each tree and shrub sample plot. Herbaceous vegetation within the sampling plot will be recorded to at least the genus level and identified as native or invasive. A list of observed tree, shrub, and herbaceous genera or species, cover estimates, and wetland indicator status will be included within each monitoring report.

Non-native, invasive plant control will be performed throughout the monitoring period. Plants listed by the Washington Noxious Weed Board will be controlled to meet applicable performance standards. Herbicide applications will be made in accordance with the Washington Department of Agriculture pesticide application procedures unless prohibited by the City of Puyallup. Herbicides will be herbicides approved by the Washington State Department of Agriculture for use in aquatic areas and will only be applied by a licensed applicator in aquatic areas.



## 2.9 Reporting

Following the implementation of the mitigation actions, the responsible Project Scientist will prepare an As-Built (Year 0) Report and will be submitted to the City of Puyallup's project manager and appropriate agencies within 90 days following the post-construction monitoring event. Following each monitoring event, a monitoring report detailing the current ecological status of the mitigation actions, measurement of performance standards, and management recommendations will be prepared and submitted to the City of Puyallup and appropriate agencies within 90 days of each monitoring event to ensure full compliance with the mitigation plan, performance standards, and regulatory conditions of approval. Per PMC 21.06.630(2), monitoring reports are only required annually for the first three years following construction and at least upon the completion of the last monitoring year.

## 2.10 Contingency Plan and Long-Term Management Plan

If monitoring results indicate that performance standards are not being met, it may be necessary to implement all or part of the contingency plan. Careful attention to maintenance is essential in ensuring that problems do not arise. Should any portion of the site fail to meet the success criteria, a contingency plan will be developed. Such plans are adaptive and will be prepared on a case-by-case basis to reflect the failed mitigation characteristics. Contingency plans can include additional plant installation, erosion control, and plant substitutions including type, size, and location. The contingency measures outlined below can also be utilized in perpetuity to maintain the streams and buffers associated with the proposed mitigation site.

This project proposes 10 years of monitoring for the mitigation actions in compliance with the goals and performance standards outlined in Section 2.6 of this report. However, the agencies may request additional years of monitoring and formal reporting if the site has not met the goals and performance standards by Year 10.

Contingency/maintenance activities may include, but are not limited to:

1. Using plugs instead of seed for emergent vegetation coverage where seeded material does not become well-established;
2. Replacing plants lost to vandalism, drought, or disease, as necessary;
3. Replacing any plant species with a 20 percent or greater mortality rate after two growing seasons with the same species or native species of similar form and function;
4. Irrigating the mitigation areas only as necessary during dry weather if plants appear to be too dry, with a minimal quantity of water;
5. Reseeding and/or repair of mitigation areas as necessary if erosion or sedimentation occurs;
6. Spot treat non-native invasive plant species, and
7. Removing all trash or undesirable debris from all mitigation areas as necessary.

## 2.11 Financial Assurances

Per PMC 21.06.650, a mitigation surety is required ensure that mitigation is fully functional. The Applicant will provide a performance bond and monitoring and maintenance bond in an amount equal to 125 percent of the total estimated fair market cost of mitigation actions. Per PMC 21.06.650, the mitigation surety shall be based on a detailed itemized cost estimate of the mitigation activity including

clearing and grading, plant materials, plant installation, irrigation, weed management, and other costs. The bond quantity worksheet will be provided for the Final Mitigation Plan.

## **2.12 Critical Area Protection**

The mitigation areas will be placed in a separate tract or dedicated to the City as a permanent protective mechanism per PMC 21.06.610(7) and PMC 21.06.830. Critical area tracts shall be designated as native growth protection areas and shall be recorded on all documents of title of record for all affected lots and will be designated on the face of the plat or recorded drawing. Fencing and signage will also be provided per PMC 21.06.810 to reduce intrusion into the critical areas and prevent future impacts to the critical areas.

## Chapter 3. Closure

---

The findings and conclusions documented in this report have been prepared for specific application for the East Town Crossing project. These findings and conclusions have been developed in a manner consistent with that level of care and skill normally exercised by members of the environmental science profession currently practicing under similar conditions in the area. The conclusions and recommendations presented in this assessment report are professional opinions based on an interpretation of information currently available to us and are made within the operation scope, budget, and schedule of this project. No warranty, expressed or implied, is made. In addition, changes in government codes, regulations, or laws may occur. Due to such changes, our observations and conclusions applicable to this assessment may need to be revised wholly or in part in the future.


## Chapter 4. References

---

- Barnard, R. J., J. Johnson, P. Brooks, K. M. Bates, B. Heiner, J. P. Klavas, D.C. Ponder, P.D. Smith, and P. D. Powers. 2013. *Water Crossings Design Guidelines*. Washington Department of Fish and Wildlife, Olympia, Washington. <http://wdfw.wa.gov/hab/ahg/culverts.htm>
- City of Puyallup. 2023a. Final Development Team Review Letter – Preliminary Site Plan for East Town Crossing. Prepared June 20, 2023.
- City of Puyallup. 2023b. Mitigated Determination of Non-Significance (MDNS). Prepared June 27, 2023.
- City of Puyallup. 2023c. Permit Review Correction Letter (Permit Application #PRCCP20230970). Prepared August 31, 2023.
- Habitat Technologies. 2021. *Wetland Delineation Report – East Town Crossing*. Prepared October 14, 2021.
- Habitat Technologies. 2022. *Stream Corridor Restoration and Enhancement Program – East Town Crossing*. Revised November 14, 2022.
- Hruby, T. 2014. *Washington State Wetland Rating System for Western Washington: 2014 Update*. (Publication #14-06-029). Olympia, WA: Washington Department of Ecology.
- John Comis Associates. 2020. *Verification Report for the Wetland & Stream Delineations at East Town Crossing for the Abbey Road Group*. Prepared March 24, 2020.
- U.S. Army Corps of Engineers (USACE) and U.S. Environmental Protection Agency (EPA). 2008. *Compensatory Mitigation for Losses of Aquatic Resources; Final Rule*. Federal Register. Volume 73, Number 70 (33 CFR Parts 325 & 332, 40 CFR Part 230)
- USACE. 2010. *Regional Supplement to the Corps of Engineers Wetland Delineation Manual: Western Mountains, Valleys, and Coast Region (Ver2.0)*, ed. J.S. Wakeley, R.W. Lichvar, and C.V. Noble. ERDC/EL TR-10-3. U.S. Army Engineer Research and Development Center. Vicksburg, Mississippi.
- Washington Department of Fish and Wildlife (WDFW) 2002. Integrated Streambank Protection Guidelines. Available at <https://wdfw.wa.gov/sites/default/files/publications/00046/wdfw00046.pdf> (accessed March 21, 2023).

# Appendix A – Proposed Site Plan Exhibits

---

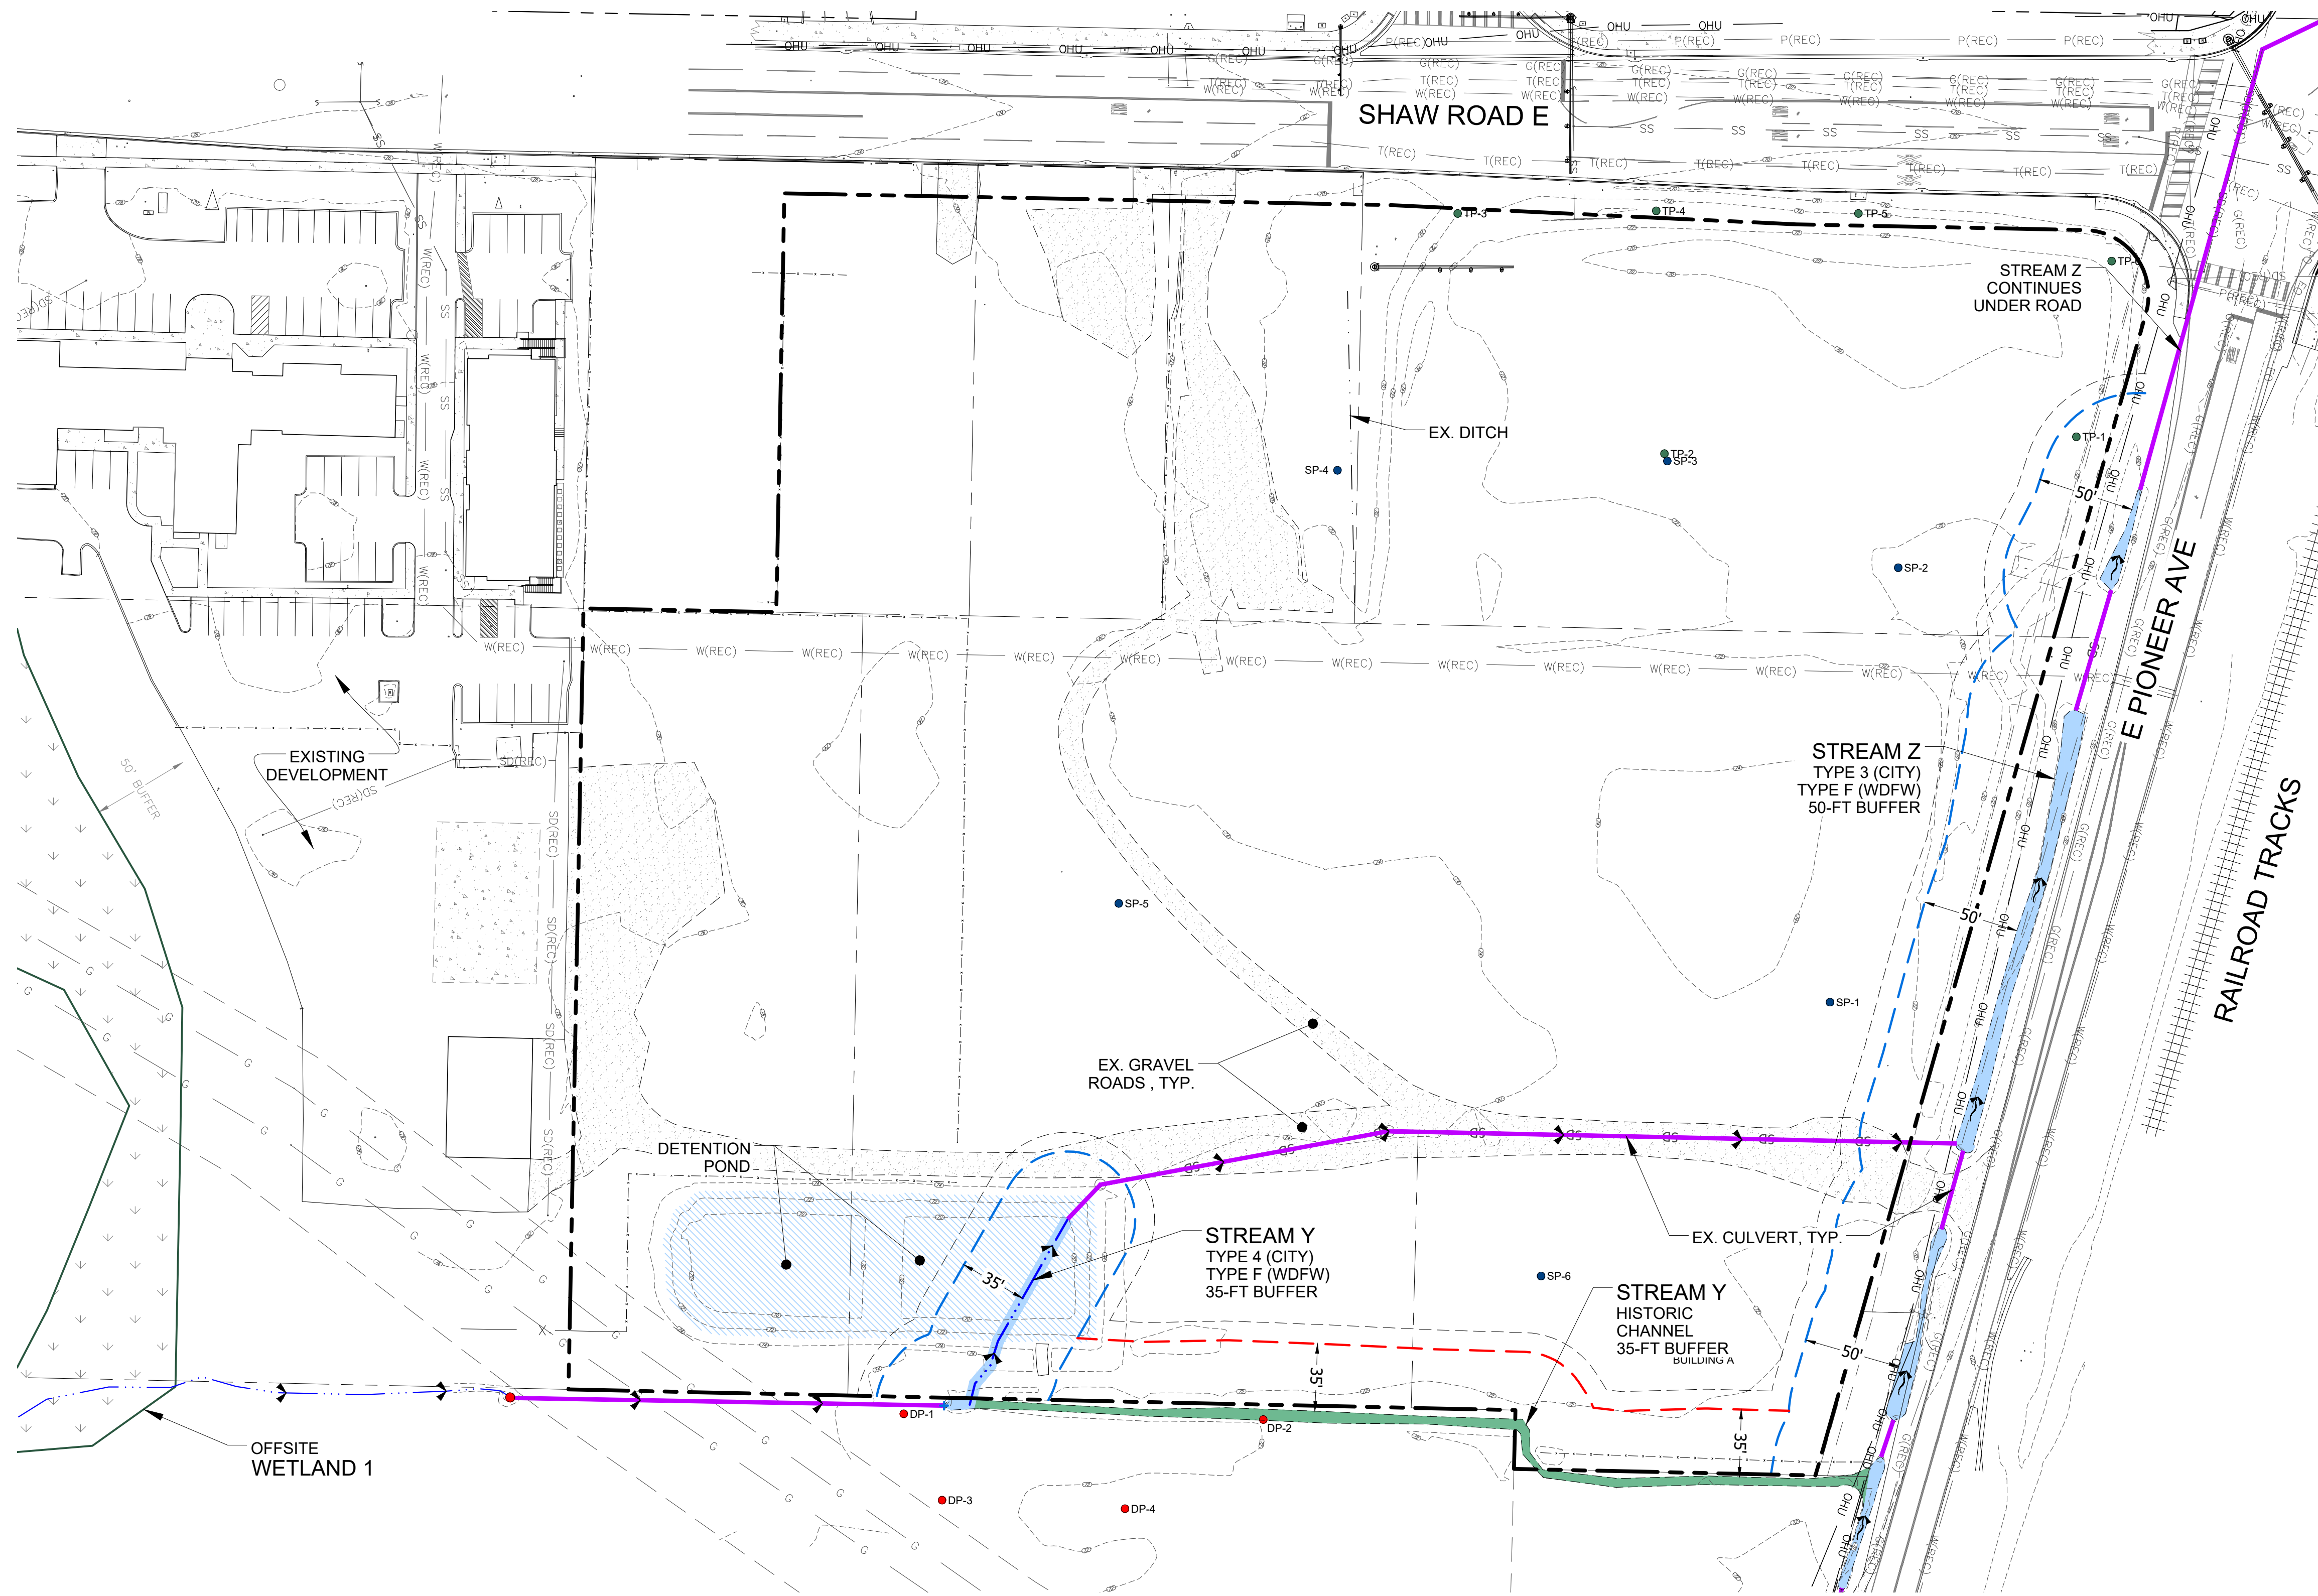


**PLAN LEGEND**

- DP-# PROPERTY LINE
- SP-# DATA PLOT LOCATION (SOUNDVIEW CONSULTANTS)
- TP-# DATA PLOT LOCATION (HABITAT TECHNOLOGIES 10/14/2021)
- TP-# DATA PLOT LOCATION (JOHN COMIS ASSOCIATES, LLC 3/24/2020)
- EXISTING STREAM CENTERLINE
- APPROXIMATE STREAM ORDINARY HIGH WATER LINE (SURVEYED TOE OF BANK)
- EXISTING STREAM BUFFER
- 10-FT BUILDING SETBACK
- EXISTING CULVERT
- HISTORIC STREAM ORDINARY HIGH WATER LINE (OHW)
- HISTORIC STREAM BUFFER
- DITCH CENTERLINE
- EXISTING 2-FT CONTOURS

**STREAM LEGEND**

	EXISTING
STREAM Y OPEN CHANNEL	110 LF (724 SF)
STREAM Y IN CULVERT	471 LF
STREAM Z OPEN CHANNEL	465 LF (3,009 SF)
STREAM Z IN CULVERT	127 LF

- NOTE**
- OFFSITE WETLAND 1 DELINEATION COMPLETED BY JOHN COMIS ASSOCIATES, LLC IN REPORT DATED MARCH 24, 2020.
  - CITY STREAM TYPING COMPLETED BY HABITAT TECHNOLOGIES IN REPORT DATED OCTOBER 14, 2021.
  - WDFW STREAM TYPING DETERMINED BY WDFW DURING JOINT SITE INVESTIGATION.

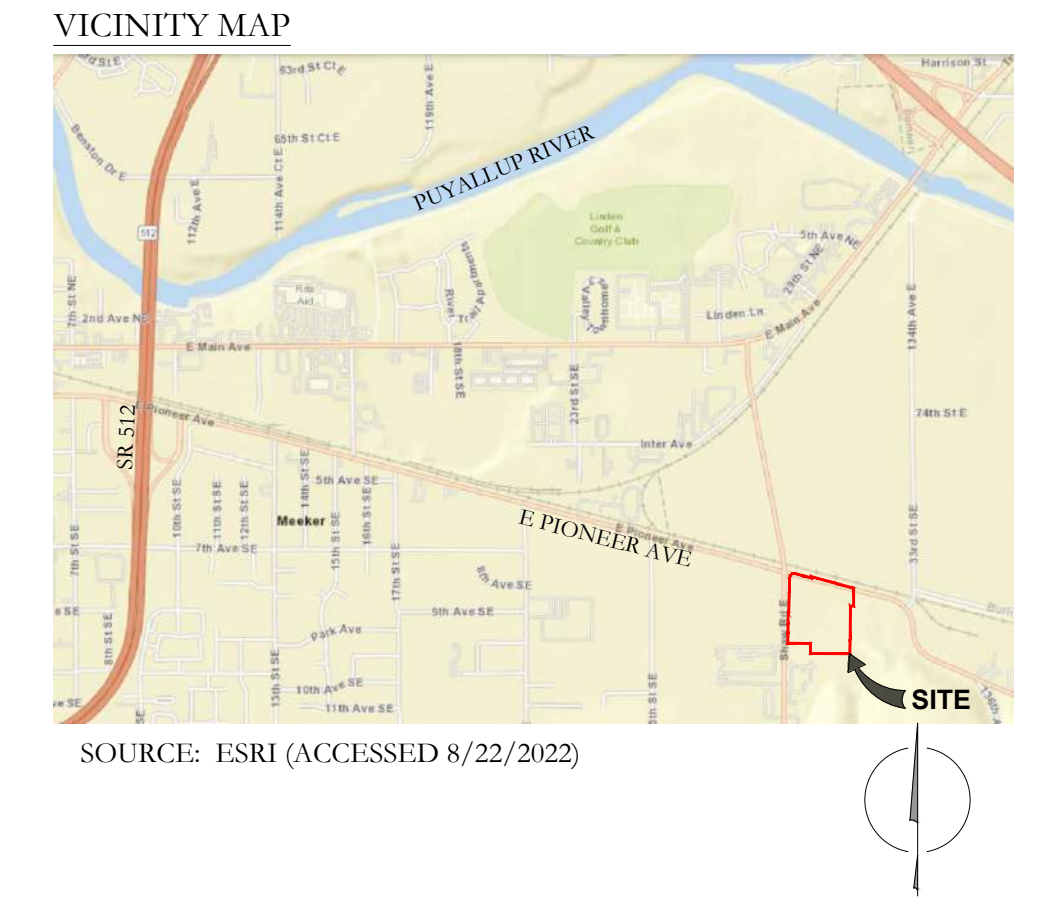

**LOCATION**

THE SE & NE ¼ OF SECTIONS 26 & 35,  
TOWNSHIP 20N, RANGE 04E, WM

LAT: 47.184068° N      LON: -122.254753° W  
IN: PUYALLUP      NEAR: ---

**APPLICANT/OWNER**

NAME: ASH DEVELOPMENT  
ADDRESS: 1001 SHAW ROAD  
PUYALLUP, WA 98371  
CONTACT: GREG HELLE  
PHONE: (253) 606-6799  
E-MAIL: GREG.HELLE@ABSHERCO.COM

**ENVIRONMENTAL CONSULTANT**

SOUNDVIEW CONSULTANTS LLC  
2907 HARBORVIEW DRIVE  
GIG HARBOR, WA 98355  
(253) 514-8952

**SHEET INDEX**

SHEET	SHEET TITLE
1.0	EXISTING CONDITIONS
2.0	PROPOSED SITE PLAN (PHASE I)
2.1	PROPOSED SITE PLAN, IMPACTS & MITIGATION (PHASE II)

**McImmis ENGINEERING**

535 Dock Street, Suite 111, Tacoma, WA 98402  
253.414.1992  
mcimmisengineering.com

**Soundview Consultants**

Environmental Assessment • Planning • Land Use Solutions  
2907 HARBORVIEW DRIVE  
GIG HARBOR, WASHINGTON 98355  
WWW.SOUNDVIEWCONSULTANTS.COM


P. 253.514.8952  
F. 253.514.8954

**EAST TOWN CROSSING**

2902 E. PIONEER AVE.  
PUYALLUP, WA 98374

PIERCE COUNTY PARCEL NUMBERS:  
0420264051, 0420264053, 0420264054, 0420351030,  
0420351029, 0420351026, & 0420351066

DATE: 9/20/2023  
JOB: 2544.0001  
BY: MW/DS  
SCALE: AS SHOWN  
SHEET: 1.0

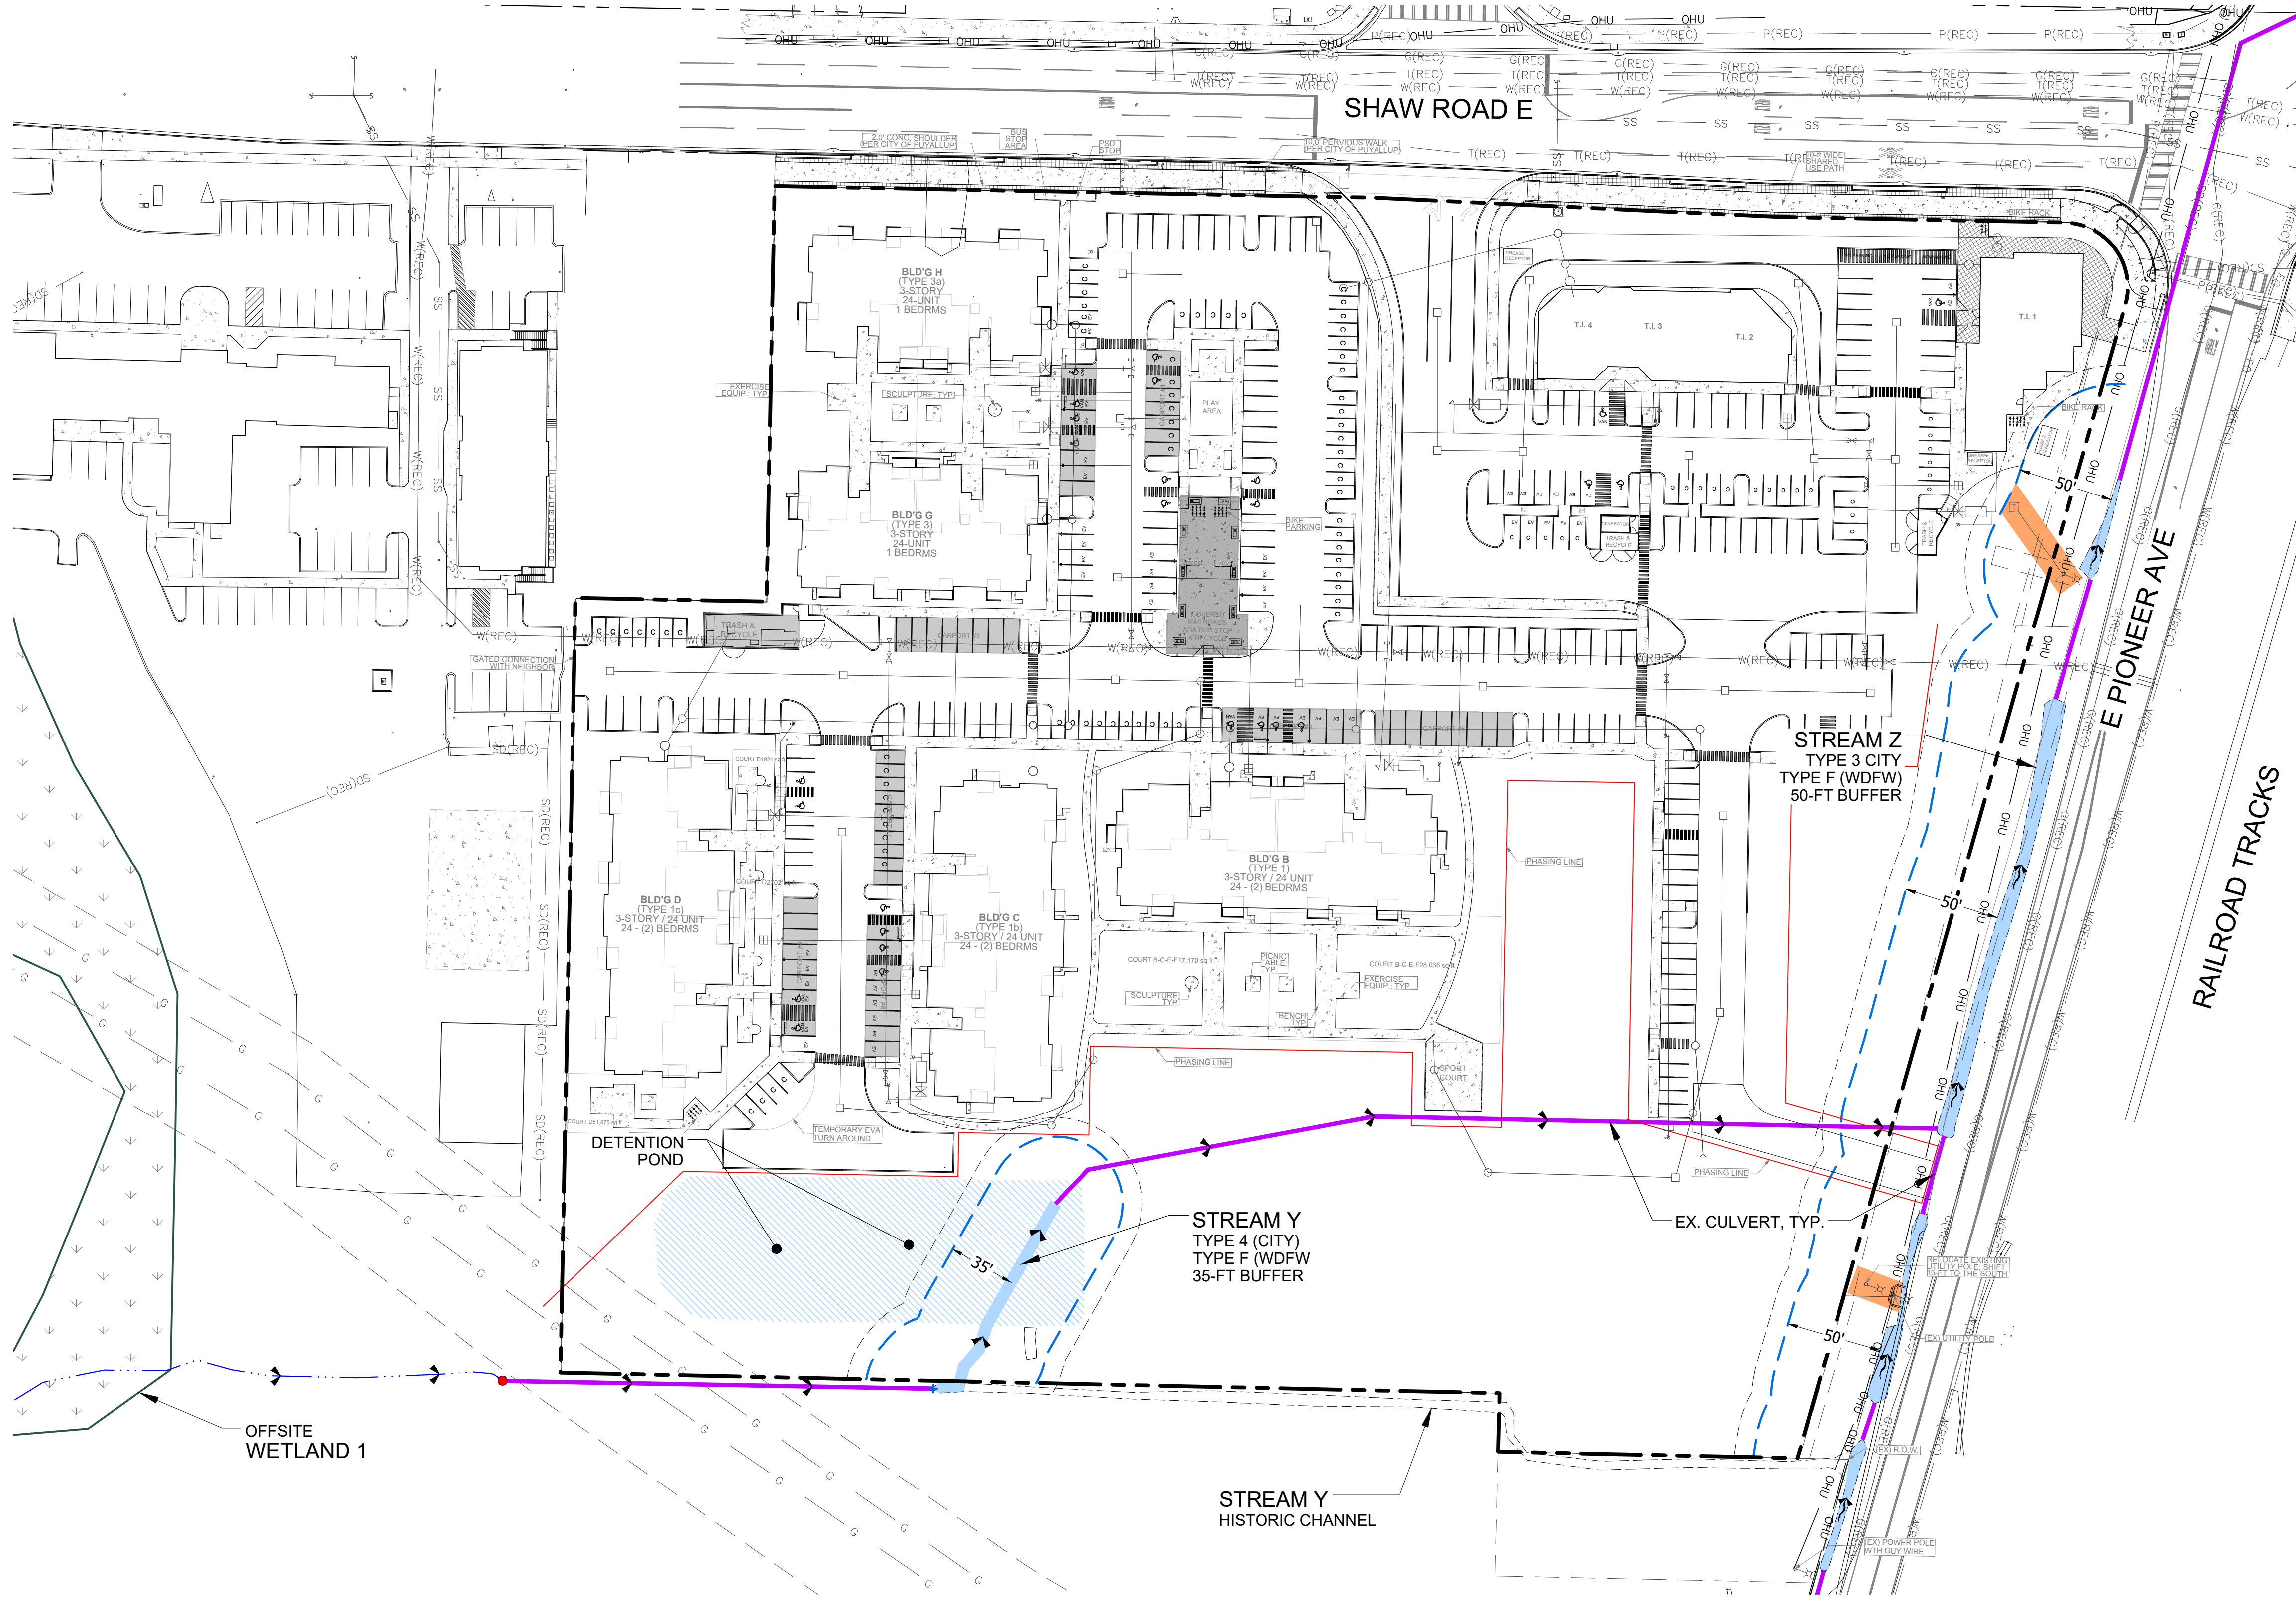

- PLAN LEGEND**
- PROPERTY LINE
  - EXISTING STREAM CENTERLINE
  - EXISTING STREAM ORDINARY HIGH WATER LINE (OHW)
  - EXISTING CULVERT
  - STREAM BUFFER
  - - - 10-FT BUILDING SETBACK


- IMPACTS & MITIGATION LEGEND**
- STREAM BUFFER IMPACTS FOR UTILITY INSTALLATION (TO BE RESTORED WITH NATIVE UPLAND GRASS SEED MIX) 1,248 SF

**McImmis ENGINEERING**  
 535 Dock Street, Suite 111, Tacoma, WA 98402  
 253.414.1992  
 mcimmisengineering.com

**Soundview Consultants**  
 Environmental Assessment • Planning • Land Use Solutions  
 P. 253.514.8952  
 F. 253.514.8954  
 WWW.SOUNDVIEWCONSULTANTS.COM

**EAST TOWN CROSSING**  
 2902 E. PIONEER AVE.  
 PUYALLUP, WA 98374  
 PIERCE COUNTY PARCEL NUMBERS:  
 0420264021, 0420264053, 0420264054, 0420351030,  
 0420351029, 0420351026, & 0420351066

DATE:	9/20/2023
JOB:	2544.0001
BY:	MW/DS
SCALE:	AS SHOWN
SHEET:	2.0

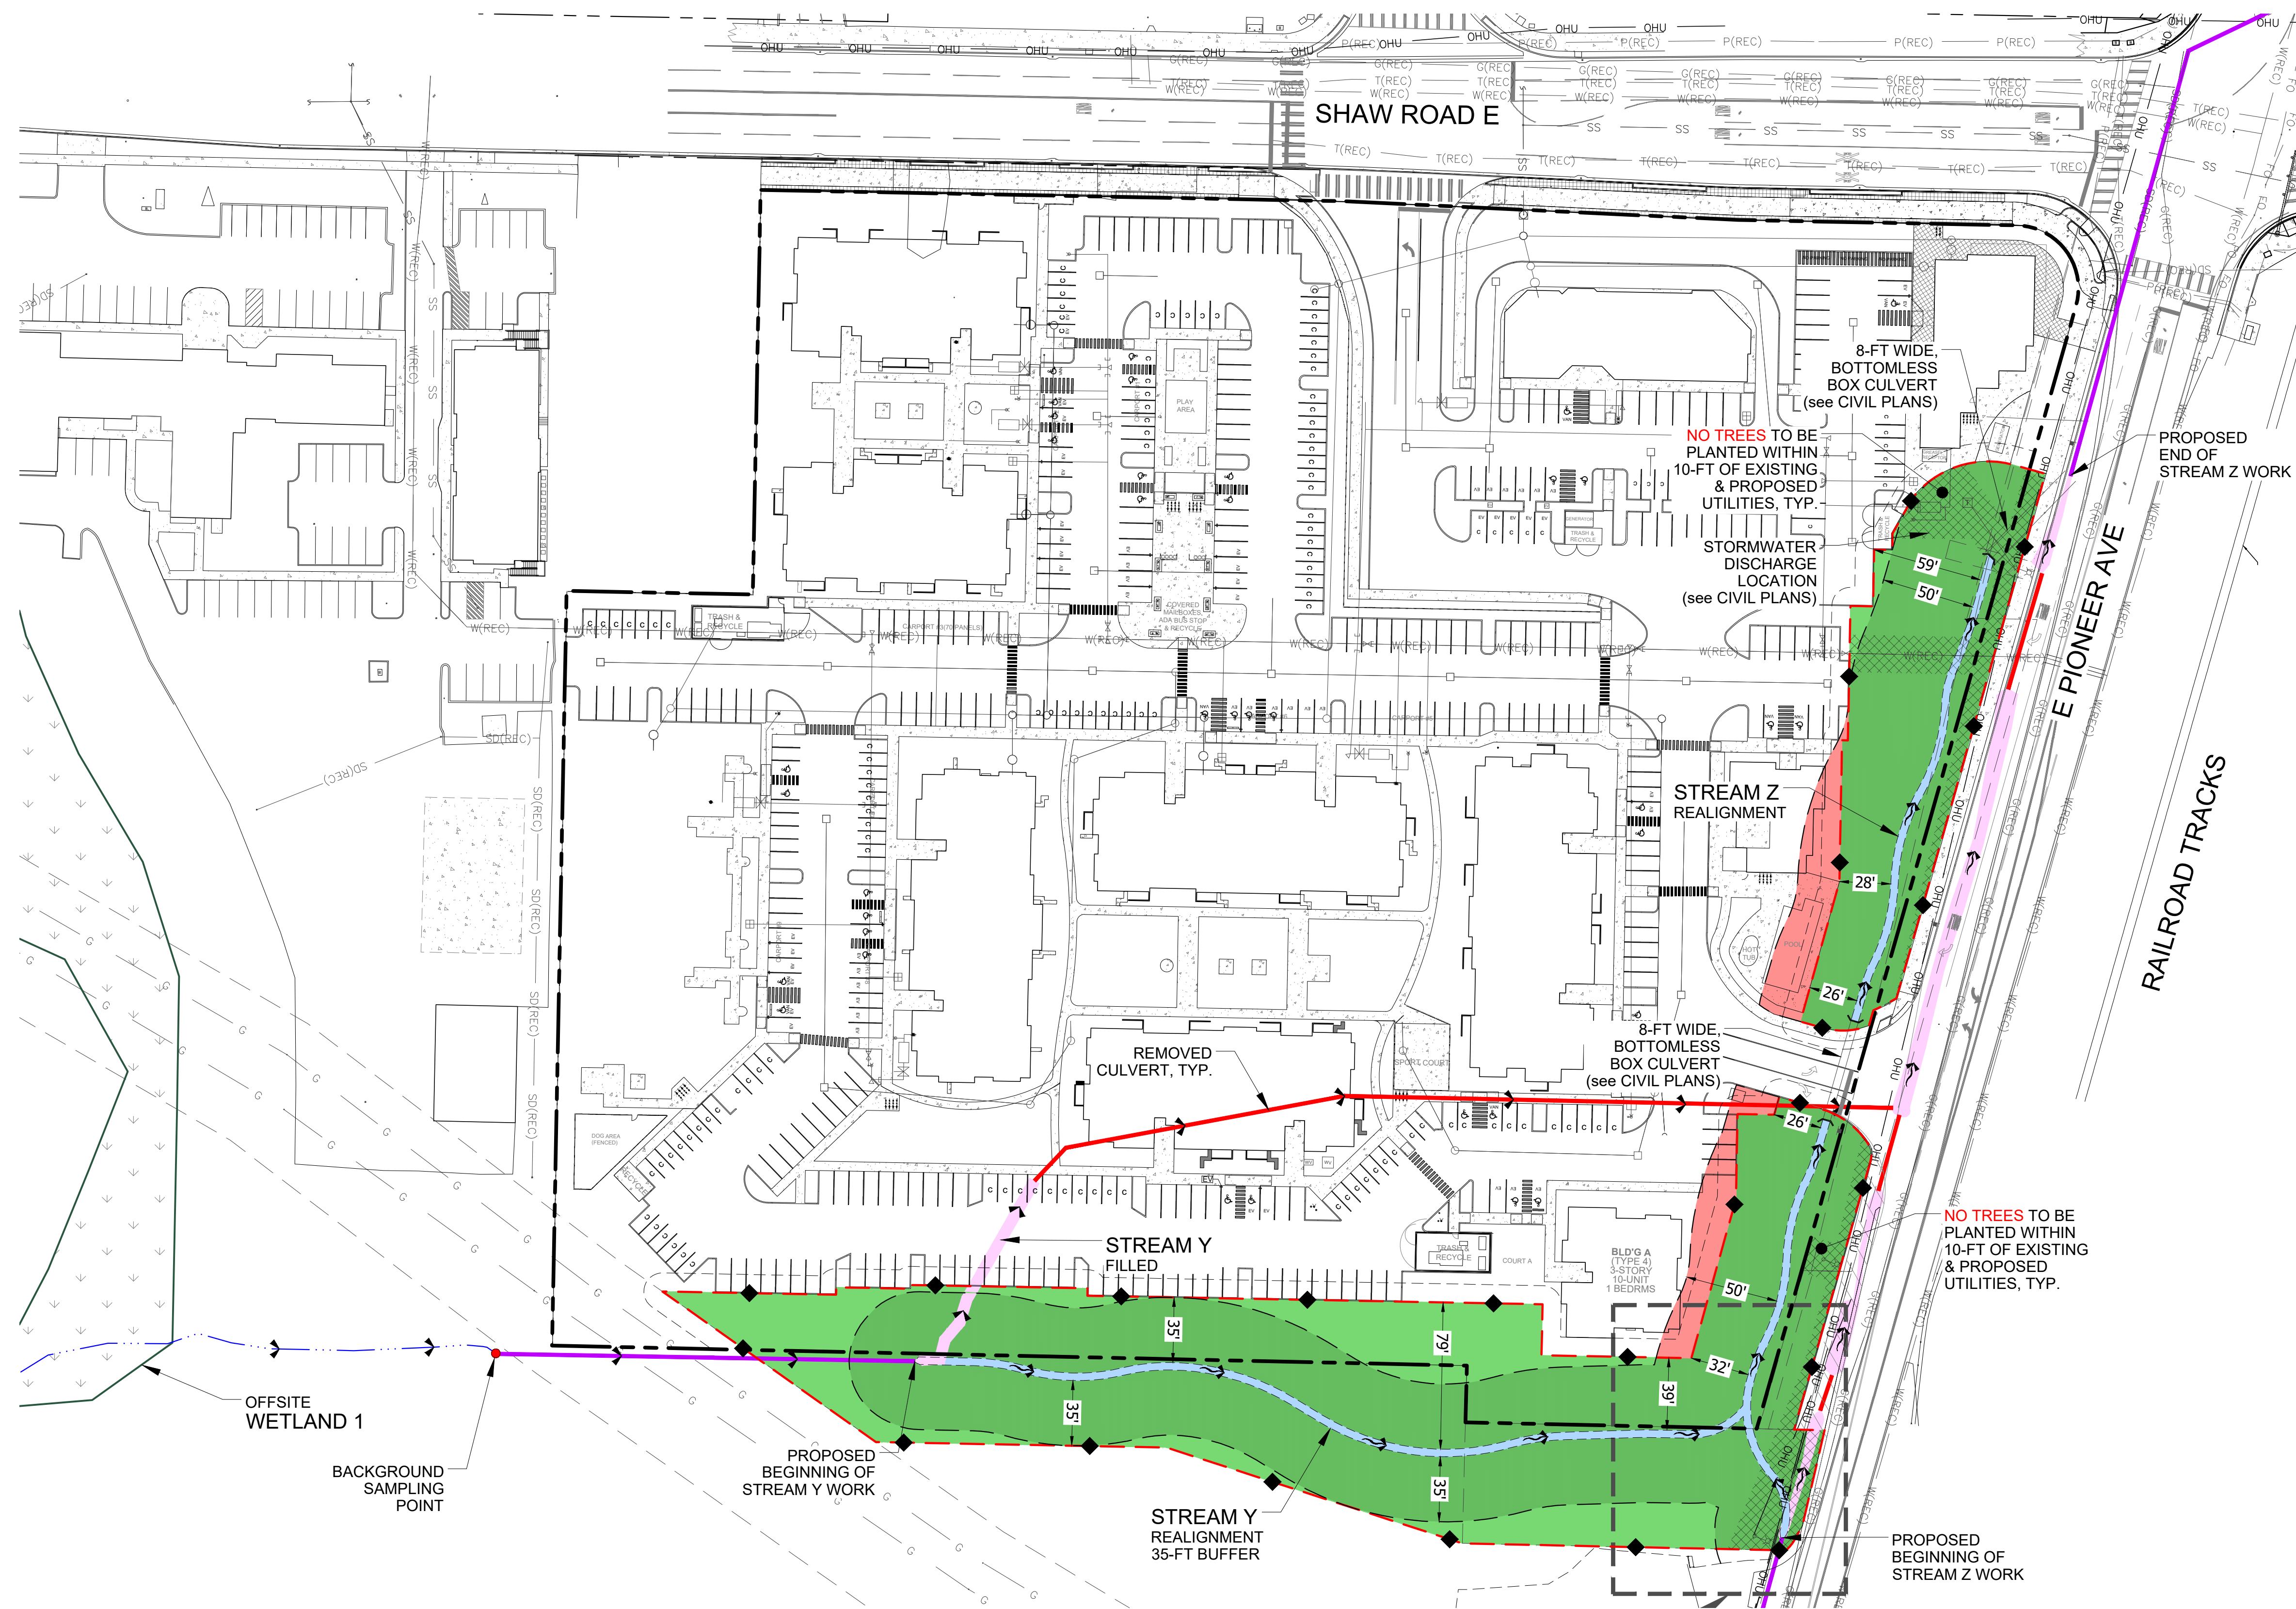

- PLAN LEGEND**
- PROPERTY LINE
  - EXISTING STREAM CENTERLINE
  - PROPOSED STREAM ORDINARY HIGH WATER LINE (OHW)
  - STANDARD STREAM BUFFER
  - EXISTING / RETAINED CULVERT
  - PROPOSED CULVERT
  - STREAM FILL
  - REMOVED CULVERT

- IMPACTS & MITIGATION LEGEND**
- STREAM BUFFER DECREASE 5,341 SF
  - STREAM BUFFER INCREASE 15,001 SF
  - STREAM BUFFER RESTORATION/ENHANCEMENT (INCLUDES AREAS OF STREAM FILL WITHIN PROPOSED BUFFERS) 63,346 SF
  - POST-CONSTRUCTION STREAM BUFFER/ CRITICAL AREA FENCE
  - 10-FT BUILDING SETBACK
  - ◆ CRITICAL AREA SIGN (24 SIGNS)

**STREAM LEGEND**

	EXISTING	PROPOSED
STREAM Y OPEN CHANNEL	110 LF (724 SF)	463 LF (1,836 SF)
STREAM Y IN CULVERT	471 LF	0 LF
STREAM Z OPEN CHANNEL	465 LF (3,009 SF)	497 LF (1,985 SF)
STREAM Z IN CULVERT	127 LF	117 LF


**McImmis ENGINEERING**  
 SOURCE:  
 535 Dock Street, Suite 111, Tacoma, WA 98402  
 253.414.1992  
 mcimmisengineering.com

**Soundview Consultants**  
 Environmental Assessment • Planning • Land Use Solutions  
 P. 253.514.8952  
 F. 253.514.8954  
 WWW.SOUNDVIEWCONSULTANTS.COM  
 2907 HARBORVIEW DRIVE  
 GIG HARBOR, WASHINGTON 98335


**EAST TOWN CROSSING**  
 2902 E. PIONEER AVE.  
 PUYALLUP, WA 98374  
 PIERCE COUNTY PARCEL NUMBERS:  
 0420264021, 0420264053, 0420264054, 0420351030,  
 0420351029, 0420351026, & 0420351066

DATE: 9/20/2023  
 JOB: 2544.0001  
 BY: MW/DS  
 SCALE: AS SHOWN  
 SHEET: 2.1



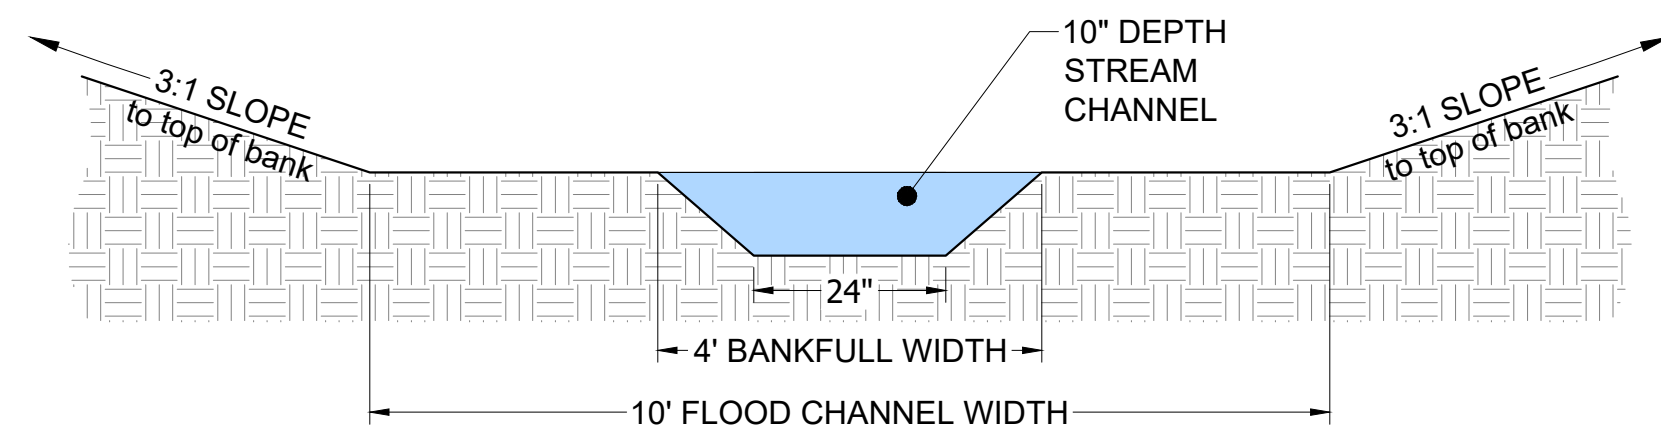


STREAMS Y & Z - PROPOSED CROSS SECTION, TYP.  
SCALE: 1"=2'

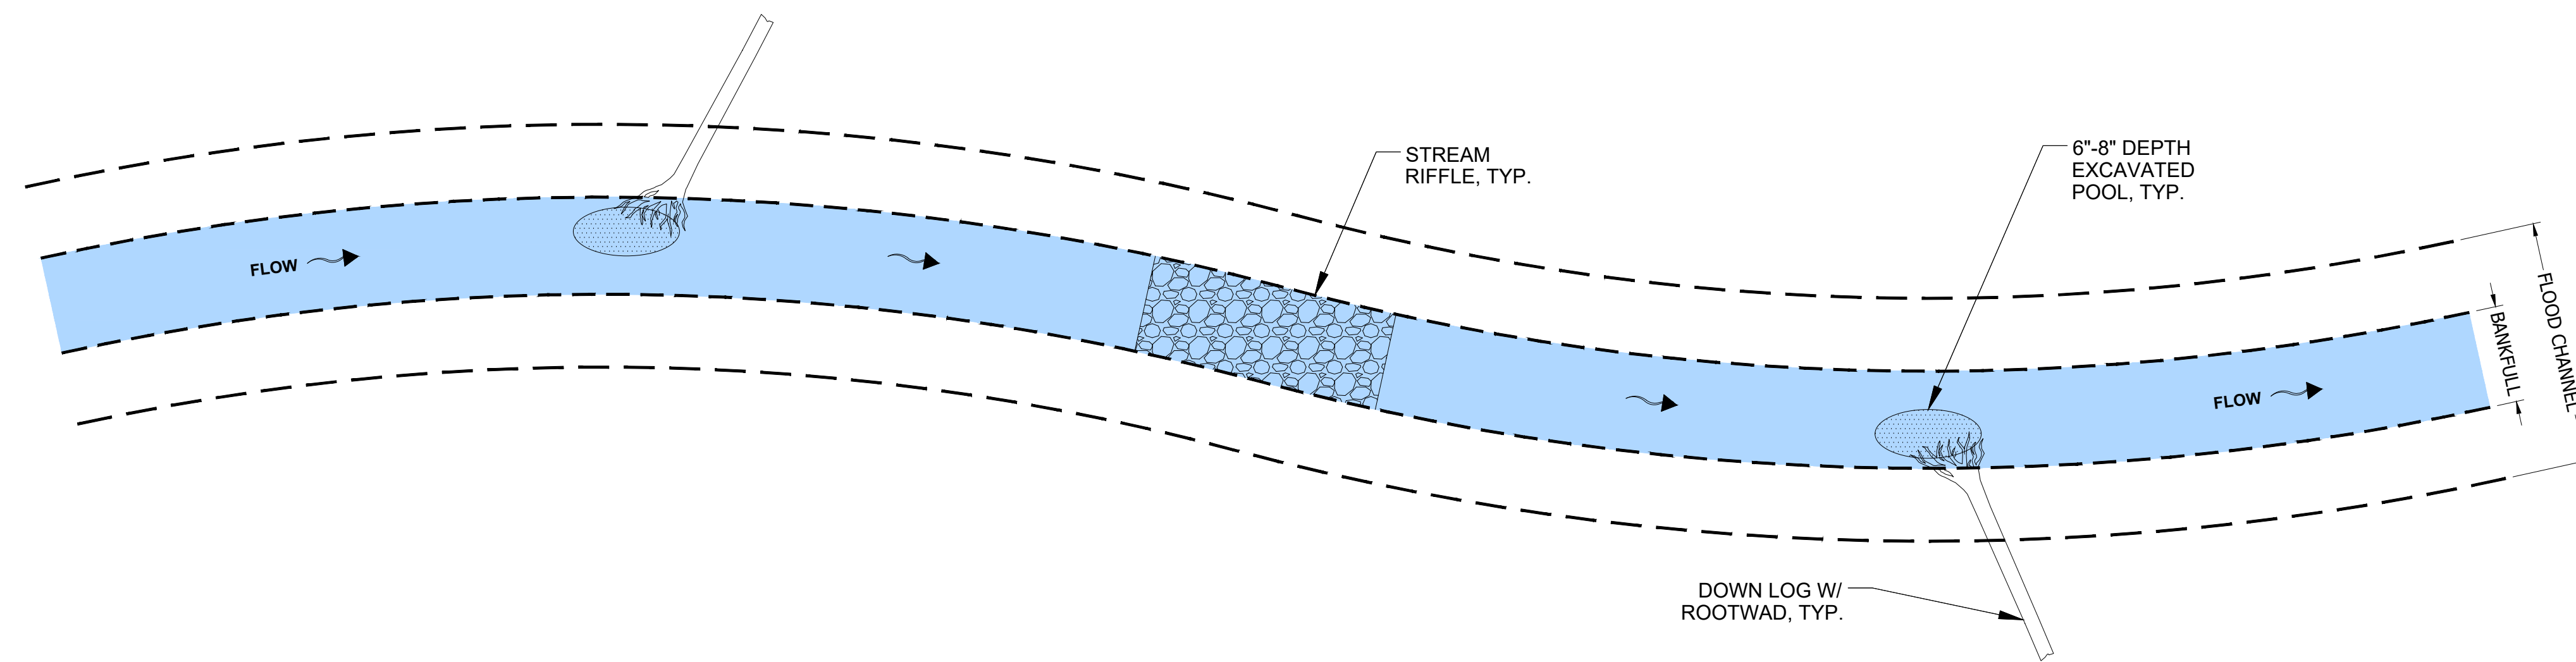

STREAMS Y & Z - PROPOSED PLAN VIEW, TYP.  
SCALE: 1"=5'

LWD INSTALLATION CROSS-SECTION (TYPICAL)

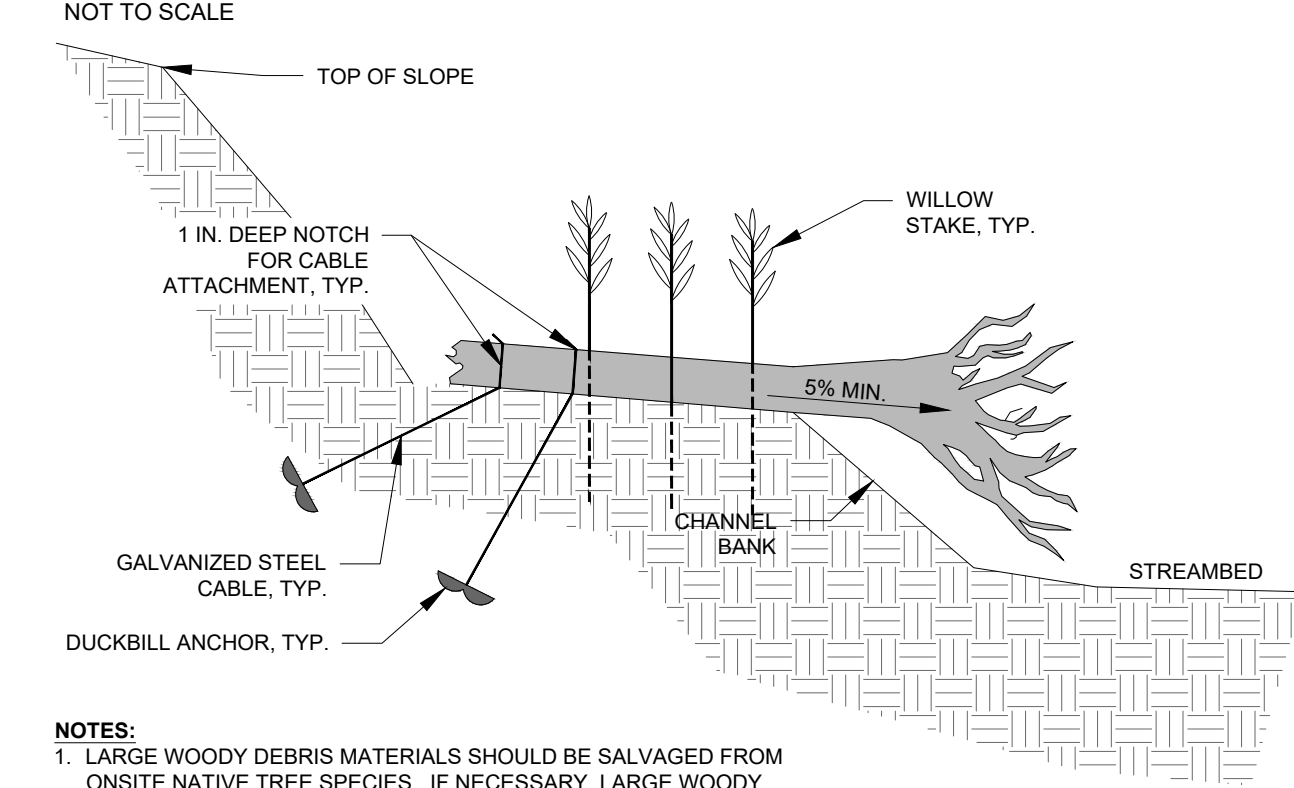


- NOTES:
1. LARGE WOODY DEBRIS MATERIALS SHOULD BE SALVAGED FROM ONSITE NATIVE TREE SPECIES. IF NECESSARY, LARGE WOODY DEBRIS MATERIALS MAY BE IMPORTED ONSITE.
  2. IMPORTED LOGS AND OTHER WOODY MATERIALS SHALL BE OF DOUGLAS-FIR, WESTERN REDCEDAR, OR OTHER SPECIES APPROVED BY THE PROJECT SCIENTIST.
  3. LARGE WOODY DEBRIS SHALL HAVE ROOTWAD STILL ATTACHED. ROOT SPREAD SHALL HAVE RELATIVELY EVEN SPREAD WITH A MINIMUM DIAMETER OF TWO (2) TO THREE (3) FEET. ROOTWADS SHALL BE CLEANED PRIOR TO PLACEMENT.
  4. FASTEN WOODY DEBRIS USING MINIMUM OF 2 GALVANIZED STEEL CABLES (DUCKBILL ANCHORS) PER PIECE OF LARGE WOODY DEBRIS.

**McInnis ENGINEERING**  
535 Dock Street, Suite 111, Tacoma, WA 98402  
253.414.1992  
mcinisengineering.com


**Soundview Consultants**  
Environmental Assessment • Planning • Land Use Solutions  
2907 HARBORVIEW DRIVE  
GIG HARBOR, WASHINGTON 98335  
WWW.SOUNDVIEWCONSULTANTS.COM  
P. 253.514.8952  
F. 253.514.8954

**EAST TOWN CROSSING**  
2902 E. PIONEER AVE.  
PUYALLUP, WA 98374  
PIERCE COUNTY PARCEL NUMBERS:  
0420264021, 0420264053, 0420264054, 0420351030,  
0420351029, 0420351026, & 0420351066

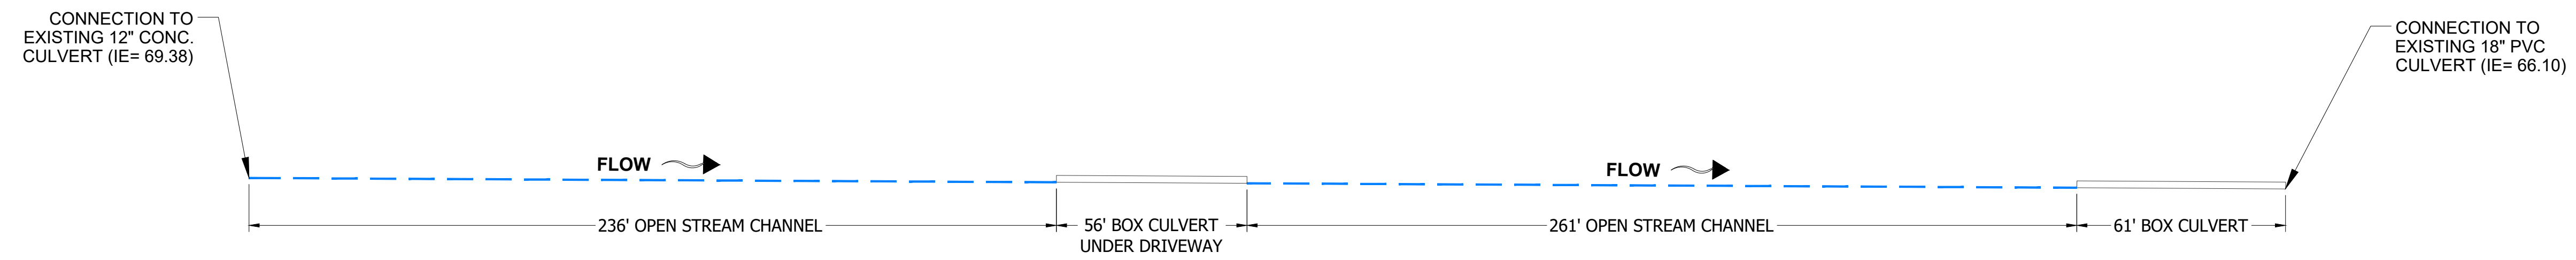


PROPOSED STREAM Z PROFILE  
SCALE: 1"=30'

DATE:	9/20/2023
JOB:	2544.0001
BY:	MW/DS
SCALE:	AS SHOWN
SHEET:	2,2

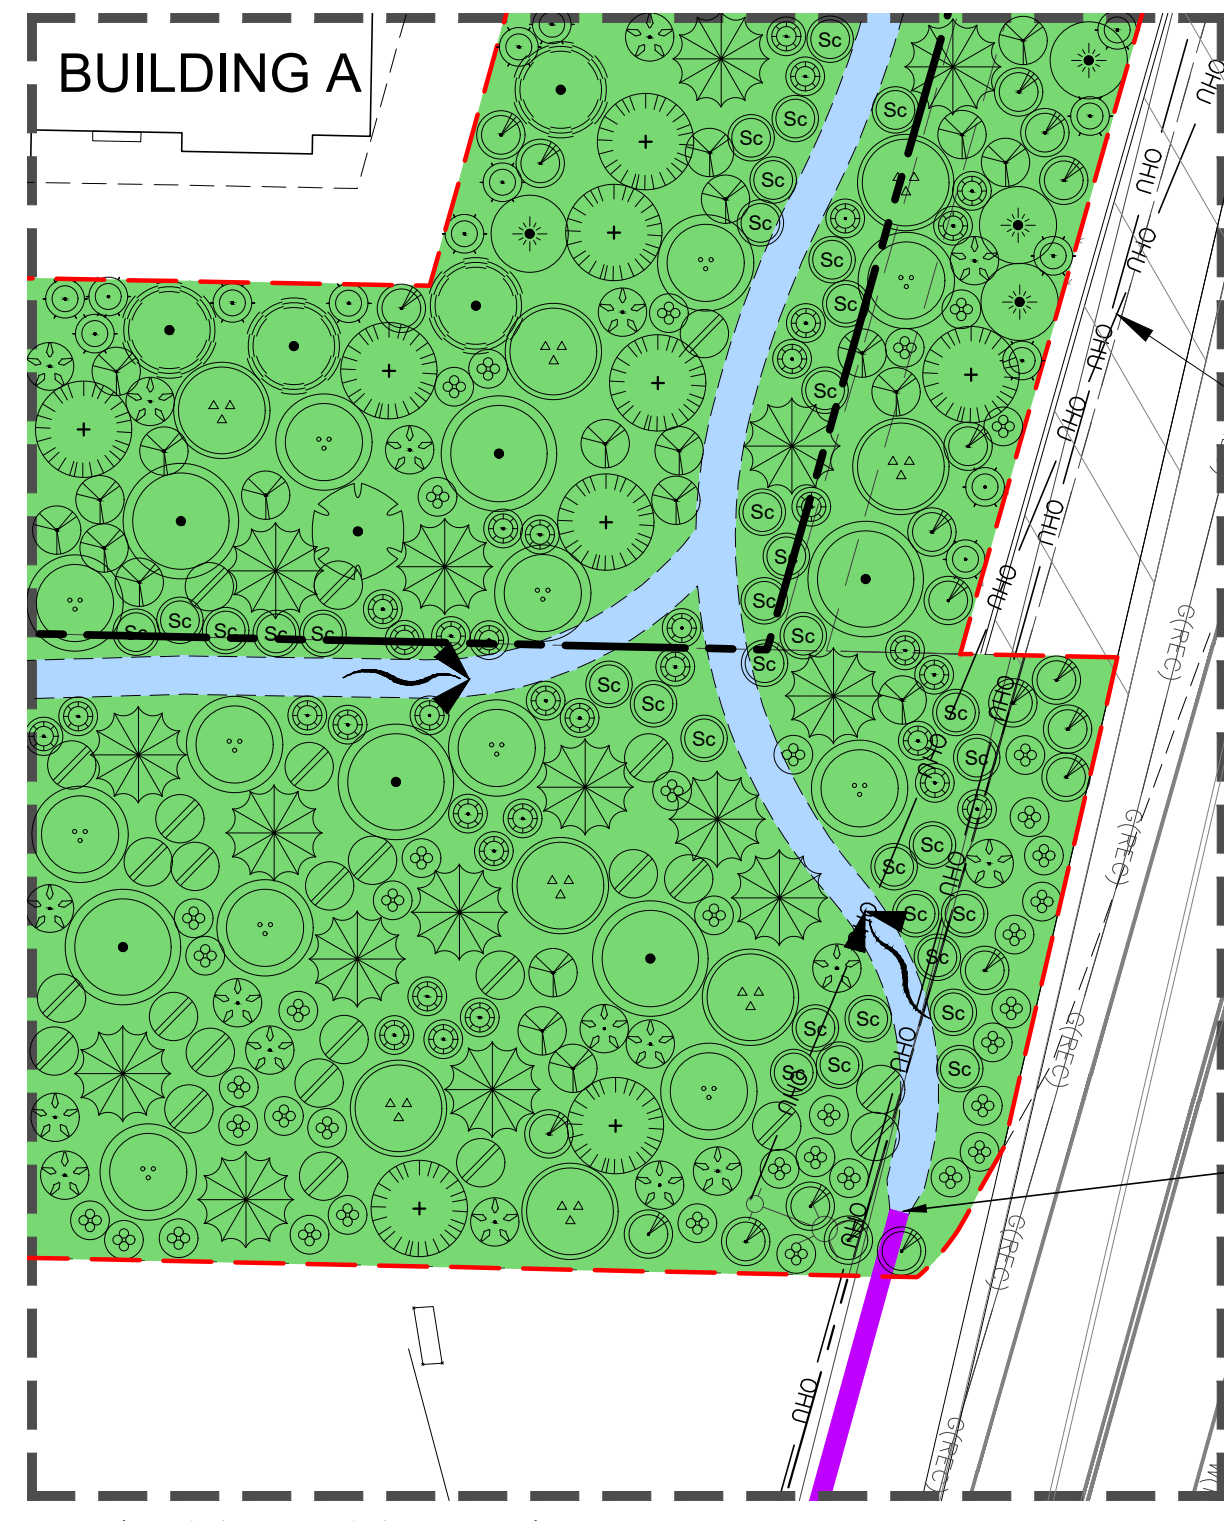

PLANTING TYPICAL  
SCALE: 1"=20'


OVERHEAD UTILITIES

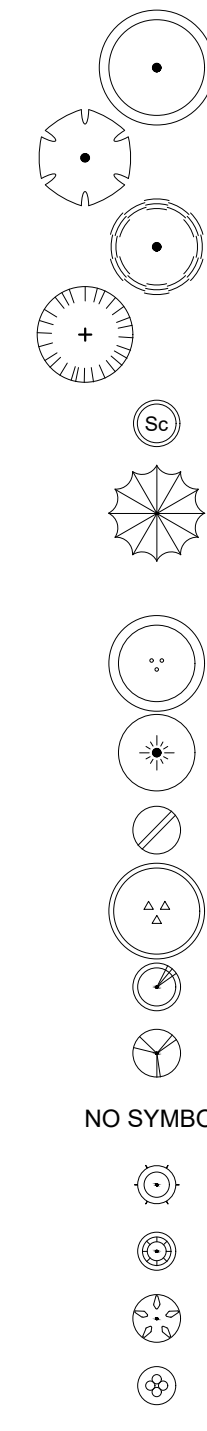

Scientific Name	Common Name	WL Status	Buffer Plantings	Spacing (min.)	Height (min.)	Size (min.)	Planting Area
<b>TREES (Qty)</b>							
<i>Acer macrophyllum</i>	bigleaf maple	FACU	37	10 ft	3 ft	2 gal	Dry
<i>Fraxinus purshiana (Rhamnus p.)</i>	cascara	FAC	6	10 ft	3 ft	1 gal	Dry
<i>Prunus emarginata</i>	bitter cherry	FACU	29	10 ft	3 ft	2 gal	Dry
<i>Pseudotsuga menziesii</i>	Douglas fir	FACU	57	10 ft	3 ft	2 gal	Dry
<i>Salix scouleriana</i>	Scouler's willow	FAC	227	5 ft	4 ft	Stakes	Dry
<i>Thuja plicata</i>	western redcedar	FAC	99	10 ft	3 ft	2 gal	Moist - on hummock
			<b>Total:</b>				
<b>SHRUBS (Qty)</b>							
<i>Acer circinatum</i>	vine maple	FAC	82	10 ft	4 ft	2 gal	Dry/Moist
<i>Amelanchier alnifolia</i>	serviceberry	FACU	32	8 ft	3 ft	2 gal	Dry
<i>Cornus stolonifera</i>	red-osier dogwood	FACW	182	4 ft	3 ft	1 gal	Moist/Wet
<i>Corylus cornuta var. californica</i>	western hazelnut	FACU	58	10 ft	2 ft	2 gal	Moist
<i>Holodiscus discolor</i>	oceanspray	FACU	140	5 ft	2 ft	1 gal	Dry
<i>Oemleria cerasiformis</i>	Indian plum	FACU	116	5 ft	2 ft	2 gal	Dry
<i>Polystichum munitum</i>	western swordfern	FACU	435	4 ft	1 ft	1 gal	Dry/Moist
<i>Rosa gymnocarpa</i>	hald hip rose	FACU	109	4 ft	2 ft	1 gal	Dry/Moist
<i>Rubus spectabilis var. spectabilis</i>	salmonberry	FAC	290	4 ft	2 ft	1 gal	Moist
<i>Sambucus racemosa var. racemosa</i>	red elderberry	FACU	116	5 ft	2 ft	2 gal	Dry
<i>Symphoricarpos albus var. laevigatus</i>	common snowberry	FACU	254	4 ft	2 ft	1 gal	Dry
			<b>Total:</b>				
<b>SEED MIXES (www.riverrefugeseed.com)</b>							
<b>Native Upland Grass Mix #9</b>		<b>20 lbs/acre</b>					
<i>Elymus glaucus</i>	Blue wildrye	30%					
<i>Bromus carinatus</i>	California brome	25%					
<i>Hordeum brachyantherum</i>	Meadow barley	10%					
<i>Festuca roemerii</i>	Roemer's fescue	10%					
<i>Deschampsia elongata</i>	Slender hairgrass	10%					
<i>Agrostis exarata</i>	Spike bentgrass	5%					
<i>Deschampsia cespitosa</i>	Tufted hairgrass	5%					
<i>Festuca rubra var. rubra</i>	Red fescue	5%					
		<b>Total (lbs):</b>					
<b>Habitat Structures (Qty)</b>			<b>Requirements</b>				
<b>Large Woody Debris</b>			<b>23 Pieces</b>				
			For salvaged large woody debris: 35.31 cubic feet of large woody debris material minimum. For imported large woody debris: 12 foot length minimum, 10 inch diameter minimum, with 2-3 foot minimum diameter rootwad attached.				


1 - Scientific names and species identification taken from *Flora of the Pacific Northwest, 2nd Edition (Hitchcock and Cronquist, Ed. by Giblin, Ledger, Zhu, and Olmstead, 2018)*.  
 2 - Over-sized container plants are suitable for replacement pending Wetland Scientist approval.  
 3 - Alternate native plant species may be substituted or added with Wetland Scientist approval.  
 4 - All disturbed and bare soil areas in the buffer to be seeded with a native grass seed mix.  
 5 - Shrub calculations based upon 5-ft average spacing.  
 6 - Tree calculations based upon 10-ft average spacing.  
 7 - *Polystichum munitum* to be planted in groups of 3 to 5 around the base of newly planted trees.

**SPLIT RAIL FENCE DETAIL**  
NOT TO SCALE

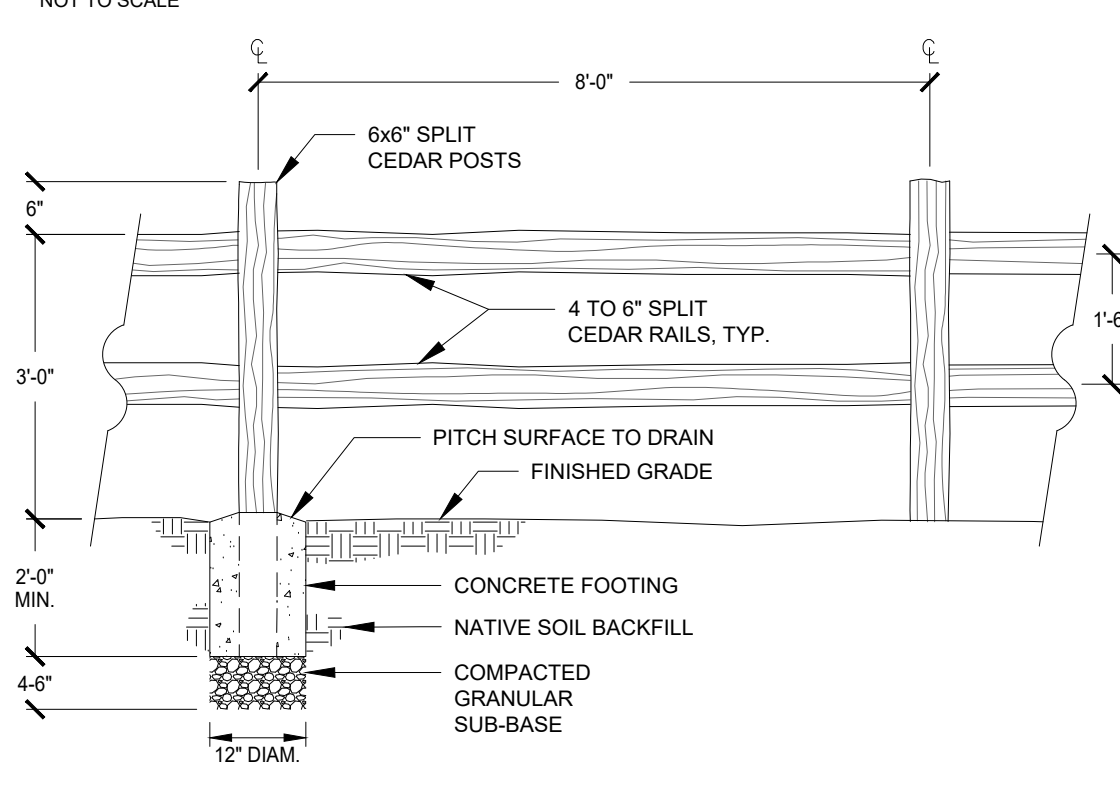


- NOTES:**
1. POSTS AND RAILINGS PRE-CUT FOR ASSEMBLY.
  2. 3-RAIL DESIGNS ARE PERMITTED.
  3. FENCE SHALL BE PLACED AT APPROVED BUFFER EDGE.
  4. ALTERNATIVE WILDLIFE FRIENDLY FENCE DESIGNS ALLOWED WITH CITY OF PUYALLUP APPROVAL.

**CRITICAL AREA SIGN DETAIL**  
NOT TO SCALE

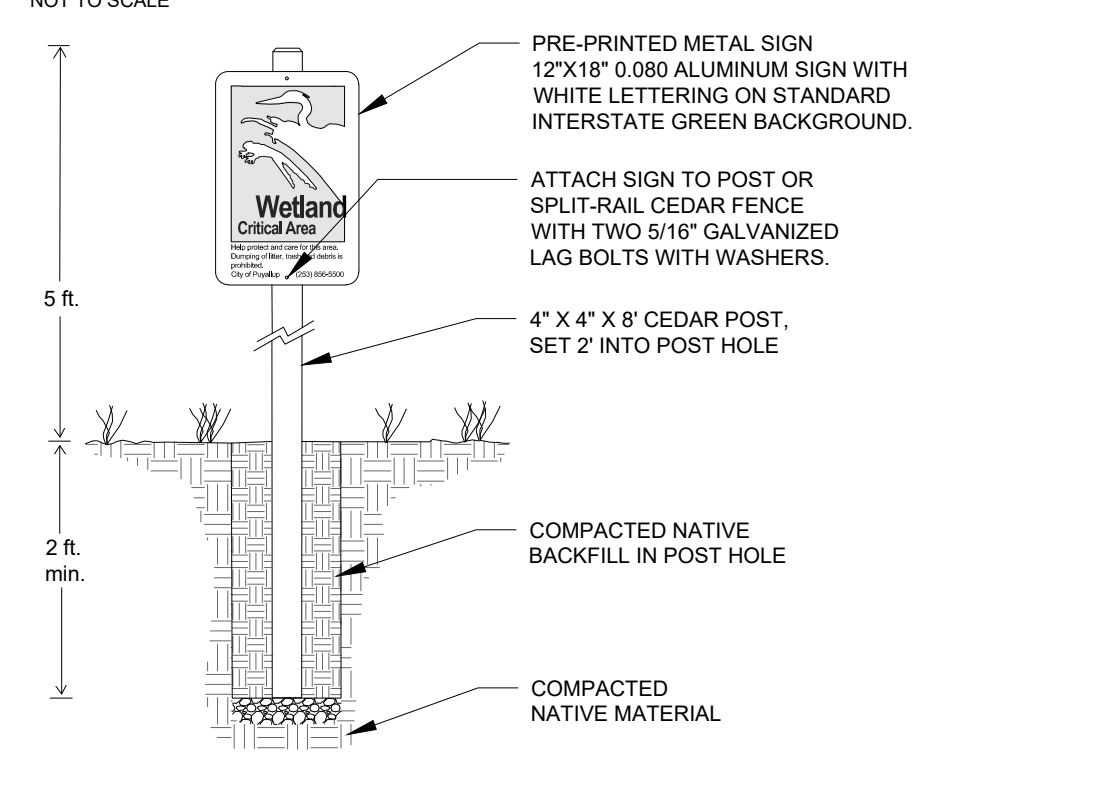


- CRITICAL AREA BOUNDARY SIGN NOTES:**
1. THE BOUNDARY AT THE OUTER EDGE OF THE CRITICAL AREA OR BUFFER SHALL BE IDENTIFIED WITH SIGNS OR MARKERS TO CLEARLY INDICATE THE LOCATION OF THE CRITICAL AREA
  2. FENCING AND SIGNS SHALL BE MAINTAINED IN GOOD CONDITION SO AS TO BE VISIBLE AND UNOBSCURED.
  3. PRE-PRINTED METAL SIGN AVAILABLE THROUGH:  
ZUMAR INDUSTRIES  
PHONE: 1-800-426-7967  
WEBSITE: WWW.ZUMAR.COM

**TREE AND SHRUB PLANTING DETAIL (TYPICAL)**  
NOT TO SCALE

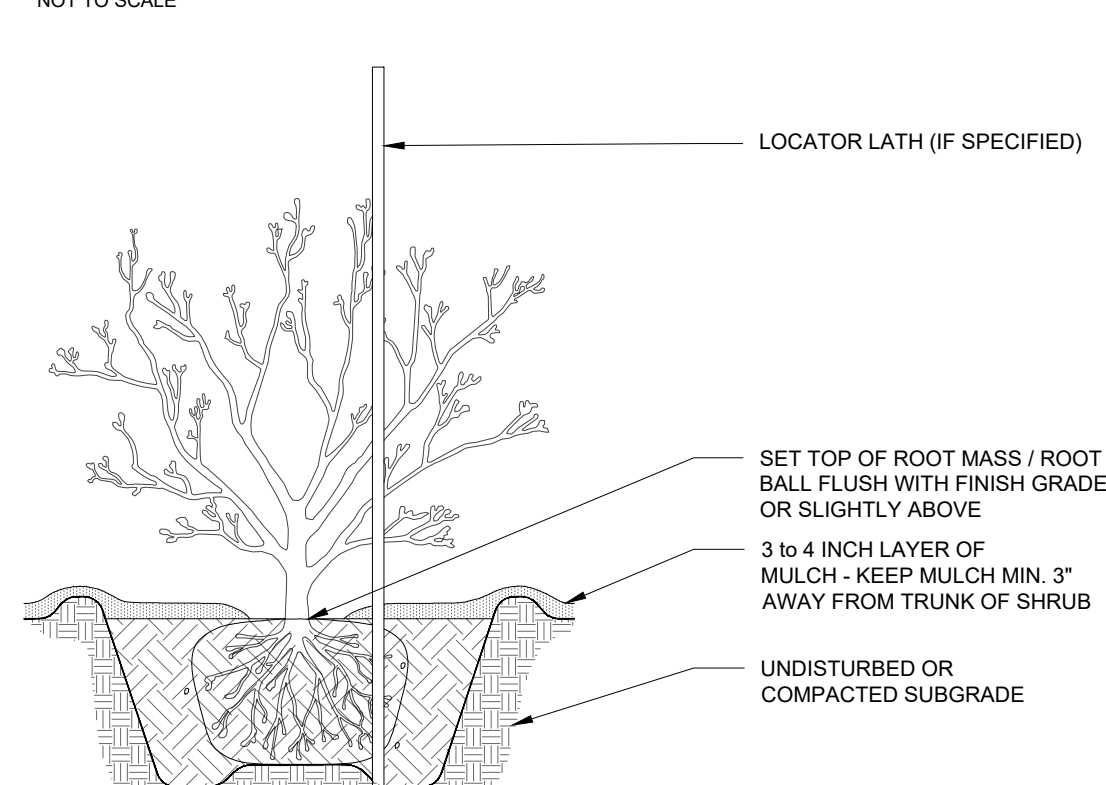

- NOTES:**
1. PLANT SHRUBS OF THE SAME SPECIES IN GROUPS OF 3 TO 9 AS APPROPRIATE OR AS SHOWN ON PLAN. AVOID INSTALLING PLANTS IN STRAIGHT LINES TO ACHIEVE A NATURAL-LOOKING LAYOUT.
  2. EXCAVATE PIT TO FULL DEPTH OF ROOT MASS AND 2 X ROOT MASS DIAMETER. SPREAD ROOTS TO FULL WIDTH OF CANOPY. SCARIFY SIDES OF PIT.
  3. MIDWAY THROUGH PLANTING ADD AGROFORM TABLET AND WATER THOROUGHLY.
  4. BACKFILL TO BE COMPACTED USING WATER ONLY.
  5. WATER IMMEDIATELY AFTER INSTALLATION.

**LIVE STAKE PLANTING DETAIL (TYPICAL)**  
NOT TO SCALE

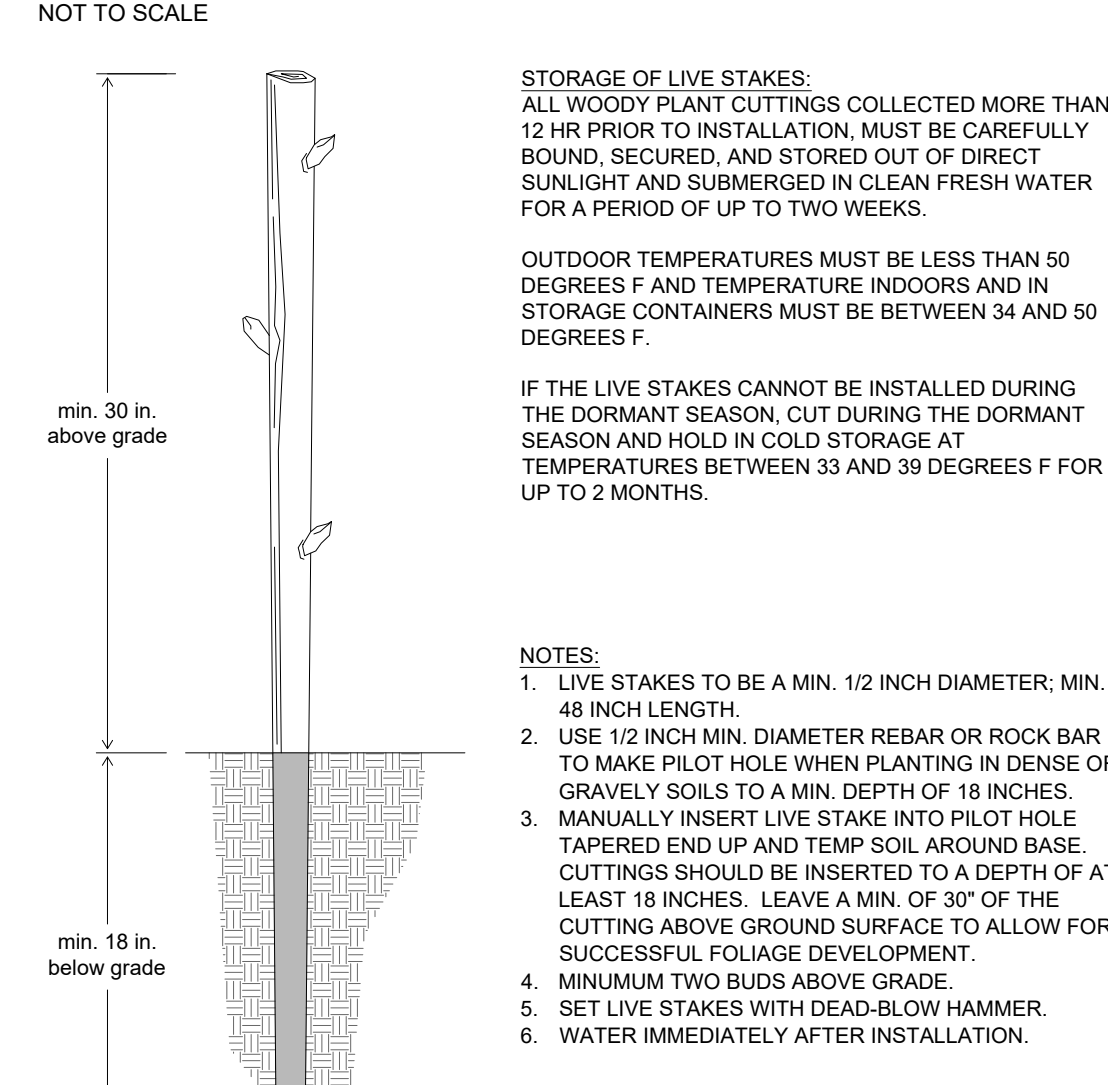

**STORAGE OF LIVE STAKES:**  
ALL WOODY PLANT CUTTINGS COLLECTED MORE THAN 12 HR PRIOR TO INSTALLATION, MUST BE CAREFULLY BOUND, SECURED, AND STORED OUT OF DIRECT SUNLIGHT AND SUBMERGED IN CLEAN FRESH WATER FOR A PERIOD OF UP TO TWO WEEKS.

OUTDOOR TEMPERATURES MUST BE LESS THAN 50 DEGREES F AND TEMPERATURE INDOORS AND IN STORAGE CONTAINERS MUST BE BETWEEN 34 AND 50 DEGREES F.

IF THE LIVE STAKES CANNOT BE INSTALLED DURING THE DORMANT SEASON, CUT DURING THE DORMANT SEASON AND HOLD IN COLD STORAGE AT TEMPERATURES BETWEEN 33 AND 39 DEGREES F FOR UP TO 2 MONTHS.

- NOTES:**
1. LIVE STAKES TO BE A MIN. 1/2 INCH DIAMETER; MIN. 48 INCH LENGTH.
  2. USE 1/2 INCH MIN. DIAMETER REBAR OR ROCK BAR TO MAKE PILOT HOLE WHEN PLANTING IN DENSE OR GRAVELY SOILS TO A MIN. DEPTH OF 18 INCHES.
  3. MANUALLY INSERT LIVE STAKE INTO PILOT HOLE TAPERED END UP AND TEMP SOIL AROUND BASE. CUTTINGS SHOULD BE INSERTED TO A DEPTH OF AT LEAST 18 INCHES. LEAVE A MIN. OF 30" OF THE CUTTING ABOVE GROUND SURFACE TO ALLOW FOR SUCCESSFUL FOLIAGE DEVELOPMENT.
  4. MINIMUM TWO BUDS ABOVE GRADE.
  5. SET LIVE STAKES WITH DEAD-BLOW HAMMER.
  6. WATER IMMEDIATELY AFTER INSTALLATION.

**McImmis ENGINEERING**  
535 Dock Street, Suite 111, Tacoma, WA 98402  
253.414.1992  
mcimmisengineering.com

**Soundview Consultants**  
Environmental Assessment • Planning • Land Use Solutions  
2907 HARBORVIEW DRIVE  
GIG HARBOR, WASHINGTON 98335  
WWW.SOUNDVIEWCONSULTANTS.COM

**EAST TOWN CROSSING**  
2902 E. PIONEER AVE.  
PUYALLUP, WA 98374  
PIERCE COUNTY PARCEL NUMBERS:  
0420264021, 0420264053, 0420264054, 0420351030,  
0420351029, 0420351026, & 0420351066

DATE: 9/20/2023  
JOB: 2544.0001  
BY: MW/DS  
SCALE: AS SHOWN  
SHEET: 3.0

## Appendix B – Photographs

---

*Typical degraded conditions of Stream Z within ROW of East Pioneer Avenue*



*Typical conditions of Stream Y*



*Existing Stream Z crossing providing access from East Pioneer Avenue to site (source: Google Earth)*



## Appendix C – Qualifications

---

All determinations and supporting documentation, including this *Conceptual Mitigation Plan* prepared for the *East Town Crossing* project were prepared by, or under the direction of, Alex Murphy and Matt DeCaro of SVC. Technical assistance was provided by Ben Wright. In addition, report preparation was completed by Kyla Caddey, and final quality assurance/ quality control was completed by Laura Livingston.

### Alex Murphy, AICP

Senior Environmental Planner & Project Manager

Professional Experience: 7 years

---

Alex Murphy is a Planner and Project Manager with a background in land use planning, site planning & design, permitting, and project management. He has over 7 years of experience working for local jurisdictions in the Intermountain West and Pacific Northwest with an emphasis on maximizing opportunities for culturally and environmentally sensitive projects.

Alex earned a Bachelor of Landscape Architecture degree from Utah State University. He is a Certified Planner through the American Institute of Certified Planners and has received formal training in climate adaptation planning for coastal communities from NOAA. Mr. Murphy currently assists in wetland, stream, and shoreline delineations and fish and wildlife habitat assessments; conducts environmental code analysis; and prepares environmental assessment and mitigation reports. He also manages development projects, supporting clients through the regulatory and planning process for various land use proposals.

### Matt DeCaro

Principal

Professional Experience: 14 years

---

Matt DeCaro is a Principal and Senior Scientist with a diverse background in environmental planning, wetland science, stream ecology, water quality, tree assessments, site remediation, NEPA compliance, and project management. He manages a wide range of industrial, commercial, and multi-family residential projects throughout Western Washington, providing environmental permitting and regulatory compliance assistance for land use projects from their planning stages through entitlement and construction. His local expertise, diverse professional background, and positive relationships with regulatory personnel are integral components of his successful project outcomes.

Matt earned a Bachelor of Science degree with a focus in Environmental Science from the Evergreen State College in Olympia, Washington, with additional graduate-level coursework and research in aquatic restoration and salmonid ecology. Matt has received 40-hour wetland delineation training (*Western Mountains, Valleys, & Coast and Arid West Regional Supplements*) and regularly performs wetland, stream, and shoreline delineations. Matt has been formally trained in the use of the *2014 Washington State Wetland Rating System* and *Determination of Ordinary High Water Mark* by WSDOE, and he is a Pierce County Qualified Wetland Specialist and Wildlife Biologist. He has attended USFWS survey workshops for multiple threatened and endangered species, and he is a Senior Author of WSDOT Biological Assessments. Matt holds 40-hour HAZWOPER training and has managed Phase I Environmental Site Assessments, subsurface investigations, and contaminant remediation projects

throughout the Pacific Northwest. His diverse experience also includes NEPA compliance for federal permitting projects; noxious weed abatement; army ant research in the Costa Rican tropical rainforest; spotted owl surveys on federal and private lands; and salmonid spawning and migration surveys.

## **Ben Wright**

Associate Principal and Senior Fisheries Biologist

Professional Experience: 20 years

---

Ben Wright is an Associate Principal and Senior Fisheries Biologist with a varied background in lake ecology, stream ecology, fisheries biology, water quality and climate science. Ben has 13 years of experience at the federal level providing technical assistance for both the development of infrastructure projects and management of aquatic resources. This technical assistance included providing oversight and design guidance on several restoration projects involving large woody debris installations, native riparian plantings, and stream channel relocations. He has experience developing biological assessments, water quality monitoring plans, and fisheries management plans. Ben has an additional 10 years of experience working on long-term ecological monitoring programs related to lakes, streams, water quality and climate. Ben currently works on permitting, design, construction guidance, and monitoring of several stream and wetland mitigation projects across western Washington.

Ben earned a Bachelor of Science degree in Genetics and Cell Biology with an emphasis in aquatic ecology from Washington State University and has a graduate certificate in Fisheries Management from Oregon State University. Ben's expertise includes endangered species monitoring, assessments and permitting, and NEPA documentation across disciplines gained during his work on federal highway projects. Ben also has experience in fish population assessments, utilizing genetic analysis, spawning escapement and movement studies. Ben has received formal training from the Washington State Department of Ecology in the Using the Revised 2014 Wetland Rating System for Western Washington, How to Determine the Ordinary High Water Mark, Navigating SEPA, How to Conduct a Forage Fish Survey and Puget Sound Coastal Processes, Shoreline Modifications and Beach Restoration. Ben has completed 40-hour wetland delineation training for the Western Mountains, Valleys, & Coast and Arid West Regional Supplement. Most recently, Ben has completed a short course in River Sediment Dynamics from River Restoration Northwest.

## **Kyla Caddey, PWS, Certified Ecologist**

Senior Environmental Scientist

Professional Experience: 8 years

---

Kyla Caddey is a Senior Environmental Scientist with a diverse background in stream and wetland ecology, wildlife ecology and conservation, wildlife and natural resource assessments and monitoring, and riparian habitat restoration at various public and private entities. Kyla has field experience performing in-depth studies in both the Pacific Northwest and Central American ecosystems which included various environmental science research and statistical analysis. Kyla has advanced expertise in federal- and state-listed endangered, threatened, and sensitive species surveys and assessment of aquatic and terrestrial systems throughout the Puget Sound region. She has completed hundreds of wetland delineations and has extensive knowledge and interest in hydric soil identification. As the senior writer, she provides informed project oversight and performs final quality assurance / quality control on various types of scientific reports for agency submittal, including: Biological

Assessments/Evaluations; Wetland, Shoreline, and Fish and Wildlife Habitat Assessments; Mitigation Plans, and Mitigation Monitoring Reports. She currently performs wetland, stream, and shoreline delineations and fish and wildlife habitat assessments; prepares scientific reports; and provides environmental permitting and regulatory compliance assistance to support a wide range of commercial, industrial, and multi-family residential land use projects.

Kyla earned a Bachelor of Science degree in Environmental Science and Resource Management from the University of Washington, Seattle with a focus in Wildlife Conservation and a minor in Quantitative Science. She has also completed additional coursework in Comprehensive Bird Biology from Cornell University. Ms. Caddey is a Certified Professional Wetland Scientist (PWS #3479) through the Society of Wetland Scientists and Certified Ecologist through the Ecological Society of America. She has received 40-hour wetland delineation training (Western Mtns, Valleys, & Coast and Arid West Regional Supplement), is a Pierce County Qualified Wetland Specialist and Wildlife Biologist, and is a USFWS-approved Mazama pocket gopher survey biologist. Kyla has been formally trained through the Washington State Department of Ecology, Coastal Training Program, and the Washington Native Plant Society in winter twig and grass, sedge, and rush identification for Western WA; Using the Credit-Debit Method in Estimating Wetland Mitigation Needs; How to Determine the Ordinary High Water Mark; Using Field Indicators for Hydric Soils; How to Administer Development Permits in Washington Shorelines; Puget Sound Coastal Processes; and Forage Fish Survey Techniques. Additionally, she has received formal training in preparing WSDOT Biological Assessments.

## **Laura Livingston**

Senior Environmental Planner

Professional Experience: 9 years

---

Laura Livingston is an Environmental Planner with a background in water quality monitoring, invasive species monitoring, wildlife monitoring, wilderness stewardship, and erosion control projects. Laura has field experience working on natural resources projects, with an emphasis on stream and river projects, in the Northwest, Northeast, and Southwest United States. She has also worked on a variety of environmental science research, grant, and teaching projects requiring scientific writing, science communication, laboratory work, and statistical analysis. She currently performs ordinary high water delineations; conducts environmental code analysis; and prepares environmental assessment and mitigation reports, biological evaluations, and permit applications to support clients through the regulatory and planning process. Laura has a particular interest in shoreline projects and has prepared a variety of application materials to support projects within Shoreline Master Program jurisdictions.

Laura earned a Master of Science degree in Environmental Science from Washington State University, Pullman. She has received training from the Washington State Department of Ecology in How to Administer Shoreline Development Permits in Western Washington's Shorelines, Determining the Ordinary High Water Mark, the revised Washington State Wetland Rating System, Puget Sound Coastal Processes, How to Conduct a Forage Fish Survey, and Using the Credit-Debit Method for Estimating Mitigation Needs. Laura has also received training from the Washington State Department of Transportation in Biological Assessment Preparation for Transportation Projects and is listed by WSDOT as a junior author for preparing Biological Assessments. Laura is interested in stormwater management and has received a certificate in Low Impact Development Design from the Washington Stormwater Center.

# ***Appendix C***

---

## **Maintenance Report**



**Table V-A.2: Maintenance Standards - Infiltration (continued)**

Maintenance Component	Defect	Conditions When Maintenance Is Needed	Results Expected When Maintenance Is Performed
		(A percolation test pit or test of facility indicates facility is only working at 90% of its designed capabilities. Test every 2 to 5 years. If two inches or more sediment is present, remove).	
Filter Bags (if applicable)	Filled with Sediment and Debris	Sediment and debris fill bag more than 1/2 full.	Filter bag is replaced or system is redesigned.
Rock Filters	Sediment and Debris	By visual inspection, little or no water flows through filter during heavy rain storms.	Gravel in rock filter is replaced.
Side Slopes of Pond	Erosion	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>
Emergency Overflow Spillway and Berms over 4 feet in height.	Tree Growth	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>
	Piping	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>
Emergency Overflow Spillway	Rock Missing	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>
	Erosion	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>
Pre-settling Ponds and Vaults	Facility or sump filled with Sediment and/or debris	6" or designed sediment trap depth of sediment.	Sediment is removed.

**Table V-A.3: Maintenance Standards - Closed Detention Systems (Tanks/Vaults)**

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is Performed
Storage Area	Plugged Air Vents	One-half of the cross section of a vent is blocked at any point or the vent is damaged.	Vents open and functioning.
	Debris and Sediment	Accumulated sediment depth exceeds 10% of the diameter of the storage area for 1/2 length of storage vault or any point depth exceeds 15% of diameter. (Example: 72-inch storage tank would require cleaning when sediment reaches depth of 7 inches for more than 1/2 length of tank.)	All sediment and debris removed from storage area.
	Joints Between Tank/Pipe Section	Any openings or voids allowing material to be transported into facility. (Will require engineering analysis to determine structural stability).	All joint between tank/pipe sections are sealed.
	Tank Pipe Bent Out of Shape	Any part of tank/pipe is bent out of shape more than 10% of its design shape. (Review required by engineer to determine structural stability).	Tank/pipe repaired or replaced to design.
	Vault Structure Includes Cracks in Wall, Bottom, Damage to Frame and/or Top Slab	Cracks wider than 1/2-inch and any evidence of soil particles entering the structure through the cracks, or maintenance/inspection personnel determines that the vault is not structurally sound. Cracks wider than 1/2-inch at the joint of any inlet/outlet pipe or any evidence of soil particles entering the vault through the walls.	Vault replaced or repaired to design specifications and is structurally sound. No cracks more than 1/4-inch wide at the joint of the inlet/outlet pipe.

**Table V-A.3: Maintenance Standards - Closed Detention Systems (Tanks/Vaults) (continued)**

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is Performed
Manhole	Cover Not in Place	Cover is missing or only partially in place. Any open manhole requires maintenance.	Manhole is closed.
	Locking Mechanism Not Working	Mechanism cannot be opened by one maintenance person with proper tools. Bolts into frame have less than 1/2 inch of thread (may not apply to self-locking lids).	Mechanism opens with proper tools.
	Cover Difficult to Remove	One maintenance person cannot remove lid after applying normal lifting pressure. Intent is to keep cover from sealing off access to maintenance.	Cover can be removed and reinstalled by one maintenance person.
	Ladder Rungs Unsafe	Ladder is unsafe due to missing rungs, misalignment, not securely attached to structure wall, rust, or cracks.	Ladder meets design standards. Allows maintenance person safe access.
Catch Basins	See <a href="#">Table V-A.5: Maintenance Standards - Catch Basins</a>	See <a href="#">Table V-A.5: Maintenance Standards - Catch Basins</a>	See <a href="#">Table V-A.5: Maintenance Standards - Catch Basins</a>

**Table V-A.4: Maintenance Standards - Control Structure/Flow Restrictor**

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
General	Trash and Debris (Includes Sediment)	Material exceeds 25% of sump depth or 1 foot below orifice plate.	Control structure orifice is not blocked. All trash and debris removed.
	Structural Damage	Structure is not securely attached to manhole wall. Structure is not in upright position (allow up to 10% from plumb). Connections to outlet pipe are not watertight and show signs of rust. Any holes - other than designed holes - in the structure.	Structure securely attached to wall and outlet pipe. Structure in correct position. Connections to outlet pipe are water tight; structure repaired or replaced and works as designed. Structure has no holes other than designed holes.
Cleanout Gate	Damaged or Missing	Cleanout gate is not watertight or is missing. Gate cannot be moved up and down by one maintenance person. Chain/rod leading to gate is missing or damaged. Gate is rusted over 50% of its surface area.	Gate is watertight and works as designed. Gate moves up and down easily and is watertight. Chain is in place and works as designed. Gate is repaired or replaced to meet design standards.
Orifice Plate	Damaged or Missing	Control device is not working properly due to missing, out of place, or bent orifice plate.	Plate is in place and works as designed.
	Obstructions	Any trash, debris, sediment, or vegetation blocking the plate.	Plate is free of all obstructions and works as designed.
Overflow Pipe	Obstructions	Any trash or debris blocking (or having the potential of blocking) the overflow pipe.	Pipe is free of all obstructions and works as designed.
Manhole	See <a href="#">Table V-A.3: Maintenance Standards - Closed Detention Systems (Tanks/Vaults)</a>	See <a href="#">Table V-A.3: Maintenance Standards - Closed Detention Systems (Tanks/Vaults)</a>	See <a href="#">Table V-A.3: Maintenance Standards - Closed Detention Systems (Tanks/Vaults)</a>
Catch Basin	See <a href="#">Table V-A.5: Maintenance Standards - Catch Basins</a>	See <a href="#">Table V-A.5: Maintenance Standards - Catch Basins</a>	See <a href="#">Table V-A.5: Maintenance Standards - Catch Basins</a>

**Table V-A.5: Maintenance Standards - Catch Basins**

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is performed
General	Trash & Debris	Trash or debris which is located immediately in front of the catch basin opening or is blocking inletting capacity of the basin by more than 10%. Trash or debris (in the basin) that exceeds 60 percent of the sump depth as measured from the bottom of basin to invert of the lowest pipe into or out of the basin, but in no case less than a minimum of six inches clearance from the debris surface to the invert of the lowest pipe. Trash or debris in any inlet or outlet pipe blocking more than 1/3 of its height. Dead animals or vegetation that could generate odors that could cause complaints or dangerous gases (e.g., methane).	No Trash or debris located immediately in front of catch basin or on grate opening. No trash or debris in the catch basin. Inlet and outlet pipes free of trash or debris. No dead animals or vegetation present within the catch basin.
	Sediment	Sediment (in the basin) that exceeds 60 percent of the sump depth as measured from the bottom of basin to invert of the lowest pipe into or out of the basin, but in no case less than a minimum of 6 inches clearance from the sediment surface to the invert of the lowest pipe.	No sediment in the catch basin
	Structure Damage to Frame and/or Top Slab	Top slab has holes larger than 2 square inches or cracks wider than 1/4 inch. (Intent is to make sure no material is running into basin). Frame not sitting flush on top slab, i.e., separation of more than 3/4 inch of the frame from the top slab. Frame not securely attached	Top slab is free of holes and cracks. Frame is sitting flush on the riser rings or top slab and firmly attached.
	Fractures or Cracks in Basin Walls/ Bottom	Maintenance person judges that structure is unsound. Grout fillet has separated or cracked wider than 1/2 inch and longer than 1 foot at the joint of any inlet/outlet pipe or any evidence of soil particles entering catch basin through cracks.	Basin replaced or repaired to design standards. Pipe is regouted and secure at basin wall.
	Settlement/ Mis-alignment	If failure of basin has created a safety, function, or design problem.	Basin replaced or repaired to design standards.
	Vegetation	Vegetation growing across and blocking more than 10% of the basin opening. Vegetation growing in inlet/outlet pipe joints that is more than six inches tall and less than six inches apart.	No vegetation blocking opening to basin. No vegetation or root growth present.
	Contamination and Pollution	See <a href="#">Table V-A.1: Maintenance Standards - Detention Ponds</a>	No pollution present.
Catch Basin Cover	Cover Not in Place	Cover is missing or only partially in place. Any open catch basin requires maintenance.	Cover/grate is in place, meets design standards, and is secured
	Locking Mechanism Not Working	Mechanism cannot be opened by one maintenance person with proper tools. Bolts into frame have less than 1/2 inch of thread.	Mechanism opens with proper tools.
	Cover Difficult to Remove	One maintenance person cannot remove lid after applying normal lifting pressure. (Intent is keep cover from sealing off access to maintenance.)	Cover can be removed by one maintenance person.
Ladder	Ladder Rungs Unsafe	Ladder is unsafe due to missing rungs, not securely attached to basin wall, misalignment, rust, cracks, or sharp edges.	Ladder meets design standards and allows maintenance person safe access.
Metal Grates (If Applicable)	Grate opening Unsafe	Grate with opening wider than 7/8 inch.	Grate opening meets design standards.
	Trash and Debris	Trash and debris that is blocking more than 20% of grate surface inletting capacity.	Grate free of trash and debris.
	Damaged or Missing.	Grate missing or broken member(s) of the grate.	Grate is in place, meets the design standards, and is installed and aligned with the flow path.

**Table V-A.13: Maintenance Standards - Sand Filters (Above Ground/Open) (continued)**

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
	Flow Spreader	Flow spreader uneven or clogged so that flows are not uniformly distributed across sand filter.	Spreader leveled and cleaned so that flows are spread evenly over sand filter.
	Damaged Pipes	Any part of the piping that is crushed or deformed more than 20% or any other failure to the piping.	Pipe repaired or replaced.

**Table V-A.14: Maintenance Standards - Sand Filters (Below Ground/Enclosed)**

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
Below Ground Vault.	Sediment Accumulation on Sand Media Section	Sediment depth exceeds 1/2-inch.	No sediment deposits on sand filter section that which would impede permeability of the filter section.
	Sediment Accumulation in Pre-Settling Portion of Vault	Sediment accumulation in vault bottom exceeds the depth of the sediment zone plus 6-inches.	No sediment deposits in first chamber of vault.
	Trash/Debris Accumulation	Trash and debris accumulated in vault, or pipe inlet/outlet, floatables and non-floatables.	Trash and debris removed from vault and inlet/outlet piping.
	Sediment in Drain Pipes/Cleanouts	When drain pipes, cleanouts become full with sediment and/or debris.	Sediment and debris removed.
	Short Circuiting	When seepage/flow occurs along the vault walls and corners. Sand eroding near inflow area.	Sand filter media section re-laid and compacted along perimeter of vault to form a semi-seal. Erosion protection added to dissipate force of incoming flow and curtail erosion.
	Damaged Pipes	Inlet or outlet piping damaged or broken and in need of repair.	Pipe repaired and/or replaced.
	Access Cover Damaged/Not Working	Cover cannot be opened, corrosion/deformation of cover. Maintenance person cannot remove cover using normal lifting pressure.	Cover repaired to proper working specifications or replaced.
	Ventilation	Ventilation area blocked or plugged	Blocking material removed or cleared from ventilation area. A specified % of the vault surface area must provide ventilation to the vault interior (see design specifications).
	Vault Structure Damaged; Includes Cracks in Walls, Bottom, Damage to Frame and/or Top Slab.	Cracks wider than 1/2-inch or evidence of soil particles entering the structure through the cracks, or maintenance/inspection personnel determine that the vault is not structurally sound. Cracks wider than 1/2-inch at the joint of any inlet/outlet pipe or evidence of soil particles entering through the cracks.	Vault replaced or repairs made so that vault meets design specifications and is structurally sound. Vault repaired so that no cracks exist wider than 1/4-inch at the joint of the inlet/outlet pipe.
	Baffles/Internal walls	Baffles or walls corroding, cracking, warping and/or showing signs of failure as determined by maintenance/inspection person.	Baffles repaired or replaced to specifications.
Access Ladder Damaged	Ladder is corroded or deteriorated, not functioning properly, not securely attached to structure wall, missing rungs, cracks, and misaligned.	Ladder replaced or repaired to specifications, and is safe to use as determined by inspection personnel.	

**Table V-A.15: Maintenance Standards - Manufactured Media Filters**

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
Below Ground	Sediment Accumulation on Media.	Sediment depth exceeds 0.25-inches.	No sediment deposits which would impede permeability of the

**Table V-A.15: Maintenance Standards - Manufactured Media Filters (continued)**

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed	
Vault			compost media.	
	Sediment Accumulation in Vault	Sediment depth exceeds 6-inches in first chamber.	No sediment deposits in vault bottom of first chamber.	
	Trash/Debris Accumulation	Trash and debris accumulated on compost filter bed.	Trash and debris removed from the compost filter bed.	
	Sediment in Drain Pipes/Clean-Outs	When drain pipes, clean-outs, become full with sediment and/or debris.	Sediment and debris removed.	
	Damaged Pipes	Any part of the pipes that are crushed or damaged due to corrosion and/or settlement.	Pipe repaired and/or replaced.	
	Access Cover Damaged/Not Working	Cover cannot be opened; one person cannot open the cover using normal lifting pressure, corrosion/deformation of cover.	Cover repaired to proper working specifications or replaced.	
	Vault Structure Includes Cracks in Wall, Bottom, Damage to Frame and/or Top Slab		Cracks wider than 1/2-inch or evidence of soil particles entering the structure through the cracks, or maintenance/inspection personnel determine that the vault is not structurally sound.	Vault replaced or repairs made so that vault meets design specifications and is structurally sound.
			Cracks wider than 1/2-inch at the joint of any inlet/outlet pipe or evidence of soil particles entering through the cracks.	Vault repaired so that no cracks exist wider than 1/4-inch at the joint of the inlet/outlet pipe.
	Baffles	Baffles corroding, cracking warping, and/or showing signs of failure as determined by maintenance/inspection person.	Baffles repaired or replaced to specifications.	
Access Ladder Damaged	Ladder is corroded or deteriorated, not functioning properly, not securely attached to structure wall, missing rungs, cracks, and misaligned.	Ladder replaced or repaired and meets specifications, and is safe to use as determined by inspection personnel.		
Below Ground Cartridge Type	Media	Drawdown of water through the media takes longer than 1 hour, and/or overflow occurs frequently.	Media cartridges replaced.	
	Short Circuiting	Flows do not properly enter filter cartridges.	Filter cartridges replaced.	

**Table V-A.16: Maintenance Standards - Baffle Oil/Water Separators (API Type)**

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
General	Monitoring	Inspection of discharge water for obvious signs of poor water quality.	Effluent discharge from vault should be clear with out thick visible sheen.
	Sediment Accumulation	Sediment depth in bottom of vault exceeds 6-inches in depth.	No sediment deposits on vault bottom that would impede flow through the vault and reduce separation efficiency.
	Trash and Debris Accumulation	Trash and debris accumulation in vault, or pipe inlet/outlet, floatables and non-floatables.	Trash and debris removed from vault, and inlet/outlet piping.
	Oil Accumulation	Oil accumulations that exceed 1-inch, at the surface of the water.	Extract oil from vault by vactoring. Disposal in accordance with state and local rules and regulations.
	Damaged Pipes	Inlet or outlet piping damaged or broken and in need of repair.	Pipe repaired or replaced.
	Access Cover Damaged/Not Working	Cover cannot be opened, corrosion/deformation of cover.	Cover repaired to proper working specifications or replaced.
	Vault Structure Damage - Includes Cracks in Walls Bottom, Damage to Frame and/or Top Slab	See <a href="#">Table V-A.5: Maintenance Standards - Catch Basins</a> Cracks wider than 1/2-inch at the joint of any inlet/outlet pipe or evidence of soil particles entering through the cracks.	Vault replaced or repairs made so that vault meets design specifications and is structurally sound. Vault repaired so that no cracks exist wider than 1/4-inch at the joint of the inlet/outlet pipe.
	Baffles	Baffles corroding, cracking, warping and/or showing signs of failure as determined by maintenance/inspection person.	Baffles repaired or replaced to specifications.
	Access Ladder Damaged	Ladder is corroded or deteriorated, not functioning properly, not securely attached to structure wall, missing rungs, cracks, and misaligned.	Ladder replaced or repaired and meets specifications, and is safe to use as determined by inspection personnel.

**Table V-A.17: Maintenance Standards - Coalescing Plate Oil/Water Separators**

Maintenance Component	Defect	Condition When Maintenance is Needed	Results Expected When Maintenance is Performed
General	Monitoring	Inspection of discharge water for obvious signs of poor water quality.	Effluent discharge from vault should be clear with no thick visible sheen.
	Sediment Accumulation	Sediment depth in bottom of vault exceeds 6-inches in depth and/or visible signs of sediment on plates.	No sediment deposits on vault bottom and plate media, which would impede flow through the vault and reduce separation efficiency.
	Trash and Debris Accumulation	Trash and debris accumulated in vault, or pipe inlet/outlet, floatables and non-floatables.	Trash and debris removed from vault, and inlet/outlet piping.
	Oil Accumulation	Oil accumulation that exceeds 1-inch at the water surface.	Oil is extracted from vault using vactoring methods. Coalescing plates are cleaned by thoroughly rinsing and flushing. Should be no visible oil depth on water.
	Damaged Coalescing Plates	Plate media broken, deformed, cracked and/or showing signs of failure.	A portion of the media pack or the entire plate pack is replaced depending on severity of failure.
	Damaged Pipes	Inlet or outlet piping damaged or broken and in need of repair.	Pipe repaired and or replaced.
	Baffles	Baffles corroding, cracking, warping and/or showing signs of failure as determined by maintenance/inspection person.	Baffles repaired or replaced to specifications.
	Vault Structure Damage - Includes Cracks in Walls, Bottom, Damage to Frame and/or Top Slab	Cracks wider than 1/2-inch or evidence of soil particles entering the structure through the cracks, or maintenance/inspection personnel determine that the vault is not structurally sound. Cracks wider than 1/2-inch at the joint of any inlet/outlet pipe or evidence of soil particles entering through the cracks.	Vault replaced or repairs made so that vault meets design specifications and is structurally sound. Vault repaired so that no cracks exist wider than 1/4-inch at the joint of the inlet/outlet pipe.
	Access Ladder Damaged	Ladder is corroded or deteriorated, not functioning properly, not securely attached to structure wall, missing rungs, cracks, and misaligned.	Ladder replaced or repaired and meets specifications, and is safe to use as determined by inspection personnel.

**Table V-A.18: Maintenance Standards - Catch Basin Inserts**

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is Performed
General	Sediment Accumulation	When sediment forms a cap over the insert media of the insert and/or unit.	No sediment cap on the insert media and its unit.
	Trash and Debris Accumulation	Trash and debris accumulates on insert unit creating a blockage/restriction.	Trash and debris removed from insert unit. Runoff freely flows into catch basin.
	Media Insert Not Removing Oil	Effluent water from media insert has a visible sheen.	Effluent water from media insert is free of oils and has no visible sheen.
	Media Insert Water Saturated	Catch basin insert is saturated with water and no longer has the capacity to absorb.	Remove and replace media insert
	Media Insert-Oil Saturated	Media oil saturated due to petroleum spill that drains into catch basin.	Remove and replace media insert.
	Media Insert Use Beyond Product Life	Media has been used beyond the typical average life of media insert product.	Remove and replace media at regular intervals, depending on insert product.

**Table V-A.19: Maintenance Standards - Media Filter Drain (MFD)**

Maintenance Component	Defect	Conditions When Maintenance is Needed	Results Expected When Maintenance is Performed
General	Sediment accumulation on grass filter strip	Sediment depth exceeds 2 inches or creates uneven grading that interferes with sheet flow.	Remove sediment deposits on grass treatment area of the embankment. When finished, embankment should be level from side to side and drain freely toward the toe of the embankment slope. There should be no areas of standing water once inflow has ceased.
	No-vegetation	Flow spreader is uneven or clogged so that flows are not uniformly distributed over entire embankment width.	Level the spreader and clean to spread flows evenly over entire embankment width.

**Table V-A.21: Maintenance Standards - Bioretention Facilities (continued)**

Maintenance Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
	vegetation management			protocols)
<p>Note that the inspection and routine maintenance frequencies listed above are recommended by Ecology. They do not supersede or replace the municipal stormwater permit requirements for inspection frequency required of municipal stormwater permittees for "stormwater treatment and flow control BMPs/facilities".</p> <p><sup>a</sup> Frequency: A = Annually; B = Biannually (twice per year); M = Monthly; W = At least one visit should occur during the wet season (for debris/clog related maintenance, this inspection/maintenance visit should occur in the early fall, after deciduous trees have lost their leaves); S = Perform inspections after major storm events (24-hour storm event with a 10-year or greater recurrence interval).</p> <p>IPM - Integrated Pest Management ISA - International Society of Arboriculture</p>				

**Table V-A.22: Maintenance Standards - Permeable Pavement**

Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
<b>Surface/Wearing Course</b>				
Permeable Pavements, all	A, S		Runoff from adjacent pervious areas deposits soil, mulch or sediment on paving	<ul style="list-style-type: none"> <li>• Clean deposited soil or other materials from permeable pavement or other adjacent surfacing</li> <li>• Check if surface elevation of planted area is too high, or slopes towards pavement, and can be regraded (prior to regrading, protect permeable pavement by covering with temporary plastic and secure covering in place)</li> <li>• Mulch and/or plant all exposed soils that may erode to pavement surface</li> </ul>
Porous asphalt or pervious concrete		A or B	None (routine maintenance)	<p>Clean surface debris from pavement surface using one or a combination of the following methods:</p> <ul style="list-style-type: none"> <li>• Remove sediment, debris, trash, vegetation, and other debris deposited onto pavement (rakes and leaf blowers can be used for removing leaves)</li> <li>• Vacuum/sweep permeable paving installation using:                             <ul style="list-style-type: none"> <li>◦ Walk-behind vacuum (sidewalks)</li> <li>◦ High efficiency regenerative air or vacuum sweeper (roadways, parking lots)</li> <li>◦ ShopVac or brush brooms (small areas)</li> </ul> </li> <li>• Hand held pressure washer or power washer with rotating brushes Follow equipment manufacturer guidelines for when equipment is most effective for cleaning permeable pavement. Dry weather is more effective for some equipment.</li> </ul>
		A <sub>b</sub>	Surface is clogged: Ponding on surface or water flows off the permeable pavement surface during a rain event (does not infiltrate)	<ul style="list-style-type: none"> <li>• Review the overall performance of the facility (note that small clogged areas may not reduce overall performance of facility)</li> <li>• Test the surface infiltration rate using ASTM C1701 as a corrective maintenance indicator. Perform one test per installation, up to 2,500 square feet. Perform an additional test for each additional 2,500 square feet up to 15,000 square feet total. Above 15,000 square feet, add one test for every 10,000 square feet.</li> <li>• If the results indicate an infiltration rate of 10 inches per hour or less, then perform corrective maintenance to restore permeability. To clean clogged pavement surfaces, use one or combination of the following methods:</li> </ul>



**Table V-A.22: Maintenance Standards - Permeable Pavement (continued)**

Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
				<ul style="list-style-type: none"> <li>○ Combined pressure wash and vacuum system calibrated to not dislodge wearing course aggregate.</li> <li>○ Hand held pressure washer or power washer with rotating brushes</li> <li>○ Pure vacuum sweepers</li> </ul> <p>Note: If the annual/biannual routine maintenance standard to clean the pavement surface is conducted using equipment from the list above, corrective maintenance may not be needed.</p>
	A		Sediment present at the surface of the pavement	<ul style="list-style-type: none"> <li>• Assess the overall performance of the pavement system during a rain event. If water runs off the pavement and/or there is ponding then see above.</li> <li>• Determine source of sediment loading and evaluate whether or not the source can be reduced/eliminated. If the source cannot be addressed, consider increasing frequency of routine cleaning (e.g., twice per year instead of once per year).</li> </ul>
	Summer		Moss growth inhibits infiltration or poses slip safety hazard	<ul style="list-style-type: none"> <li>• Sidewalks: Use a stiff broom to remove moss in the summer when it is dry</li> <li>• Parking lots and roadways: Pressure wash, vacuum sweep, or use a combination of the two for cleaning moss from pavement surface. May require stiff broom or power brush in areas of heavy moss.</li> </ul>
	A		Major cracks or trip hazards and concrete spalling and raveling	<ul style="list-style-type: none"> <li>• Fill potholes or small cracks with patching mixes</li> <li>• Large cracks and settlement may require cutting and replacing the pavement section. Replace in-kind where feasible. Replacing porous asphalt with conventional asphalt is acceptable if it is a small percentage of the total facility area and does not impact the overall facility function.</li> <li>• Take appropriate precautions during pavement repair and replacement efforts to prevent clogging of adjacent porous materials</li> </ul>
Interlocking concrete paver blocks and aggregate pavers		A or B	None (routine maintenance)	<p>Clean pavement surface using one or a combination of the following methods:</p> <ul style="list-style-type: none"> <li>• Remove sediment, debris, trash, vegetation, and other debris deposited onto pavement (rakes and leaf blowers can be used for removing leaves)</li> <li>• Vacuum/sweep permeable paving installation using:                             <ul style="list-style-type: none"> <li>○ Walk-behind vacuum (sidewalks)</li> <li>○ High efficiency regenerative air or vacuum sweeper (roadways, parking lots)</li> <li>○ ShopVac or brush brooms (small areas)</li> </ul> </li> </ul> <p>Note: Vacuum settings may have to be adjusted to prevent excess uptake of aggregate from paver openings or joints. Vacuum surface openings in dry weather to remove dry, encrusted sediment.</p>
	A <sub>b</sub>		Surface is clogged: Ponding on surface or water flows off the permeable pavement surface during a rain event (does not infiltrate)	<ul style="list-style-type: none"> <li>• Review the overall performance of the facility (note that small clogged areas may not reduce overall performance of facility)</li> <li>• Test the surface infiltration rate using ASTM C1701 as a corrective maintenance indicator. Perform one test per installation, up to 2,500 square feet. Perform an additional test for each additional 2,500 square feet up to 15,000 square feet total. Above 15,000 square feet, add one test for every 10,000 square feet.</li> <li>• If the results indicate an infiltration rate of 10 inches per hour or less, then perform corrective maintenance to restore permeability.</li> </ul>

**Table V-A.22: Maintenance Standards - Permeable Pavement (continued)**

Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
				<ul style="list-style-type: none"> <li>Clogging is usually an issue in the upper 2 to 3 centimeters of aggregate. Remove the upper layer of encrusted sediment, and fines, and/or vegetation from openings and joints between the pavers by mechanical means and/or suction equipment (e.g., pure vacuum sweeper).</li> <li>Replace aggregate in paver cells, joints, or openings per manufacturer's recommendations</li> </ul>
	A		Sediment present at the surface of the pavement	<ul style="list-style-type: none"> <li>Assess the overall performance of the pavement system during a rain event. If water runs off the pavement and/or there is ponding, then see above.</li> <li>Determine source of sediment loading and evaluate whether or not the source can be reduced/eliminated. If the source cannot be addressed, consider increasing frequency of routine cleaning (e.g., twice per year instead of once per year).</li> </ul>
	Summer		Moss growth inhibits infiltration or poses slip safety hazard	<ul style="list-style-type: none"> <li>Sidewalks: Use a stiff broom to remove moss in the summer when it is dry</li> <li>Parking lots and roadways: Vacuum sweep or stiff broom/power brush for cleaning moss from pavement surface</li> </ul>
	A		Paver block missing or damaged	Remove individual damaged paver blocks by hand and replace or repair per manufacturer's recommendations
	A		Loss of aggregate material between paver blocks	Refill per manufacturer's recommendations for interlocking paver sections
	A		Settlement of surface	May require resetting
Open-celled paving grid with gravel		A or B	None (routine maintenance)	<ul style="list-style-type: none"> <li>Remove sediment, debris, trash, vegetation, and other debris deposited onto pavement (rakes and leaf blowers can be used for removing leaves)</li> <li>Follow equipment manufacturer guidelines for cleaning surface.</li> </ul>
	A <sub>b</sub>		Aggregate is clogged: Ponding on surface or water flows off the permeable pavement surface during a rain event (does not infiltrate)	<ul style="list-style-type: none"> <li>Use vacuum truck to remove and replace top course aggregate</li> <li>Replace aggregate in paving grid per manufacturer's recommendations</li> </ul>
	A		Paving grid missing or damaged	<ul style="list-style-type: none"> <li>Remove pins, pry up grid segments, and replace gravel</li> <li>Replace grid segments where three or more adjacent rings are broken or damaged</li> <li>Follow manufacturer guidelines for repairing surface.</li> </ul>
	A		Settlement of surface	May require resetting
	A		Loss of aggregate material in paving grid	Replenish aggregate material by spreading gravel with a rake (gravel level should be maintained at the same level as the plastic rings or no more than 1/4 inch above the top of rings). See manufacturer's recommendations.
		A	Weeds present	<ul style="list-style-type: none"> <li>Manually remove weeds</li> <li>Presence of weeds may indicate that too many fines are present (refer to Actions Needed under "Aggregate is clogged" to address this issue)</li> </ul>
Open-celled paving grid with grass		A or B	None (routine maintenance)	<ul style="list-style-type: none"> <li>Remove sediment, debris, trash, vegetation, and other debris deposited onto pavement (rakes and leaf blowers can be used for removing leaves)</li> <li>Follow equipment manufacturer guidelines for cleaning surface.</li> </ul>

**Table V-A.22: Maintenance Standards - Permeable Pavement (continued)**

Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
	A <sub>b</sub>		Aggregate is clogged: Ponding on surface or water flows off the permeable pavement surface during a rain event (does not infiltrate)	Rehabilitate per manufacturer's recommendations.
	A		Paving grid missing or damaged	<ul style="list-style-type: none"> <li>Remove pins, pry up grid segments, and replace grass</li> <li>Replace grid segments where three or more adjacent rings are broken or damaged</li> <li>Follow manufacturer guidelines for repairing surface.</li> </ul>
	A		Settlement of surface	May require resetting
	A		Poor grass coverage in paving grid	<ul style="list-style-type: none"> <li>Restore growing medium, reseed or plant, aerate, and/or amend vegetated area as needed</li> <li>Traffic loading may be inhibiting grass growth; reconsider traffic loading if feasible</li> </ul>
		As needed	None (routine maintenance)	Use a mulch mower to mow grass
		A	None (routine maintenance)	<ul style="list-style-type: none"> <li>Sprinkle a thin layer of compost on top of grass surface (1/2" top dressing) and sweep it in</li> <li>Do not use fertilizer</li> </ul>
		A	Weeds present	<ul style="list-style-type: none"> <li>Manually remove weeds</li> <li>Mow, torch, or inoculate and replace with preferred vegetation</li> </ul>
<b>Inlets/Outlets/Pipes</b>				
Inlet/outlet pipe	A		Pipe is damaged	Repair/replace
	A		Pipe is clogged	Remove roots or debris
Underdrain pipe	Clean pipe as needed	Clean orifice at least biannually (may need more frequent cleaning during wet season)	Plant roots, sediment or debris reducing capacity of underdrain (may cause prolonged draw-down period)	<ul style="list-style-type: none"> <li>Jet clean or rotary cut debris/roots from underdrain(s)</li> <li>If underdrains are equipped with a flow restrictor (e.g., orifice) to attenuate flows, the orifice must be cleaned regularly</li> </ul>
Raised subsurface overflow pipe	Clean pipe as needed	Clean orifice at least biannually (may need more frequent cleaning during wet season)	Plant roots, sediment or debris reducing capacity of underdrain	<ul style="list-style-type: none"> <li>Jet clean or rotary cut debris/roots from under-drain(s)</li> <li>If underdrains are equipped with a flow restrictor (e.g., orifice) to attenuate flows, the orifice must be cleaned regularly</li> </ul>
Outlet structure	A, S		Sediment, vegetation, or debris reducing capacity of outlet structure	<ul style="list-style-type: none"> <li>Clear the blockage</li> <li>Identify the source of the blockage and take actions to prevent future blockages</li> </ul>
Overflow	B		Native soil is exposed or other signs of erosion damage are present at discharge point	Repair erosion and stabilize surface
<b>Aggregate Storage Reservoir</b>				
Observation port	A, S		Water remains in the storage aggregate longer than anticipated by design after the end of a storm	If immediate cause of extended ponding is not identified, schedule investigation of subsurface materials or other potential causes of system failure.

**Table V-A.22: Maintenance Standards - Permeable Pavement (continued)**

Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
<b>Vegetation</b>				
Adjacent large shrubs or trees		As needed	Vegetation related fallout clogs or will potentially clog voids	<ul style="list-style-type: none"> <li>Sweep leaf litter and sediment to prevent surface clogging and ponding</li> <li>Prevent large root systems from damaging subsurface structural components</li> </ul>
		Once in May and Once in September	Vegetation growing beyond facility edge onto sidewalks, paths, and street edge	Edging and trimming of planted areas to control groundcovers and shrubs from overreaching the sidewalks, paths and street edge improves appearance and reduces clogging of permeable pavements by leaf litter, mulch and soil.
Leaves, needles, and organic debris		In fall (October to December) after leaf drop (1-3 times, depending on canopy cover)	Accumulation of organic debris and leaf litter	Use leaf blower or vacuum to blow or remove leaves, evergreen needles, and debris (i.e., flowers, blossoms) off of and away from permeable pavement
<p>Note that the inspection and routine maintenance frequencies listed above are recommended by Ecology. They do not supersede or replace the municipal stormwater permit requirements for inspection frequency required of municipal stormwater permittees for "stormwater treatment and flow control BMPs/facilities".</p> <p>a Frequency: A= Annually; B= Biannually (twice per year); S = Perform inspections after major storm events (24-hour storm event with a 10-year or greater recurrence interval).</p> <p>b Inspection should occur during storm event.</p>				

**Table V-A.23: Maintenance Standards - Vegetated Roofs**

Activity	Objective	Schedule	Notes
<b>Structural and Drainage Components</b>			
<b>Clear inlet pipes:</b> Remove soil substrate, vegetation or other debris.	Maintain free drainage of inlet pipes.	Twice annually.	
<b>Inspect drain pipe:</b> Check for cracks settling and proper alignment, and correct and re-compact soils or fill material surrounding pipe, if necessary.	Maintain free drainage of inlet pipes.	Twice annually.	
<b>Inspect fire ventilation points for proper operation</b>	Fire and safety.	Twice annually.	
<b>Maintain egress and ingress:</b> Clear routes of obstructions and maintained to design standards.	Fire and safety.	Twice annually.	
<b>Insects:</b> (see note)			Roof garden design should provide drainage rates that do not allow pooling of water for periods that promote insect larvae development. If standing water is present for extended periods correct drainage problem. Chemical sprays should not be used.
<b>Prevent release of contaminants:</b> Identify activities (mechanical systems maintenance, pet access, etc.) that can potentially release pollutants to the roof garden and establish agreements to prevent release.	Water quality protection.	During construction of roof and then as determined by inspection.	Any cause of pollutant release should be corrected as soon as identified and the pollutant removed.
<b>Vegetation and Growth Medium</b>			
<b>Invasive or nuisance plants:</b> Remove manually and without herbicide applications.	Promote selected plant growth and survival, maintain aesthetics.	Twice annually.	At a minimum, schedule weeding with inspections to coincide with important horticultural cycles (e.g., prior to major weed varieties dispersing seeds).

# ***Appendix D***

---

## **Drainage Calculations**

- D-1.....Conveyance Calculations and Analysis
- D-2.....Water Quality Calculations and GULD Standards.
- D-3.....Buoyancy Calculations for R-Tank 4
- D-4.....Flow Control Calculations for R-Tank 4
- D-5.....Shaw Road Development Storm Report (Dated December 2004)

# APPENDIX D-1 25 YR CONVEYANCE CALCULATIONS

## Project Description

File Name ..... 20240503 Conveyance Calc.SPF  
 Description .....  
 Q:\2023\2230752\10\_CIV\CAD\\_2230752-W-SD.dwg

## Project Options

Flow Units ..... CFS  
 Elevation Type ..... Elevation  
 Hydrology Method ..... Santa Barbara UH  
 Time of Concentration (TOC) Method ..... SCS TR-55  
 Link Routing Method ..... Hydrodynamic  
 Enable Overflow Ponding at Nodes ..... YES  
 Skip Steady State Analysis Time Periods ..... YES

## Analysis Options

Start Analysis On ..... 00:00:00      0:00:00  
 End Analysis On ..... 00:00:00      0:00:00  
 Start Reporting On ..... 00:00:00      0:00:00  
 Antecedent Dry Days ..... 0      days  
 Runoff (Dry Weather) Time Step ..... 0 01:00:00      days hh:mm:ss  
 Runoff (Wet Weather) Time Step ..... 0 00:05:00      days hh:mm:ss  
 Reporting Time Step ..... 0 00:05:00      days hh:mm:ss  
 Routing Time Step ..... 30      seconds

## Number of Elements

	Qty
Rain Gages .....	1
Subbasins .....	64
Nodes .....	119
<i>Junctions</i> .....	115
<i>Outfalls</i> .....	1
<i>Flow Diversions</i> .....	0
<i>Inlets</i> .....	0
<i>Storage Nodes</i> .....	3
Links .....	118
<i>Channels</i> .....	0
<i>Pipes</i> .....	116
<i>Pumps</i> .....	0
<i>Orifices</i> .....	0
<i>Weirs</i> .....	0
<i>Outlets</i> .....	2
Pollutants .....	0
Land Uses .....	0

## Rainfall Details

SN	Rain Gage ID	Data Source	Data Source ID	Rainfall Type	Rain Units	State	County	Return Period (years)	Rainfall Depth (inches)	Rainfall Distribution
1	Rain Gage-01	Time Series	25-year	Intensity	inches	Washington	Pierce	25.00	3.50	SCS Type IA 24-hr

## Subbasin Summary

SN	Subbasin ID	Area (ac)	Impervious Area (%)	Impervious Area Curve Number	Pervious Area Curve Number	Total Rainfall (in)	Total Runoff (in)	Total Runoff Volume (ac-in)	Peak Runoff (cfs)	Time of Concentration (days hh:mm:ss)
1	AREA DRAIN G2	0.08	25.00	98.00	76.00	3.46	1.82	0.14	0.03	0 00:05:00
2	AREA DRAIN H2	0.07	25.00	98.00	76.00	3.46	1.82	0.13	0.03	0 00:05:00
3	BLDG A NORTH	0.05	100.00	98.00	76.00	3.46	3.24	0.15	0.04	0 00:05:00
4	BLDG A SOUTH	0.05	100.00	98.00	76.00	3.46	3.24	0.15	0.04	0 00:05:00
5	BLDG B NE	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
6	BLDG B NW	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
7	BLDG B SE	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
8	BLDG B SW	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
9	BLDG C NE	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
10	BLDG C NW	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
11	BLDG C SE	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
12	BLDG C SW	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
13	BLDG CLUB EAST	0.03	100.00	98.00	76.00	3.46	3.24	0.09	0.02	0 00:05:00
14	BLDG CLUB WEST	0.03	100.00	98.00	76.00	3.46	3.24	0.09	0.02	0 00:05:00
15	BLDG D NE	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
16	BLDG D NW	0.06	100.00	98.00	76.00	3.46	3.24	0.21	0.05	0 00:05:00
17	BLDG D SOUTH	0.13	100.00	98.00	76.00	3.46	3.24	0.41	0.11	0 00:05:00
18	BLDG E EAST	0.13	100.00	98.00	76.00	3.46	3.24	0.43	0.11	0 00:05:00
19	BLDG E WEST	0.13	100.00	98.00	76.00	3.46	3.24	0.43	0.11	0 00:05:00
20	BLDG F EAST	0.11	100.00	98.00	76.00	3.46	3.24	0.36	0.09	0 00:05:00
21	BLDG F WEST	0.11	100.00	98.00	76.00	3.46	3.24	0.36	0.09	0 00:05:00
22	BLDG G EAST	0.09	100.00	98.00	76.00	3.46	3.24	0.30	0.08	0 00:05:00
23	BLDG G WEST	0.09	100.00	98.00	76.00	3.46	3.24	0.30	0.08	0 00:05:00
24	BLDG H EAST	0.09	100.00	98.00	76.00	3.46	3.24	0.30	0.08	0 00:05:00
25	BLDG H WEST	0.09	100.00	98.00	76.00	3.46	3.24	0.30	0.08	0 00:05:00
26	BLDG T.I. EAST	0.06	100.00	98.00	76.00	3.46	3.24	0.19	0.05	0 00:05:00
27	BLDG T.I. NE	0.04	100.00	98.00	76.00	3.46	3.24	0.11	0.03	0 00:05:00
28	BLDG T.I. NW	0.04	100.00	98.00	76.00	3.46	3.24	0.11	0.03	0 00:05:00
29	BLDG T.I. SE	0.04	100.00	98.00	76.00	3.46	3.24	0.11	0.03	0 00:05:00
30	BLDG T.I. SW	0.04	100.00	98.00	76.00	3.46	3.24	0.11	0.03	0 00:05:00
31	BLDG T.I. WEST	0.06	100.00	98.00	76.00	3.46	3.24	0.19	0.05	0 00:05:00
32	SDCB 02	0.17	98.00	98.00	76.00	3.46	3.20	0.53	0.14	0 00:05:00
33	SDCB 03	0.13	100.00	98.00	76.00	3.46	3.24	0.44	0.11	0 00:05:00
34	SDCB 04	0.07	73.00	98.00	76.00	3.46	2.73	0.20	0.05	0 00:05:00
35	SDCB 05	0.27	90.00	98.00	76.00	3.46	3.05	0.83	0.21	0 00:05:00
36	SDCB 06	0.19	65.00	98.00	76.00	3.46	2.57	0.48	0.12	0 00:05:00
37	SDCB 07	0.10	64.00	98.00	76.00	3.46	2.56	0.26	0.06	0 00:05:00
38	SDCB 08	0.06	100.00	98.00	76.00	3.46	3.24	0.20	0.05	0 00:05:00
39	SDCB 09	0.21	82.00	98.00	76.00	3.46	2.90	0.61	0.15	0 00:05:00
40	SDCB 11	0.13	91.00	98.00	76.00	3.46	3.07	0.40	0.10	0 00:05:00
41	SDCB 12	0.10	99.00	98.00	76.00	3.46	3.22	0.32	0.08	0 00:05:00
42	SDCB 13	0.11	94.00	98.00	76.00	3.46	3.12	0.35	0.09	0 00:05:00
43	SDCB 14	0.09	68.00	98.00	76.00	3.46	2.63	0.23	0.06	0 00:05:00
44	SDCB 15	0.13	88.00	98.00	76.00	3.46	3.01	0.38	0.10	0 00:05:00
45	SDCB 16	0.10	65.00	98.00	76.00	3.46	2.57	0.25	0.06	0 00:05:00
46	SDCB 17	0.11	92.00	98.00	76.00	3.46	3.09	0.33	0.08	0 00:05:00
47	SDCB 19	0.41	78.00	98.00	76.00	3.46	2.82	1.15	0.29	0 00:05:00
48	SDCB 20	0.12	79.00	98.00	76.00	3.46	2.84	0.33	0.08	0 00:05:00
49	SDCB 21	0.10	93.00	98.00	76.00	3.46	3.11	0.30	0.08	0 00:05:00
50	SDCB 22	0.16	82.00	98.00	76.00	3.46	2.90	0.46	0.12	0 00:05:00
51	SDCB 23	0.22	86.00	98.00	76.00	3.46	2.97	0.66	0.17	0 00:05:00
52	SDCB 24	0.09	85.00	98.00	76.00	3.46	2.95	0.28	0.07	0 00:05:00
53	SDCB 27	0.44	76.00	98.00	76.00	3.46	2.78	1.21	0.30	0 00:05:00
54	SDCB 28	0.15	73.00	98.00	76.00	3.46	2.73	0.42	0.11	0 00:05:00
55	SDCB 29	0.31	79.00	98.00	76.00	3.46	2.84	0.89	0.22	0 00:05:00
56	SDCB 30	0.36	70.00	98.00	76.00	3.46	2.67	0.97	0.24	0 00:05:00
57	SDCB 33	0.32	83.00	98.00	76.00	3.46	2.92	0.92	0.23	0 00:05:00
58	SDCB 34	0.21	76.00	98.00	76.00	3.46	2.78	0.58	0.15	0 00:05:00
59	SDCB 36	0.10	79.00	98.00	76.00	3.46	2.84	0.28	0.07	0 00:05:00
60	SDCB 37	0.08	96.00	98.00	76.00	3.46	3.16	0.24	0.06	0 00:05:00
61	SDCB 38	0.09	72.00	98.00	76.00	3.46	2.71	0.25	0.06	0 00:05:00
62	SDCB 40	0.14	0.00	98.00	76.00	3.46	1.34	0.19	0.04	0 00:05:00
63	SDCB 41	0.16	60.00	98.00	76.00	3.46	2.48	0.40	0.10	0 00:05:00
64	SDCB 42	0.14	100.00	98.00	76.00	3.46	3.24	0.46	0.12	0 00:05:00

# Node Summary

SN	Element ID	Element Type	Invert Elevation (ft)	Ground/Rim Elevation (ft)	Initial Water Elevation (ft)	Surcharge Elevation (ft)	Ponded Area (ft <sup>2</sup> )	Peak Inflow (cfs)	Max HGL Elevation Attained (ft)	Max Surcharge Depth Attained (ft)	Min Freeboard Attained (ft)	Time of Peak Flooding Occurrence (days hh:mm)	Total Flooded Volume (ac-in)
1	AREA DRAIN G1 (SD - Phase 1)	Junction	73.07	77.13	73.07	77.13	0.00	0.00	73.07	0.00	4.05	0 00:00	0.00
2	AREA DRAIN G2 (SD - Phase 1)	Junction	72.78	77.43	72.78	77.43	0.00	0.11	72.93	0.00	4.51	0 00:00	0.00
3	AREA DRAIN H1 (SD - Phase 1)	Junction	72.33	77.10	72.33	77.10	0.00	2.52	77.10	0.00	0.00	0 21:01	0.00
4	AREA DRAIN H2 (SD - Phase 1)	Junction	72.58	77.04	72.58	77.04	0.00	0.11	72.69	0.00	4.34	0 00:00	0.00
5	SDCB#01 (SD - Phase 1)	Junction	67.40	75.51	67.40	75.51	0.00	27.91	70.02	0.00	5.49	0 00:00	0.00
6	SDCB#02 (SD - Phase 1)	Junction	69.50	72.50	69.50	72.50	0.00	0.42	69.78	0.00	2.72	0 00:00	0.00
7	SDCB#03 (SD - Phase 1)	Junction	70.52	72.19	70.52	72.19	0.00	0.19	70.71	0.00	1.48	0 00:00	0.00
8	SDCB#04 (SD - Phase 1)	Junction	70.79	72.72	70.79	72.72	0.00	0.08	70.93	0.00	1.80	0 00:00	0.00
9	SDCB#05 (SD - Phase 1)	Junction	68.96	72.50	68.96	72.50	0.00	0.68	69.31	0.00	3.19	0 00:00	0.00
10	SDCB#06 (SD - Phase 1)	Junction	69.06	72.68	69.06	72.68	0.00	0.26	69.33	0.00	3.35	0 00:00	0.00
11	SDCB#07 (SD - Phase 1)	Junction	69.42	71.79	69.42	71.79	0.00	0.14	69.60	0.00	2.18	0 00:00	0.00
12	SDCB#08 (SD - Phase 1)	Junction	69.67	72.48	69.67	72.48	0.00	0.08	69.80	0.00	2.67	0 00:00	0.00
13	SDCB#09 (SD - Phase 1)	Junction	68.51	72.28	68.51	72.28	0.00	1.09	69.06	0.00	3.22	0 00:00	0.00
14	SDCB#10 (SD - Phase 1)	Junction	67.90	77.20	68.40	77.20	0.00	16.47	76.24	0.00	0.96	0 00:00	0.00
15	SDCB#11 (SD - Phase 1)	Junction	72.01	76.68	72.01	76.68	0.00	0.27	72.14	0.00	4.54	0 00:00	0.00
16	SDCB#12 (SD - Phase 1)	Junction	72.98	76.60	72.98	76.60	0.00	0.08	73.09	0.00	3.51	0 00:00	0.00
17	SDCB#13 (SD - Phase 1)	Junction	73.13	76.62	73.13	76.62	0.00	0.09	73.24	0.00	3.38	0 00:00	0.00
18	SDCB#14 (SD - Phase 1)	Junction	71.89	76.84	71.89	76.84	0.00	4.57	72.68	0.00	4.16	0 00:00	0.00
19	SDCB#15 (SD - Phase 1)	Junction	71.68	76.30	71.68	76.30	0.00	23.91	74.14	0.00	2.16	0 00:00	0.00
20	SDCB#16 (SD - Phase 1)	Junction	72.23	76.89	72.23	76.89	0.00	0.50	72.56	0.00	4.33	0 00:00	0.00
21	SDCB#17 (SD - Phase 1)	Junction	72.75	76.64	72.75	76.64	0.00	0.16	72.96	0.00	3.68	0 00:00	0.00
22	SDCB#18 (SD - Phase 1)	Junction	68.40	76.69	68.40	76.69	0.00	1.66	70.68	0.00	6.02	0 00:00	0.00
23	SDCB#19 (SD - Phase 1)	Junction	68.35	75.25	68.35	75.25	0.00	1.12	70.88	0.00	4.37	0 00:00	0.00
24	SDCB#20 (SD - Phase 1)	Junction	68.98	75.25	68.98	75.25	0.00	0.84	71.38	0.00	3.87	0 00:00	0.00
25	SDCB#21 (SD - Phase 1)	Junction	71.60	75.25	71.60	75.25	0.00	0.08	71.74	0.00	3.51	0 00:00	0.00
26	SDCB#22 (SD - Phase 1)	Junction	69.36	75.25	69.36	75.25	0.00	0.68	71.74	0.00	3.51	0 00:00	0.00
27	SDCB#23 (SD - Phase 1)	Junction	71.93	75.25	71.93	75.25	0.00	0.42	72.20	0.00	3.05	0 00:00	0.00
28	SDCB#24 (SD - Phase 1)	Junction	72.28	74.30	72.28	74.30	0.00	0.07	72.40	0.00	1.89	0 00:00	0.00
29	SDCB#26 (SD - Phase 1)	Junction	68.40	76.79	68.40	76.79	0.00	1.49	70.68	0.00	6.11	0 00:00	0.00
30	SDCB#27 (SD - Phase 1)	Junction	71.20	75.52	71.20	75.52	0.00	1.21	71.74	0.00	3.78	0 00:00	0.00
31	SDCB#28 (SD - Phase 1)	Junction	72.15	75.25	72.15	75.25	0.00	0.21	72.38	0.00	2.87	0 00:00	0.00
32	SDCB#29 (SD - Phase 1)	Junction	71.72	75.40	71.72	75.40	0.00	0.67	72.05	0.00	3.35	0 00:00	0.00
33	SDCB#30 (SD - Phase 1)	Junction	72.69	75.40	72.69	75.40	0.00	0.24	72.94	0.00	2.46	0 00:00	0.00
34	SDCB#31	Junction	68.52	77.06	68.52	77.06	0.00	0.46	70.68	0.00	6.38	0 00:00	0.00
35	SDCB#32 (SD - Phase 2)	Junction	72.57	75.89	72.57	75.89	0.00	0.08	72.71	0.00	3.18	0 00:00	0.00
36	SDCB#33 (SD - Phase 2)	Junction	70.35	74.69	70.35	74.69	0.00	0.38	70.68	0.00	4.01	0 00:00	0.00
37	SDCB#34 (SD - Phase 2)	Junction	71.03	74.49	71.03	74.49	0.00	0.15	71.23	0.00	3.26	0 00:00	0.00
38	SDCB#35 (SD - Phase 2)	Junction	68.40	77.15	68.40	77.15	0.00	0.50	70.68	0.00	6.47	0 00:00	0.00
39	SDCB#36 (SD - Phase 2)	Junction	71.23	75.31	71.23	75.31	0.00	0.41	71.54	0.00	3.77	0 00:00	0.00
40	SDCB#37 (SD - Phase 2)	Junction	71.83	75.35	71.83	75.35	0.00	0.22	72.08	0.00	3.27	0 00:00	0.00
41	SDCB#38 (SD - Phase 2)	Junction	72.10	75.30	72.10	75.30	0.00	0.16	72.30	0.00	3.00	0 00:00	0.00
42	SDCB#40 (SD - Phase 1)	Junction	72.24	76.45	72.24	76.45	0.00	0.04	72.31	0.00	4.14	0 00:00	0.00
43	SDCB#41 (SD - Phase 2)	Junction	72.41	75.30	72.41	75.30	0.00	0.10	72.56	0.00	2.74	0 00:00	0.00
44	SDCB#42 (SD - Phase 2)	Junction	71.89	75.19	71.89	75.19	0.00	0.12	72.06	0.00	3.12	0 00:00	0.00
45	SDCO#A1 (SD - Phase 2)	Junction	72.80	76.33	72.80	76.33	0.00	0.08	72.93	0.00	3.40	0 00:00	0.00
46	SDCO#A2 (SD - Phase 2)	Junction	72.94	76.51	72.94	76.51	0.00	0.04	73.03	0.00	3.49	0 00:00	0.00
47	SDCO#A3 (SD - Phase 2)	Junction	73.57	76.45	73.57	76.45	0.00	0.04	73.66	0.00	2.78	0 00:00	0.00
48	SDCO#A4 (SD - Phase 2)	Junction	73.72	75.96	73.72	75.96	0.00	0.04	73.81	0.00	2.15	0 00:00	0.00
49	SDCO#A5 (SD - Phase 2)	Junction	73.42	75.48	73.42	75.48	0.00	0.04	73.51	0.00	1.97	0 00:00	0.00
50	SDCO#B1 (SD - Phase 1)	Junction	74.10	77.21	74.10	77.21	0.00	0.11	74.18	0.00	3.03	0 00:00	0.00
51	SDCO#B2 (SD - Phase 1)	Junction	75.07	77.58	75.07	77.58	0.00	0.05	75.18	0.00	2.40	0 00:00	0.00
52	SDCO#B3 (SD - Phase 1)	Junction	75.14	77.26	75.14	77.26	0.00	0.05	75.26	0.00	2.00	0 00:00	0.00
53	SDCO#B4 (SD - Phase 1)	Junction	75.19	77.67	75.19	77.67	0.00	0.05	75.30	0.00	2.37	0 00:00	0.00
54	SDCO#B5 (SD - Phase 1)	Junction	72.05	77.74	72.05	77.74	0.00	0.11	72.21	0.00	5.52	0 00:00	0.00
55	SDCO#B6 (SD - Phase 1)	Junction	72.88	77.61	72.88	77.61	0.00	0.05	72.98	0.00	4.63	0 00:00	0.00
56	SDCO#B7 (SD - Phase 1)	Junction	72.97	77.70	72.97	77.70	0.00	0.05	73.09	0.00	4.61	0 00:00	0.00
57	SDCO#B8 (SD - Phase 1)	Junction	72.88	77.62	72.88	77.62	0.00	0.05	72.98	0.00	4.64	0 00:00	0.00
58	SDCO#C1 (SD - Phase 1)	Junction	73.04	76.84	73.04	76.84	0.00	0.11	73.16	0.00	3.68	0 00:00	0.00
59	SDCO#C10 (SD - Phase 1)	Junction	72.92	76.81	72.92	76.81	0.00	0.05	73.02	0.00	3.79	0 00:00	0.00
60	SDCO#C2 (SD - Phase 1)	Junction	73.50	76.87	73.50	76.87	0.00	0.05	73.61	0.00	3.25	0 00:00	0.00
61	SDCO#C3 (SD - Phase 1)	Junction	73.57	76.93	73.57	76.93	0.00	0.05	73.69	0.00	3.25	0 00:00	0.00
62	SDCO#C4 (SD - Phase 1)	Junction	74.29	76.87	74.29	76.87	0.00	0.05	74.39	0.00	2.48	0 00:00	0.00
63	SDCO#C5 (SD - Phase 1)	Junction	71.44	76.87	71.44	76.87	0.00	0.11	71.62	0.00	5.24	0 00:00	0.00
64	SDCO#C6 (SD - Phase 1)	Junction	72.62	77.07	72.62	77.07	0.00	0.05	72.73	0.00	4.34	0 00:00	0.00
65	SDCO#C7 (SD - Phase 1)	Junction	72.72	77.06	72.72	77.06	0.00	0.05	72.84	0.00	4.22	0 00:00	0.00
66	SDCO#C8 (SD - Phase 1)	Junction	72.24	76.87	72.24	76.87	0.00	0.05	72.32	0.00	4.54	0 00:00	0.00
67	SDCO#C9 (SD - Phase 1)	Junction	72.37	76.85	72.37	76.85	0.00	0.05	72.48	0.00	4.36	0 00:00	0.00
68	SDCO#CLUB1 (SD - Phase 2)	Junction	72.10	75.59	72.10	75.59	0.00	0.05	72.18	0.00	3.41	0 00:00	0.00
69	SDCO#CLUB2 (SD - Phase 2)	Junction	72.44	76.23	72.44	76.23	0.00	0.02	72.51	0.00	3.72	0 00:00	0.00
70	SDCO#CLUB3 (SD - Phase 2)	Junction	73.00	76.51	73.00	76.51	0.00	0.02	73.07	0.00	3.44	0 00:00	0.00
71	SDCO#CLUB4 (SD - Phase 2)	Junction	72.39	76.11	72.39	76.11	0.00	0.02	72.46	0.00	3.65	0 00:00	0.00
72	SDCO#CLUB5 (SD - Phase 2)	Junction	72.85	76.47	72.85	76.47	0.00	0.02	72.92	0.00	3.55	0 00:00	0.00
73	SDCO#COM01 (SD - Phase 1)	Junction	70.74	73.56	70.74	73.56	0.00	0.05	70.84	0.00	2.72	0 00:00	0.00
74	SDCO#COM02 (SD - Phase 1)	Junction	71.22	73.55	71.22	73.55	0.00	0.05	71.32	0.00	2.23	0 00:00	0.00





## Node Summary

SN Element ID	Element Type	Invert Elevation (ft)	Ground/Rim (Max) Elevation (ft)	Initial Water Elevation (ft)	Surcharge Elevation (ft)	Ponded Area (ft <sup>2</sup> )	Peak Inflow (cfs)	Max HGL Elevation Attained (ft)	Max Surcharge Depth Attained (ft)	Min Freeboard Attained (ft)	Time of Peak Flooding Occurrence (days hh:mm)	Total Flooded Volume (ac-in)
75 SDCO#COM04 (SD - Phase 1)	Junction	70.14	73.55	70.14	73.55	0.00	0.10	70.29	0.00	3.26	0 00:00	0.00
76 SDCO#COM05 (SD - Phase 1)	Junction	70.58	73.54	70.58	73.54	0.00	0.05	70.68	0.00	2.86	0 00:00	0.00
77 SDCO#COM06 (SD - Phase 1)	Junction	71.21	73.56	71.21	73.56	0.00	0.05	71.31	0.00	2.25	0 00:00	0.00
78 SDCO#COM07 (SD - Phase 1)	Junction	70.91	73.15	70.91	73.15	0.00	0.03	71.00	0.00	2.16	0 00:00	0.00
79 SDCO#COM08 (SD - Phase 1)	Junction	71.45	73.68	71.45	73.68	0.00	0.03	71.53	0.00	2.15	0 00:00	0.00
80 SDCO#COM09 (SD - Phase 1)	Junction	70.17	73.64	70.17	73.64	0.00	0.06	70.25	0.00	3.38	0 00:00	0.00
81 SDCO#COM10 (SD - Phase 1)	Junction	71.09	73.64	71.09	73.64	0.00	0.03	71.16	0.00	2.48	0 00:00	0.00
82 SDCO#COM11 (SD - Phase 1)	Junction	71.09	73.61	71.09	73.61	0.00	0.03	71.17	0.00	2.44	0 00:00	0.00
83 SDCO#COM12 (SD - Phase 1)	Junction	69.76	72.88	69.76	72.88	0.00	0.03	69.84	0.00	3.04	0 00:00	0.00
84 SDCO#COM13 (SD - Phase 1)	Junction	70.39	73.57	70.39	73.57	0.00	0.03	70.47	0.00	3.10	0 00:00	0.00
85 SDCO#D1 (SD - Phase 1)	Junction	72.84	77.28	72.84	77.28	0.00	0.10	72.96	0.00	4.32	0 00:00	0.00
86 SDCO#D2 (SD - Phase 1)	Junction	74.65	77.33	74.65	77.33	0.00	0.10	74.80	0.00	2.53	0 00:00	0.00
87 SDCO#D3 (SD - Phase 1)	Junction	74.71	77.20	74.71	77.20	0.00	0.11	74.89	0.00	2.31	0 00:00	0.00
88 SDCO#D4 (SD - Phase 1)	Junction	73.43	77.45	73.43	77.45	0.00	0.11	73.54	0.00	3.91	0 00:00	0.00
89 SDCO#D5 (SD - Phase 1)	Junction	73.83	77.41	73.83	77.41	0.00	0.05	73.94	0.00	3.47	0 00:00	0.00
90 SDCO#D6 (SD - Phase 1)	Junction	73.89	77.38	73.89	77.38	0.00	0.05	74.01	0.00	3.37	0 00:00	0.00
91 SDCO#D7 (SD - Phase 1)	Junction	74.62	77.45	74.62	77.45	0.00	0.05	74.73	0.00	2.72	0 00:00	0.00
92 SDCO#E1 (SD - Phase 2)	Junction	71.90	76.52	71.90	76.52	0.00	0.11	72.07	0.00	4.45	0 00:00	0.00
93 SDCO#E2 (SD - Phase 2)	Junction	72.28	76.76	72.28	76.76	0.00	0.11	72.44	0.00	4.32	0 00:00	0.00
94 SDCO#E3 (SD - Phase 2)	Junction	72.99	76.50	72.99	76.50	0.00	0.11	73.14	0.00	3.35	0 00:00	0.00
95 SDCO#E4 (SD - Phase 2)	Junction	72.45	76.31	72.45	76.31	0.00	0.11	72.62	0.00	3.69	0 00:00	0.00
96 SDCO#E5 (SD - Phase 2)	Junction	72.69	76.43	72.69	76.43	0.00	0.11	72.86	0.00	3.57	0 00:00	0.00
97 SDCO#E6 (SD - Phase 2)	Junction	73.46	76.48	73.46	76.48	0.00	0.11	73.61	0.00	2.86	0 00:00	0.00
98 SDCO#E7 (SD - Phase 2)	Junction	74.08	76.71	74.08	76.71	0.00	0.11	74.23	0.00	2.48	0 00:00	0.00
99 SDCO#F1 (SD - Phase 2)	Junction	72.28	76.98	72.28	76.98	0.00	0.09	72.40	0.00	4.58	0 00:00	0.00
100 SDCO#F2 (SD - Phase 2)	Junction	72.50	77.19	72.50	77.19	0.00	0.09	72.57	0.00	4.62	0 00:00	0.00
101 SDCO#F3 (SD - Phase 2)	Junction	73.46	77.18	73.46	77.18	0.00	0.09	73.61	0.00	3.56	0 00:00	0.00
102 SDCO#G2 (SD - Phase 1)	Junction	73.98	76.84	73.98	76.84	0.00	0.08	74.11	0.00	2.73	0 00:00	0.00
103 SDCO#G3 (SD - Phase 1)	Junction	73.16	77.18	73.16	77.18	0.00	0.08	73.29	0.00	3.89	0 00:00	0.00
104 SDCO#G4 (SD - Phase 1)	Junction	74.38	76.92	74.38	76.92	0.00	0.08	74.51	0.00	2.41	0 00:00	0.00
105 SDCO#H3 (SD - Phase 1)	Junction	73.73	76.96	73.73	76.96	0.00	0.08	73.86	0.00	3.11	0 00:00	0.00
106 SDCO#H4 (SD - Phase 1)	Junction	72.33	77.17	72.33	77.17	0.00	1.67	73.23	0.00	3.94	0 00:00	0.00
107 SDCO#H5 (SD - Phase 1)	Junction	72.94	75.97	72.94	75.97	0.00	0.17	73.08	0.00	2.90	0 00:00	0.00
108 SDCO#H6 (SD - Phase 1)	Junction	74.06	76.54	74.06	76.54	0.00	0.08	74.18	0.00	2.36	0 00:00	0.00
109 WQ#2 OUTLET (SD - Phase 1)	Junction	69.73	76.80	0.00	76.80	0.00	6.40	72.47	0.00	4.33	0 00:00	0.00
110 WQ#3 OUTLET (SD - Phase 1)	Junction	68.90	76.50	0.00	76.50	0.00	30.88	76.50	0.00	0.00	0 19:51	0.00
111 WQ#4 OUTLET (SD - Phase 1)	Junction	69.60	76.00	0.00	76.00	0.00	1.12	70.68	0.00	5.32	0 00:00	0.00
112 WQ#6 OUTLET (SD - Phase 2)	Junction	68.84	75.50	0.00	75.50	0.00	0.38	70.68	0.00	4.82	0 00:00	0.00
113 WQ#7 OUTLET (SD - Phase 2)	Junction	69.60	76.00	0.00	76.00	0.00	0.41	70.68	0.00	5.32	0 00:00	0.00
114 WQ1 OUTLET (SD - Phase 1)	Junction	67.73	72.78	0.00	72.78	0.00	1.09	68.92	0.00	3.86	0 00:00	0.00
115 WQ5 OUTLET (SD - Phase 1)	Junction	70.30	76.26	0.00	76.26	0.00	1.21	70.68	0.00	5.58	0 00:00	0.00
116 DISPERAL TRENCH INLET (SD - Phase 1)	Outfall	67.32					0.39	67.32				
117 R-TANK 1 OUTLET (SD - Phase 1)	Storage Node	66.90	73.73	67.40		0.00	121.62	68.89				0.00
118 R-TANK 2 OUTLET (SD - Phase 1)	Storage Node	67.90	77.71	68.40		0.00	572.89	70.68				0.00
119 R-TANK 3	Storage Node	67.90	76.75	68.40		0.00	1.84	70.68				0.00



## Link Summary

SN Element ID	Element Type	From (Inlet) Node	To (Outlet) Node	Length (ft)	Inlet Invert Elevation (ft)	Outlet Invert Elevation (ft)	Average Slope (%)	Diameter or Height (in)	Manning's Roughness	Peak Flow (cfs)	Design Flow Capacity (cfs)	Peak Flow/Design Flow Ratio	Peak Flow Velocity (ft/sec)	Peak Flow Depth (ft)
1 {SD - Phase 1}.Pipe - (132) (SD - Phase 1)	Pipe	SDCB#11 (SD - Phase 1)	WQ#2 OUTLET (SD - Phase 1)	5.71	71.48	71.37	1.9300	12.000	0.0130	0.27	11.93	0.02	6.62	0.39
2 {SD - Phase 1}.Pipe - (133) (1) (SD - Phase 1)	Pipe	WQ#2 OUTLET (SD - Phase 1)	R-TANK 2 OUTLET (SD - Phase 1)	5.62	69.20	68.87	5.8800	12.000	0.0130	6.79	13.94	0.49	10.13	1.00
3 {SD - Phase 1}.Pipe - (134) (SD - Phase 1)	Pipe	SDCB#15 (SD - Phase 1)	WQ#3 OUTLET (SD - Phase 1)	6.67	71.68	71.65	0.4500	12.000	0.0130	23.83	2.39	9.98	50.00	0.96
4 {SD - Phase 1}.Pipe - (135) (1) (SD - Phase 1)	Pipe	WQ#3 OUTLET (SD - Phase 1)	R-TANK 2 OUTLET (SD - Phase 1)	5.46	68.90	68.87	0.5500	12.000	0.0130	35.97	2.64	13.62	45.80	1.00
5 {SD - Phase 1}.PIPE 1 (SD - Phase 1)	Pipe	SDCB#02 (SD - Phase 1)	SDCB#05 (SD - Phase 1)	108.10	69.50	68.96	0.5000	12.000	0.0130	0.42	2.52	0.17	1.99	0.31
6 {SD - Phase 1}.PIPE 10 (SD - Phase 1)	Pipe	SDCB#06 (SD - Phase 1)	SDCB#09 (SD - Phase 1)	42.41	69.06	68.84	0.5000	8.004	0.0130	0.26	0.86	0.30	2.11	0.25
7 {SD - Phase 1}.PIPE 12 (SD - Phase 1)	Pipe	SDCB#12 (SD - Phase 1)	SDCB#11 (SD - Phase 1)	64.21	72.45	71.81	1.0000	8.004	0.0130	0.08	1.49	0.06	1.97	0.12
8 {SD - Phase 1}.PIPE 13 (SD - Phase 1)	Pipe	SDCB#13 (SD - Phase 1)	SDCB#11 (SD - Phase 1)	79.19	72.60	71.81	1.0000	8.004	0.0130	0.09	1.44	0.06	2.05	0.12
9 {SD - Phase 1}.PIPE 140	Pipe	AREA DRAIN H1 (SD - Phase 1)	SDCB#15 (SD - Phase 1)	14.56	72.33	72.18	1.0300	6.000	0.0130	6.43	0.57	11.29	32.75	0.48
10 {SD - Phase 1}.PIPE 141	Pipe	AREA DRAIN G1 (SD - Phase 1)	SDCB#17 (SD - Phase 1)	15.44	73.07	72.92	0.9700	6.000	0.0130	0.00	0.56	0.00	0.00	0.02
11 {SD - Phase 1}.PIPE 15 (SD - Phase 1)	Pipe	SDCB#14 (SD - Phase 1)	SDCB#15 (SD - Phase 1)	43.35	71.89	71.68	0.4800	12.000	0.0130	4.51	2.48	1.82	10.11	0.70
12 {SD - Phase 1}.PIPE 16 (SD - Phase 1)	Pipe	SDCB#16 (SD - Phase 1)	SDCB#14 (SD - Phase 1)	67.76	72.23	71.89	0.5000	12.000	0.0130	0.47	2.52	0.18	1.82	0.47
13 {SD - Phase 1}.PIPE 17 (SD - Phase 1)	Pipe	SDCB#17 (SD - Phase 1)	SDCB#16 (SD - Phase 1)	36.06	72.75	72.57	0.5000	8.004	0.0130	0.16	0.85	0.19	1.85	0.20
14 {SD - Phase 1}.PIPE 18 (SD - Phase 1)	Pipe	SDCB#18 (SD - Phase 1)	R-TANK 2 OUTLET (SD - Phase 1)	25.89	68.40	68.40	0.0000	24.000	0.0130	1.64	1.41	1.17	1.17	2.00
15 {SD - Phase 1}.PIPE 19 (SD - Phase 1)	Pipe	WQ#4 OUTLET (SD - Phase 1)	SDCB#18 (SD - Phase 1)	40.09	69.60	69.40	0.5000	12.000	0.0130	1.12	2.52	0.44	2.91	1.00
16 {SD - Phase 1}.PIPE 19.1	Pipe	SDCB#19 (SD - Phase 1)	WQ#4 OUTLET (SD - Phase 1)	49.00	70.35	70.10	0.5000	12.000	0.0130	1.12	2.52	0.44	2.94	0.49
17 {SD - Phase 1}.PIPE 2 (SD - Phase 1)	Pipe	SDCB#03 (SD - Phase 1)	SDCB#02 (SD - Phase 1)	71.71	70.52	69.88	0.8900	8.004	0.0130	0.19	1.14	0.16	2.34	0.19
18 {SD - Phase 1}.PIPE 20 (SD - Phase 1)	Pipe	SDCB#20 (SD - Phase 1)	SDCB#19 (SD - Phase 1)	126.79	70.98	70.35	0.5000	12.000	0.0130	0.84	2.52	0.33	2.37	0.46
19 {SD - Phase 1}.PIPE 21 (SD - Phase 1)	Pipe	SDCB#21 (SD - Phase 1)	SDCB#20 (SD - Phase 1)	57.67	71.60	71.31	0.5000	8.004	0.0130	0.08	0.86	0.09	1.54	0.13
20 {SD - Phase 1}.PIPE 22 (SD - Phase 1)	Pipe	SDCB#22 (SD - Phase 1)	SDCB#20 (SD - Phase 1)	75.77	71.36	70.98	0.5000	12.000	0.0130	0.68	2.52	0.27	2.40	0.39
21 {SD - Phase 1}.PIPE 23 (SD - Phase 1)	Pipe	SDCB#23 (SD - Phase 1)	SDCB#22 (SD - Phase 1)	113.35	71.93	71.36	0.5000	12.000	0.0130	0.42	2.52	0.16	1.86	0.33
22 {SD - Phase 1}.PIPE 24 (SD - Phase 1)	Pipe	SDCB#24 (SD - Phase 1)	SDCB#23 (SD - Phase 1)	69.19	72.28	71.93	0.5000	8.004	0.0130	0.07	0.86	0.08	0.79	0.20
23 {SD - Phase 1}.PIPE 26 (SD - Phase 1)	Pipe	SDCB#26 (SD - Phase 1)	SDCB#18 (SD - Phase 1)	104.96	68.40	68.40	0.0000	24.000	0.0130	1.33	0.70	1.91	0.42	2.00
24 {SD - Phase 1}.PIPE 26 TO RT3 (SD - Phase 1)	Pipe	R-TANK 3	SDCB#26 (SD - Phase 1)	400.00	68.40	68.40	0.0000	24.000	0.0150	1.44	0.31	4.63	0.46	2.00
25 {SD - Phase 1}.PIPE 27 (SD - Phase 1)	Pipe	SDCB#27 (SD - Phase 1)	WQ5 OUTLET (SD - Phase 1)	80.37	71.20	70.80	0.5000	12.000	0.0130	1.21	2.52	0.48	3.06	0.50
26 {SD - Phase 1}.PIPE 27 TO WD (SD - Phase 1)	Pipe	SDCB#40 (SD - Phase 1)	SDCB#27 (SD - Phase 1)	52.19	72.24	71.20	2.0000	12.000	0.0130	0.04	5.04	0.01	0.21	0.30
27 {SD - Phase 1}.PIPE 27.1	Pipe	WQ5 OUTLET (SD - Phase 1)	SDCB#26 (SD - Phase 1)	45.11	70.30	69.40	2.0000	12.000	0.0130	1.21	5.03	0.24	4.82	0.69
28 {SD - Phase 1}.PIPE 28 (SD - Phase 1)	Pipe	SDCB#28 (SD - Phase 1)	SDCB#27 (SD - Phase 1)	122.99	72.15	71.54	0.5000	8.004	0.0130	0.21	0.86	0.24	2.04	0.22
29 {SD - Phase 1}.PIPE 29 (SD - Phase 1)	Pipe	SDCB#29 (SD - Phase 1)	SDCB#27 (SD - Phase 1)	82.06	71.72	71.20	0.6300	12.000	0.0130	0.67	2.84	0.24	2.04	0.44
30 {SD - Phase 1}.PIPE 3 (SD - Phase 1)	Pipe	SDCO#COM04 (SD - Phase 1)	SDCB#02 (SD - Phase 1)	34.93	70.14	69.88	0.7500	8.004	0.0130	0.10	1.05	0.09	1.81	0.14
31 {SD - Phase 1}.PIPE 30 (SD - Phase 1)	Pipe	SDCB#30 (SD - Phase 1)	SDCB#29 (SD - Phase 1)	128.14	72.69	72.05	0.5000	8.004	0.0130	0.24	0.86	0.28	2.13	0.24
32 {SD - Phase 1}.PIPE 4 (SD - Phase 1)	Pipe	SDCB#04 (SD - Phase 1)	SDCB#03 (SD - Phase 1)	54.09	70.79	70.52	0.5000	8.004	0.0130	0.08	0.86	0.09	1.17	0.16
33 {SD - Phase 1}.PIPE 5 (SD - Phase 1)	Pipe	SDCB#05 (SD - Phase 1)	SDCB#09 (SD - Phase 1)	89.22	68.96	68.51	0.5000	12.000	0.0130	0.68	2.52	0.27	1.99	0.45
34 {SD - Phase 1}.PIPE 6 (SD - Phase 1)	Pipe	SDCO#COM09 (SD - Phase 1)	SDCB#05 (SD - Phase 1)	34.89	70.17	69.29	2.5300	8.004	0.0130	0.06	1.92	0.03	2.41	0.08
35 {SD - Phase 1}.PIPE 8 (SD - Phase 1)	Pipe	SDCB#07 (SD - Phase 1)	SDCB#06 (SD - Phase 1)	72.16	69.42	69.06	0.5000	8.004	0.0130	0.14	0.86	0.17	1.36	0.23
36 {SD - Phase 1}.PIPE 9 (SD - Phase 1)	Pipe	SDCB#08 (SD - Phase 1)	SDCB#07 (SD - Phase 1)	48.66	69.67	69.42	0.5100	8.004	0.0130	0.08	0.86	0.09	1.23	0.16
37 {SD - Phase 1}.PIPE E1	Pipe	SDCO#E1 (SD - Phase 2)	SDCB#22 (SD - Phase 1)	42.57	71.90	71.69	0.4900	8.004	0.0130	0.11	0.85	0.13	1.68	0.16
38 {SD - Phase 1}.PIPE E4	Pipe	SDCO#E4 (SD - Phase 2)	SDCB#23 (SD - Phase 1)	37.89	72.45	72.26	0.4900	8.004	0.0130	0.11	0.85	0.13	1.67	0.16
39 {SD - Phase 1}.PIPE RT1 TO CS (SD - Phase 1)	Pipe	R-TANK 1 OUTLET (SD - Phase 1)	SDCB#01 (SD - Phase 1)	4.18	67.40	67.40	0.0000	24.000	0.0130	121.46	3.50	34.71	42.68	1.82
40 {SD - Phase 1}.PIPE RT2 TO CS (SD - Phase 1)	Pipe	R-TANK 2 OUTLET (SD - Phase 1)	SDCB#10 (SD - Phase 1)	5.00	68.40	68.40	0.0000	24.000	0.0130	570.02	3.20	178.17	50.00	2.00
41 {SD - Phase 1}.PIPE RT3 TO 32 (SD - Phase 1)	Pipe	SDCB#31	R-TANK 3	9.11	68.52	68.40	1.3200	12.000	0.0130	0.45	4.09	0.11	1.45	1.00
42 {SD - Phase 1}.PIPE RT3 TO RD43 (SD - Phase 1)	Pipe	SDCO#B5 (SD - Phase 1)	R-TANK 3	8.98	72.05	71.94	1.2500	6.000	0.0130	0.10	0.63	0.17	2.13	0.15
43 {SD - Phase 1}.PIPE130	Pipe	SDCB#09 (SD - Phase 1)	WQ1 OUTLET (SD - Phase 1)	21.39	68.51	68.40	0.5000	12.000	0.0130	1.09	2.52	0.43	2.82	0.49
44 {SD - Phase 1}.PIPE131	Pipe	WQ1 OUTLET (SD - Phase 1)	R-TANK 1 OUTLET (SD - Phase 1)	10.34	67.63	67.58	0.5000	12.000	0.0130	1.09	4.32	0.25	2.72	1.00
45 {SD - Phase 1}.RD1 (SD - Phase 1)	Pipe	SDCO#COM02 (SD - Phase 1)	SDCO#COM01 (SD - Phase 1)	47.75	71.22	70.74	1.0000	6.000	0.0130	0.05	0.56	0.09	1.72	0.10
46 {SD - Phase 1}.RD10 (SD - Phase 1)	Pipe	SDCO#COM10 (SD - Phase 1)	SDCO#COM09 (SD - Phase 1)	48.43	71.09	70.34	1.5500	6.000	0.0130	0.03	0.70	0.04	1.73	0.07
47 {SD - Phase 1}.RD11 (SD - Phase 1)	Pipe	SDCO#COM11 (SD - Phase 1)	SDCO#COM09 (SD - Phase 1)	74.63	71.09	70.34	1.0000	6.000	0.0130	0.03	0.56	0.05	1.49	0.08

Peak Flow Depth/ Total Depth Ratio	Total Time Reported Surcharged Condition (min)
0.52	0.00 Calculated
1.00	9.00 SURCHARGED
1.00	0.00 SURCHARGED
1.00	810.00 SURCHARGED
0.31	0.00 Calculated
0.38	0.00 Calculated
0.18	0.00 Calculated
0.18	0.00 Calculated
1.00	1.00 SURCHARGED
0.04	0.00 Calculated
0.79	0.00 > CAPACITY
0.47	0.00 Calculated
0.29	0.00 Calculated
1.00	372.00 SURCHARGED
1.00	174.00 SURCHARGED
0.49	0.00 Calculated
0.28	0.00 Calculated
0.46	0.00 Calculated
0.20	0.00 Calculated
0.39	0.00 Calculated
0.33	0.00 Calculated
0.30	0.00 Calculated
1.00	371.00 SURCHARGED
1.00	372.00 SURCHARGED
0.50	0.00 Calculated
0.30	0.00 Calculated
0.69	0.00 Calculated
0.33	0.00 Calculated
0.44	0.00 Calculated
0.21	0.00 Calculated
0.36	0.00 Calculated
0.24	0.00 Calculated
0.45	0.00 Calculated
0.12	0.00 Calculated
0.34	0.00 Calculated
0.24	0.00 Calculated
0.24	0.00 Calculated
0.24	0.00 Calculated
1.00	0.00 > CAPACITY
1.00	371.00 SURCHARGED
1.00	958.00 SURCHARGED
0.30	0.00 Calculated
0.49	0.00 Calculated
1.00	200.00 SURCHARGED
0.20	0.00 Calculated
0.14	0.00 Calculated
0.15	0.00 Calculated

# Link Summary

SN Element ID	Element Type	From (Inlet) Node	To (Outlet) Node	Length (ft)	Inlet Invert Elevation (ft)	Outlet Invert Elevation (ft)	Average Slope (%)	Diameter or Height (in)	Manning's Roughness	Peak Flow (cfs)	Design Flow Capacity (cfs)	Peak Flow/Design Flow Ratio	Peak Flow Velocity (ft/sec)	Peak Flow Depth (ft)
48 {SD - Phase 1},RD12 (SD - Phase 1)	Pipe	SDCO#H4 (SD - Phase 1)	SDCB#15 (SD - Phase 1)	24.70	72.79	72.18	2.4700	6.000	0.0130	1.66	0.88	1.88	12.20	0.47
49 {SD - Phase 1},RD13 (SD - Phase 1)	Pipe	SDCO#H5 (SD - Phase 1)	SDCO#H4 (SD - Phase 1)	14.98	72.94	72.79	1.0000	6.000	0.0130	0.16	0.56	0.29	1.87	0.30
50 {SD - Phase 1},RD14 (SD - Phase 1)	Pipe	SDCO#H6 (SD - Phase 1)	SDCO#H5 (SD - Phase 1)	112.34	74.06	72.94	1.0000	6.000	0.0130	0.08	0.56	0.14	1.88	0.13
51 {SD - Phase 1},RD16 (SD - Phase 1)	Pipe	AREA DRAIN H2 (SD - Phase 1)	SDCB#14 (SD - Phase 1)	12.65	72.58	72.22	2.8500	8.004	0.0130	0.11	2.04	0.05	2.85	0.26
52 {SD - Phase 1},RD17 (SD - Phase 1)	Pipe	SDCO#H3 (SD - Phase 1)	AREA DRAIN H2 (SD - Phase 1)	120.85	73.73	72.58	0.9500	6.000	0.0130	0.08	0.55	0.14	1.94	0.13
53 {SD - Phase 1},RD18 (SD - Phase 1)	Pipe	AREA DRAIN G2 (SD - Phase 1)	SDCB#16 (SD - Phase 1)	22.10	72.78	72.56	1.0000	8.004	0.0130	0.11	1.21	0.09	2.02	0.14
54 {SD - Phase 1},RD19 (SD - Phase 1)	Pipe	SDCO#G2 (SD - Phase 1)	AREA DRAIN G2 (SD - Phase 1)	120.31	73.98	72.78	1.0000	6.000	0.0130	0.08	0.56	0.14	1.79	0.14
55 {SD - Phase 1},RD20 (SD - Phase 1)	Pipe	SDCO#G3 (SD - Phase 1)	SDCB#17 (SD - Phase 1)	24.27	73.16	72.92	0.9900	6.000	0.0130	0.08	0.56	0.14	1.90	0.13
56 {SD - Phase 1},RD21 (SD - Phase 1)	Pipe	SDCO#G4 (SD - Phase 1)	SDCO#G3 (SD - Phase 1)	121.90	74.38	73.16	1.0000	6.000	0.0130	0.08	0.56	0.14	1.91	0.13
57 {SD - Phase 1},RD22 (SD - Phase 1)	Pipe	SDCO#B1 (SD - Phase 1)	SDCB#18 (SD - Phase 1)	37.09	74.10	69.73	11.7800	8.004	0.0130	0.10	4.15	0.03	4.80	0.35
58 {SD - Phase 1},RD23 (SD - Phase 1)	Pipe	SDCO#B2 (SD - Phase 1)	SDCO#B1 (SD - Phase 1)	80.06	75.07	74.27	1.0000	6.000	0.0130	0.05	0.56	0.09	1.77	0.10
59 {SD - Phase 1},RD24 (SD - Phase 1)	Pipe	SDCO#B3 (SD - Phase 1)	SDCO#B2 (SD - Phase 1)	7.08	75.14	75.07	1.0000	6.000	0.0130	0.05	0.56	0.09	1.61	0.11
60 {SD - Phase 1},RD25 (SD - Phase 1)	Pipe	SDCO#B4 (SD - Phase 1)	SDCO#B1 (SD - Phase 1)	92.11	75.19	74.27	1.0000	6.000	0.0130	0.05	0.56	0.09	1.77	0.10
61 {SD - Phase 1},RD29	Pipe	SDCO#CLU81 (SD - Phase 2)	SDCB#22 (SD - Phase 1)	20.21	72.10	71.69	2.0100	8.004	0.0130	0.05	1.72	0.03	2.07	0.08
62 {SD - Phase 1},RD3 (SD - Phase 1)	Pipe	SDCO#COM04 (SD - Phase 1)	SDCO#COM01 (SD - Phase 1)	60.09	70.14	70.74	-1.0000	6.000	0.0130	0.05	0.56	0.09	1.30	0.12
63 {SD - Phase 1},RD4 (SD - Phase 1)	Pipe	SDCO#COM05 (SD - Phase 1)	SDCO#COM04 (SD - Phase 1)	44.23	70.58	70.14	1.0000	6.000	0.0130	0.05	0.56	0.09	1.30	0.12
64 {SD - Phase 1},RD43 (SD - Phase 1)	Pipe	SDCO#B5 (SD - Phase 1)	SDCO#B6 (SD - Phase 1)	83.04	72.05	72.88	-1.0000	6.000	0.0130	0.05	0.56	0.09	1.25	0.13
65 {SD - Phase 1},RD44 (SD - Phase 1)	Pipe	SDCO#B6 (SD - Phase 1)	SDCO#B7 (SD - Phase 1)	9.22	72.88	72.97	-1.0000	6.000	0.0130	0.05	0.56	0.09	1.66	0.11
66 {SD - Phase 1},RD45 (SD - Phase 1)	Pipe	SDCO#B8 (SD - Phase 1)	SDCO#B5 (SD - Phase 1)	82.68	72.88	72.05	1.0000	6.000	0.0130	0.05	0.56	0.09	1.25	0.13
67 {SD - Phase 1},RD49 (SD - Phase 1)	Pipe	SDCO#C5 (SD - Phase 1)	SDCO#C6 (SD - Phase 1)	118.19	71.44	72.63	-1.0000	6.000	0.0130	0.05	0.56	0.09	1.16	0.14
68 {SD - Phase 1},RD5 (SD - Phase 1)	Pipe	SDCO#COM06 (SD - Phase 1)	SDCO#COM05 (SD - Phase 1)	62.68	71.21	70.58	1.0000	6.000	0.0130	0.05	0.56	0.09	1.72	0.10
69 {SD - Phase 1},RD50 (SD - Phase 1)	Pipe	SDCO#C6 (SD - Phase 1)	SDCO#C7 (SD - Phase 1)	10.45	72.62	72.72	-1.0000	6.000	0.0130	0.05	0.56	0.09	1.62	0.11
70 {SD - Phase 1},RD51 (SD - Phase 1)	Pipe	SDCO#C8 (SD - Phase 1)	SDCO#C5 (SD - Phase 1)	39.88	72.24	71.44	2.0000	6.000	0.0130	0.05	0.79	0.07	1.23	0.13
71 {SD - Phase 1},RD52 (SD - Phase 1)	Pipe	SDCO#C9 (SD - Phase 1)	SDCO#C8 (SD - Phase 1)	13.12	72.37	72.24	1.0000	6.000	0.0130	0.05	0.56	0.09	1.68	0.11
72 {SD - Phase 1},RD53 (SD - Phase 1)	Pipe	SDCO#C10 (SD - Phase 1)	SDCO#C9 (SD - Phase 1)	54.84	72.92	72.37	1.0000	6.000	0.0130	0.05	0.56	0.09	1.67	0.11
73 {SD - Phase 1},RD54 (SD - Phase 1)	Pipe	SDCO#C1 (SD - Phase 1)	SDCB#29 (SD - Phase 1)	45.31	73.04	72.05	2.1900	8.004	0.0130	0.11	1.79	0.06	2.72	0.11
74 {SD - Phase 1},RD55 (SD - Phase 1)	Pipe	SDCO#C2 (SD - Phase 1)	SDCO#C1 (SD - Phase 1)	36.88	73.50	73.21	0.7800	6.000	0.0130	0.05	0.50	0.11	1.60	0.11
75 {SD - Phase 1},RD56 (SD - Phase 1)	Pipe	SDCO#C3 (SD - Phase 1)	SDCO#C2 (SD - Phase 1)	6.22	73.57	73.50	1.0900	6.000	0.0130	0.05	0.59	0.09	1.55	0.11
76 {SD - Phase 1},RD57 (SD - Phase 1)	Pipe	SDCO#C4 (SD - Phase 1)	SDCO#C1 (SD - Phase 1)	97.20	74.29	73.21	1.1100	6.000	0.0130	0.05	0.59	0.09	1.84	0.10
77 {SD - Phase 1},RD58 (SD - Phase 1)	Pipe	SDCO#D1 (SD - Phase 1)	SDCB#28 (SD - Phase 1)	47.81	72.84	72.15	1.4500	8.004	0.0130	0.10	1.46	0.07	1.40	0.18
78 {SD - Phase 1},RD59 (SD - Phase 1)	Pipe	SDCO#D2 (SD - Phase 1)	SDCO#D1 (SD - Phase 1)	163.61	74.65	73.01	1.0000	6.000	0.0130	0.10	0.56	0.18	2.16	0.15
79 {SD - Phase 1},RD6 (SD - Phase 1)	Pipe	SDCO#COM07 (SD - Phase 1)	SDCB#04 (SD - Phase 1)	24.45	70.91	70.79	0.5000	8.004	0.0130	0.03	0.85	0.03	0.77	0.11
80 {SD - Phase 1},RD60 (SD - Phase 1)	Pipe	SDCO#D3 (SD - Phase 1)	SDCO#D2 (SD - Phase 1)	6.36	74.71	74.65	1.0100	6.000	0.0130	0.10	0.56	0.19	1.88	0.16
81 {SD - Phase 1},RD61 (SD - Phase 1)	Pipe	SDCO#D5 (SD - Phase 1)	SDCO#D4 (SD - Phase 1)	39.98	73.83	73.43	1.0000	6.000	0.0130	0.05	0.56	0.09	1.70	0.11
82 {SD - Phase 1},RD61A (SD - Phase 1)	Pipe	SDCO#D4 (SD - Phase 1)	SDCB#29 (SD - Phase 1)	54.63	73.43	72.05	2.5200	8.004	0.0130	0.10	1.92	0.05	2.88	0.11
83 {SD - Phase 1},RD62 (SD - Phase 1)	Pipe	SDCO#D6 (SD - Phase 1)	SDCO#D5 (SD - Phase 1)	5.69	73.89	73.83	1.0000	6.000	0.0130	0.05	0.56	0.09	1.58	0.11
84 {SD - Phase 1},RD63 (SD - Phase 1)	Pipe	SDCO#D7 (SD - Phase 1)	SDCO#D4 (SD - Phase 1)	119.29	74.62	73.43	1.0000	6.000	0.0130	0.05	0.56	0.09	1.73	0.11
85 {SD - Phase 1},RD7 (SD - Phase 1)	Pipe	SDCO#COM08 (SD - Phase 1)	SDCO#COM07 (SD - Phase 1)	36.57	71.45	71.08	1.0000	6.000	0.0130	0.03	0.56	0.05	1.47	0.08
86 {SD - Phase 1},RD8 (SD - Phase 1)	Pipe	SDCO#COM13 (SD - Phase 1)	SDCO#COM12 (SD - Phase 1)	45.72	70.39	69.93	1.0000	6.000	0.0130	0.03	0.56	0.05	1.48	0.08
87 {SD - Phase 1},RD9 (SD - Phase 1)	Pipe	SDCO#COM12 (SD - Phase 1)	SDCB#08 (SD - Phase 1)	17.28	69.76	69.67	0.5000	8.004	0.0130	0.03	0.85	0.03	0.78	0.11
88 {SD - Phase 1},RT3 TO RD49 (SD - Phase 1)	Pipe	SDCO#C5 (SD - Phase 1)	R-TANK 3	7.93	71.44	71.40	0.5000	8.004	0.0130	0.10	0.86	0.12	1.58	0.16
89 {SD - Phase 2},PIPE 31 (SD - Phase 2)	Pipe	SDCB#32 (SD - Phase 2)	SDCB#23 (SD - Phase 1)	60.86	72.57	72.26	0.5100	8.004	0.0130	0.08	0.86	0.09	1.54	0.13
90 {SD - Phase 2},PIPE 33 (SD - Phase 2)	Pipe	WQ#6 OUTLET (SD - Phase 2)	SDCB#31	65.81	68.84	68.52	0.4900	12.000	0.0130	0.37	2.50	0.15	1.20	1.00
91 {SD - Phase 2},PIPE 33.1 (SD - Phase 2)	Pipe	SDCB#33 (SD - Phase 2)	WQ#6 OUTLET (SD - Phase 2)	18.46	70.35	70.26	0.4900	12.000	0.0130	0.38	2.49	0.15	2.12	0.37
92 {SD - Phase 2},PIPE 34 (SD - Phase 2)	Pipe	SDCB#34 (SD - Phase 2)	SDCB#33 (SD - Phase 2)	69.89	71.03	70.68	0.5000	8.004	0.0130	0.15	0.86	0.17	1.84	0.18
93 {SD - Phase 2},PIPE 35 (SD - Phase 2)	Pipe	SDCB#35 (SD - Phase 2)	R-TANK 3	83.10	68.40	68.40	0.0000	24.000	0.0130	0.48	0.78	0.62	0.54	2.00
94 {SD - Phase 2},PIPE 36 (SD - Phase 2)	Pipe	SDCB#36 (SD - Phase 2)	WQ#7 OUTLET (SD - Phase 2)	26.75	71.23	71.10	0.4900	12.000	0.0130	0.41	2.48	0.16	2.20	0.29

Peak Flow Depth/ Total Depth Ratio	Total Time Reported Surcharged Condition (min)
1.00	0.00 SURCHARGED
0.63	0.00 Calculated
0.26	0.00 Calculated
0.40	0.00 Calculated
0.25	0.00 Calculated
0.21	0.00 Calculated
0.27	0.00 Calculated
0.26	0.00 Calculated
0.26	0.00 Calculated
0.52	0.00 Calculated
0.21	0.00 Calculated
0.22	0.00 Calculated
0.21	0.00 Calculated
0.12	0.00 Calculated
0.25	0.00 Calculated
0.25	0.00 Calculated
0.27	0.00 Calculated
0.22	0.00 Calculated
0.27	0.00 Calculated
0.28	0.00 Calculated
0.20	0.00 Calculated
0.22	0.00 Calculated
0.27	0.00 Calculated
0.22	0.00 Calculated
0.22	0.00 Calculated
0.17	0.00 Calculated
0.22	0.00 Calculated
0.23	0.00 Calculated
0.20	0.00 Calculated
0.27	0.00 Calculated
0.29	0.00 Calculated
0.16	0.00 Calculated
0.33	0.00 Calculated
0.22	0.00 Calculated
0.16	0.00 Calculated
0.23	0.00 Calculated
0.21	0.00 Calculated
0.16	0.00 Calculated
0.16	0.00 Calculated
0.16	0.00 Calculated
0.24	0.00 Calculated
0.20	0.00 Calculated
1.00	853.00 SURCHARGED
0.37	0.00 Calculated
0.28	0.00 Calculated
1.00	372.00 SURCHARGED
0.29	0.00 Calculated

## Link Summary

SN Element ID	Element Type	From (Inlet) Node	To (Outlet) Node	Length (ft)	Inlet Invert Elevation (ft)	Outlet Invert Elevation (ft)	Average Slope (%)	Diameter or Height (in)	Manning's Roughness	Peak Flow (cfs)	Design Flow Capacity (cfs)	Peak Flow/Design Flow Ratio	Peak Flow Velocity (ft/sec)	Peak Flow Depth (ft)
95 {SD - Phase 2}.PIPE 36.1 (SD - Phase 2)	Pipe	WQ#7 OUTLET (SD - Phase 2)	SDCB#35 (SD - Phase 2)	40.73	69.60	69.40	0.4900	12.000	0.0130	0.41	2.52	0.16	2.25	1.00
96 {SD - Phase 2}.PIPE 37 (SD - Phase 2)	Pipe	SDCB#37 (SD - Phase 2)	SDCB#36 (SD - Phase 2)	54.00	71.83	71.56	0.5000	8.004	0.0130	0.22	0.86	0.26	2.04	0.23
97 {SD - Phase 2}.PIPE 38 (SD - Phase 2)	Pipe	SDCB#38 (SD - Phase 2)	SDCB#37 (SD - Phase 2)	54.50	72.10	71.83	0.5000	8.004	0.0130	0.16	0.85	0.19	1.58	0.22
98 {SD - Phase 2}.PIPE 39 (SD - Phase 2)	Pipe	SDCB#38 (SD - Phase 2)	SDCB#41 (SD - Phase 2)	62.25	72.10	72.41	-0.5000	8.004	0.0130	0.10	0.86	0.12	1.34	0.18
99 {SD - Phase 2}.PIPE 40 (SD - Phase 2)	Pipe	SDCB#36 (SD - Phase 2)	SDCB#42 (SD - Phase 2)	65.00	71.56	71.89	-0.5000	8.004	0.0130	0.12	0.86	0.14	1.73	0.17
100 {SD - Phase 2}.PIPE E2	Pipe	SDCO#E2 (SD - Phase 2)	SDCO#E1 (SD - Phase 2)	38.23	72.28	71.90	1.0000	6.000	0.0130	0.11	0.56	0.19	1.95	0.16
101 {SD - Phase 2}.PIPE E3	Pipe	SDCO#E3 (SD - Phase 2)	SDCO#E2 (SD - Phase 2)	71.20	72.99	72.28	1.0000	6.000	0.0130	0.11	0.56	0.19	2.10	0.15
102 {SD - Phase 2}.PIPE E5	Pipe	SDCO#E5 (SD - Phase 2)	SDCO#E4 (SD - Phase 2)	24.49	72.70	72.45	1.0000	6.000	0.0130	0.11	0.56	0.19	1.90	0.17
103 {SD - Phase 2}.PIPE E6	Pipe	SDCO#E6 (SD - Phase 2)	SDCO#E5 (SD - Phase 2)	77.14	73.46	72.69	1.0000	6.000	0.0130	0.11	0.56	0.19	2.04	0.16
104 {SD - Phase 2}.PIPE E7	Pipe	SDCO#E7 (SD - Phase 2)	SDCO#E3 (SD - Phase 2)	108.92	74.08	72.99	1.0000	6.000	0.0130	0.11	0.56	0.19	2.14	0.15
105 {SD - Phase 2}.RD30 (SD - Phase 2)	Pipe	SDCO#CLUB2 (SD - Phase 2)	SDCO#CLUB1 (SD - Phase 2)	34.29	72.44	72.10	1.0000	6.000	0.0130	0.02	0.56	0.04	1.28	0.08
106 {SD - Phase 2}.RD31 (SD - Phase 2)	Pipe	SDCO#CLUB3 (SD - Phase 2)	SDCO#CLUB2 (SD - Phase 2)	56.29	73.00	72.44	1.0000	6.000	0.0130	0.02	0.56	0.04	1.37	0.07
107 {SD - Phase 2}.RD32 (SD - Phase 2)	Pipe	SDCO#CLUB4 (SD - Phase 2)	SDCO#CLUB1 (SD - Phase 2)	29.06	72.39	72.10	1.0000	6.000	0.0130	0.02	0.56	0.04	1.28	0.08
108 {SD - Phase 2}.RD33 (SD - Phase 2)	Pipe	SDCO#CLUB5 (SD - Phase 2)	SDCO#CLUB4 (SD - Phase 2)	45.67	72.85	72.39	1.0000	6.000	0.0130	0.02	0.56	0.04	1.38	0.07
109 {SD - Phase 2}.RD38 (SD - Phase 2)	Pipe	SDCO#A1 (SD - Phase 2)	SDCB#32 (SD - Phase 2)	39.39	72.80	72.57	0.5800	8.004	0.0130	0.08	0.92	0.08	1.47	0.14
110 {SD - Phase 2}.RD39 (SD - Phase 2)	Pipe	SDCO#A2 (SD - Phase 2)	SDCO#A1 (SD - Phase 2)	13.80	72.94	72.80	1.0000	6.000	0.0130	0.04	0.56	0.07	1.19	0.11
111 {SD - Phase 2}.RD40 (SD - Phase 2)	Pipe	SDCO#A3 (SD - Phase 2)	SDCO#A2 (SD - Phase 2)	63.18	73.57	72.94	1.0000	6.000	0.0130	0.04	0.56	0.07	1.60	0.09
112 {SD - Phase 2}.RD41 (SD - Phase 2)	Pipe	SDCO#A4 (SD - Phase 2)	SDCO#A5 (SD - Phase 2)	29.48	73.72	73.42	1.0000	6.000	0.0130	0.04	0.56	0.07	1.59	0.09
113 {SD - Phase 2}.RD42 (SD - Phase 2)	Pipe	SDCO#A5 (SD - Phase 2)	SDCO#A1 (SD - Phase 2)	61.99	73.42	72.80	1.0000	6.000	0.0130	0.04	0.56	0.07	1.19	0.11
114 {SD - Phase 2}.RD46 (SD - Phase 2)	Pipe	SDCO#F1 (SD - Phase 2)	SDCB#31	163.24	72.28	69.02	2.0000	6.000	0.0130	0.09	0.79	0.11	1.76	0.31
115 {SD - Phase 2}.RD47 (SD - Phase 2)	Pipe	SDCO#F2 (SD - Phase 2)	SDCB#35 (SD - Phase 2)	17.66	72.50	69.90	14.7200	6.000	0.0130	0.09	2.15	0.04	5.24	0.26
116 {SD - Phase 2}.RD48 (SD - Phase 2)	Pipe	SDCO#F3 (SD - Phase 2)	SDCO#F2 (SD - Phase 2)	96.18	73.46	72.50	1.0000	6.000	0.0130	0.09	0.56	0.16	2.73	0.11
117 {SD - Phase 1}.PIPE CS TO RT1 (SD - Phase 1)	Outlet	SDCB#10 (SD - Phase 1)	R-TANK 1 OUTLET (SD - Phase 1)		67.90	66.90				3.69				
118 {SD - Phase 1}.PIPE CS TO WQ (SD - Phase 1)	Outlet	SDCB#01 (SD - Phase 1)	DISPERAL TRENCH INLET (SD - Phase 1)		67.40	67.32				0.39				



Peak Flow Depth/ Total Depth Ratio	Total Time Reported Surcharged Condition (min)
1.00	168.00 SURCHARGED
0.35	0.00 Calculated
0.33	0.00 Calculated
0.26	0.00 Calculated
0.25	0.00 Calculated
0.33	0.00 Calculated
0.31	0.00 Calculated
0.33	0.00 Calculated
0.32	0.00 Calculated
0.31	0.00 Calculated
0.15	0.00 Calculated
0.14	0.00 Calculated
0.15	0.00 Calculated
0.14	0.00 Calculated
0.20	0.00 Calculated
0.22	0.00 Calculated
0.18	0.00 Calculated
0.18	0.00 Calculated
0.22	0.00 Calculated
0.61	0.00 Calculated
0.53	0.00 Calculated
0.23	0.00 Calculated

# Subbasin Hydrology

## Subbasin : AREA DRAIN G2

### Input Data

Area (ac) ..... 0.08  
 Impervious Area (%) ..... 25  
 Impervious Area Curve Number ..... 98  
 Pervious Area Curve Number ..... 76  
 Rain Gage ID ..... Rain Gage-01

### Composite Curve Number

Soil/Surface Description	Area (acres)	Soil Group	Curve Number
32			
Composite Area & Weighted CN	0.08		81.5

### Time of Concentration

TOC Method : SCS TR-55

Sheet Flow Equation :

$$T_c = (0.007 * ((n * L_f)^{0.8}) / ((P^{0.5}) * (S_f^{0.4})))$$

Where :

T<sub>c</sub> = Time of Concentration (hr)  
 n = Manning's roughness  
 L<sub>f</sub> = Flow Length (ft)  
 P = 2 yr, 24 hr Rainfall (inches)  
 S<sub>f</sub> = Slope (ft/ft)

Shallow Concentrated Flow Equation :

V = 16.1345 \* (S<sub>f</sub><sup>0.5</sup>) (unpaved surface)  
 V = 20.3282 \* (S<sub>f</sub><sup>0.5</sup>) (paved surface)  
 V = 15.0 \* (S<sub>f</sub><sup>0.5</sup>) (grassed waterway surface)  
 V = 10.0 \* (S<sub>f</sub><sup>0.5</sup>) (nearly bare & untilled surface)  
 V = 9.0 \* (S<sub>f</sub><sup>0.5</sup>) (cultivated straight rows surface)  
 V = 7.0 \* (S<sub>f</sub><sup>0.5</sup>) (short grass pasture surface)  
 V = 5.0 \* (S<sub>f</sub><sup>0.5</sup>) (woodland surface)  
 V = 2.5 \* (S<sub>f</sub><sup>0.5</sup>) (forest w/heavy litter surface)  
 T<sub>c</sub> = (L<sub>f</sub> / V) / (3600 sec/hr)

Where:

T<sub>c</sub> = Time of Concentration (hr)  
 L<sub>f</sub> = Flow Length (ft)  
 V = Velocity (ft/sec)  
 S<sub>f</sub> = Slope (ft/ft)

Channel Flow Equation :

V = (1.49 \* (R<sup>2/3</sup>) \* (S<sub>f</sub><sup>0.5</sup>)) / n  
 R = A<sub>q</sub> / W<sub>p</sub>  
 T<sub>c</sub> = (L<sub>f</sub> / V) / (3600 sec/hr)

Where :


T<sub>c</sub> = Time of Concentration (hr)  
 L<sub>f</sub> = Flow Length (ft)  
 R = Hydraulic Radius (ft)  
 A<sub>q</sub> = Flow Area (ft<sup>2</sup>)  
 W<sub>p</sub> = Wetted Perimeter (ft)  
 V = Velocity (ft/sec)  
 S<sub>f</sub> = Slope (ft/ft)  
 n = Manning's roughness

**Subbasin Runoff Results**


Total Rainfall (in) .....	3.46
Total Runoff (in) .....	1.82
Peak Runoff (cfs) .....	0.03
Weighted Curve Number .....	81.5
Time of Concentration (days hh:mm:ss) .....	0 00:00:00

Subbasin : AREA DRAIN G2

Rainfall Intensity Graph

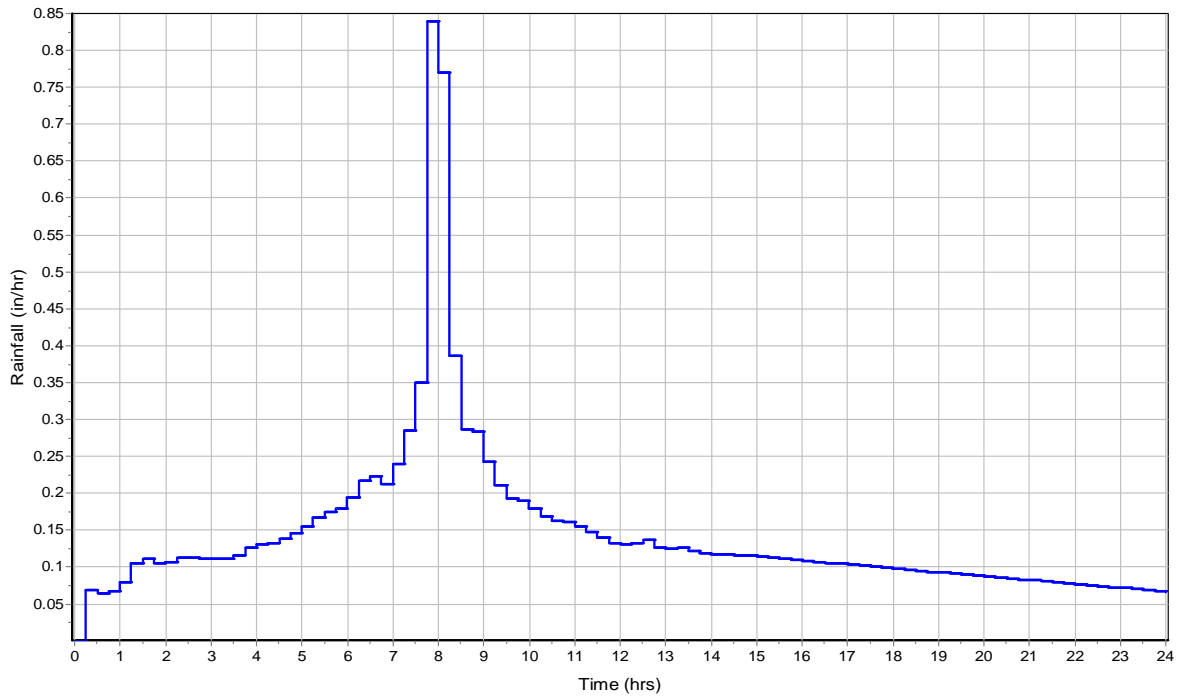

Runoff Hydrograph

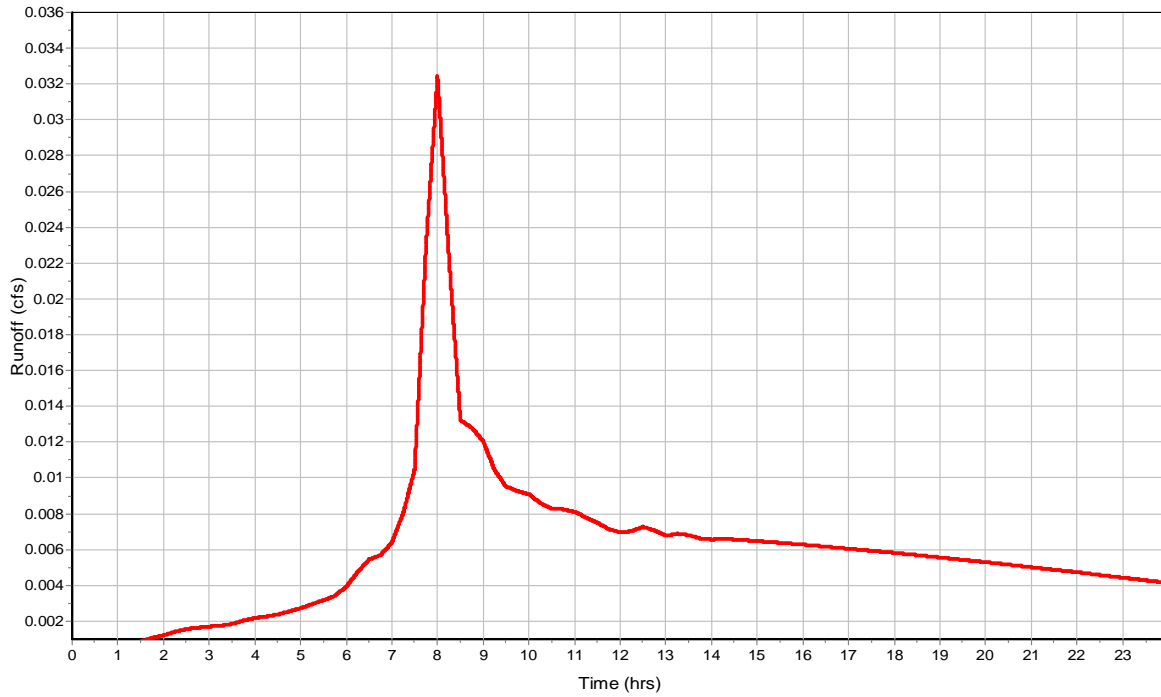

**Subbasin : AREA DRAIN H2**

**Input Data**

Area (ac) ..... 0.07  
Impervious Area (%) ..... 25  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.07		81.5


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 1.82  
Peak Runoff (cfs) ..... 0.03  
Weighted Curve Number ..... 81.5  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : AREA DRAIN H2

Rainfall Intensity Graph

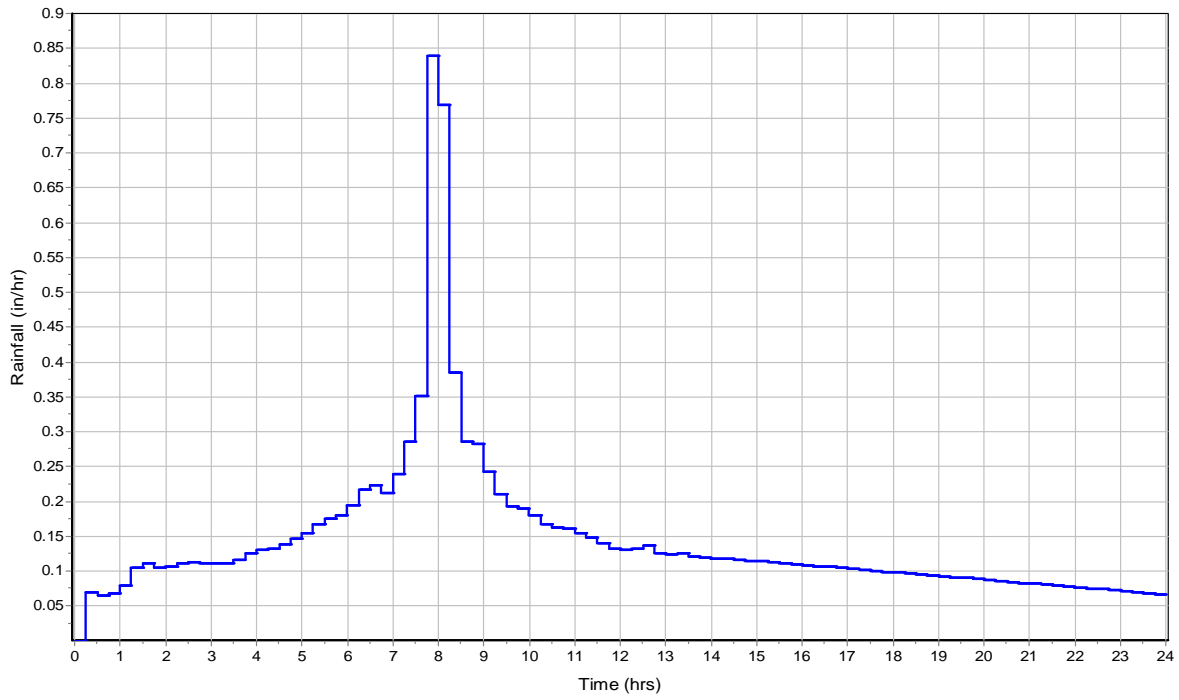

Runoff Hydrograph

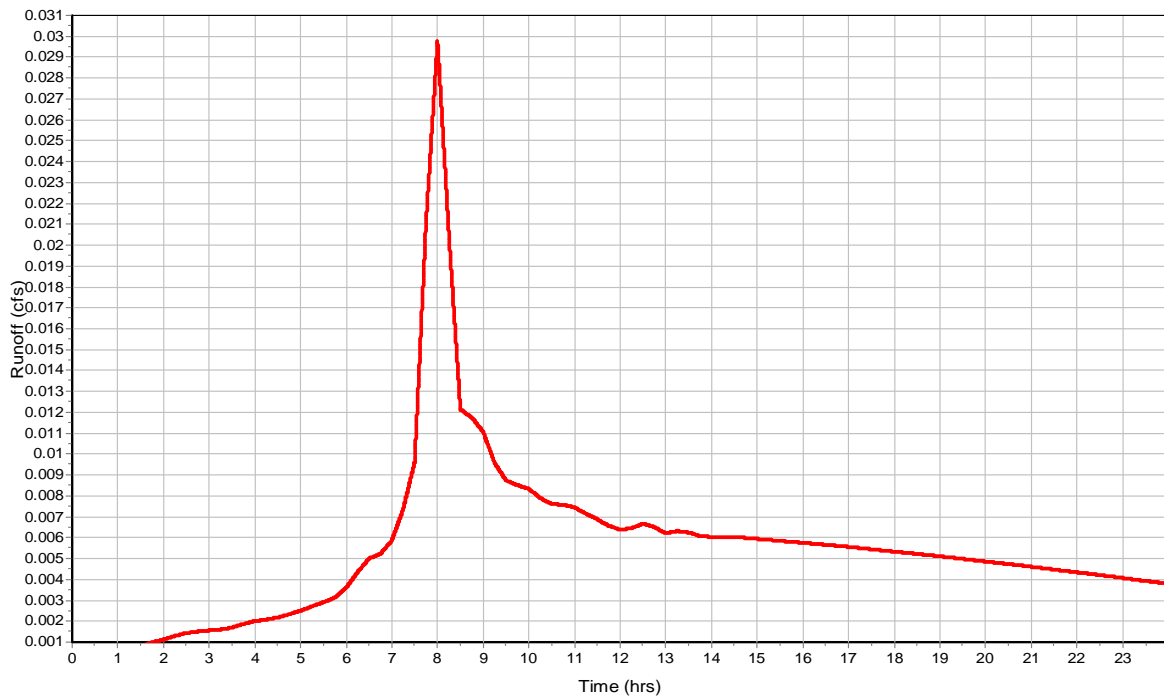

**Subbasin : BLDG A NORTH**

**Input Data**

Area (ac) ..... 0.05  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.05		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.04  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG A NORTH

Rainfall Intensity Graph

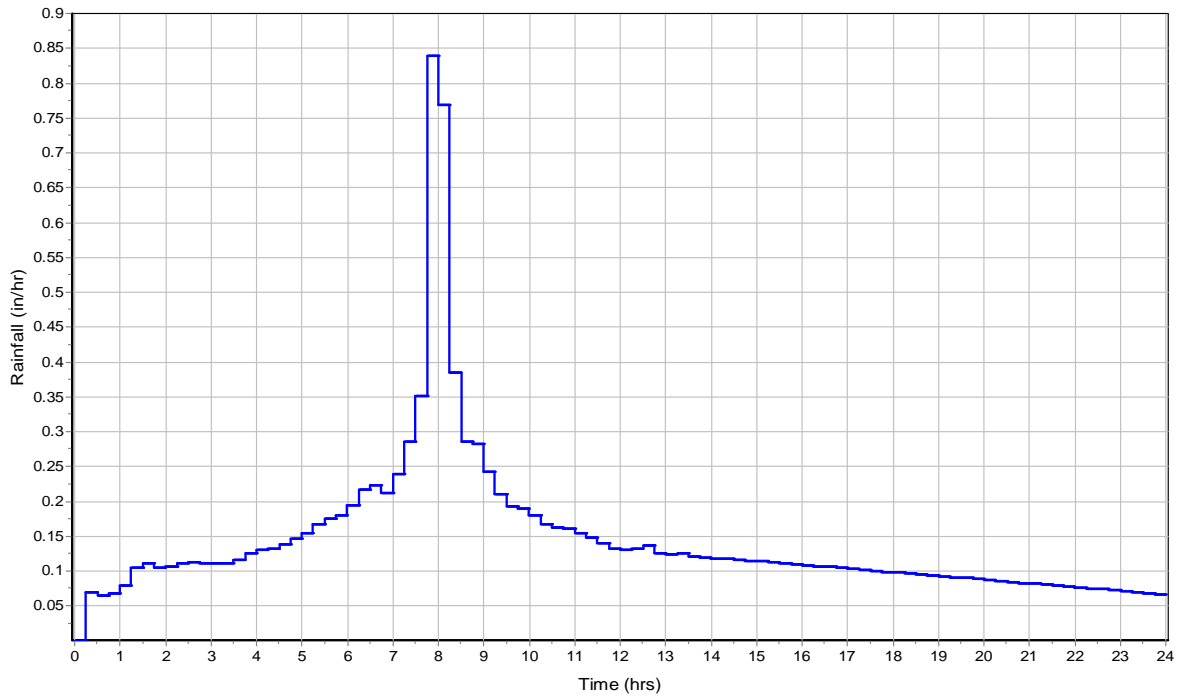

Runoff Hydrograph

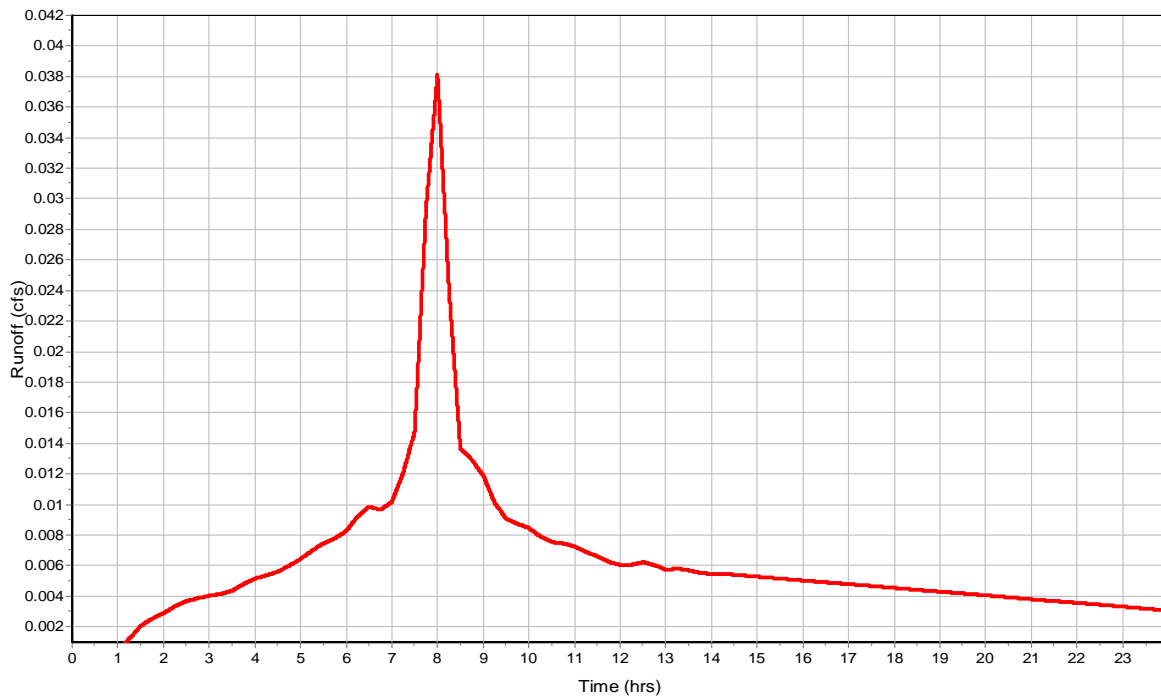



**Subbasin : BLDG A SOUTH**

**Input Data**

Area (ac) ..... 0.05  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.05		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.04  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG A SOUTH

Rainfall Intensity Graph

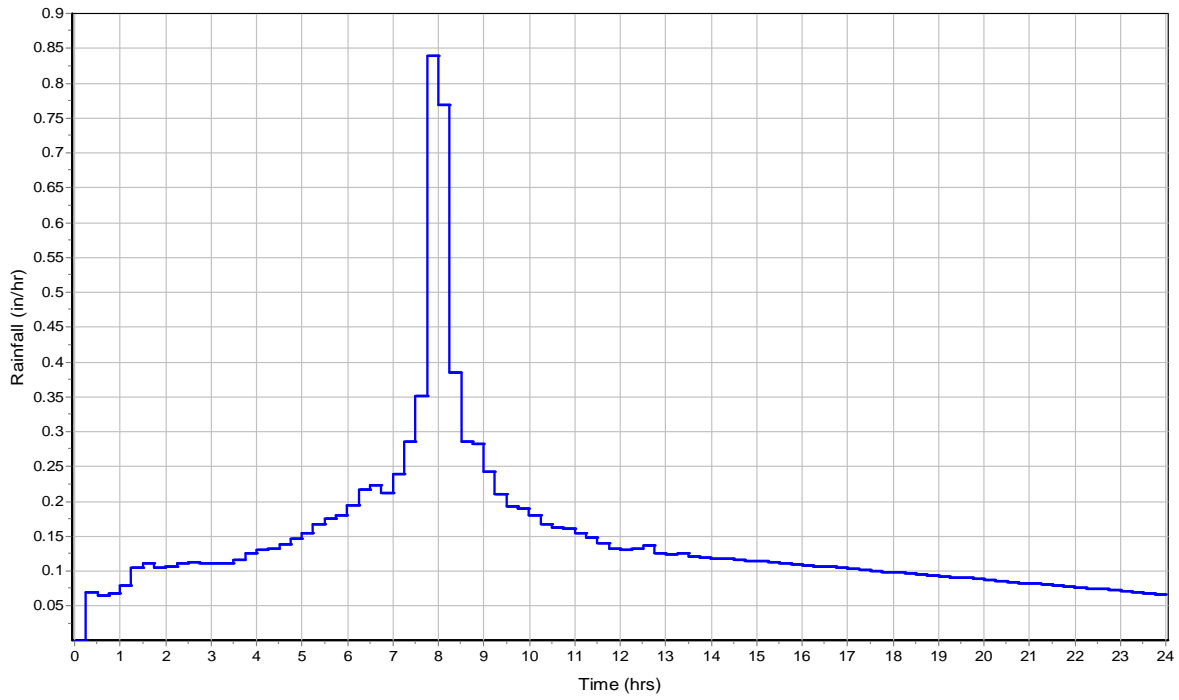

Runoff Hydrograph

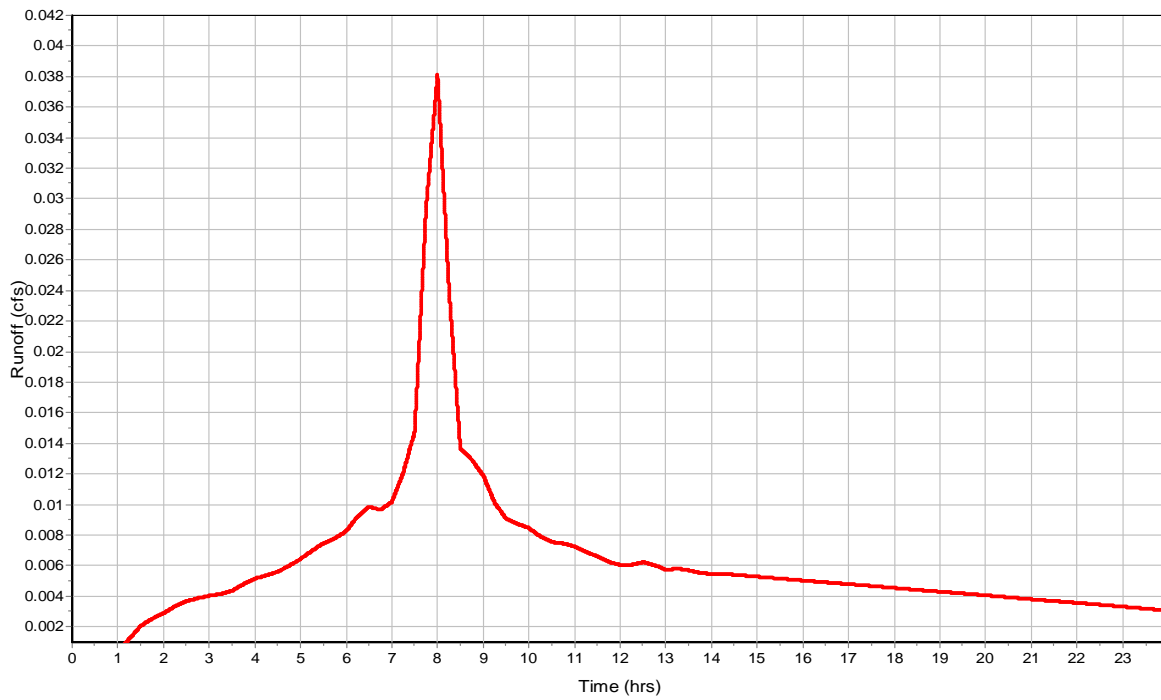

**Subbasin : BLDG B NE**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG B NE

Rainfall Intensity Graph

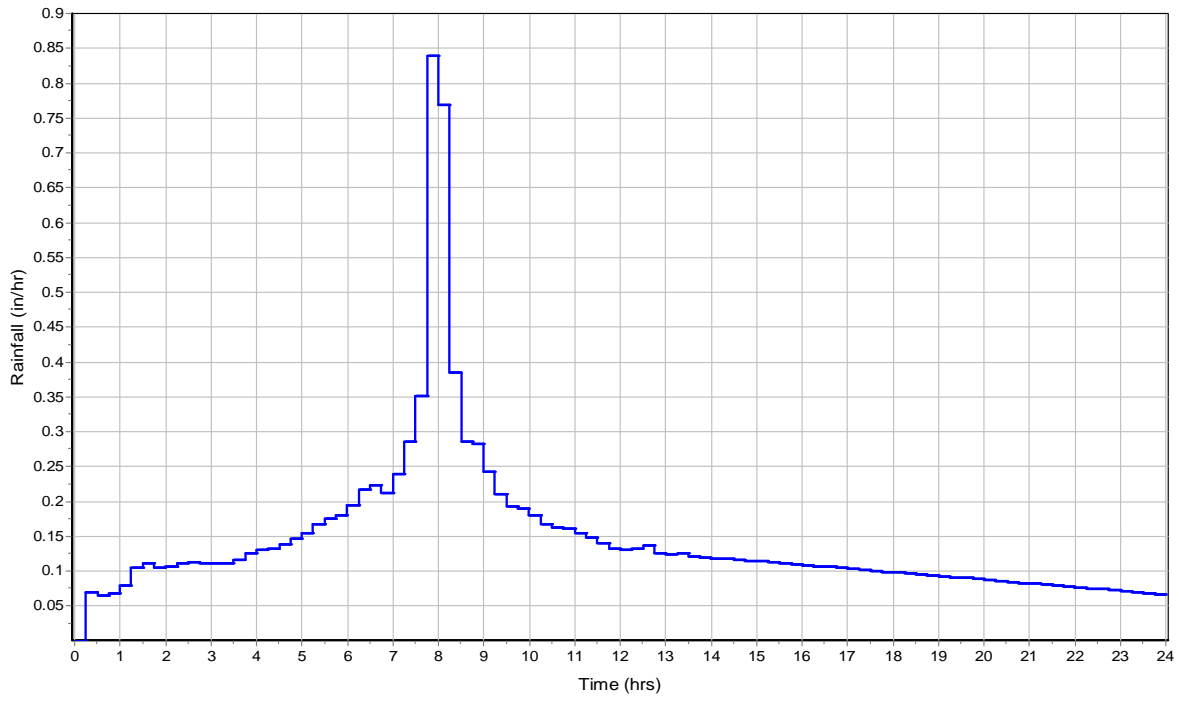

Runoff Hydrograph

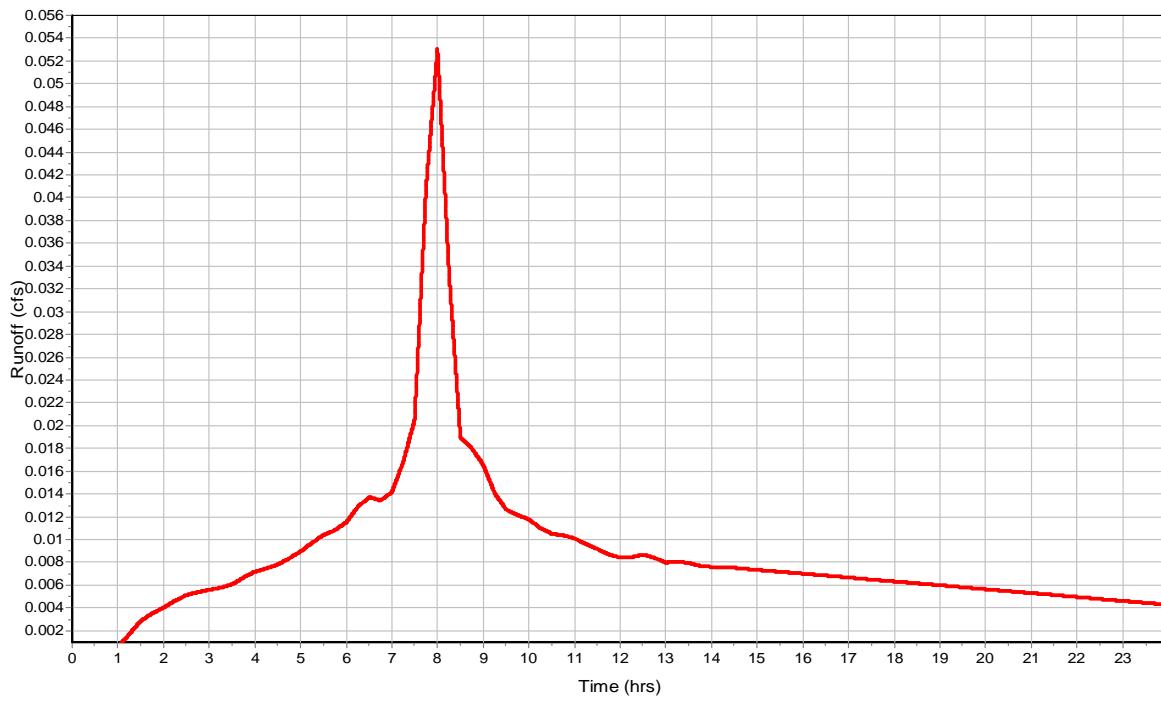

**Subbasin : BLDG B NW**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG B NW

Rainfall Intensity Graph

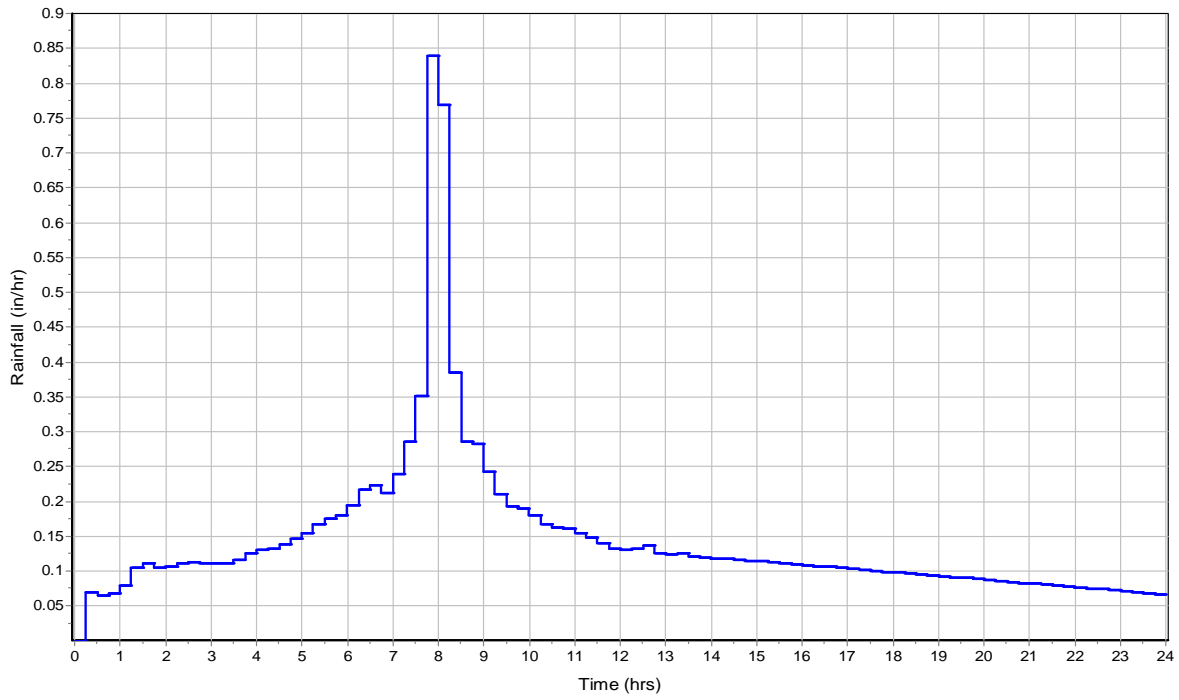

Runoff Hydrograph

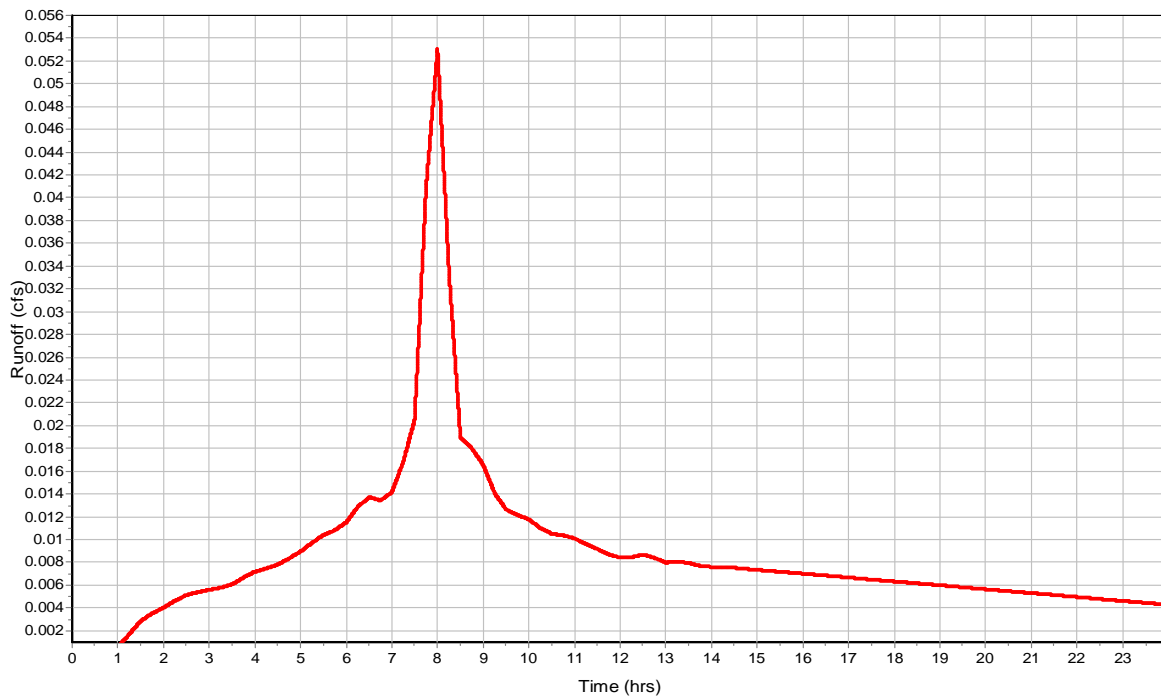

**Subbasin : BLDG B SE**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG B SE

Rainfall Intensity Graph

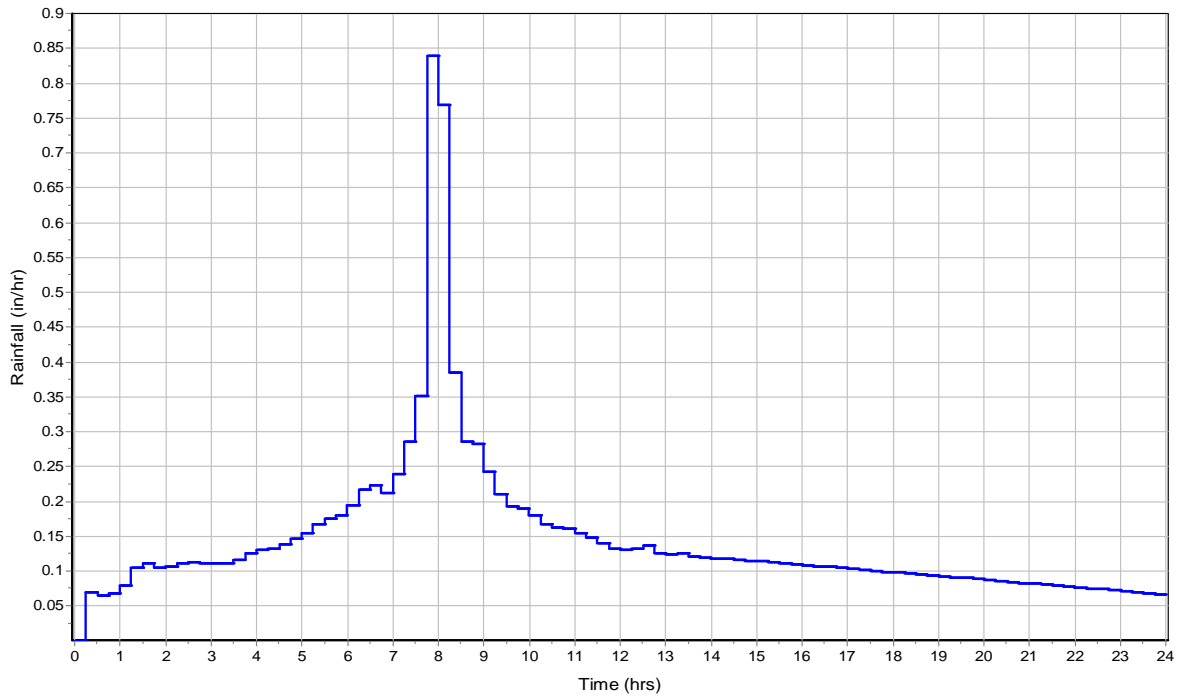

Runoff Hydrograph

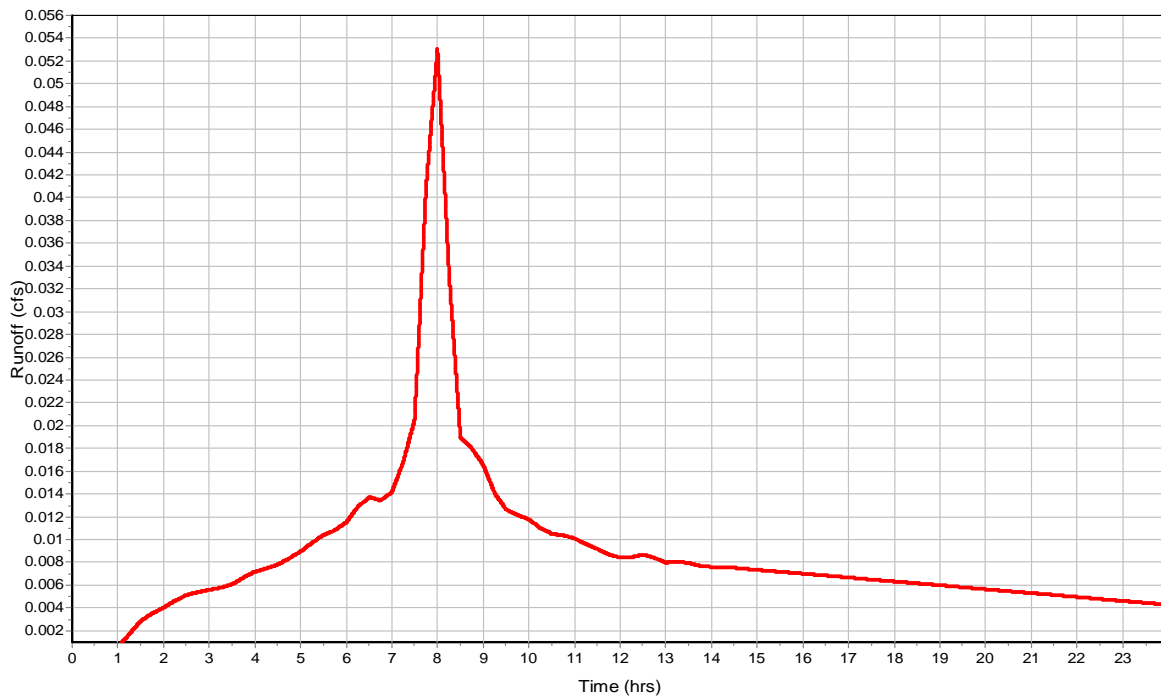



**Subbasin : BLDG B SW**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG B SW

Rainfall Intensity Graph

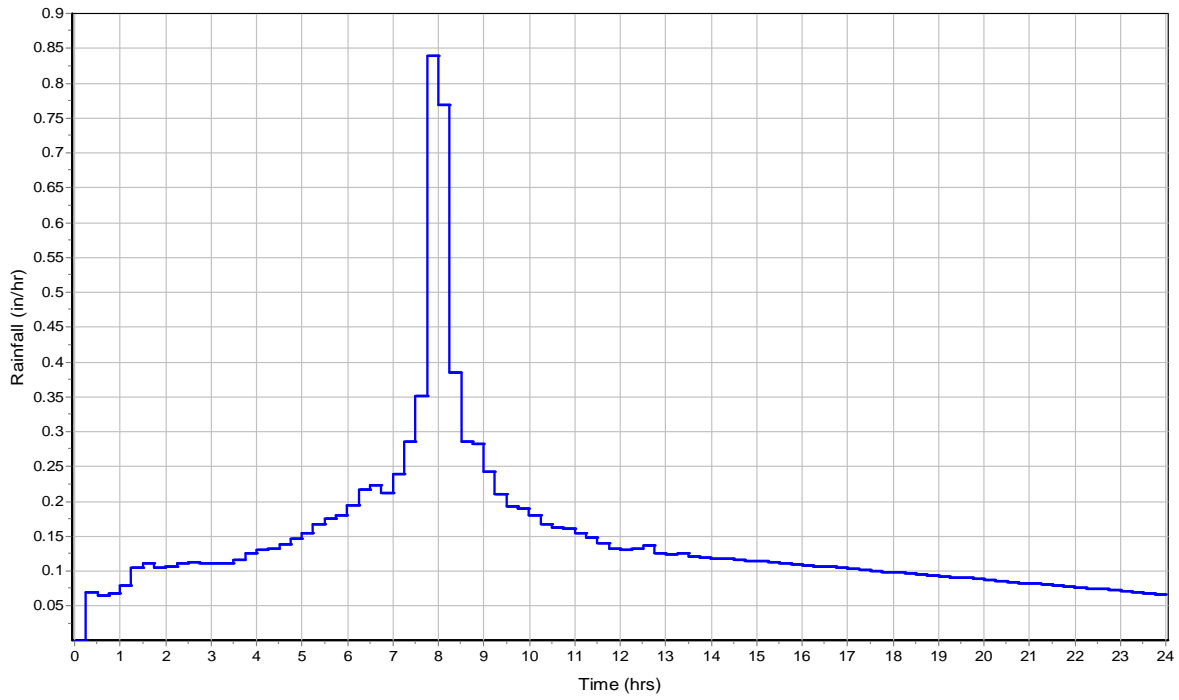

Runoff Hydrograph

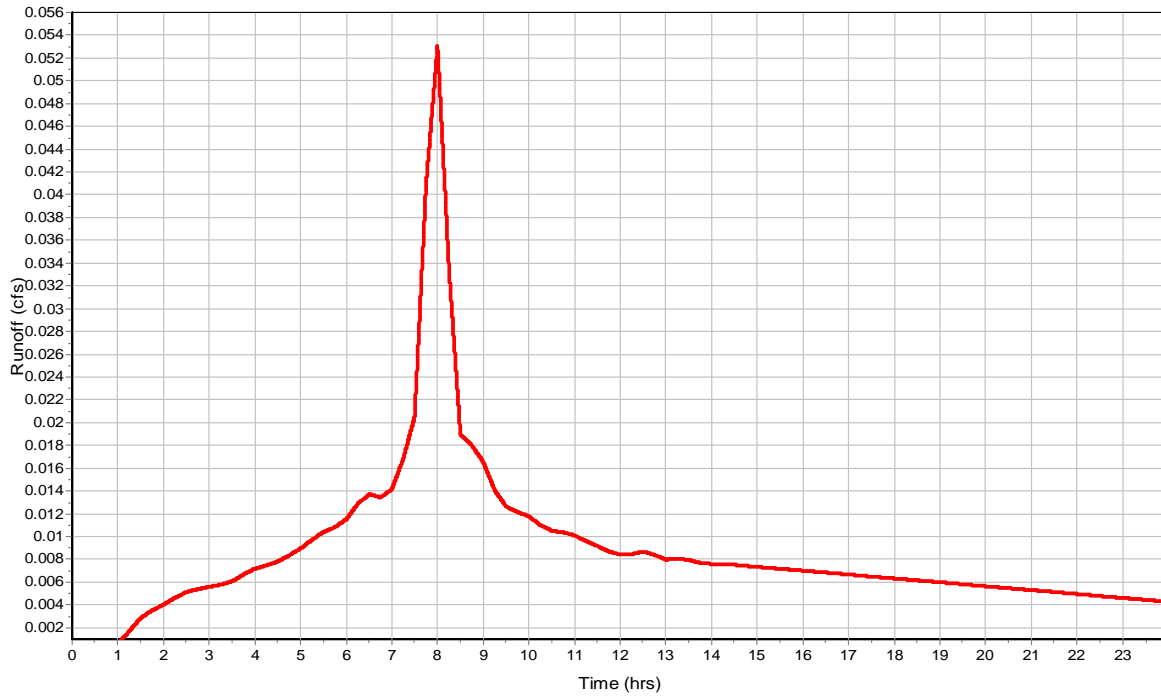

**Subbasin : BLDG C NE**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG C NE

Rainfall Intensity Graph

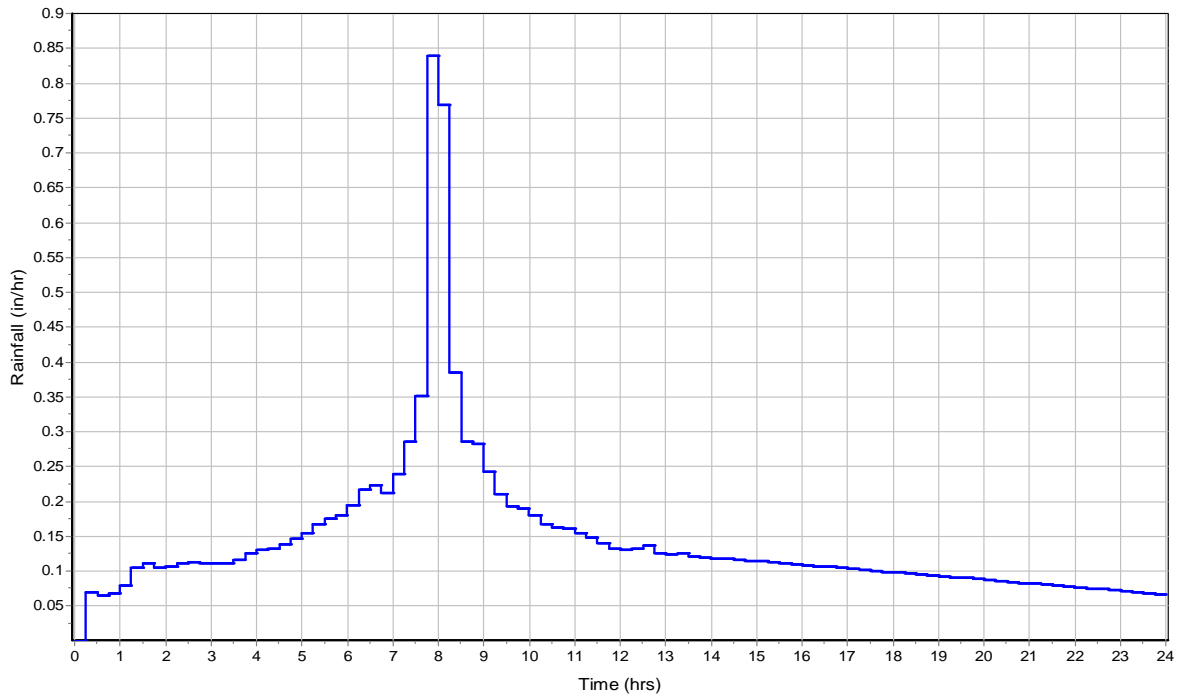

Runoff Hydrograph

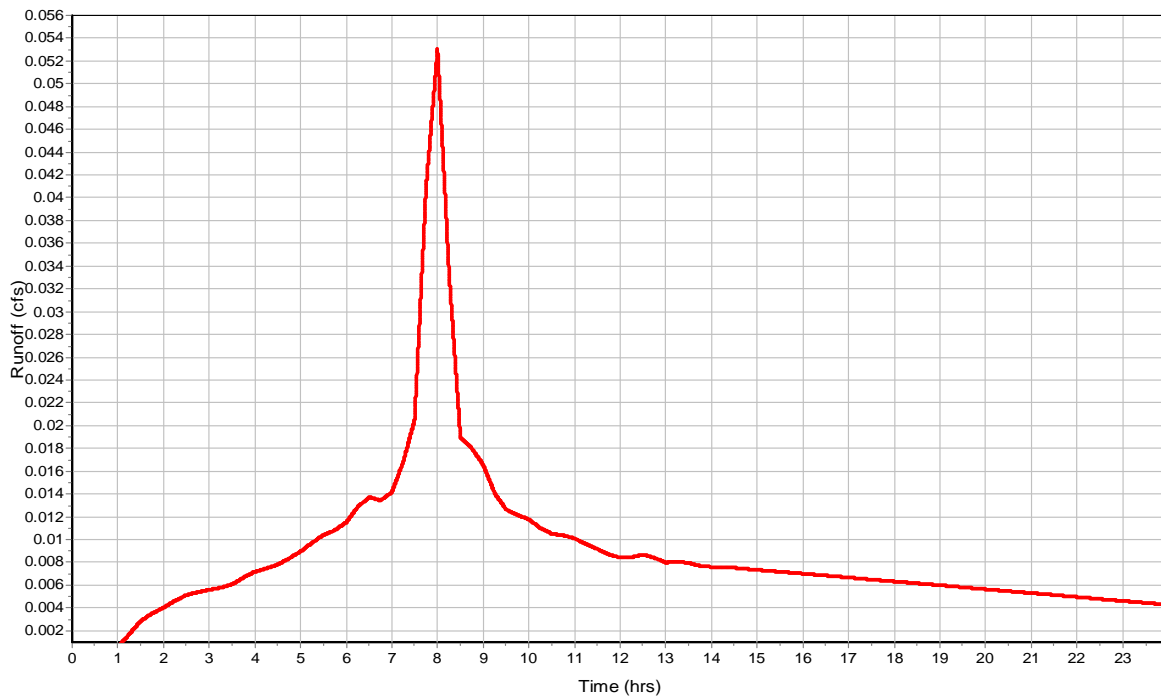

**Subbasin : BLDG C NW**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

32	Area	Soil	Curve
Soil/Surface Description	(acres)	Group	Number
Composite Area & Weighted CN	0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG C NW

Rainfall Intensity Graph

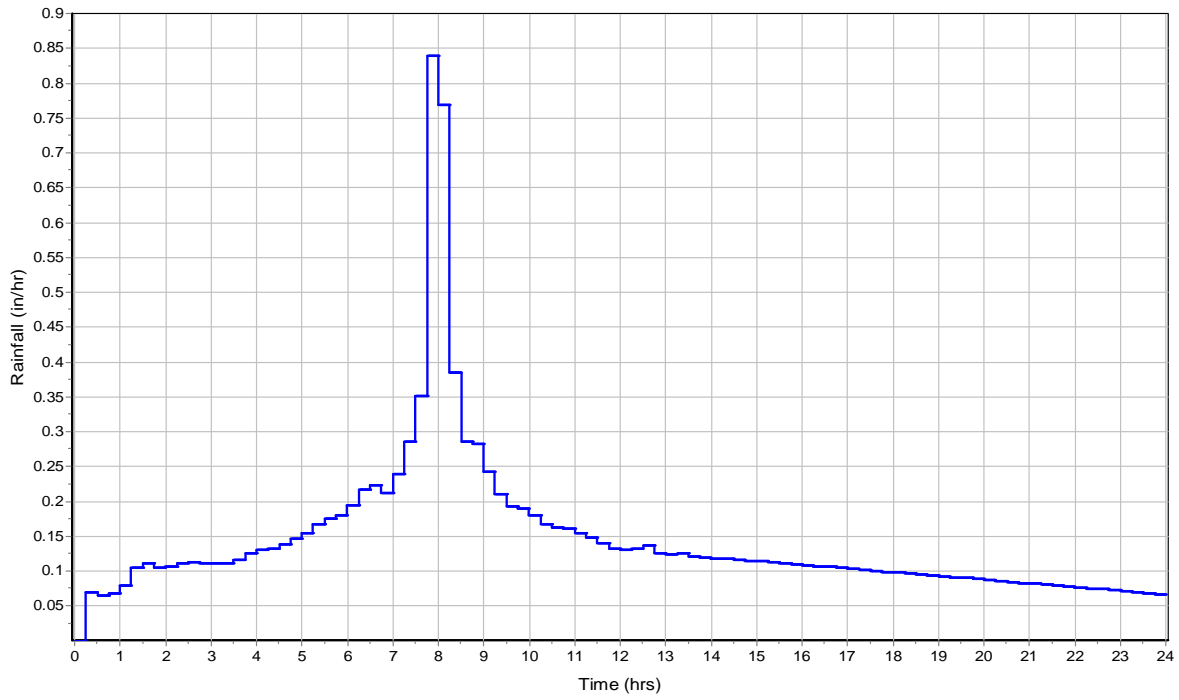

Runoff Hydrograph

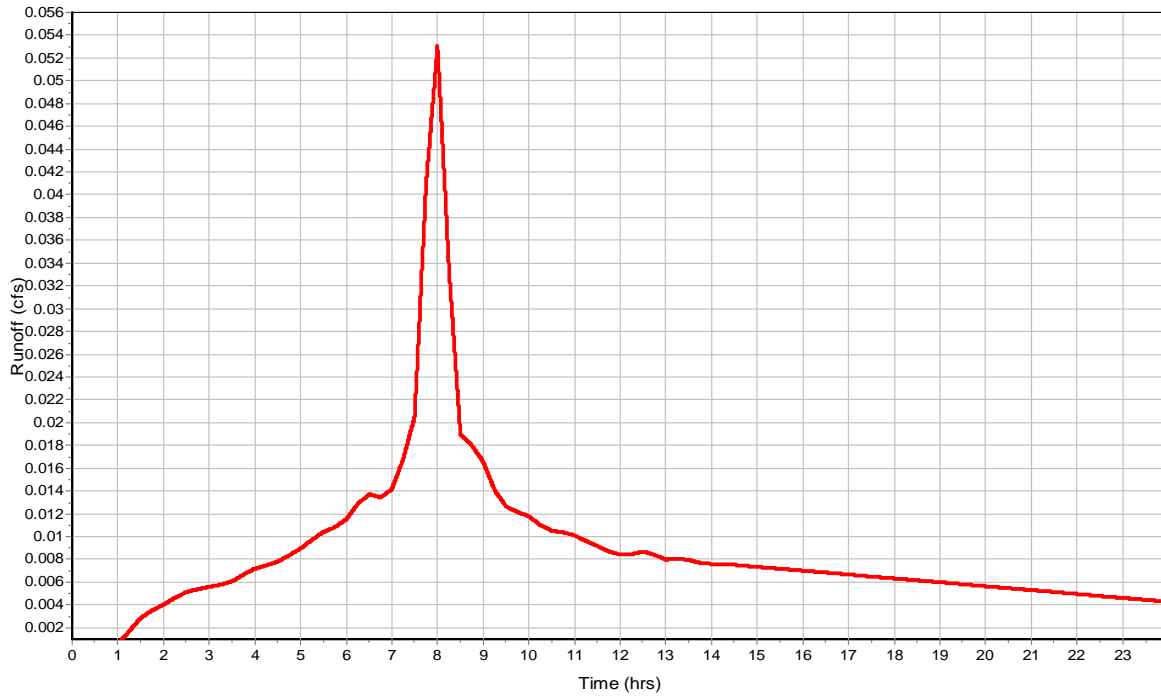

**Subbasin : BLDG C SE**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG C SE

Rainfall Intensity Graph

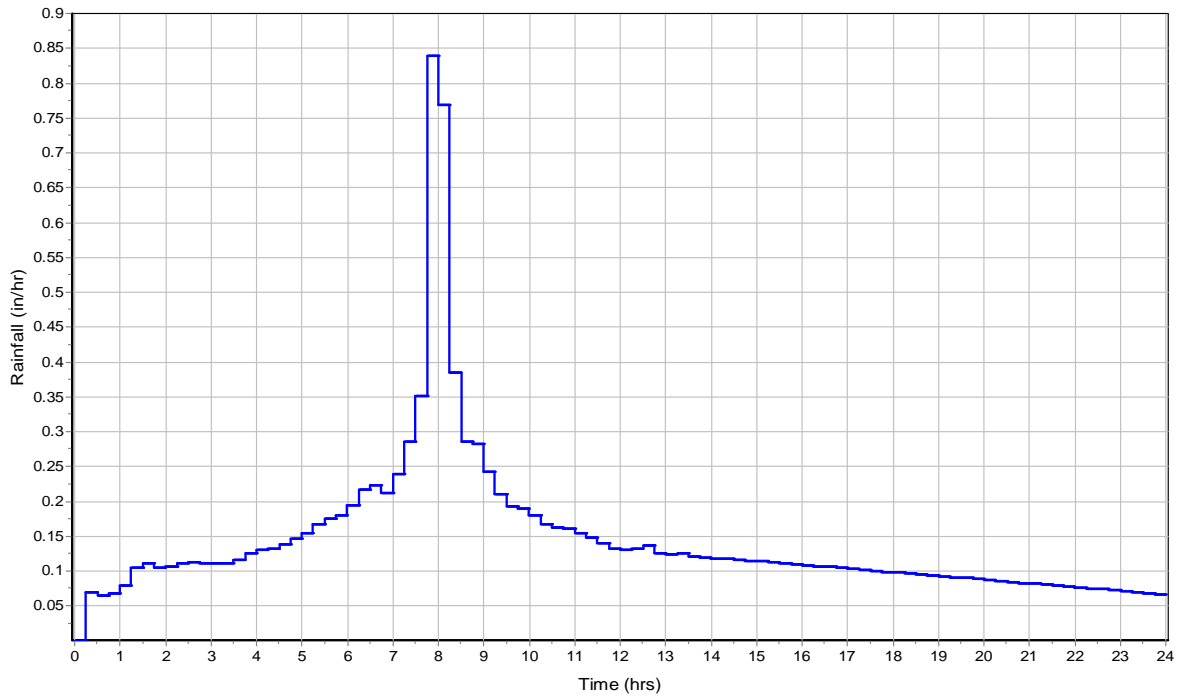

Runoff Hydrograph

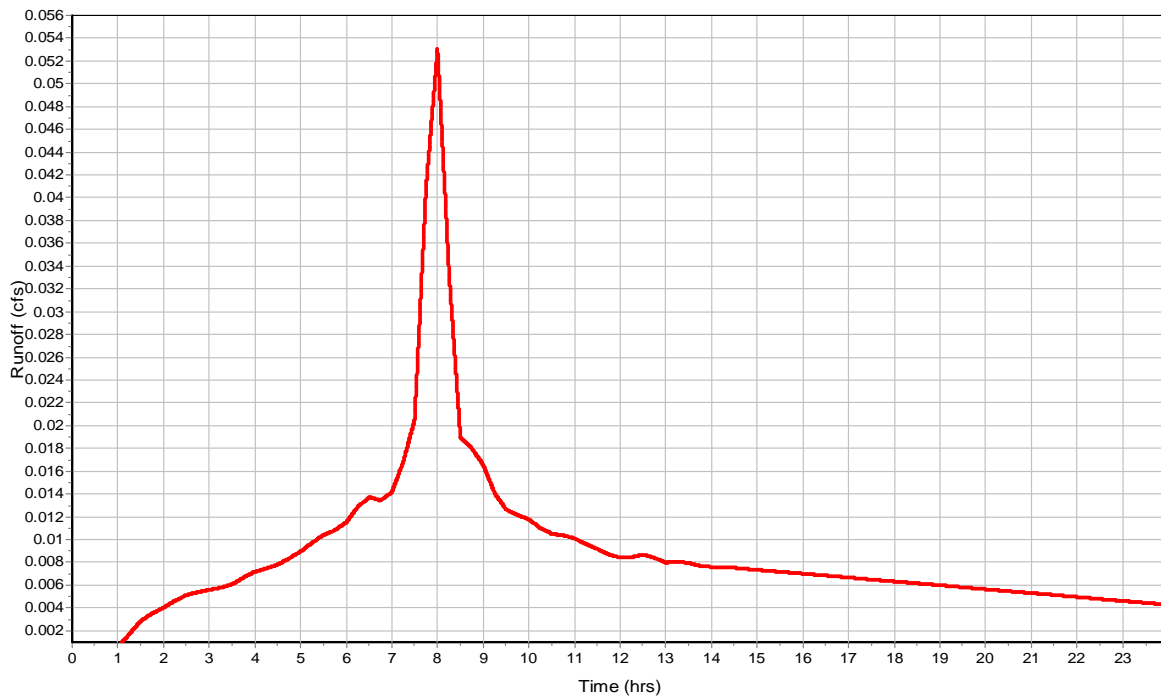



**Subbasin : BLDG C SW**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG C SW

Rainfall Intensity Graph

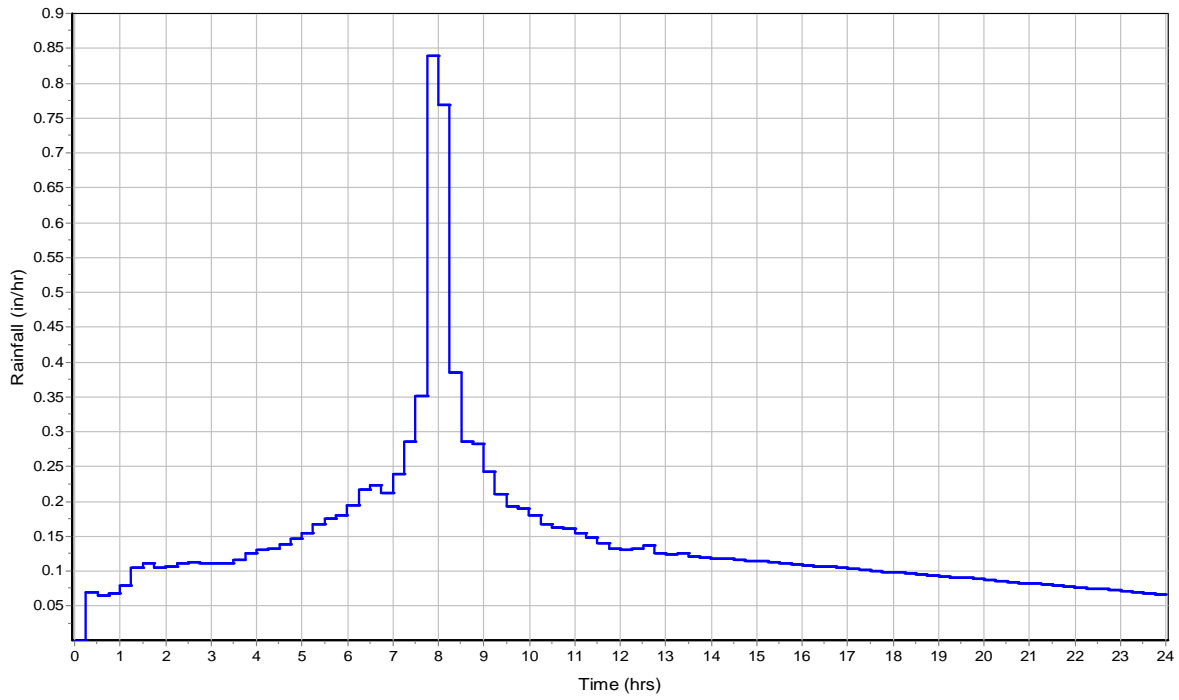

Runoff Hydrograph

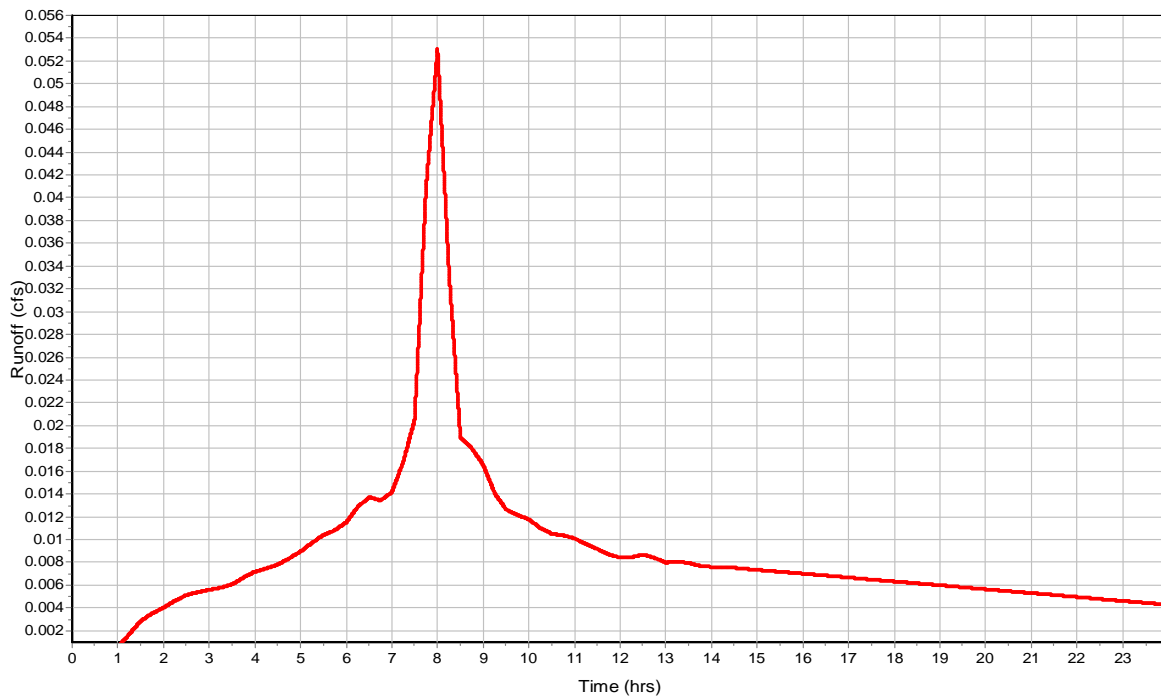

**Subbasin : BLDG CLUB EAST**

**Input Data**

Area (ac) ..... 0.03  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.03		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.02  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG CLUB EAST

Rainfall Intensity Graph

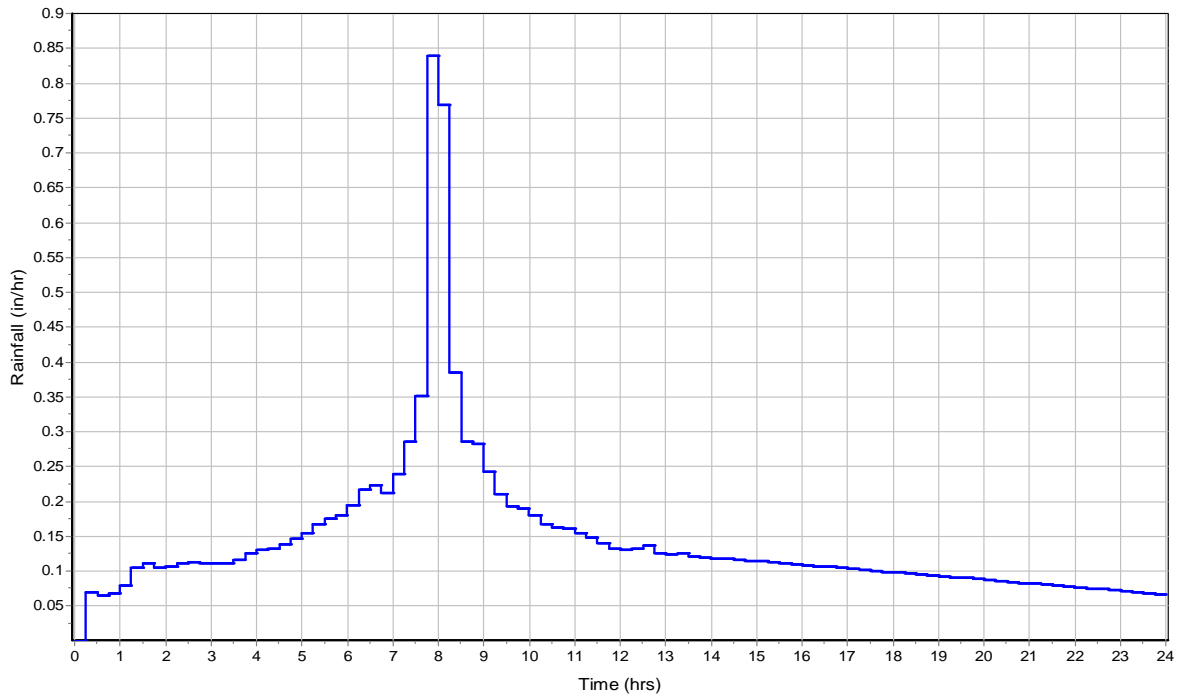

Runoff Hydrograph

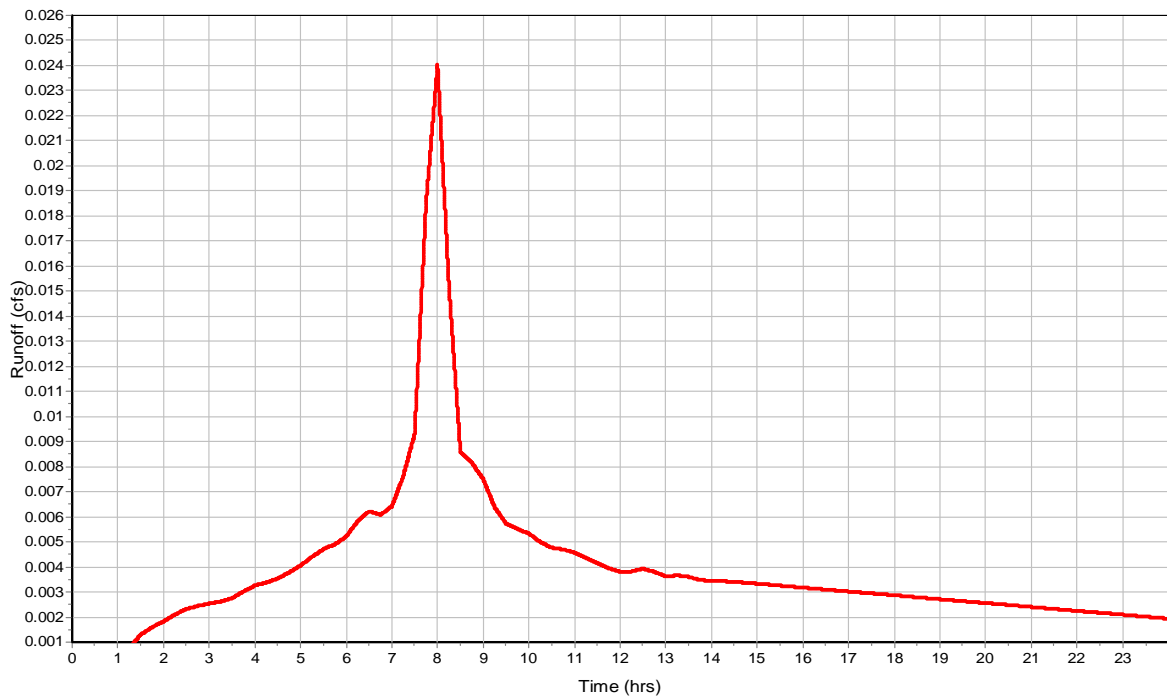

**Subbasin : BLDG CLUB WEST**

**Input Data**

Area (ac) ..... 0.03  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.03		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.02  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG CLUB WEST

Rainfall Intensity Graph

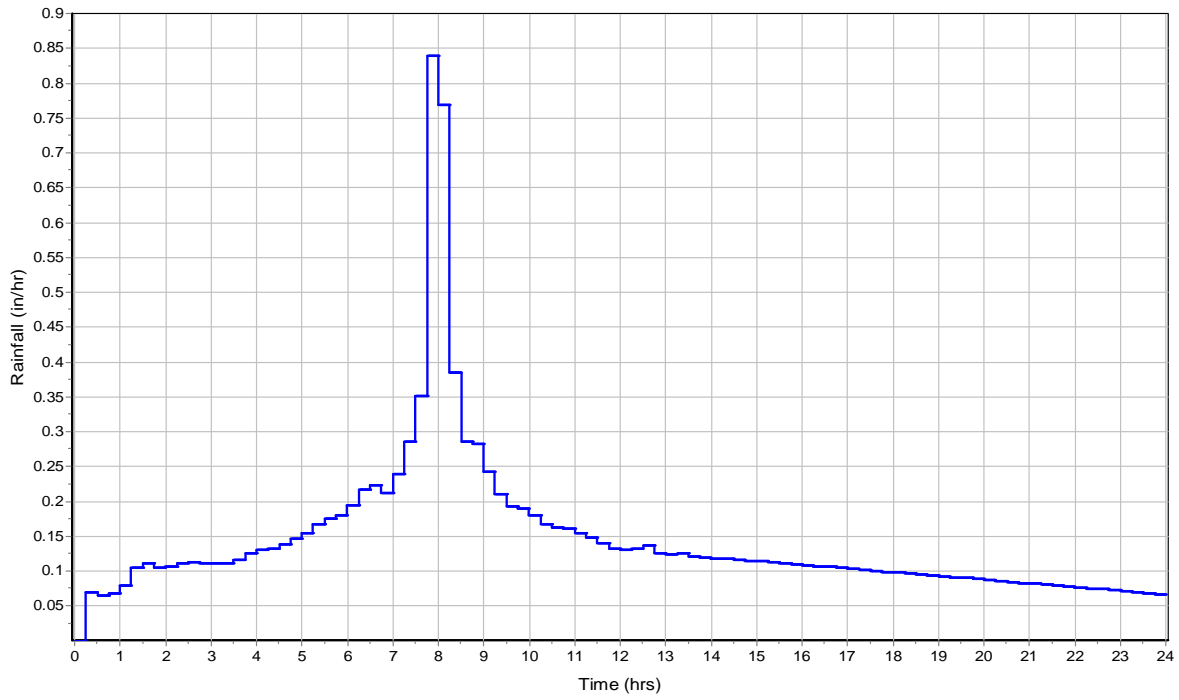

Runoff Hydrograph

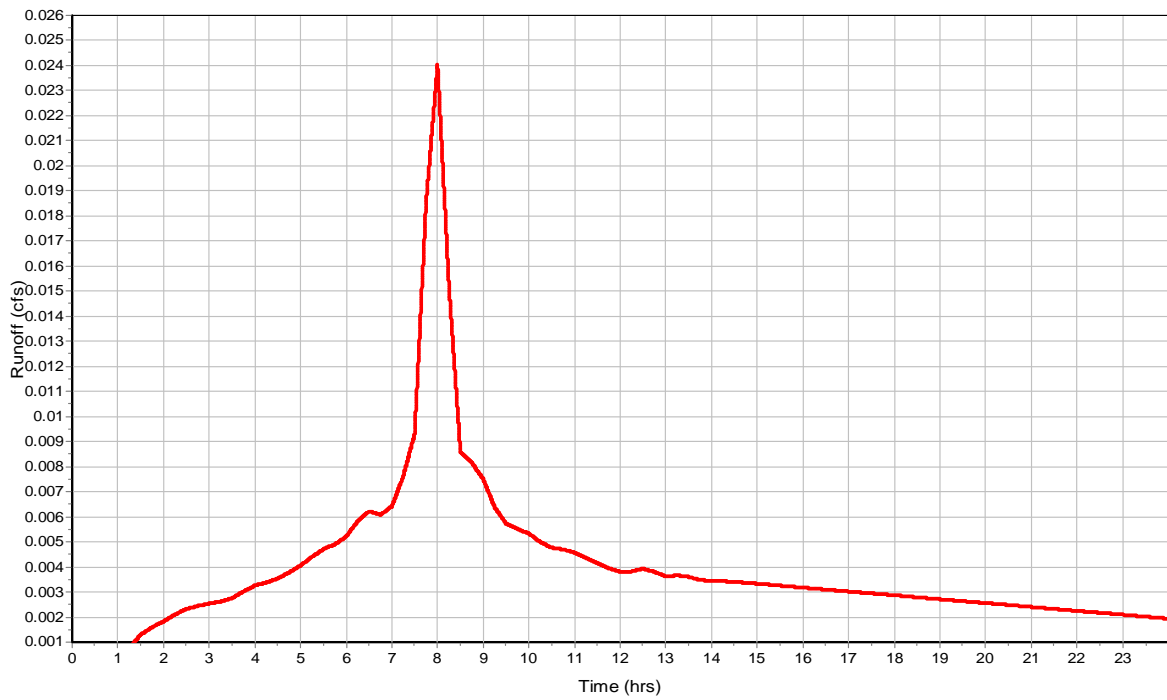

**Subbasin : BLDG D NE**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG D NE

Rainfall Intensity Graph

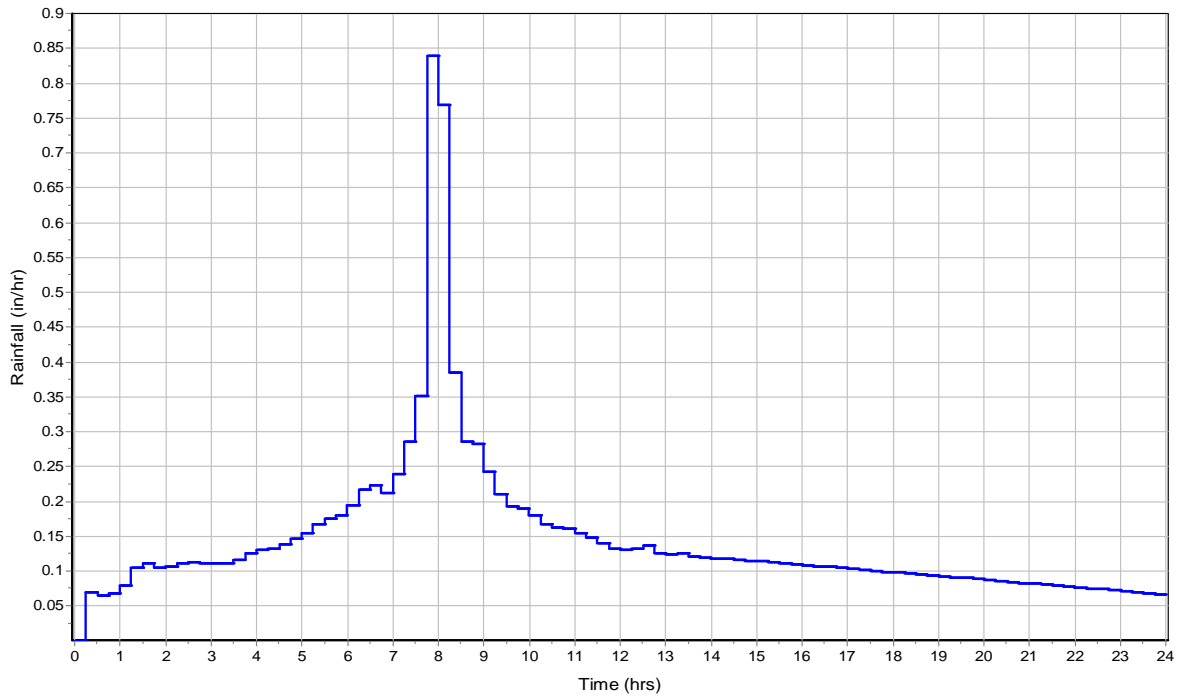

Runoff Hydrograph

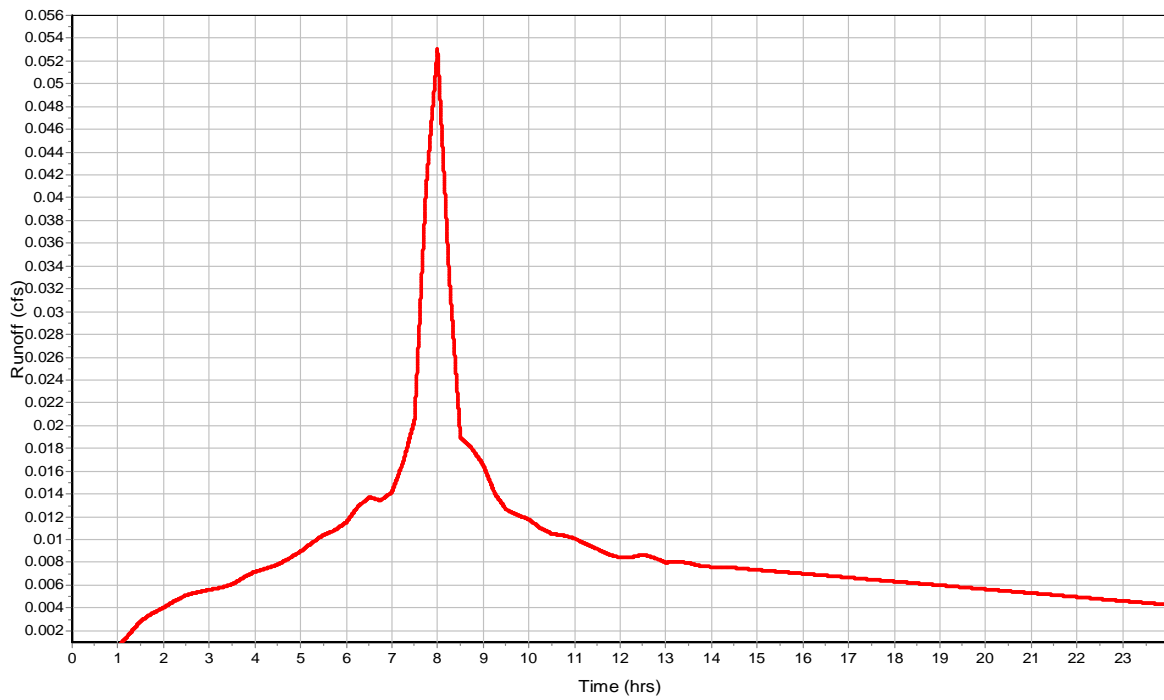



**Subbasin : BLDG D NW**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG D NW

Rainfall Intensity Graph

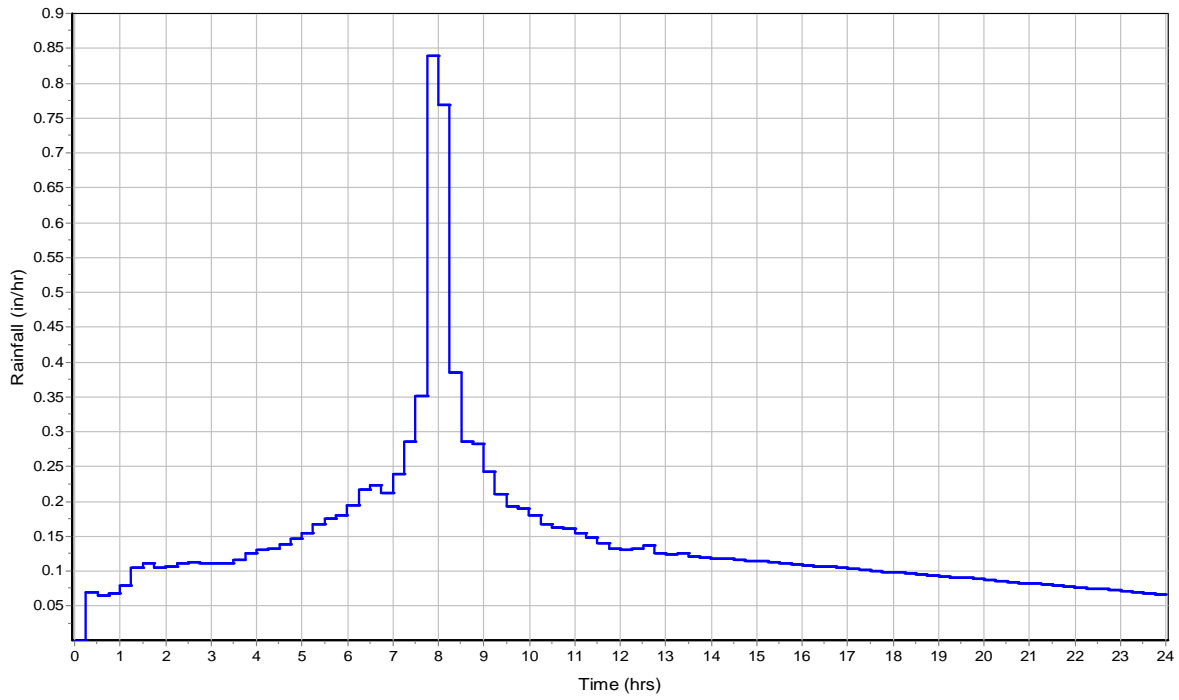

Runoff Hydrograph

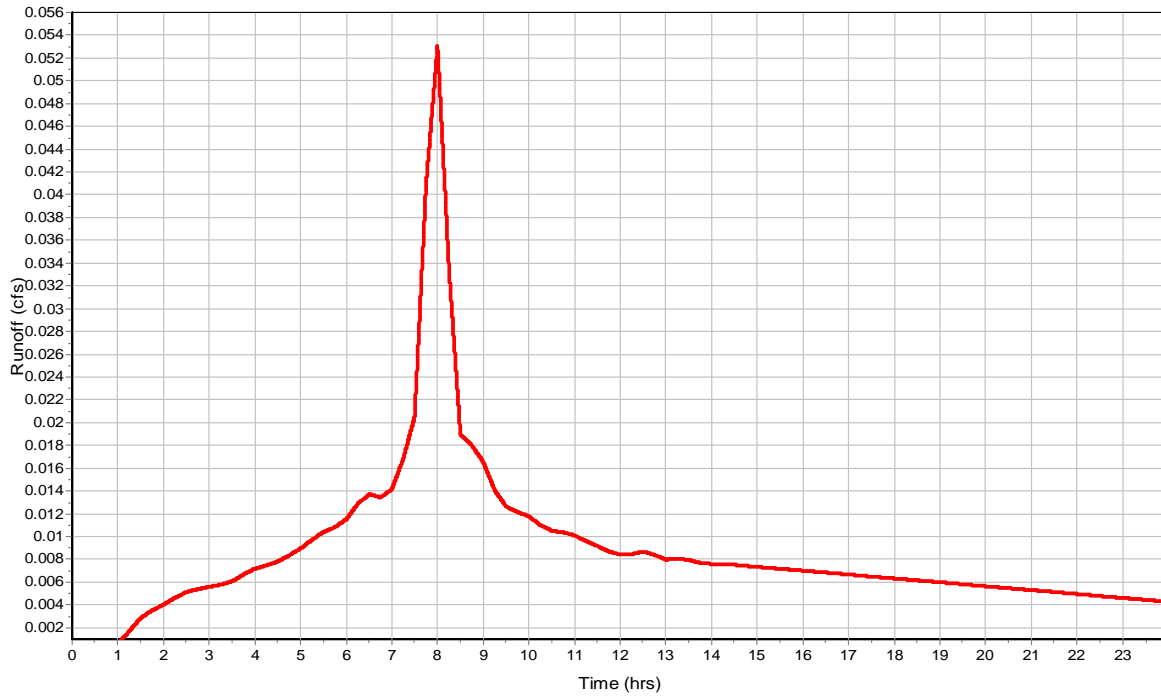

**Subbasin : BLDG D SOUTH**

**Input Data**

Area (ac) ..... 0.13  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.13		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.11  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG D SOUTH

Rainfall Intensity Graph

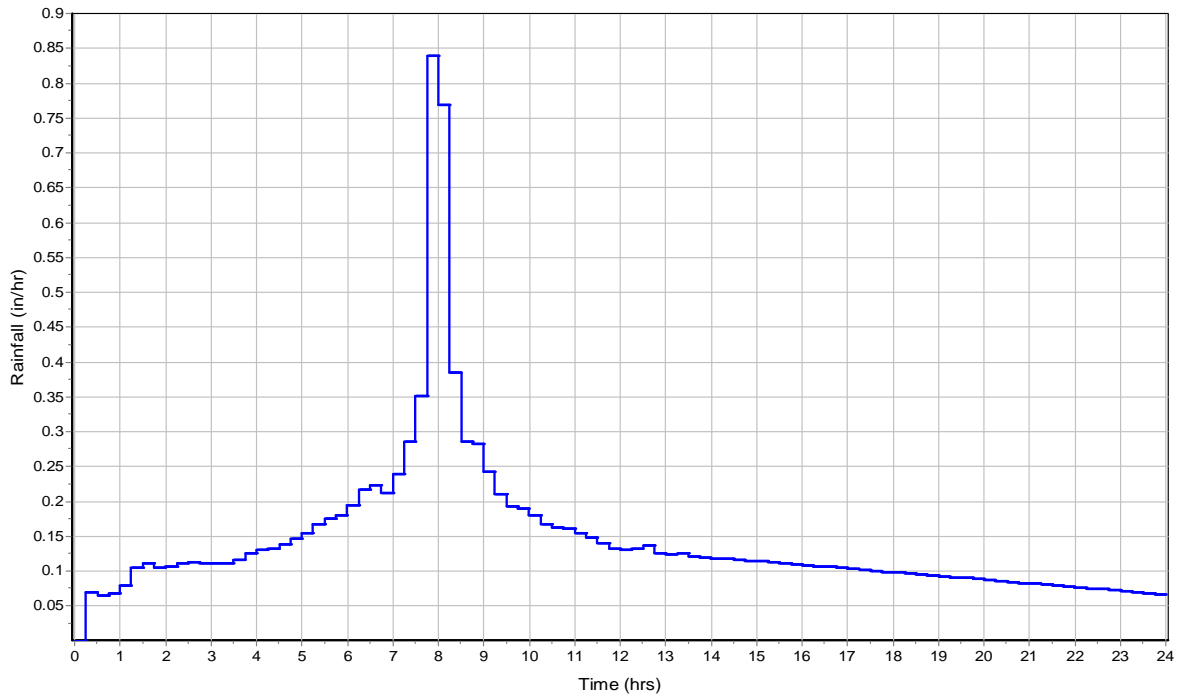

Runoff Hydrograph

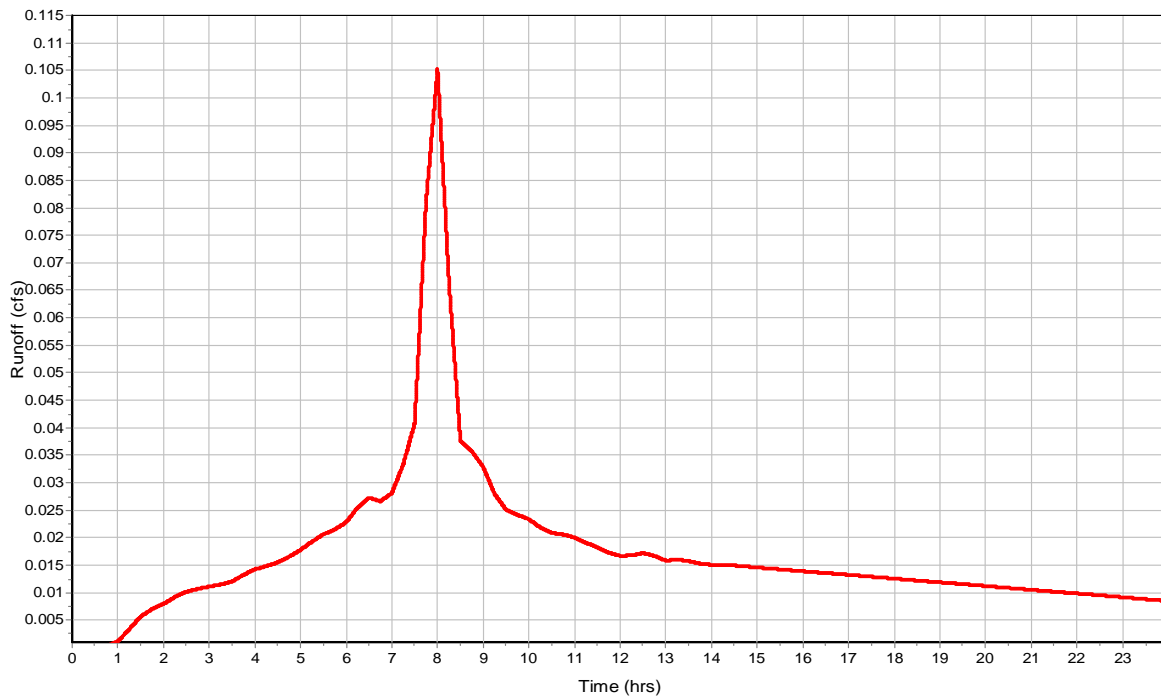

**Subbasin : BLDG E EAST**

**Input Data**

Area (ac) ..... 0.13  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.13		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.11  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG E EAST

Rainfall Intensity Graph

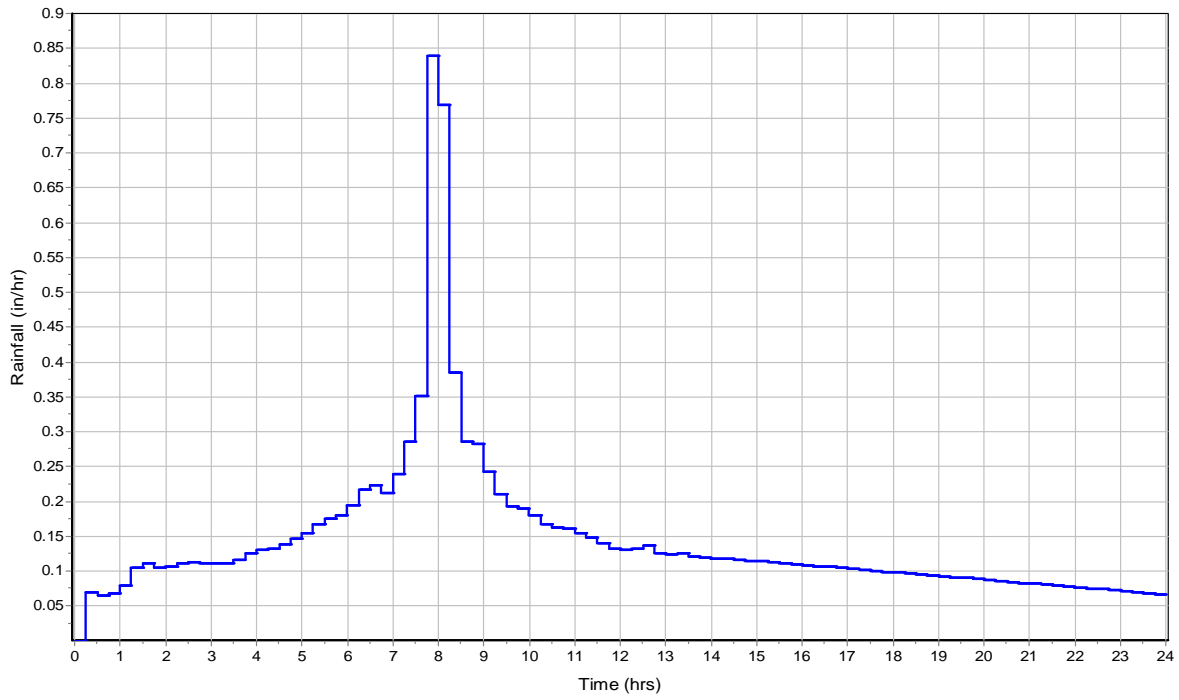

Runoff Hydrograph

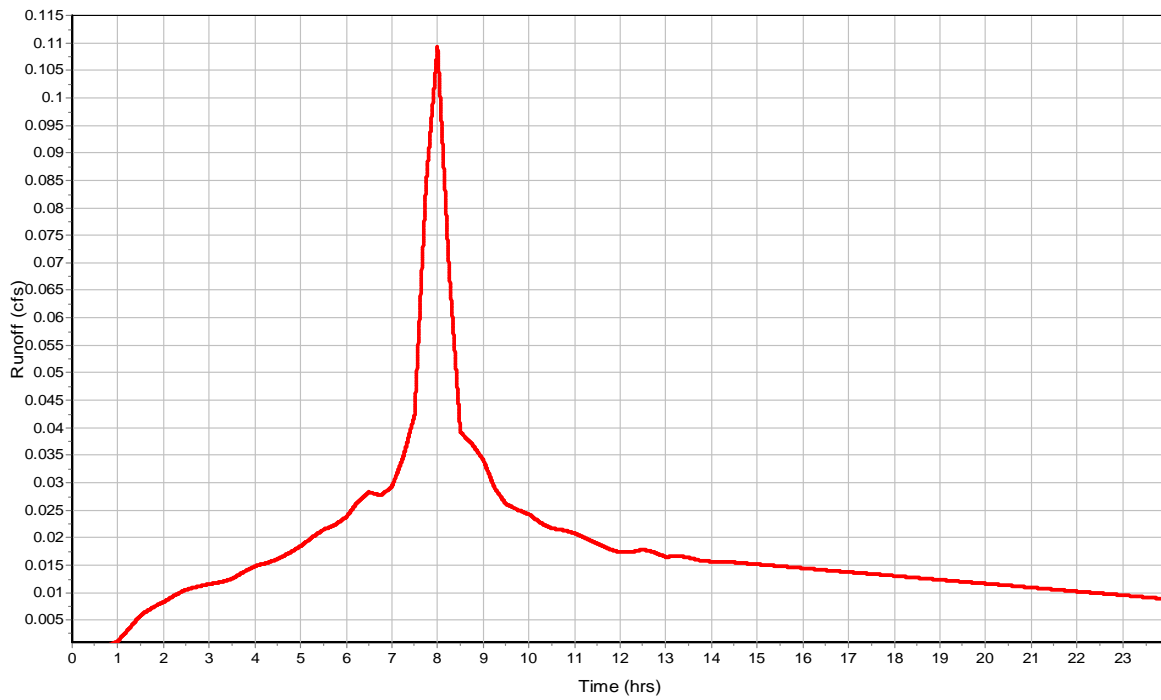

**Subbasin : BLDG E WEST**

**Input Data**

Area (ac) ..... 0.13  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.13		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.11  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG E WEST

Rainfall Intensity Graph

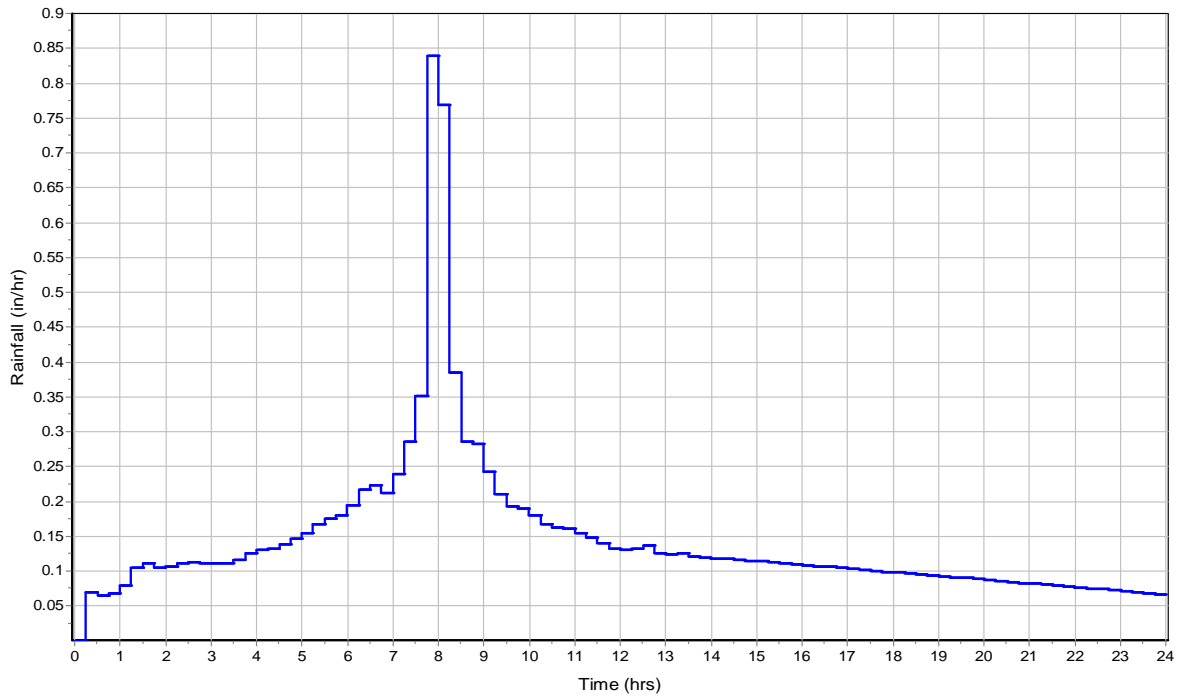

Runoff Hydrograph

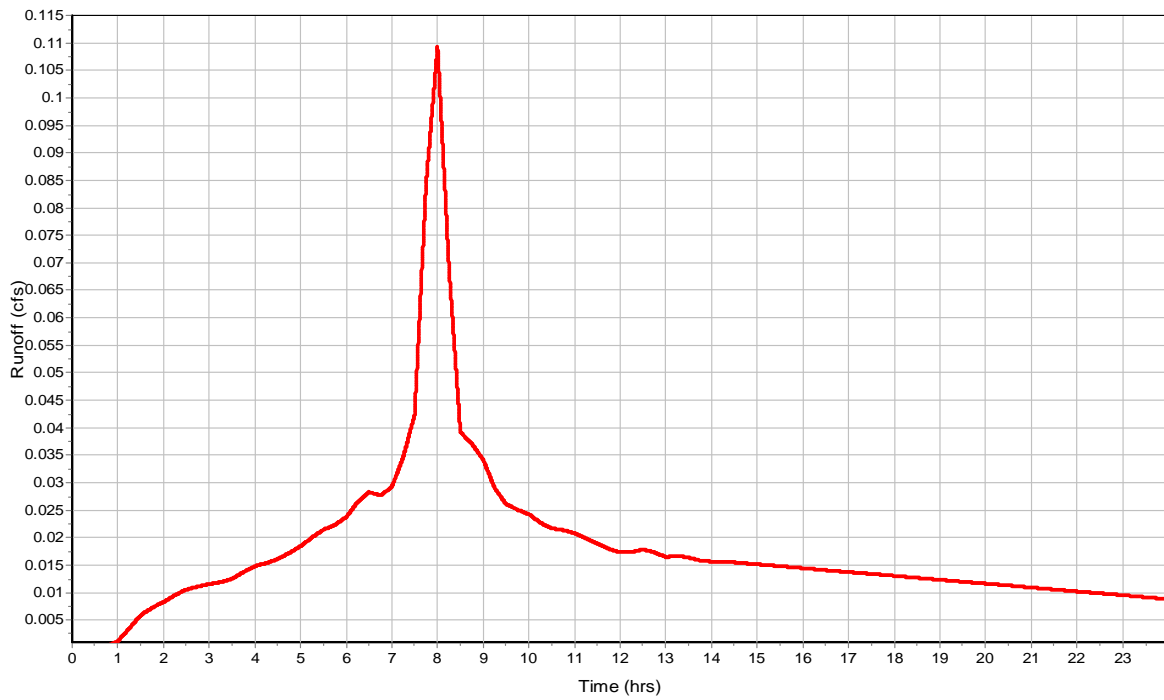



**Subbasin : BLDG F EAST**

**Input Data**

Area (ac) ..... 0.11  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.11		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.09  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG F EAST

Rainfall Intensity Graph

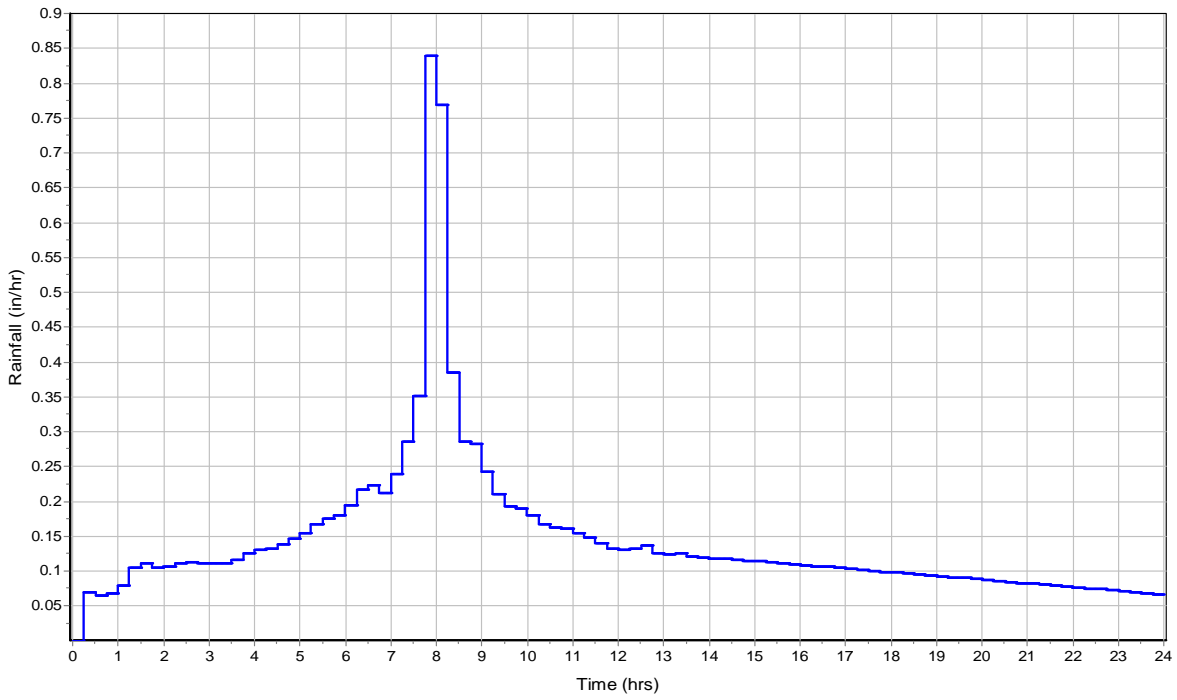

Runoff Hydrograph

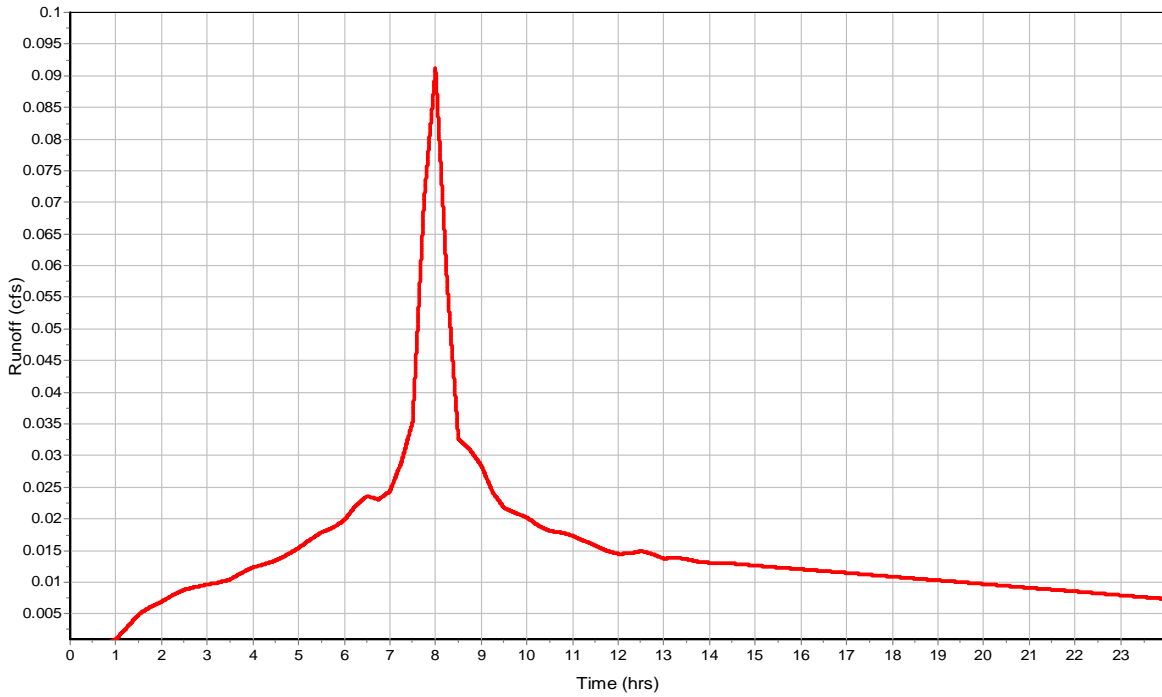

**Subbasin : BLDG F WEST**

**Input Data**

Area (ac) ..... 0.11  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.11		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.09  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG F WEST

Rainfall Intensity Graph

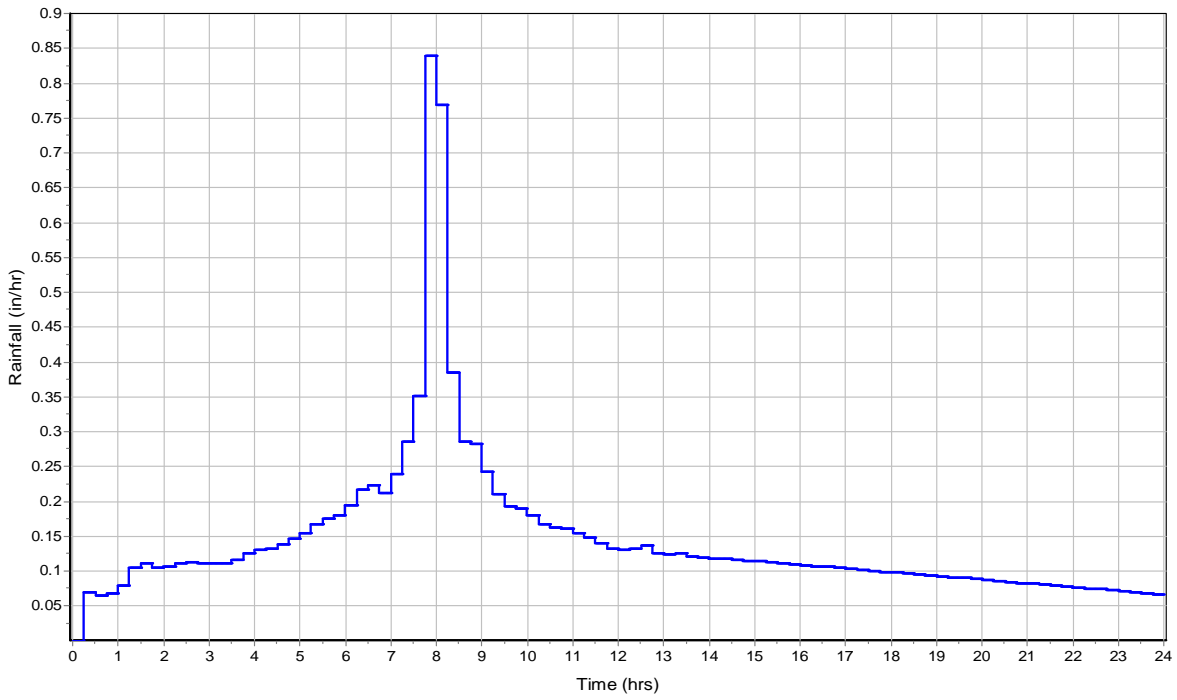

Runoff Hydrograph

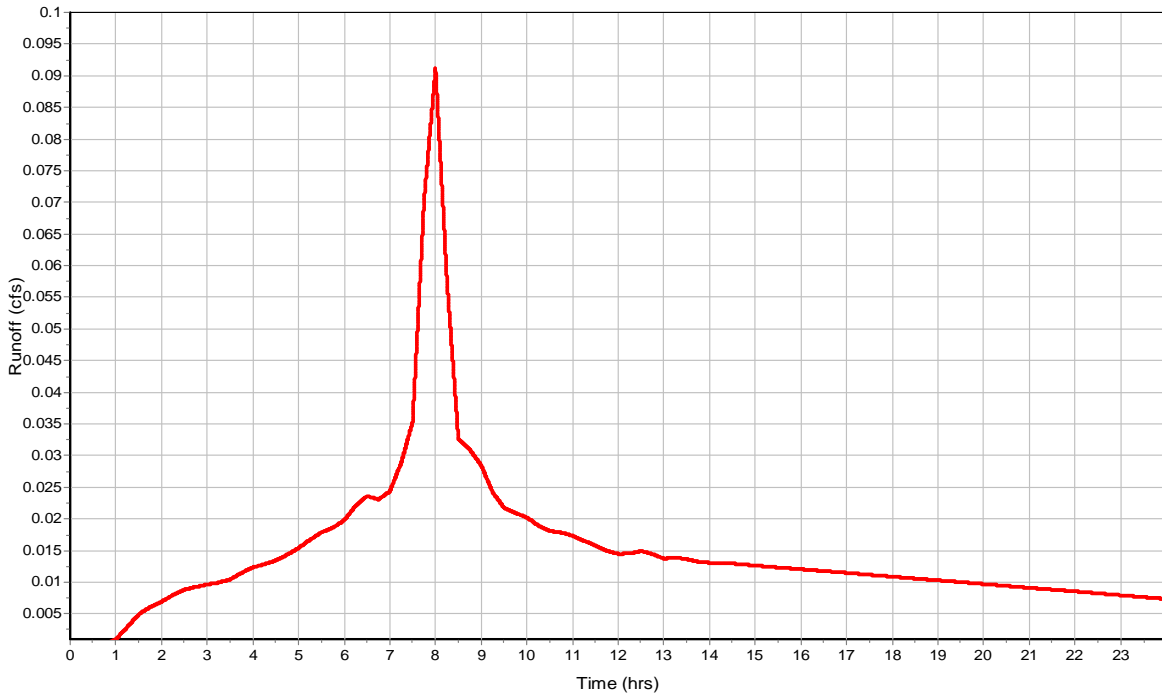

**Subbasin : BLDG G EAST**

**Input Data**

Area (ac) ..... 0.09  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.09		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.08  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG G EAST

Rainfall Intensity Graph

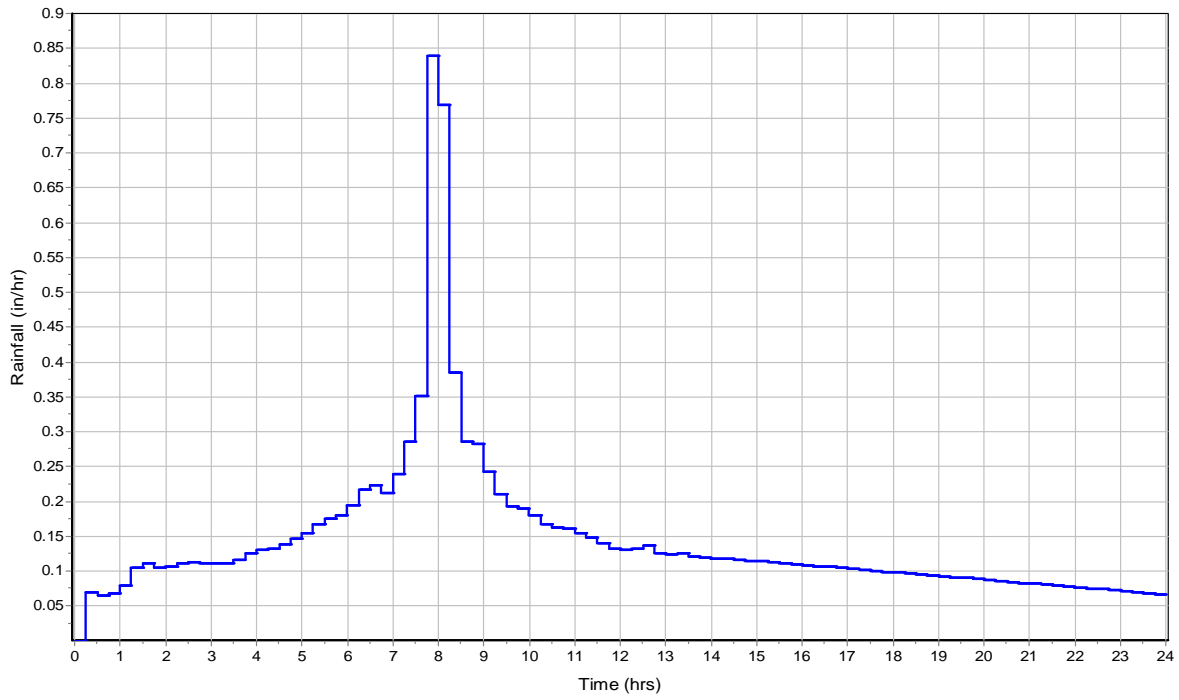

Runoff Hydrograph

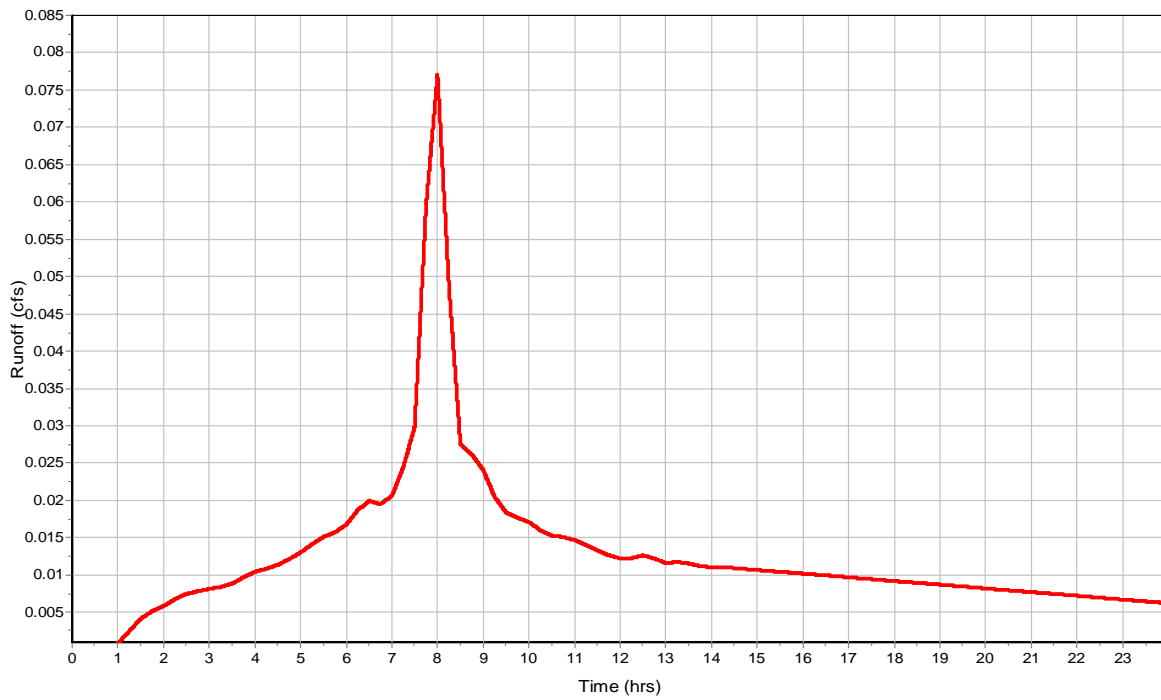

**Subbasin : BLDG G WEST**

**Input Data**

Area (ac) ..... 0.09  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.09		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.08  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG G WEST

Rainfall Intensity Graph

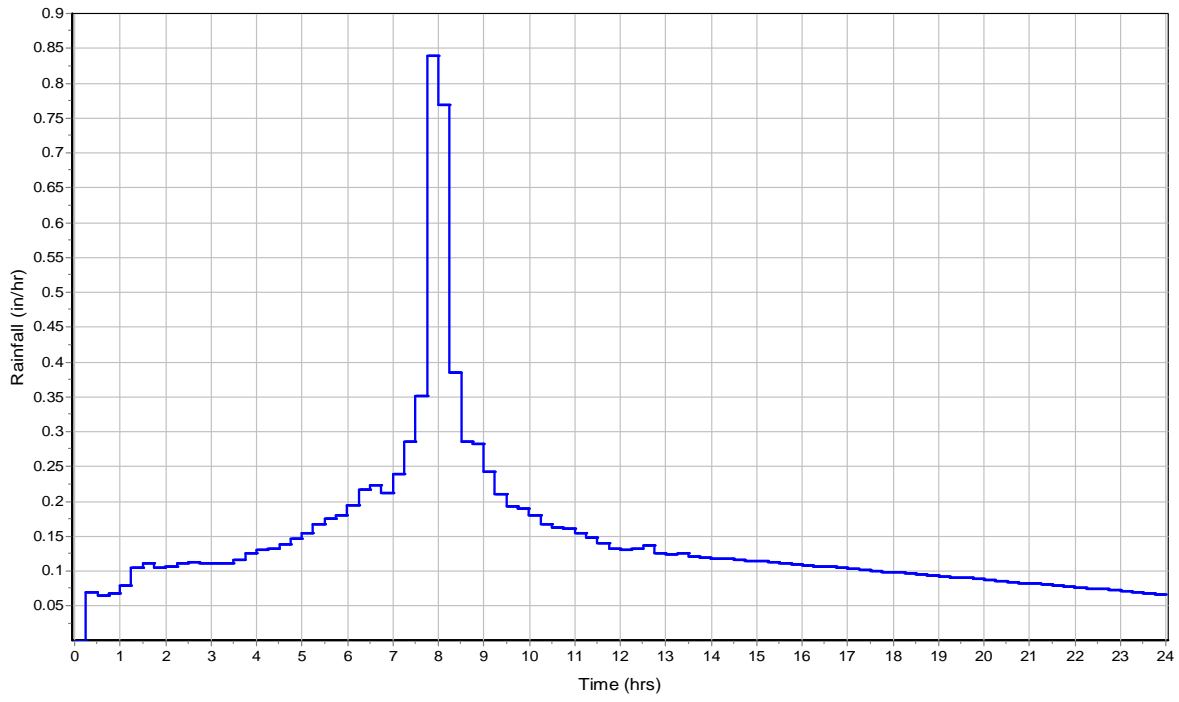

Runoff Hydrograph

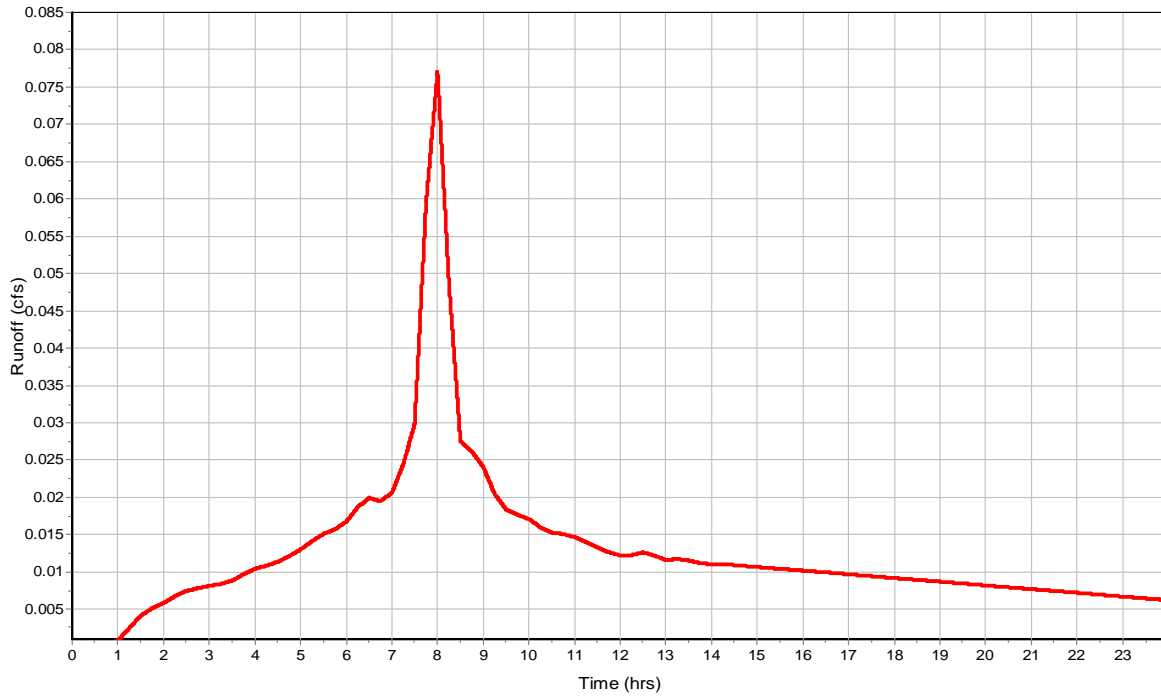



**Subbasin : BLDG H EAST**

**Input Data**

Area (ac) ..... 0.09  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.09		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.08  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG H EAST

Rainfall Intensity Graph

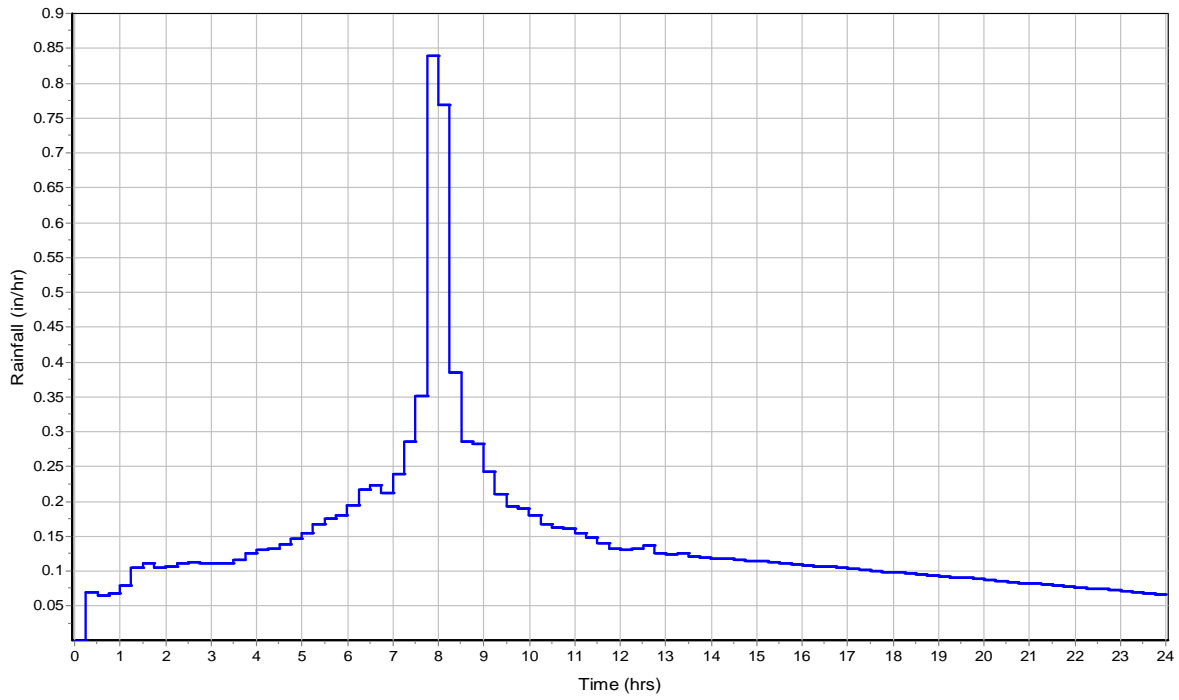

Runoff Hydrograph

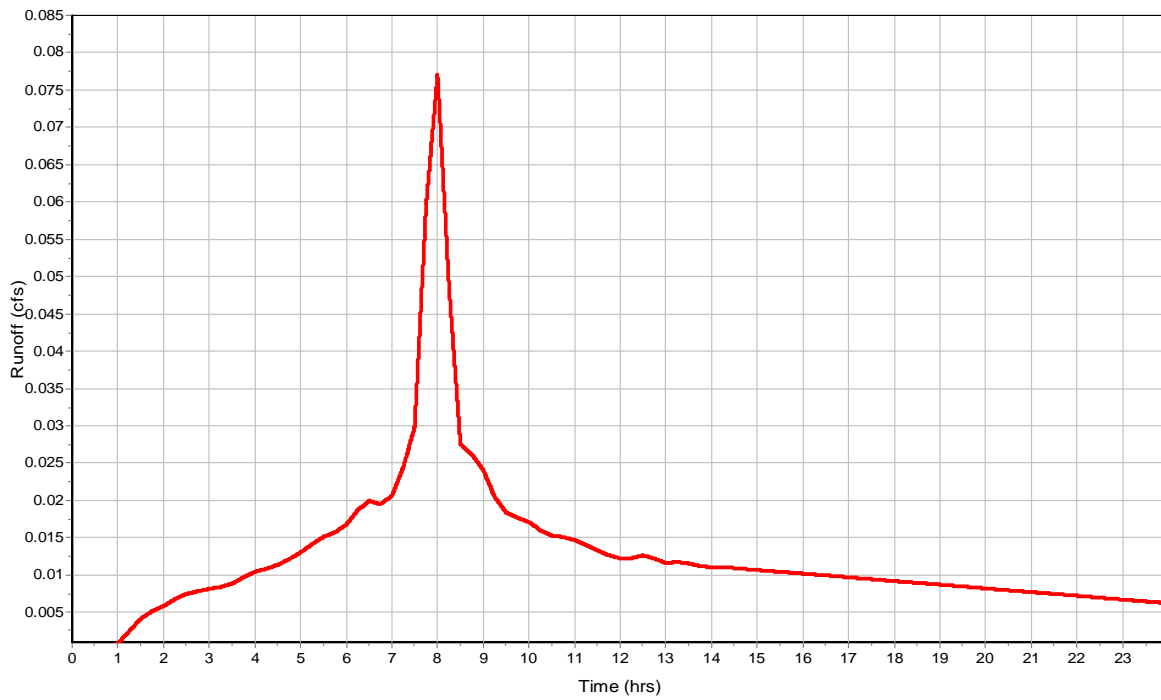

**Subbasin : BLDG H WEST**

**Input Data**

Area (ac) ..... 0.09  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.09		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.08  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG H WEST

Rainfall Intensity Graph

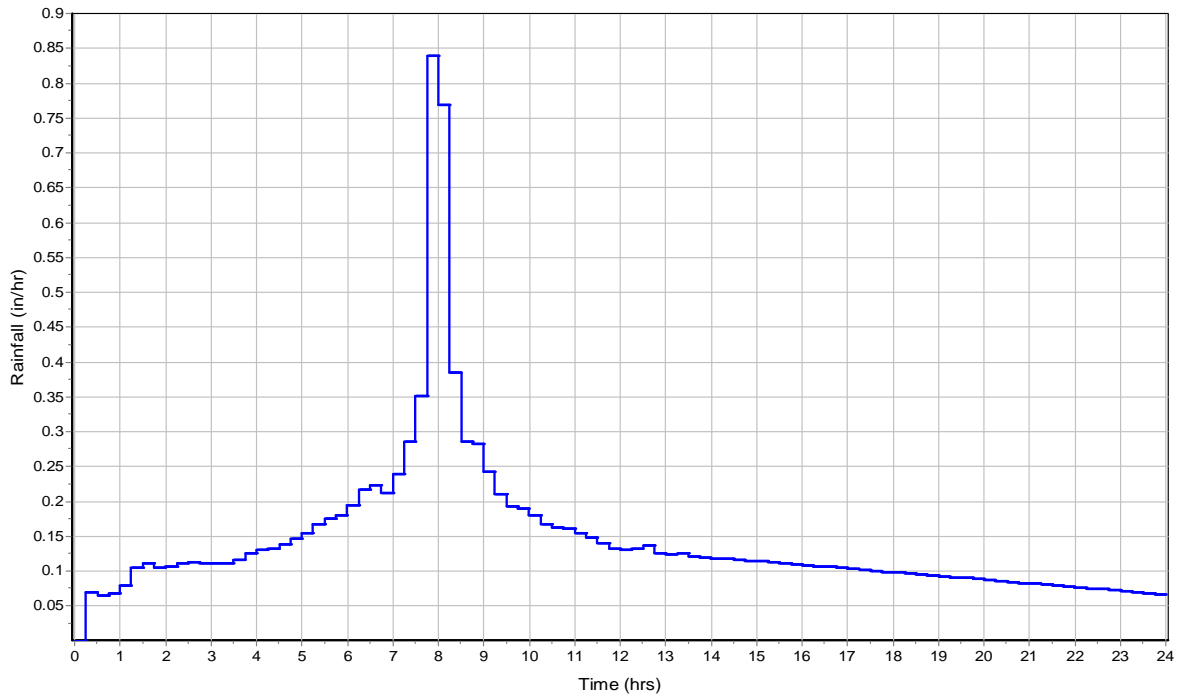

Runoff Hydrograph

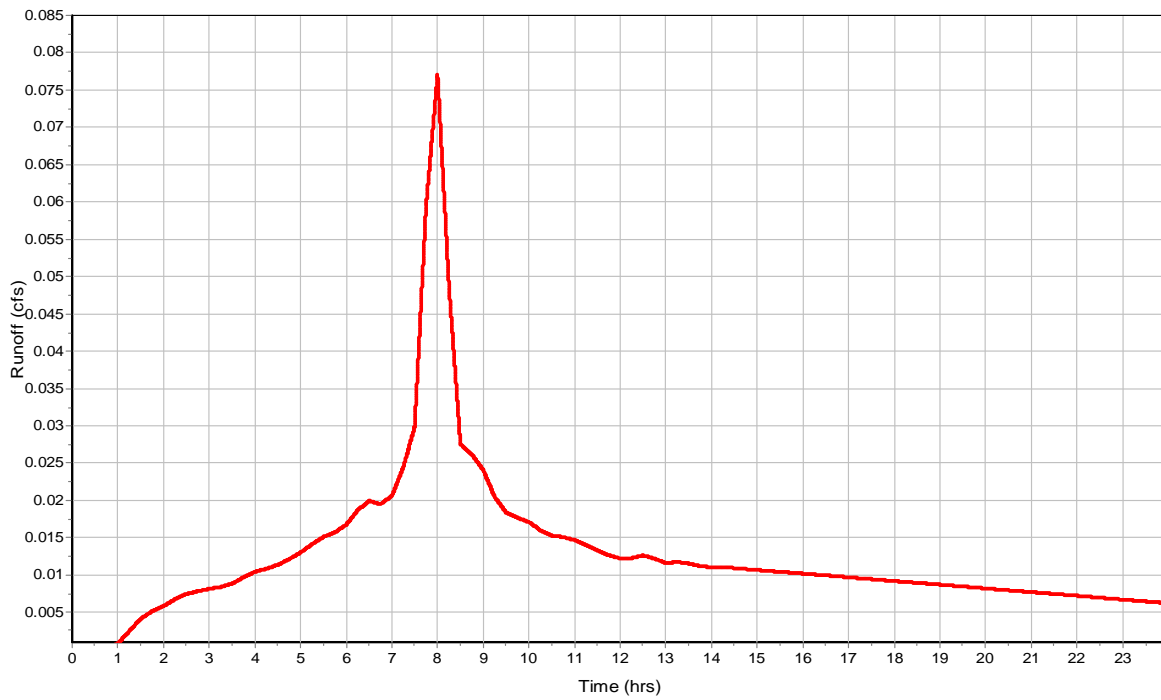

**Subbasin : BLDG T.I. EAST**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG T.I. EAST

Rainfall Intensity Graph

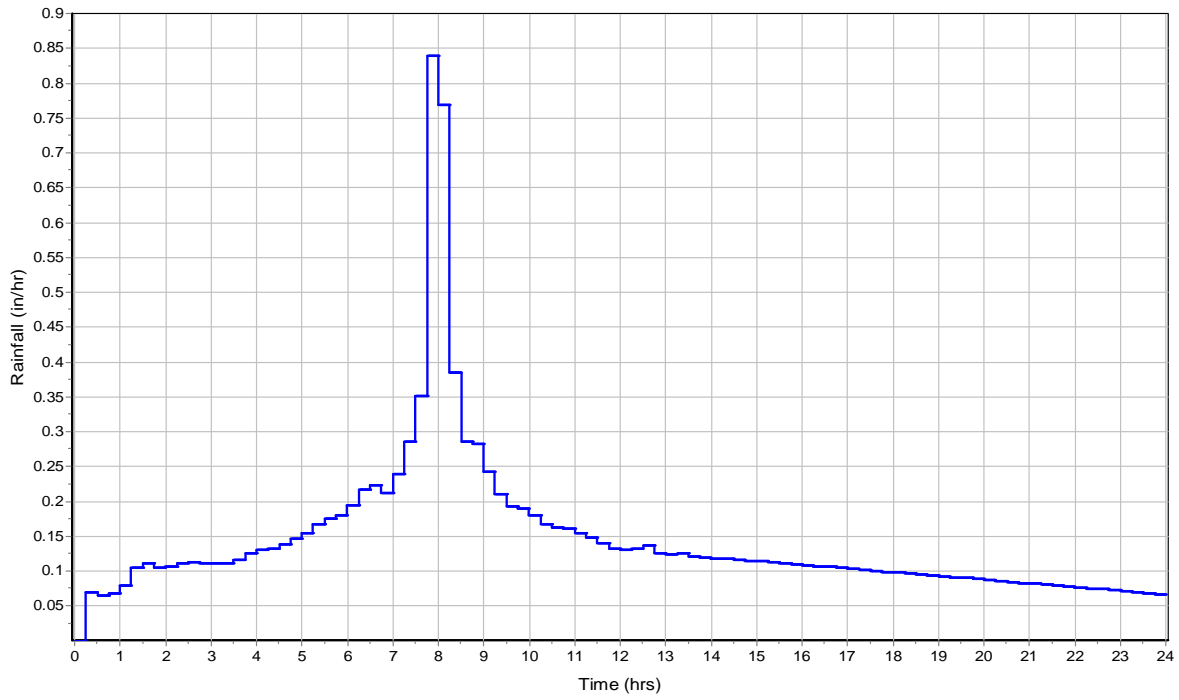

Runoff Hydrograph

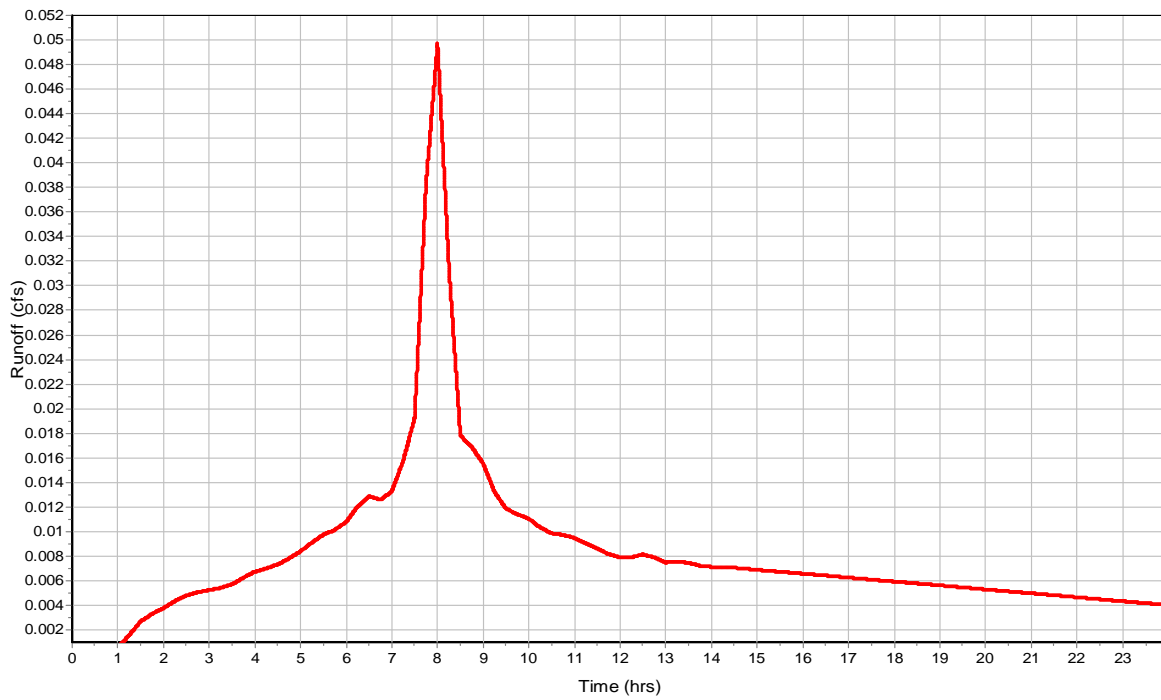

**Subbasin : BLDG T.I. NE**

**Input Data**

Area (ac) ..... 0.04  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.04		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.03  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG T.I. NE

Rainfall Intensity Graph

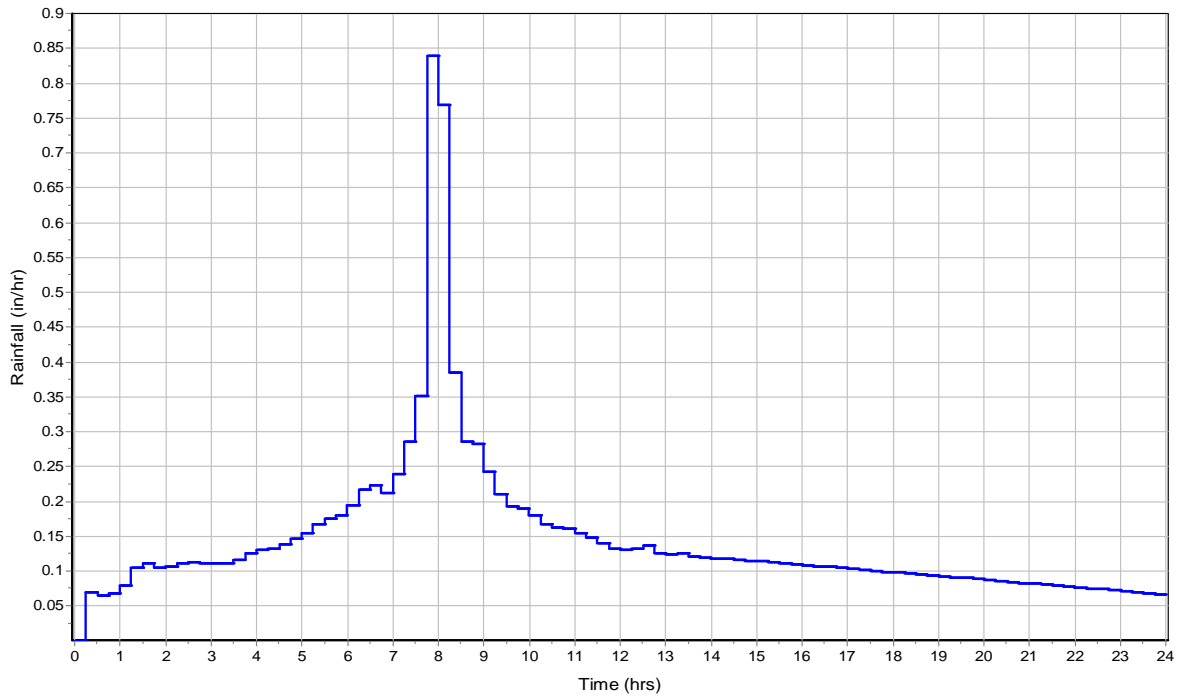

Runoff Hydrograph

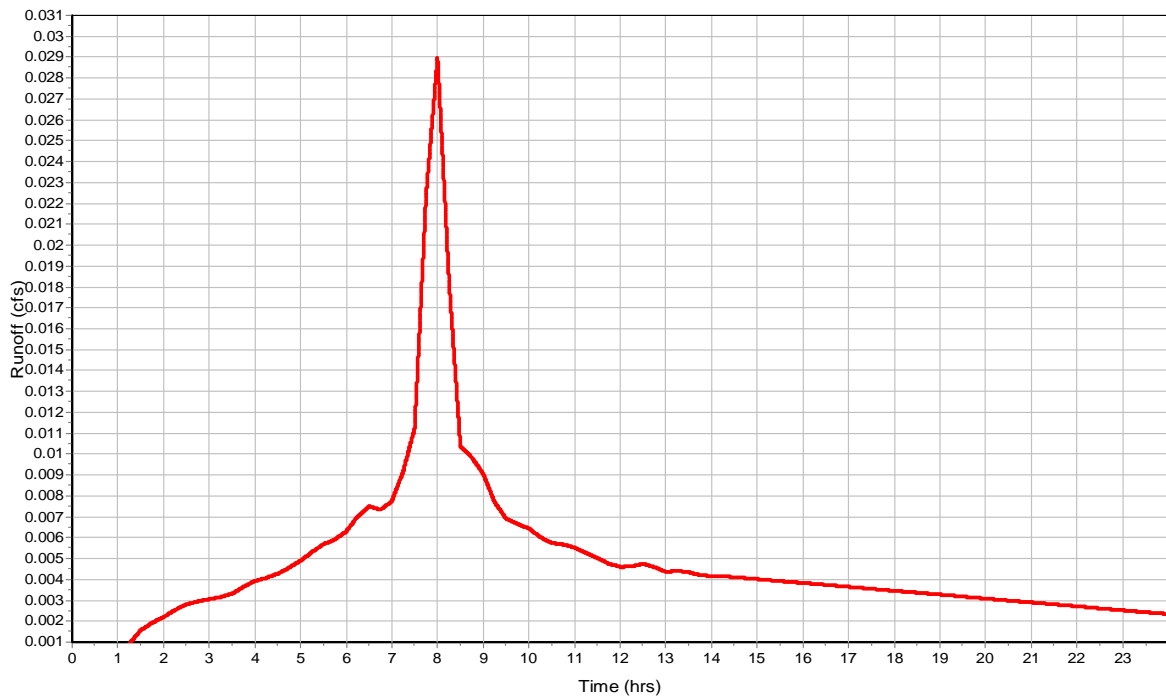



**Subbasin : BLDG T.I. NW**

**Input Data**

Area (ac) ..... 0.04  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.04		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.03  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG T.I. NW

Rainfall Intensity Graph

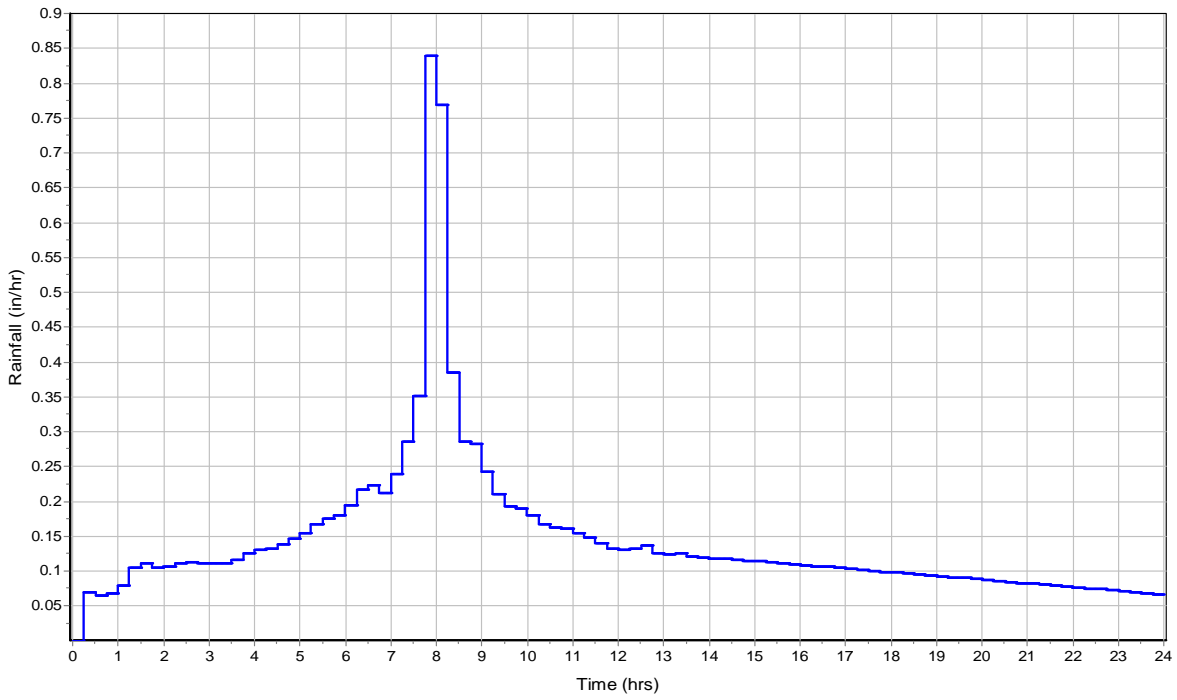

Runoff Hydrograph

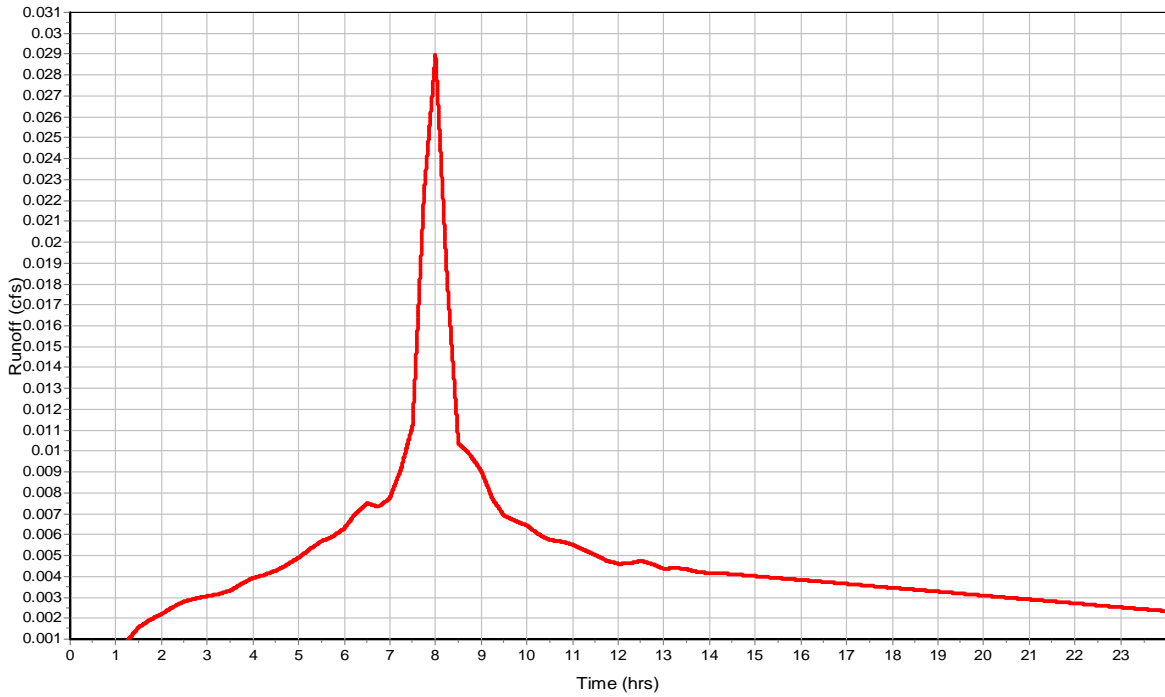

**Subbasin : BLDG T.I. SE**

**Input Data**

Area (ac) ..... 0.04  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.04		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.03  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG T.I. SE

Rainfall Intensity Graph

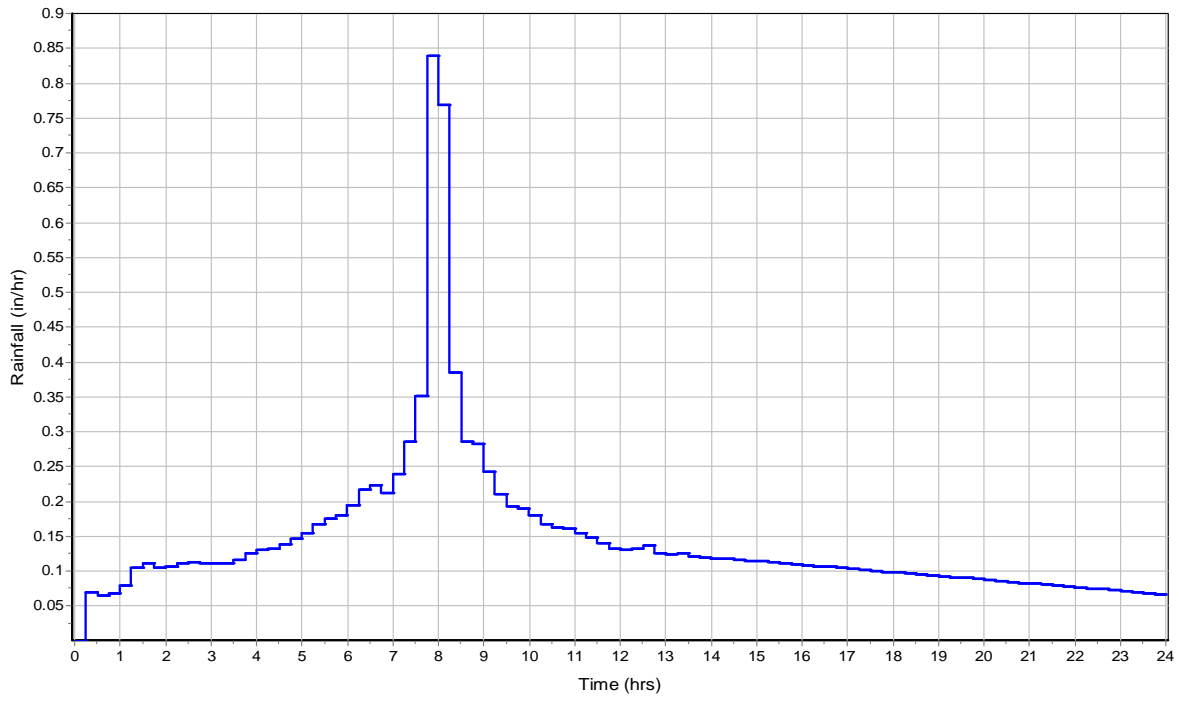

Runoff Hydrograph

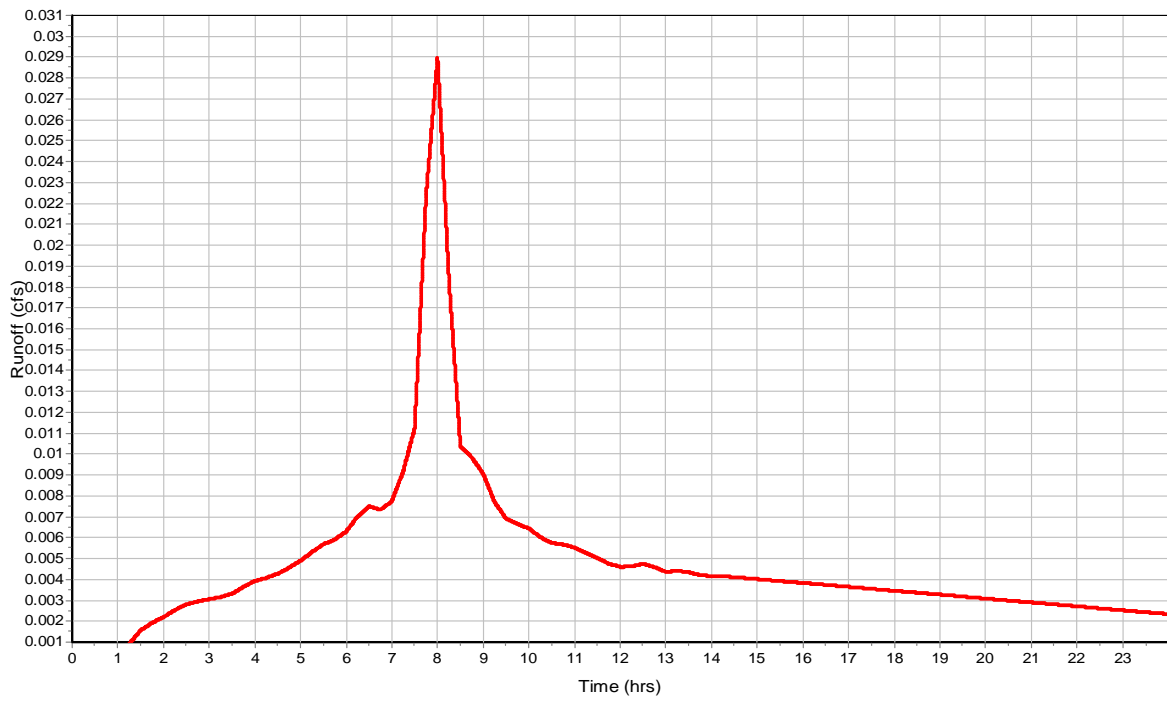

**Subbasin : BLDG T.I. SW**

**Input Data**

Area (ac) ..... 0.04  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.04		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.03  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG T.I. SW

Rainfall Intensity Graph

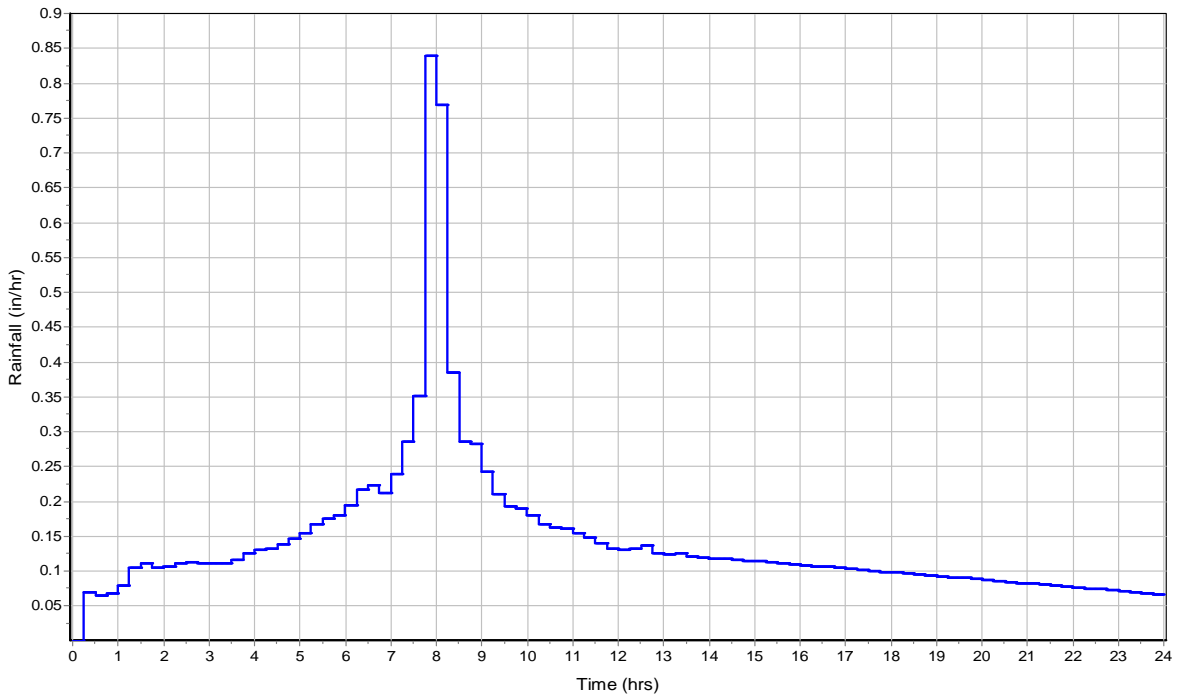

Runoff Hydrograph

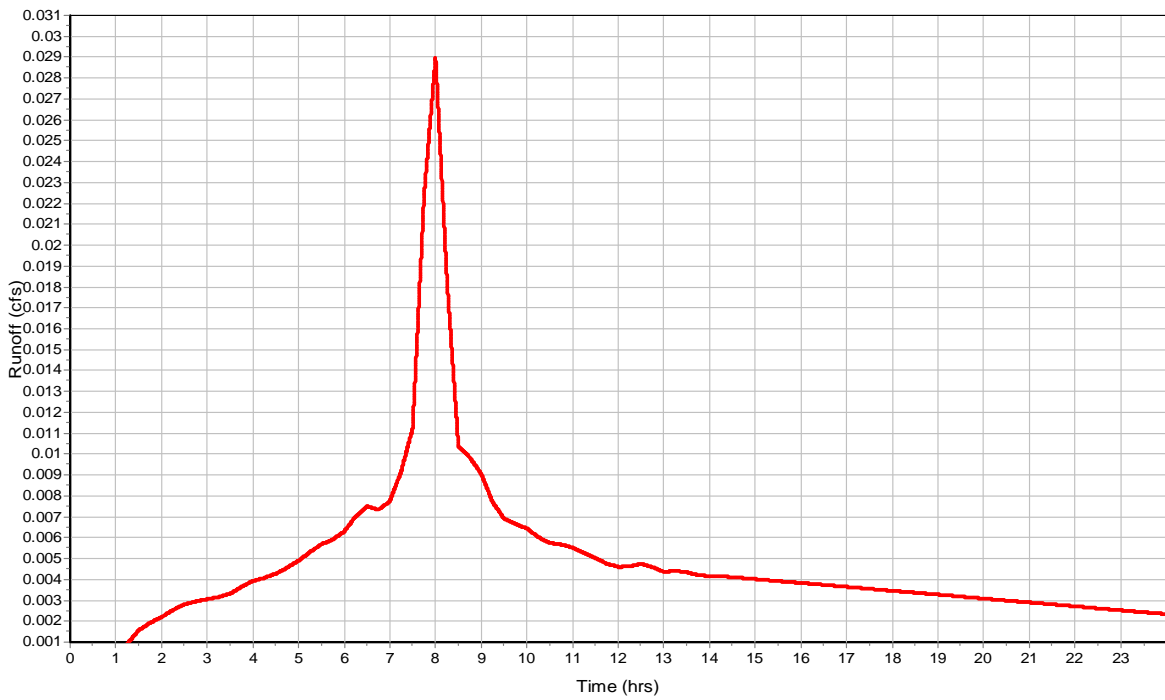

**Subbasin : BLDG T.I. WEST**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : BLDG T.I. WEST

Rainfall Intensity Graph

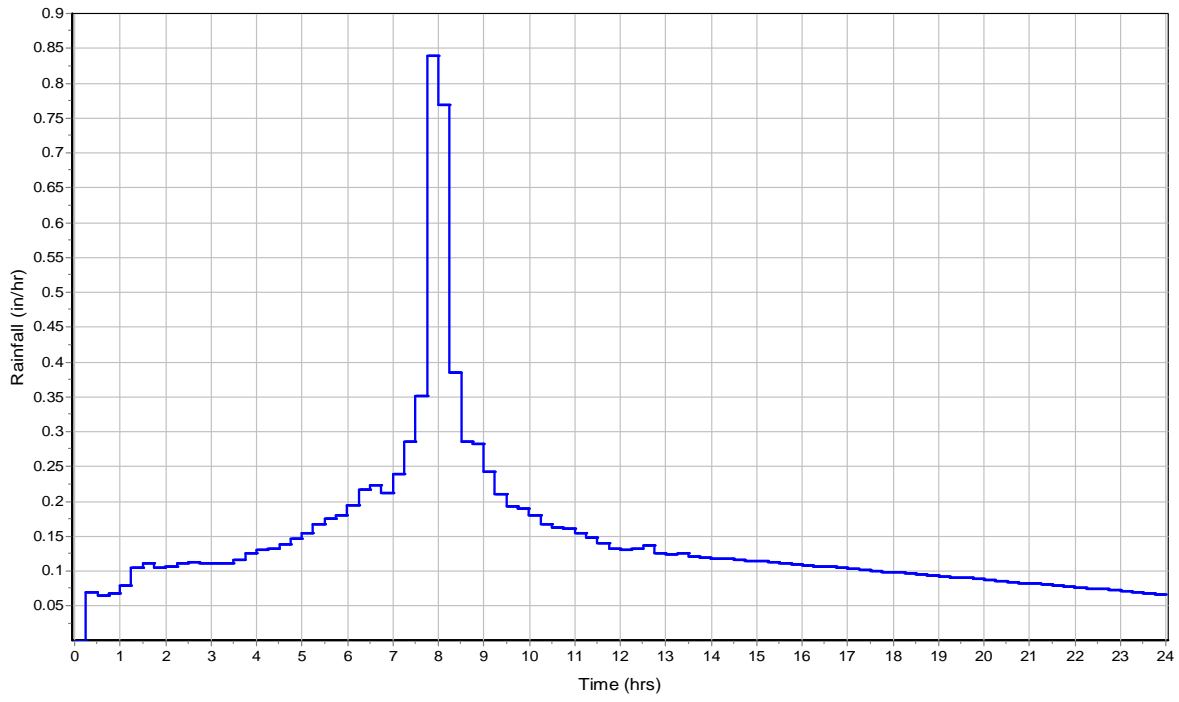

Runoff Hydrograph

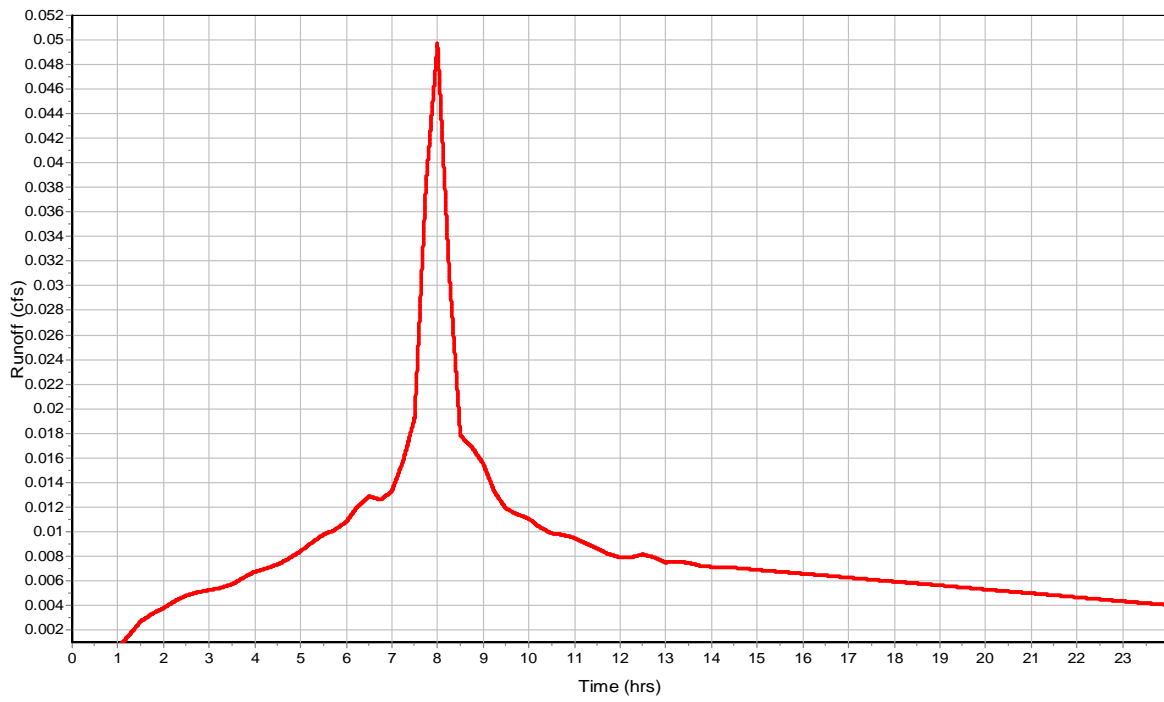



**Subbasin : SDCB 02**

**Input Data**

Area (ac) ..... 0.17  
Impervious Area (%) ..... 98  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.17		97.56


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.2  
Peak Runoff (cfs) ..... 0.14  
Weighted Curve Number ..... 97.56  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 02

Rainfall Intensity Graph

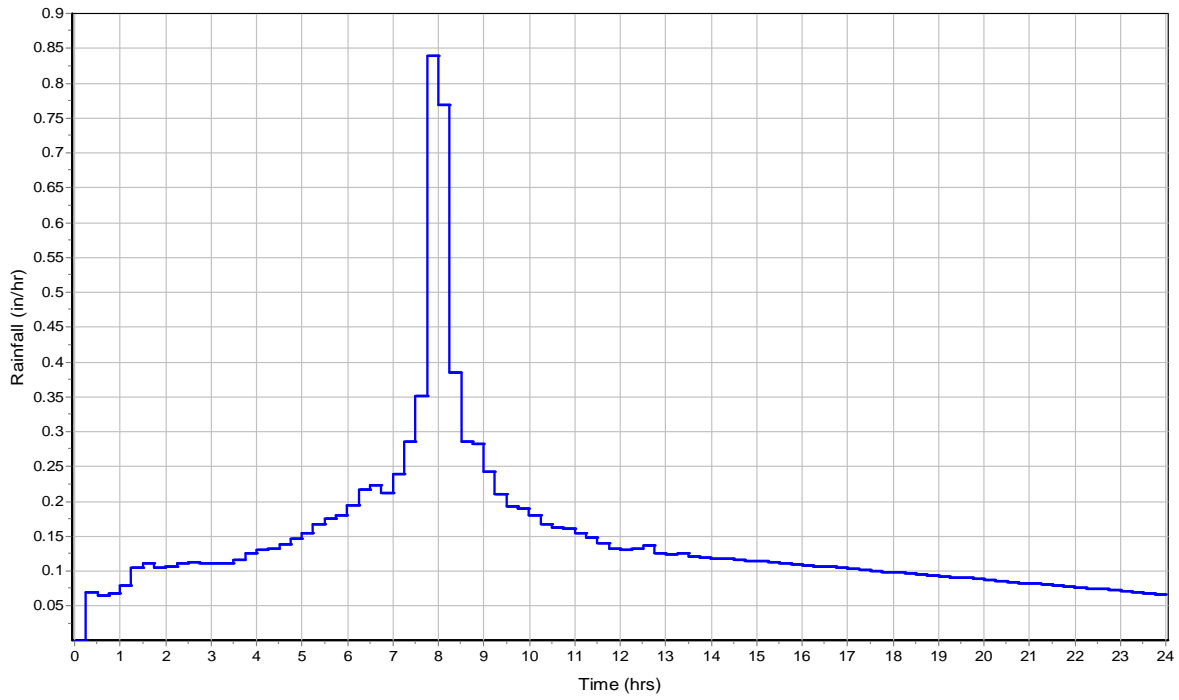

Runoff Hydrograph

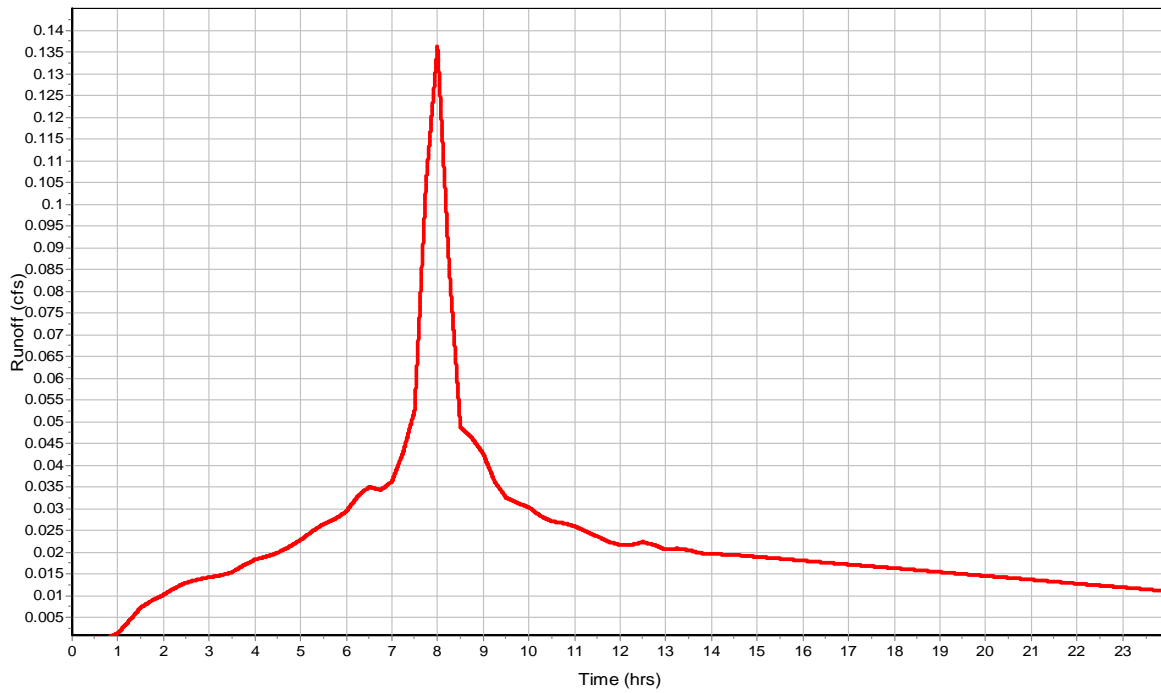

**Subbasin : SDCB 03**

**Input Data**

Area (ac) ..... 0.13  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.13		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.11  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 03

Rainfall Intensity Graph

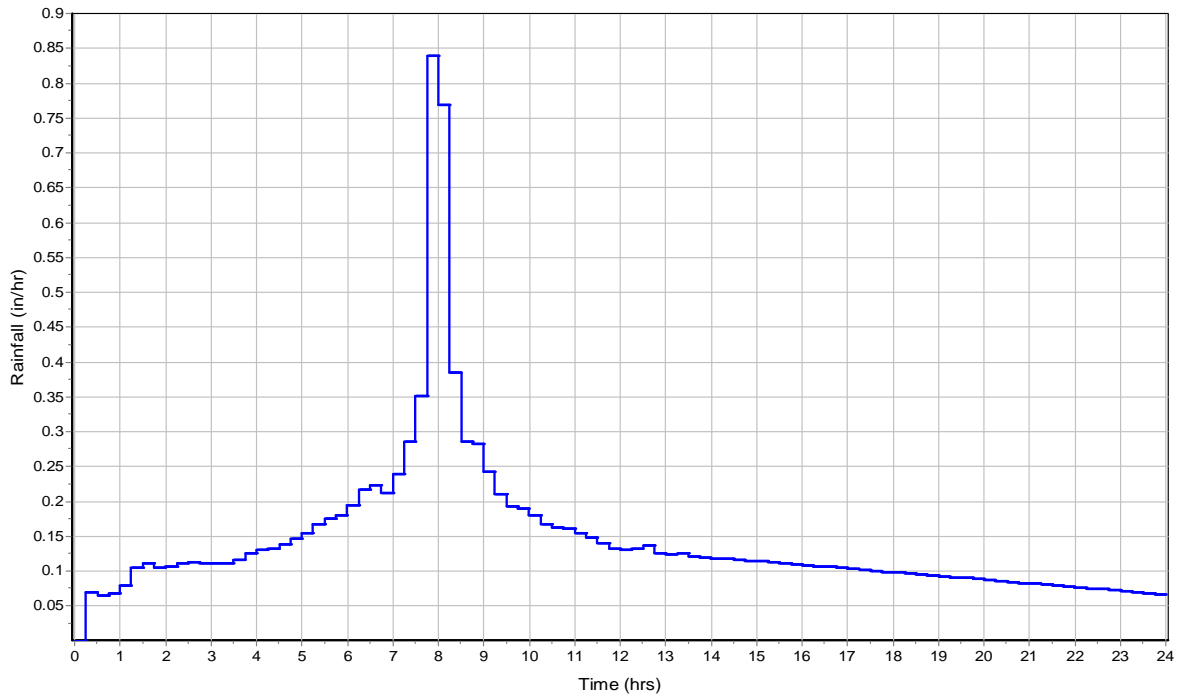

Runoff Hydrograph

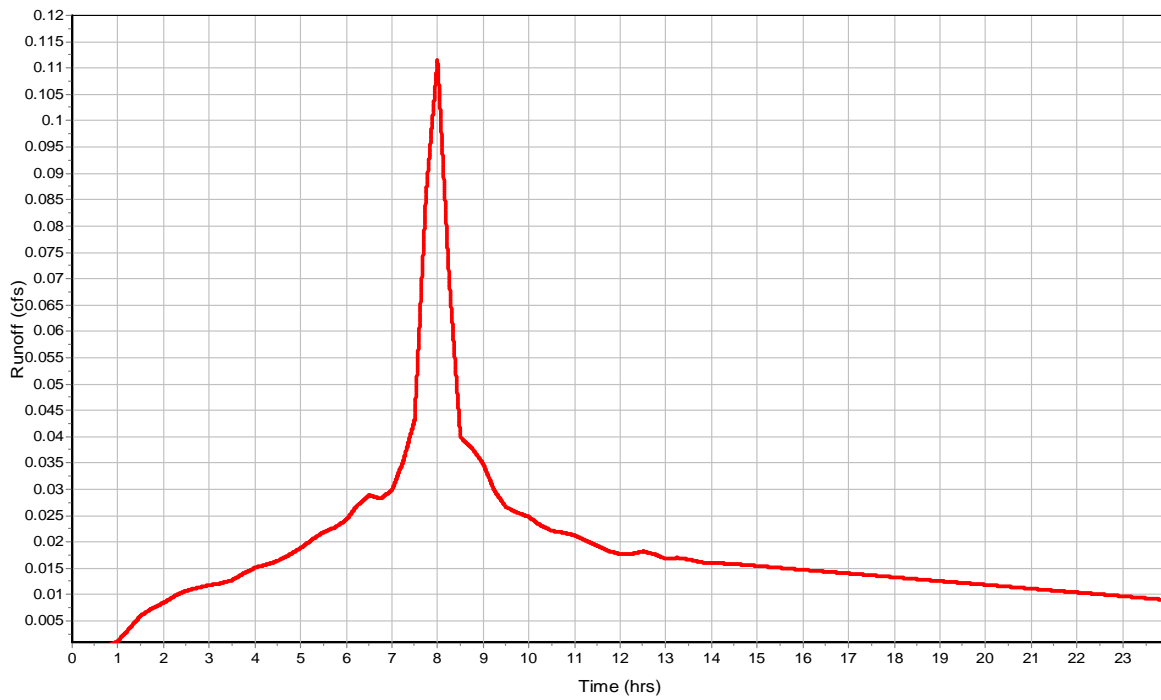

**Subbasin : SDCB 04**

**Input Data**

Area (ac) ..... 0.07  
Impervious Area (%) ..... 73  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.07		92.06


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.73  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 92.06  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 04

Rainfall Intensity Graph

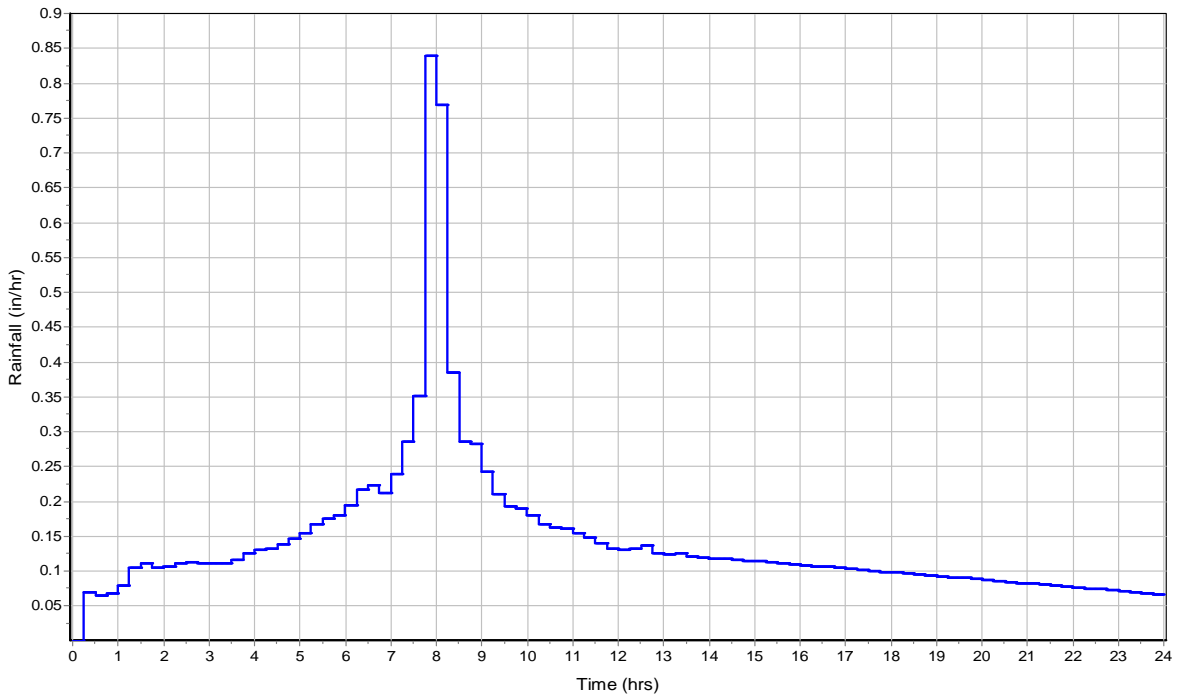

Runoff Hydrograph

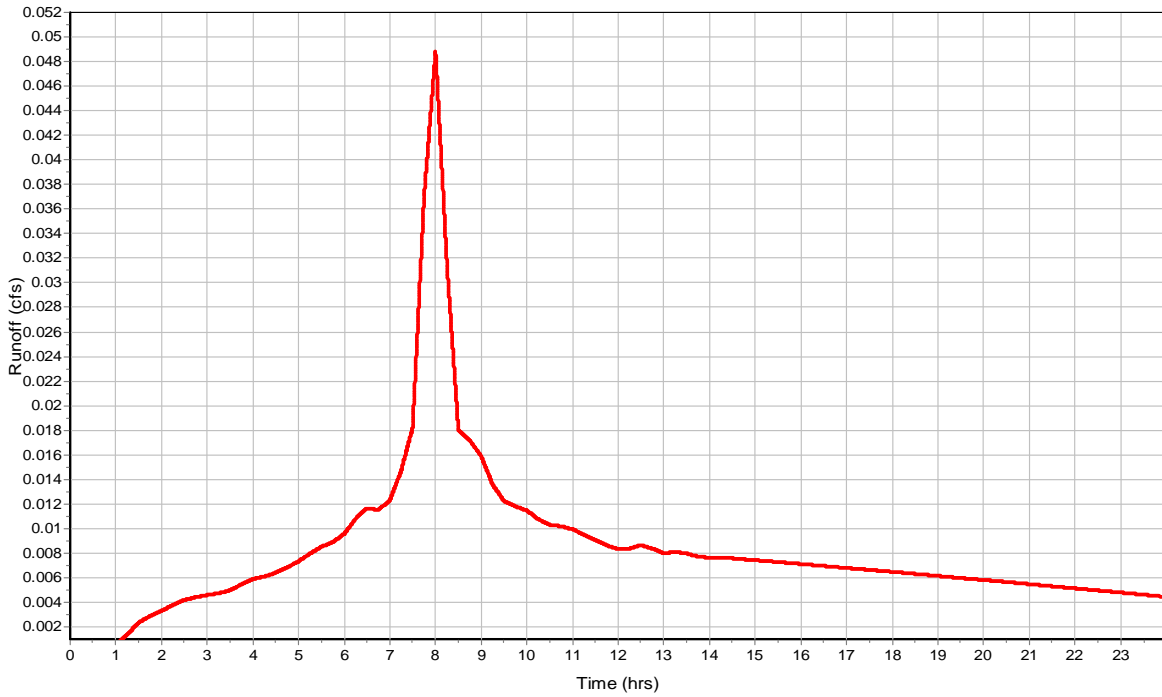

**Subbasin : SDCB 05**

**Input Data**

Area (ac) .....	0.27
Impervious Area (%) .....	90
Impervious Area Curve Number .....	98
Pervious Area Curve Number .....	76
Rain Gage ID .....	Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.27		95.8


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) .....	3.46
Total Runoff (in) .....	3.05
Peak Runoff (cfs) .....	0.21
Weighted Curve Number .....	95.8
Time of Concentration (days hh:mm:ss) .....	0 00:00:00

Subbasin : SDCB 05

Rainfall Intensity Graph

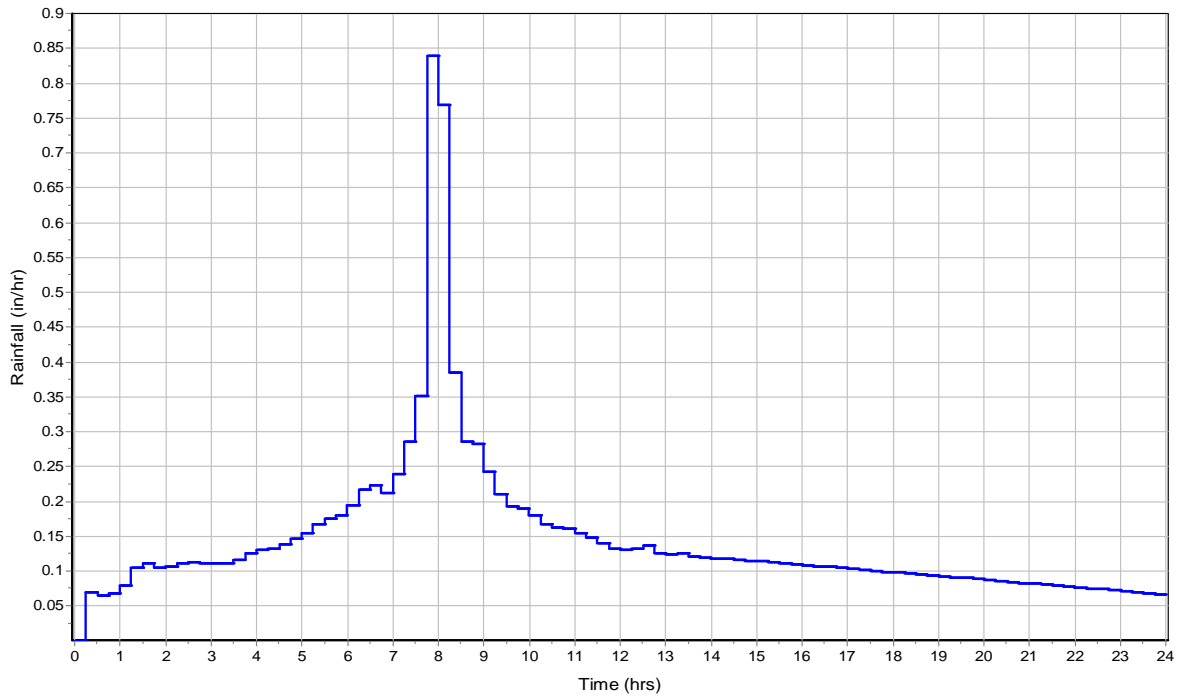

Runoff Hydrograph

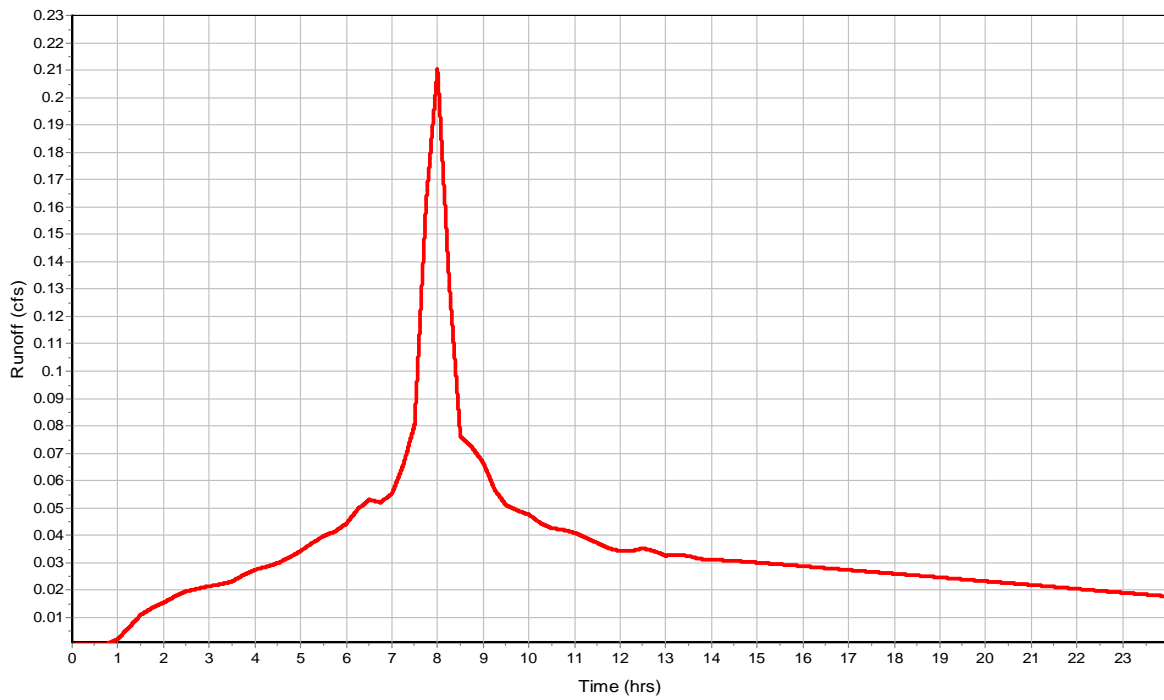



**Subbasin : SDCB 06**

**Input Data**

Area (ac) ..... 0.19  
Impervious Area (%) ..... 65  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.19		90.3


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.57  
Peak Runoff (cfs) ..... 0.12  
Weighted Curve Number ..... 90.3  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 06

Rainfall Intensity Graph

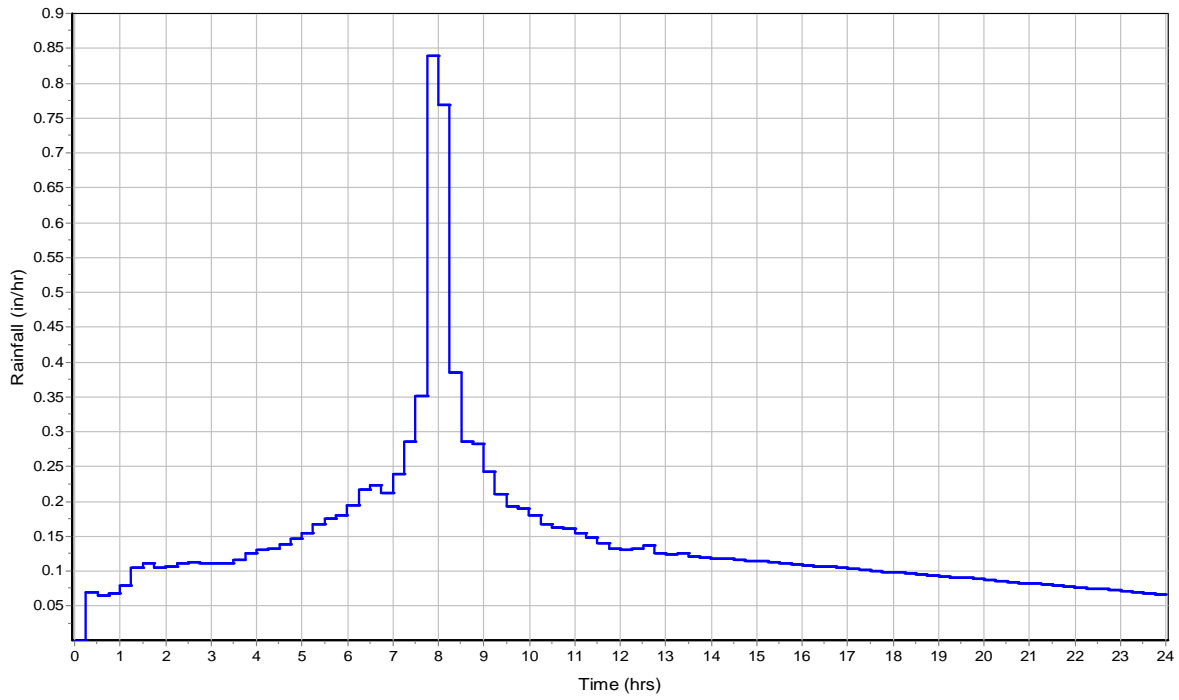

Runoff Hydrograph

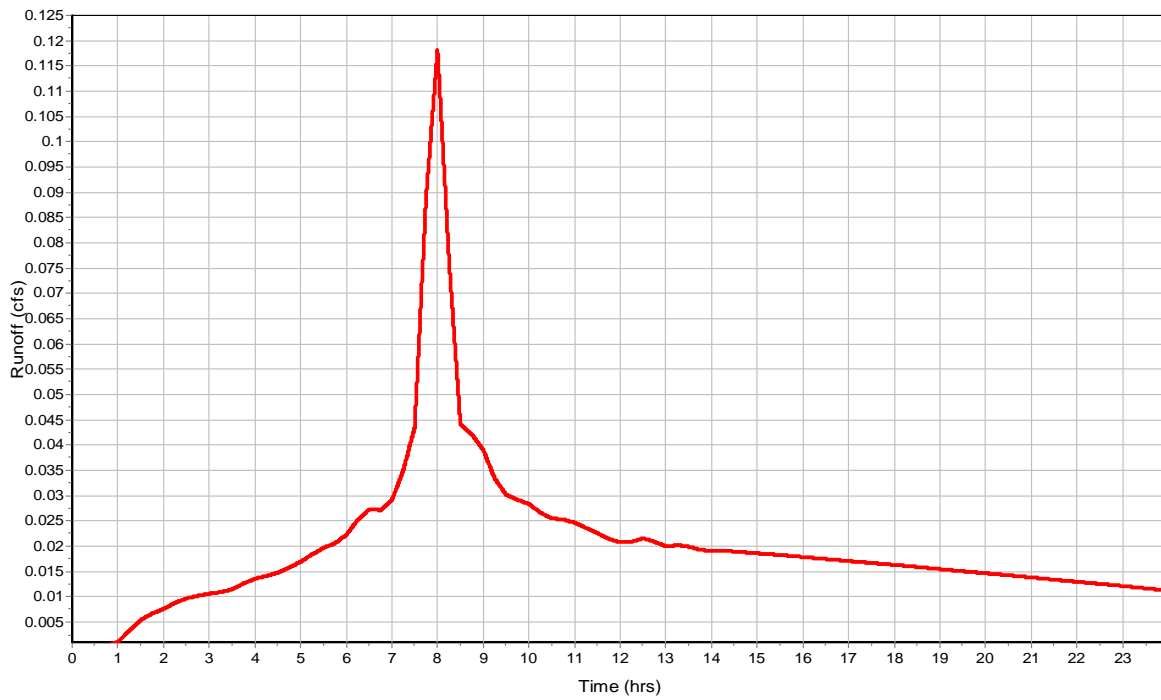

**Subbasin : SDCB 07**

**Input Data**

Area (ac) ..... 0.1  
Impervious Area (%) ..... 64  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.1		90.08


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.56  
Peak Runoff (cfs) ..... 0.06  
Weighted Curve Number ..... 90.08  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 07

Rainfall Intensity Graph

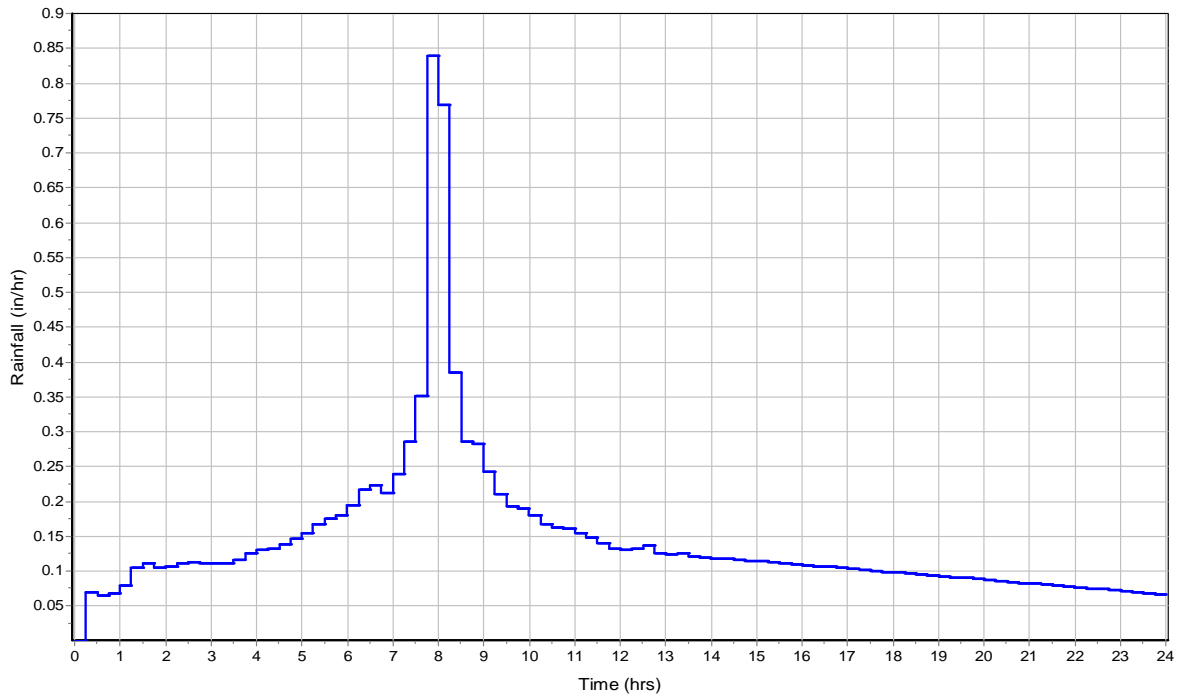

Runoff Hydrograph

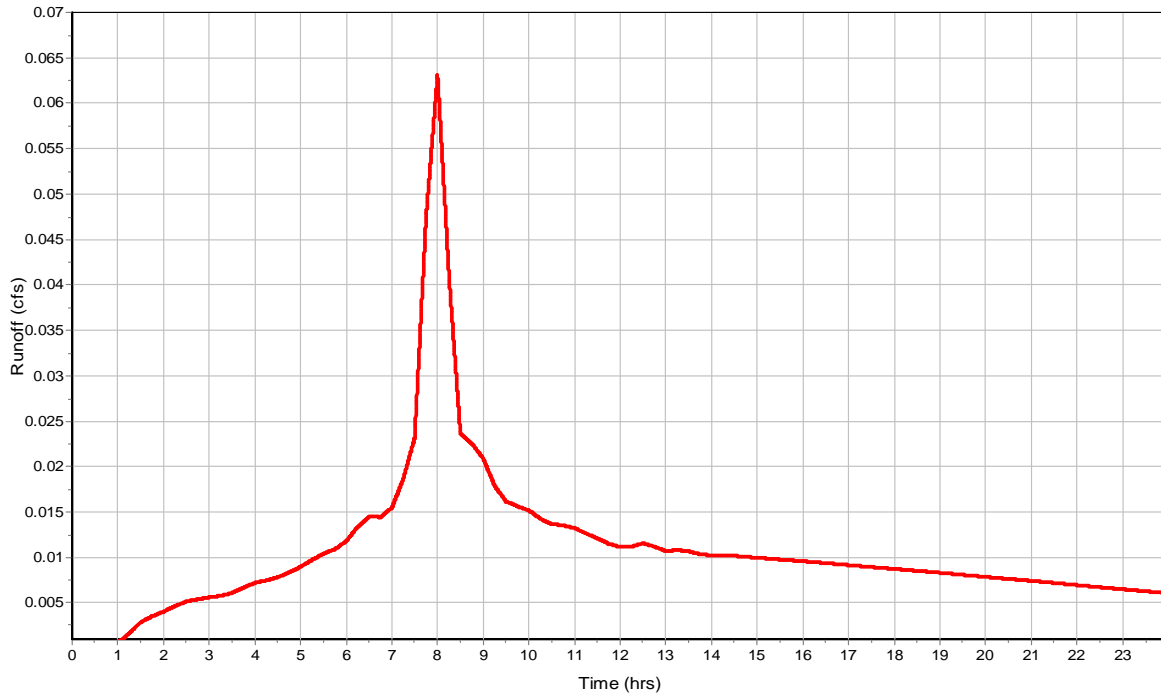

**Subbasin : SDCB 08**

**Input Data**

Area (ac) ..... 0.06  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.06		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.05  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 08

Rainfall Intensity Graph

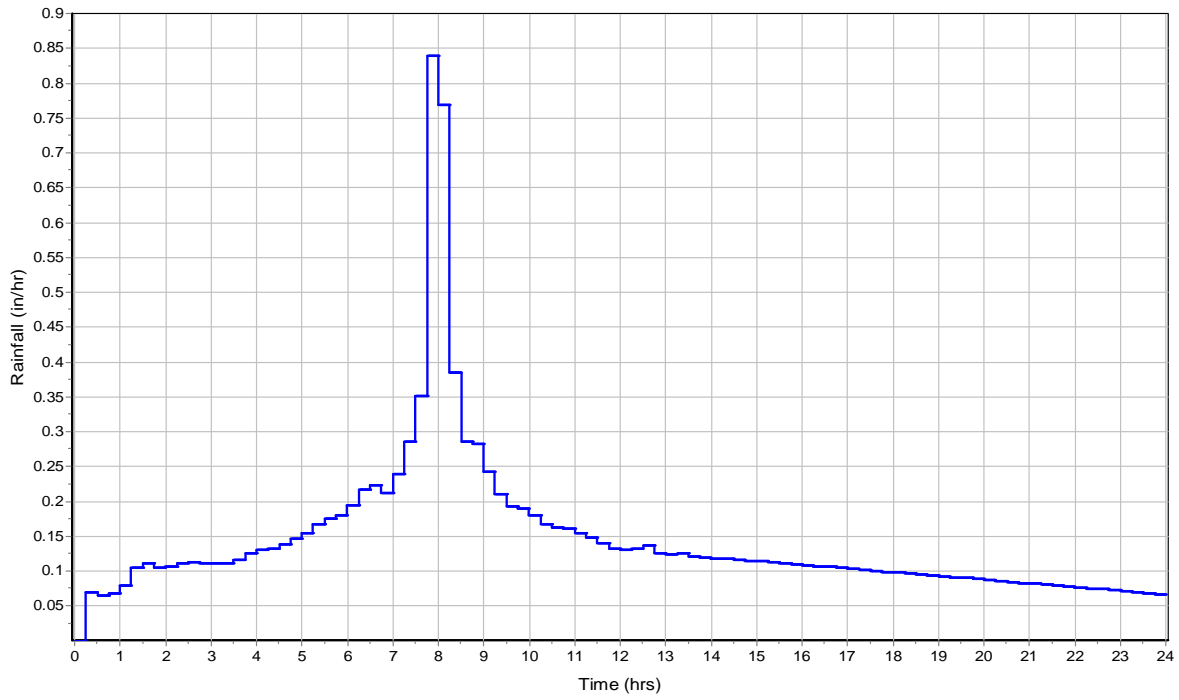

Runoff Hydrograph

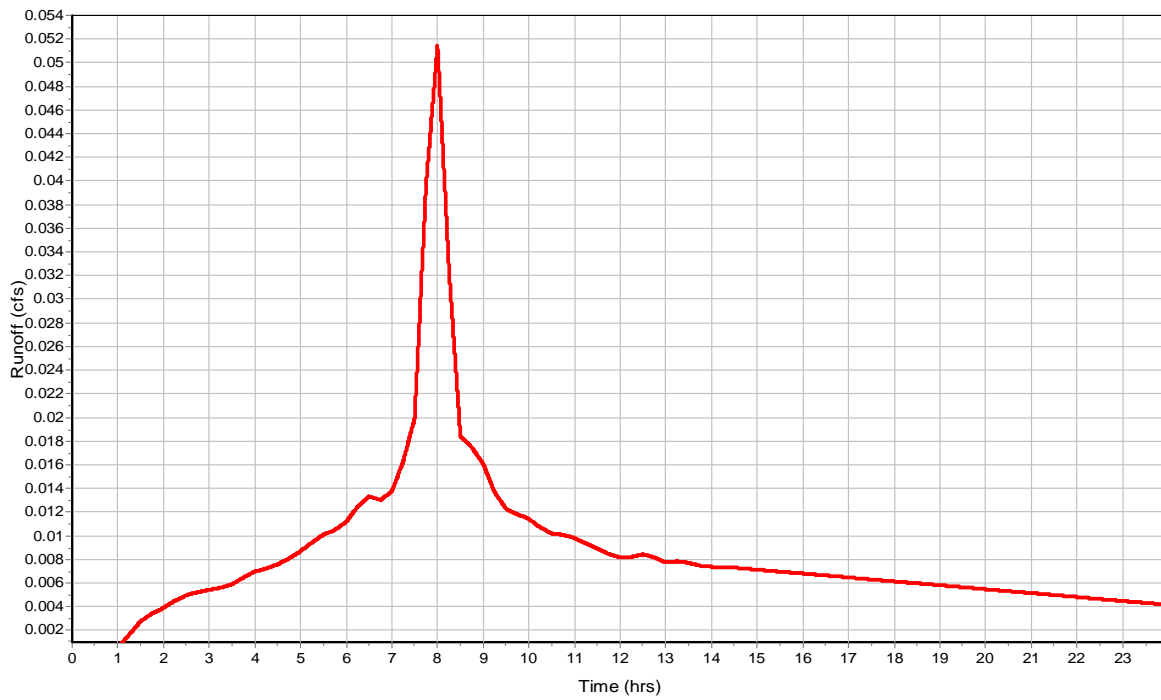

**Subbasin : SDCB 09**

**Input Data**

Area (ac) ..... 0.21  
Impervious Area (%) ..... 82  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.21		94.04


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.9  
Peak Runoff (cfs) ..... 0.15  
Weighted Curve Number ..... 94.04  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 09

Rainfall Intensity Graph

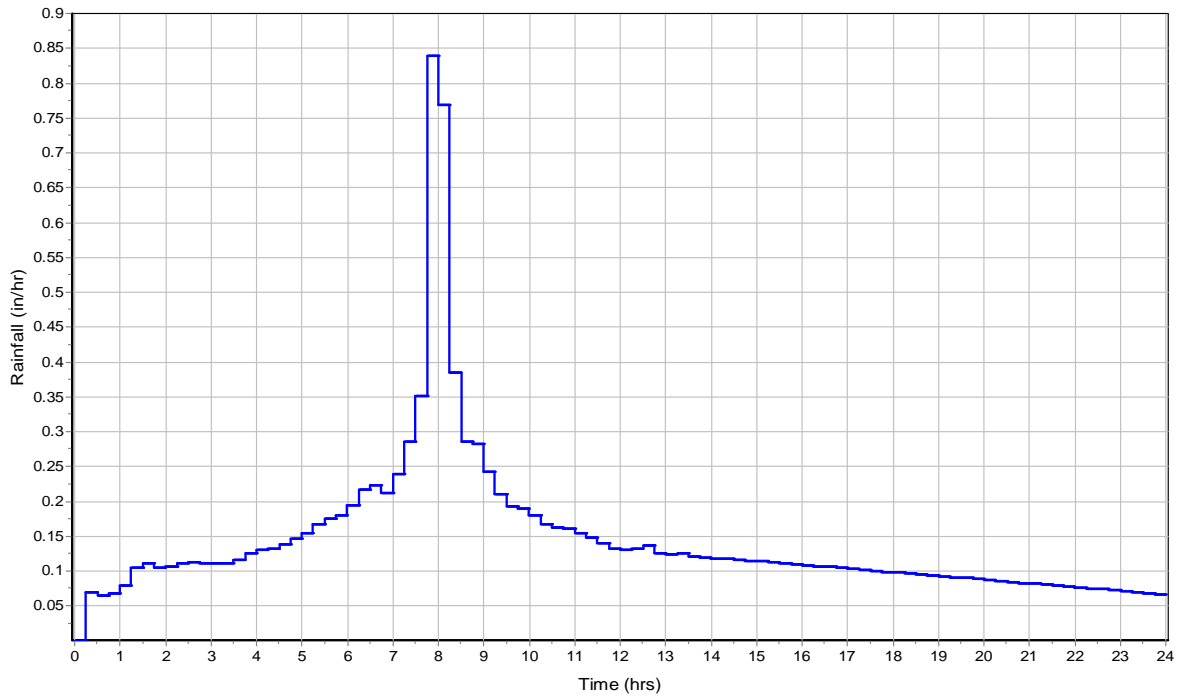

Runoff Hydrograph

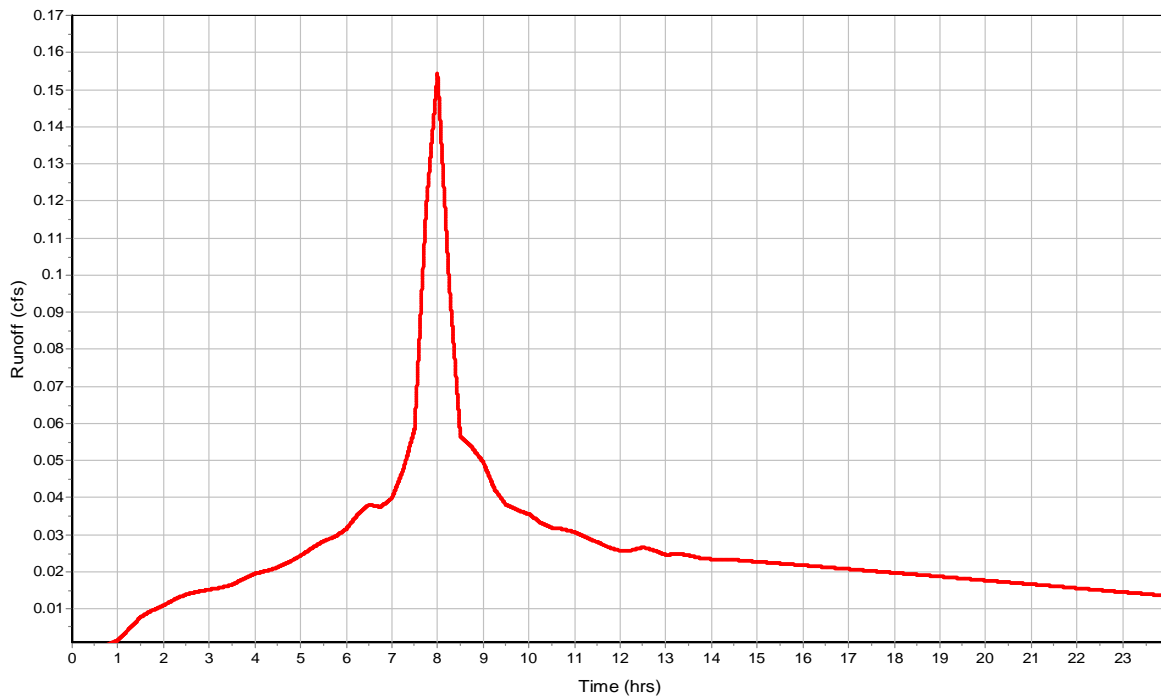



**Subbasin : SDCB 11**

**Input Data**

Area (ac) ..... 0.13  
Impervious Area (%) ..... 91  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.13		96.02


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.07  
Peak Runoff (cfs) ..... 0.1  
Weighted Curve Number ..... 96.02  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 11

Rainfall Intensity Graph

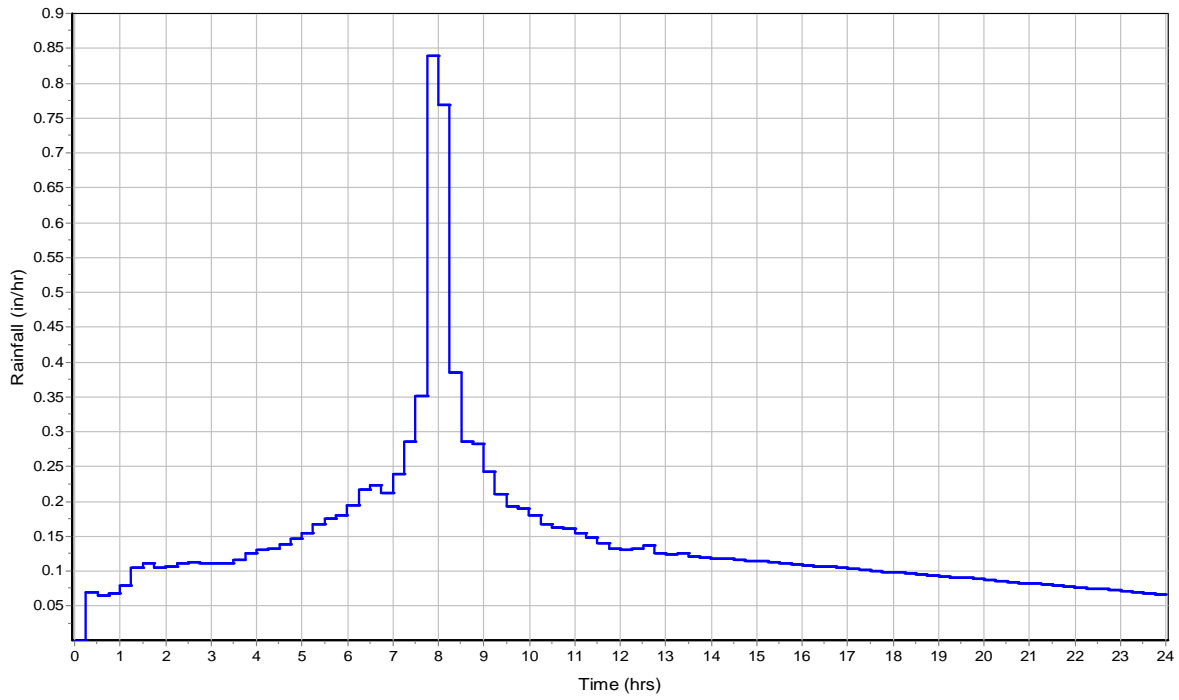

Runoff Hydrograph

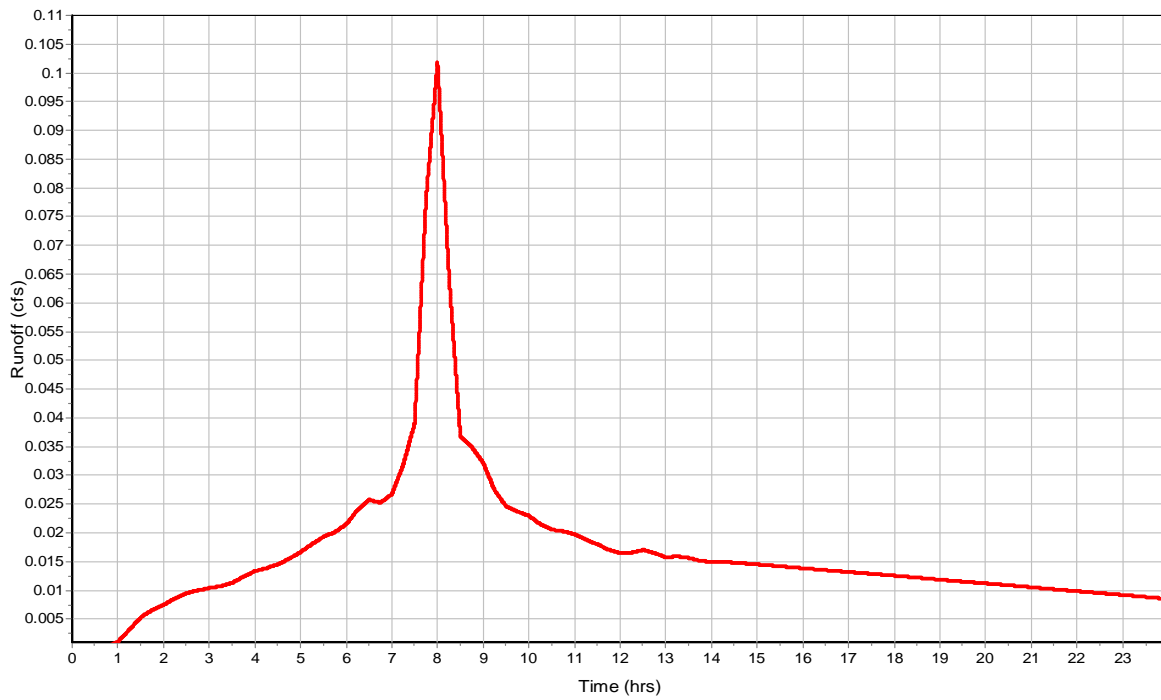

**Subbasin : SDCB 12**

**Input Data**

Area (ac) ..... 0.1  
Impervious Area (%) ..... 99  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.1		97.78


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.22  
Peak Runoff (cfs) ..... 0.08  
Weighted Curve Number ..... 97.78  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 12

Rainfall Intensity Graph

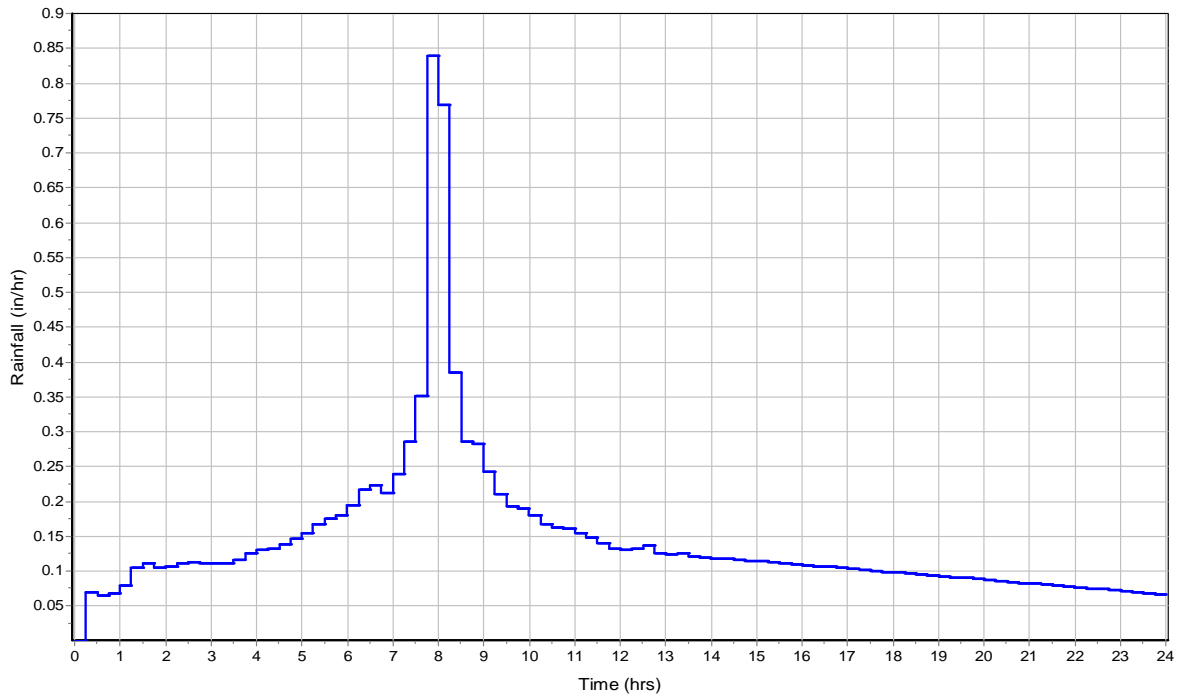

Runoff Hydrograph

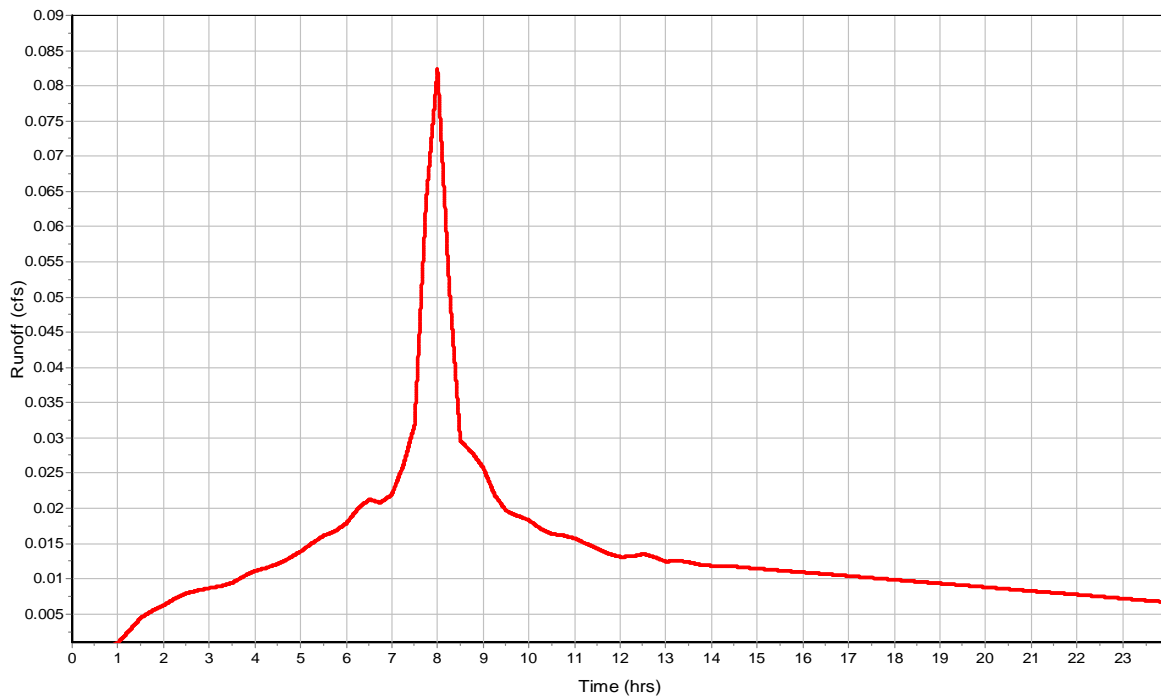

**Subbasin : SDCB 13**

**Input Data**

Area (ac) ..... 0.11  
Impervious Area (%) ..... 94  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.11		96.68


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.12  
Peak Runoff (cfs) ..... 0.09  
Weighted Curve Number ..... 96.68  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 13

Rainfall Intensity Graph

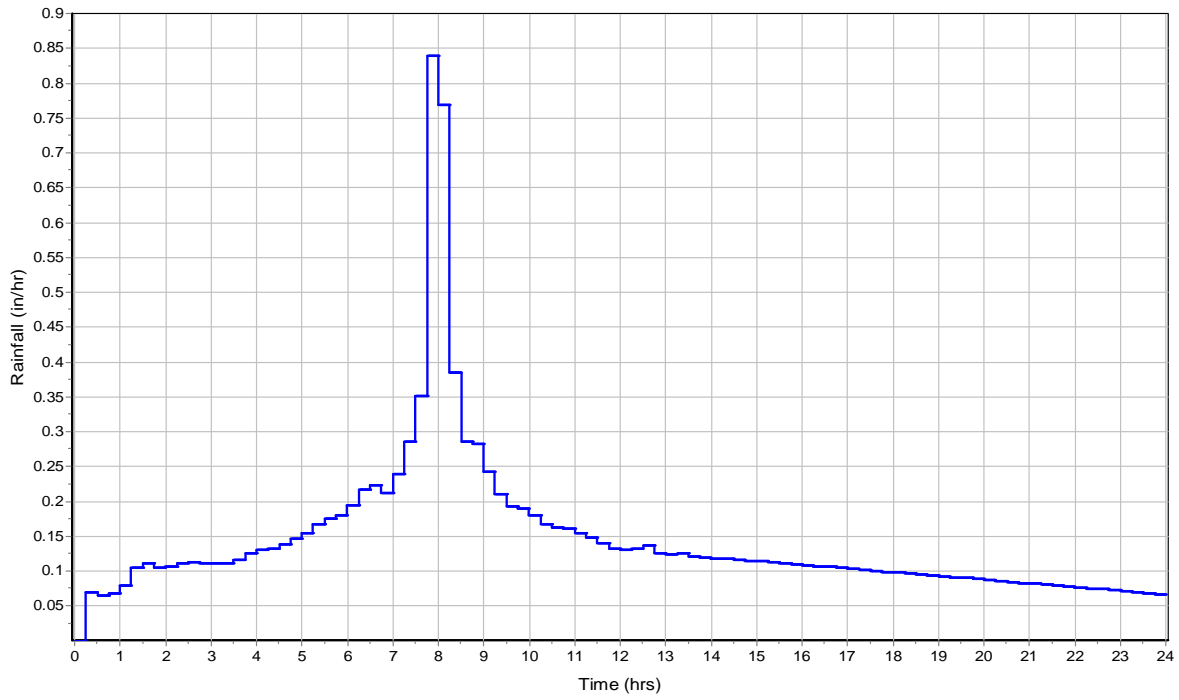

Runoff Hydrograph

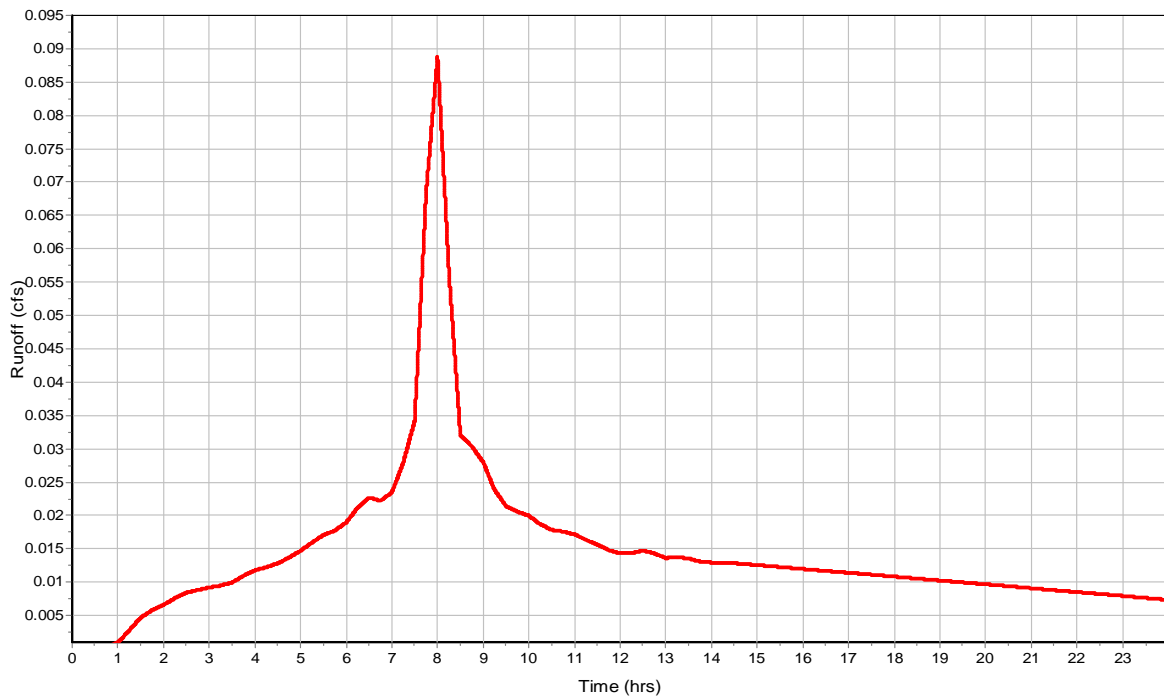

**Subbasin : SDCB 14**

**Input Data**

Area (ac) ..... 0.09  
Impervious Area (%) ..... 68  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.09		90.96


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.63  
Peak Runoff (cfs) ..... 0.06  
Weighted Curve Number ..... 90.96  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 14

Rainfall Intensity Graph

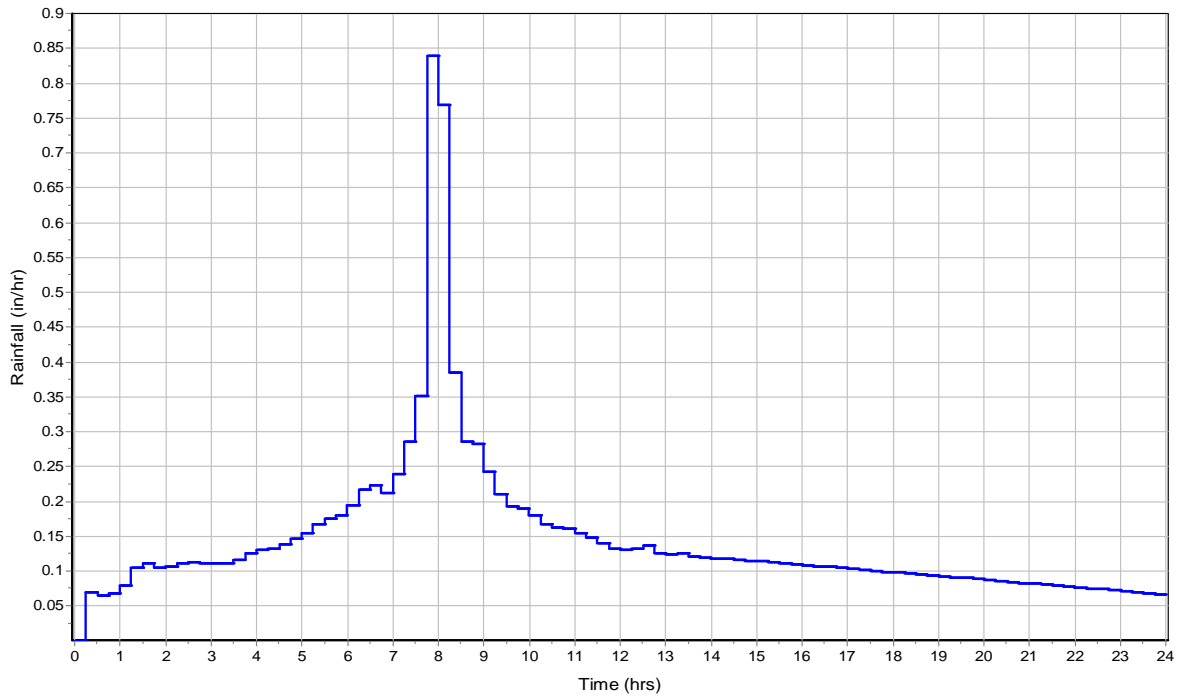

Runoff Hydrograph

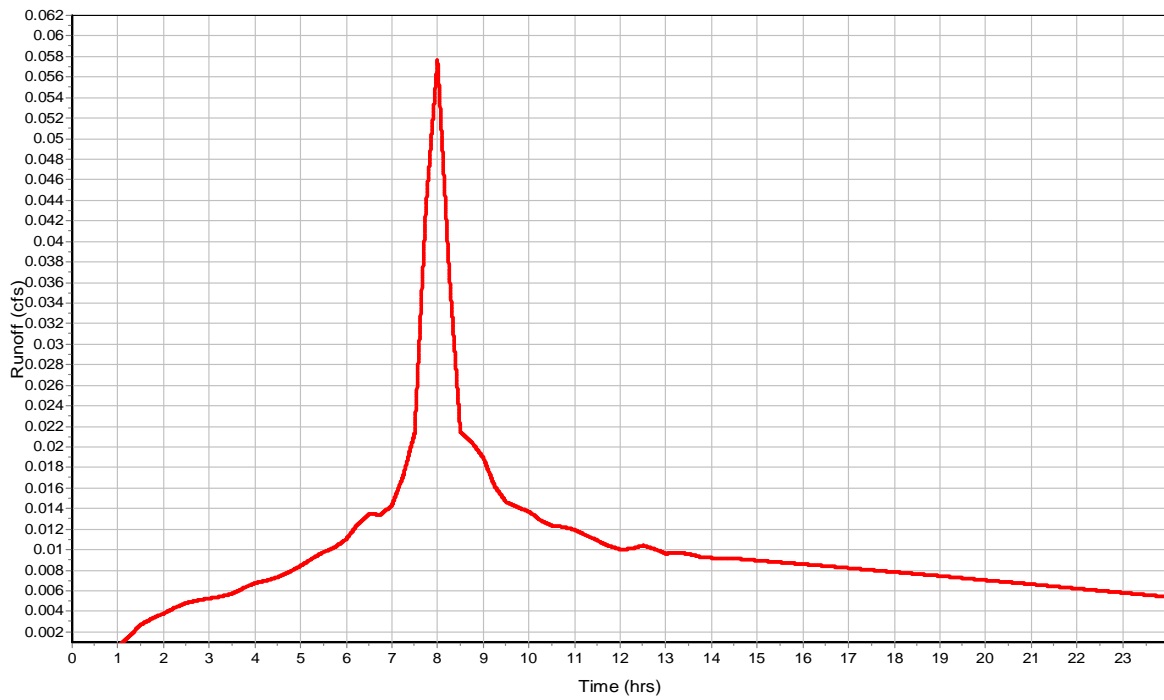



**Subbasin : SDCB 15**

**Input Data**

Area (ac) ..... 0.13  
Impervious Area (%) ..... 88  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.13		95.36


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.01  
Peak Runoff (cfs) ..... 0.1  
Weighted Curve Number ..... 95.36  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 15

Rainfall Intensity Graph

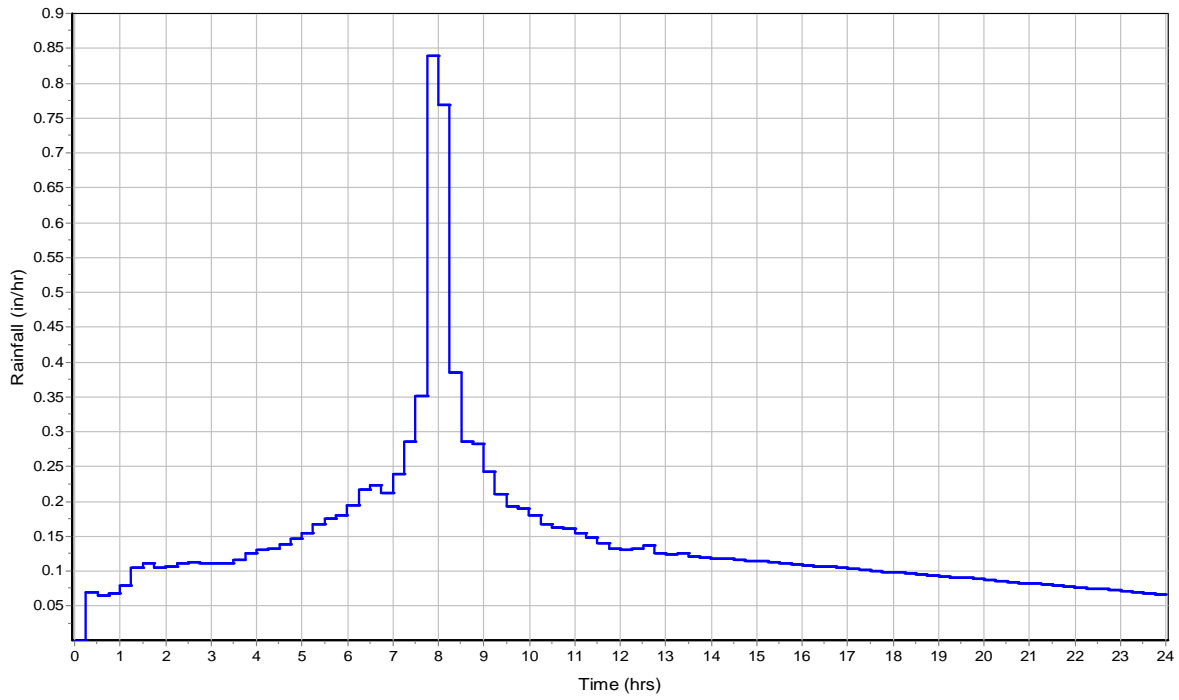

Runoff Hydrograph

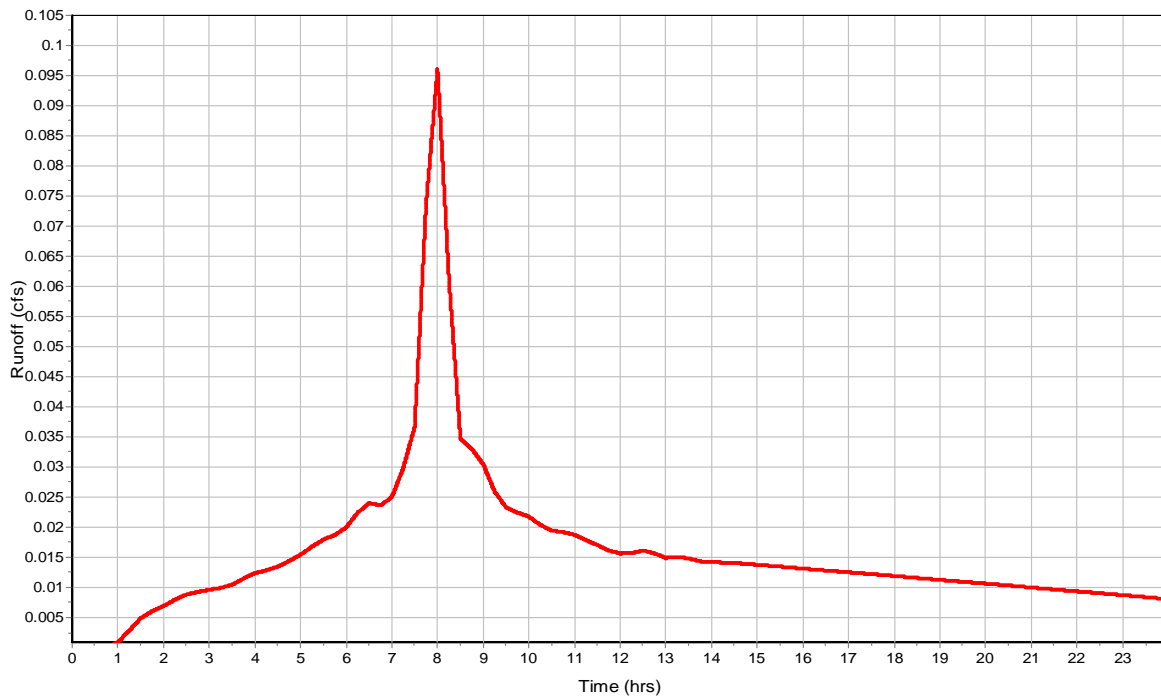

**Subbasin : SDCB 16**

**Input Data**

Area (ac) ..... 0.1  
Impervious Area (%) ..... 65  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.1		90.3


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.57  
Peak Runoff (cfs) ..... 0.06  
Weighted Curve Number ..... 90.3  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 16

Rainfall Intensity Graph

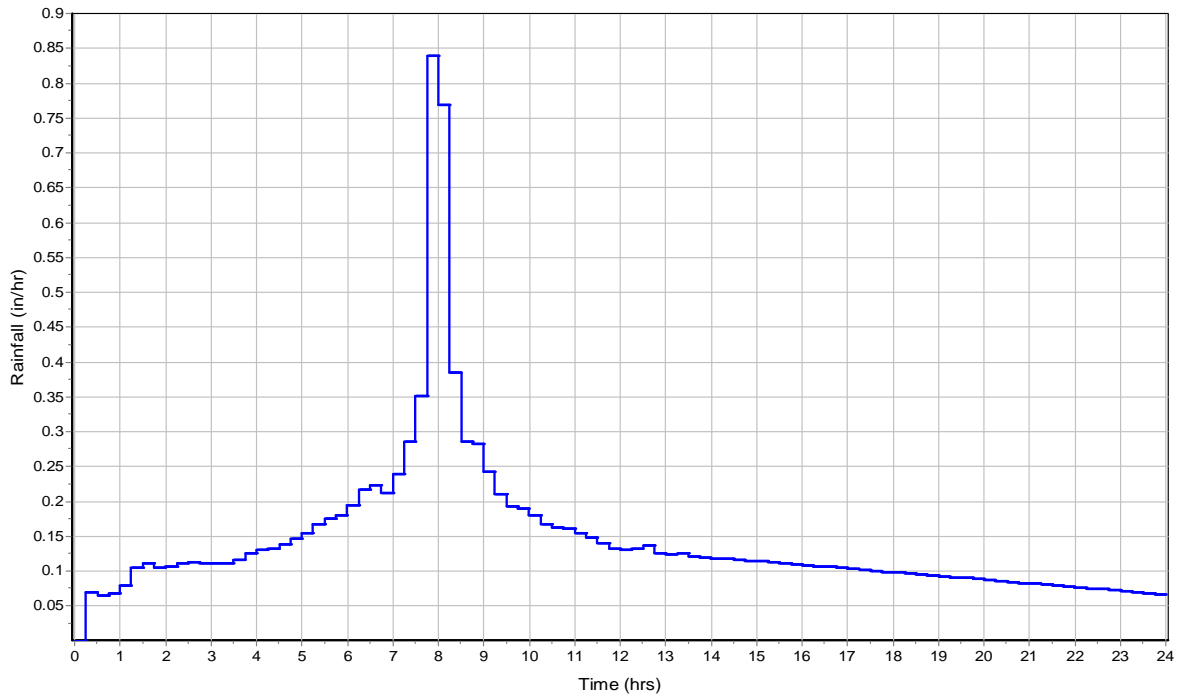

Runoff Hydrograph

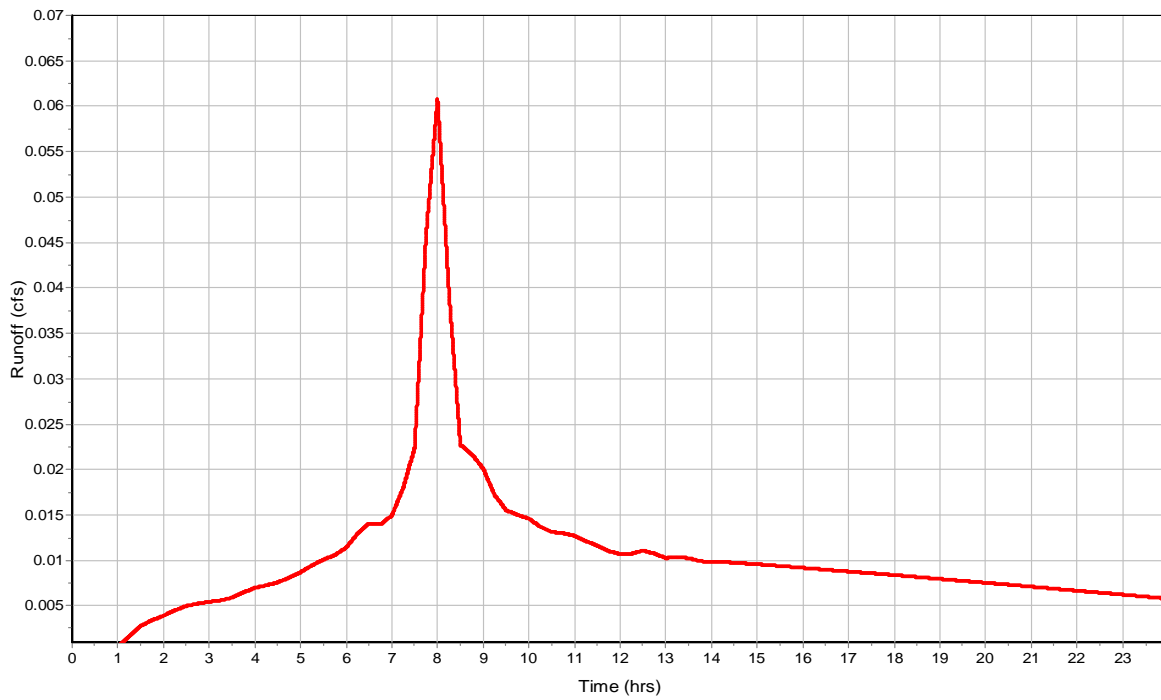

**Subbasin : SDCB 17**

**Input Data**

Area (ac) ..... 0.11  
Impervious Area (%) ..... 92  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.11		96.24


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.09  
Peak Runoff (cfs) ..... 0.08  
Weighted Curve Number ..... 96.24  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 17

Rainfall Intensity Graph

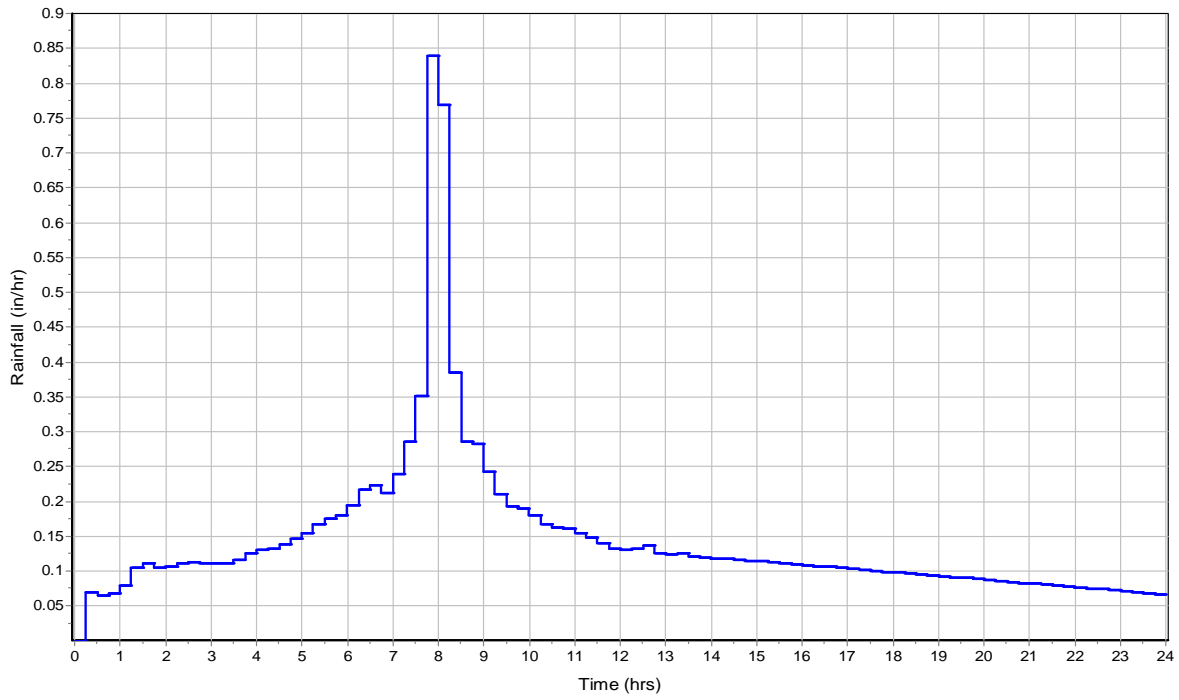

Runoff Hydrograph

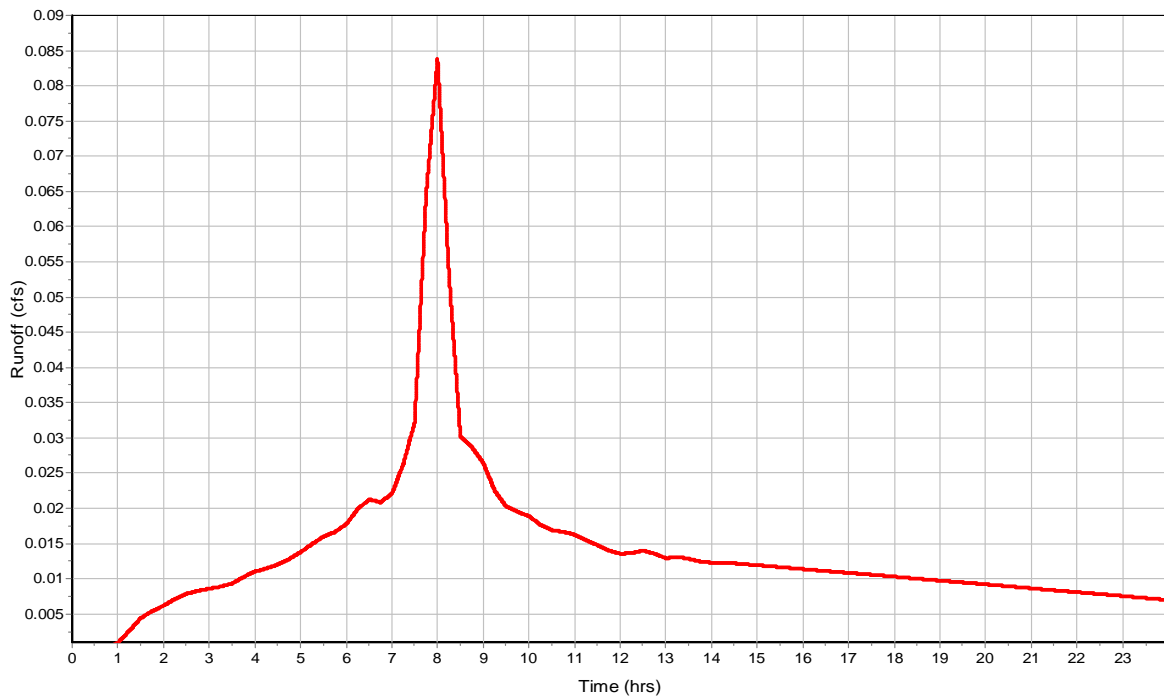

**Subbasin : SDCB 19**

**Input Data**

Area (ac) ..... 0.41  
Impervious Area (%) ..... 78  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.41		93.16


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.82  
Peak Runoff (cfs) ..... 0.29  
Weighted Curve Number ..... 93.16  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 19

Rainfall Intensity Graph

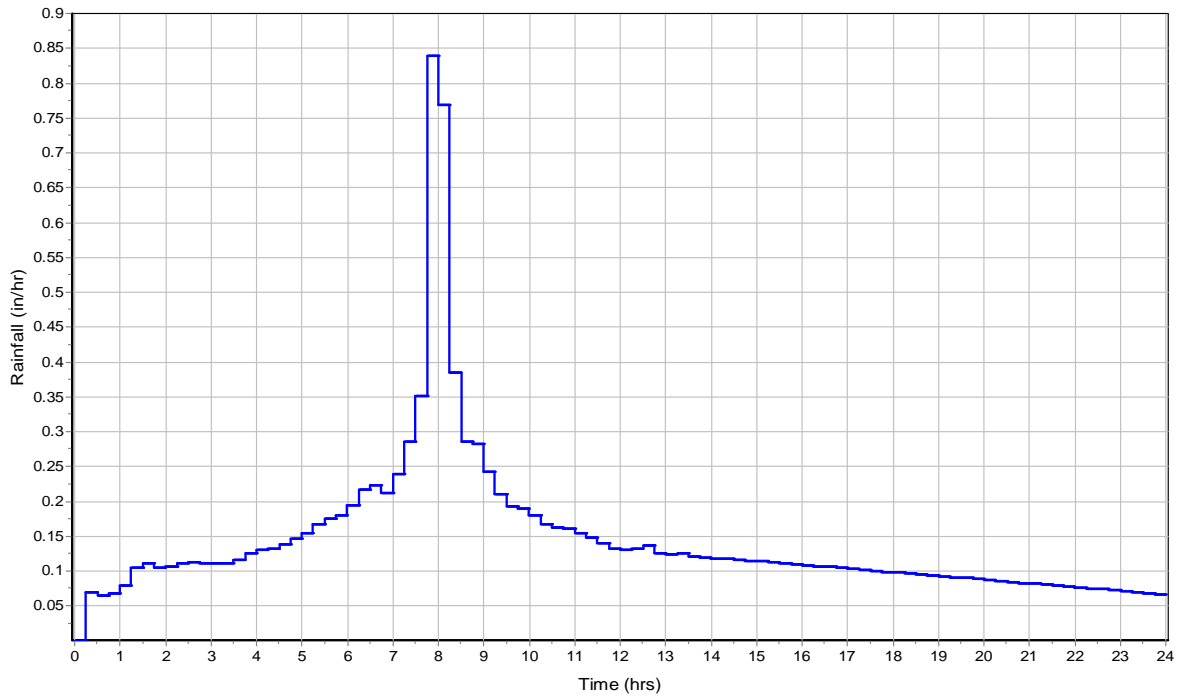

Runoff Hydrograph

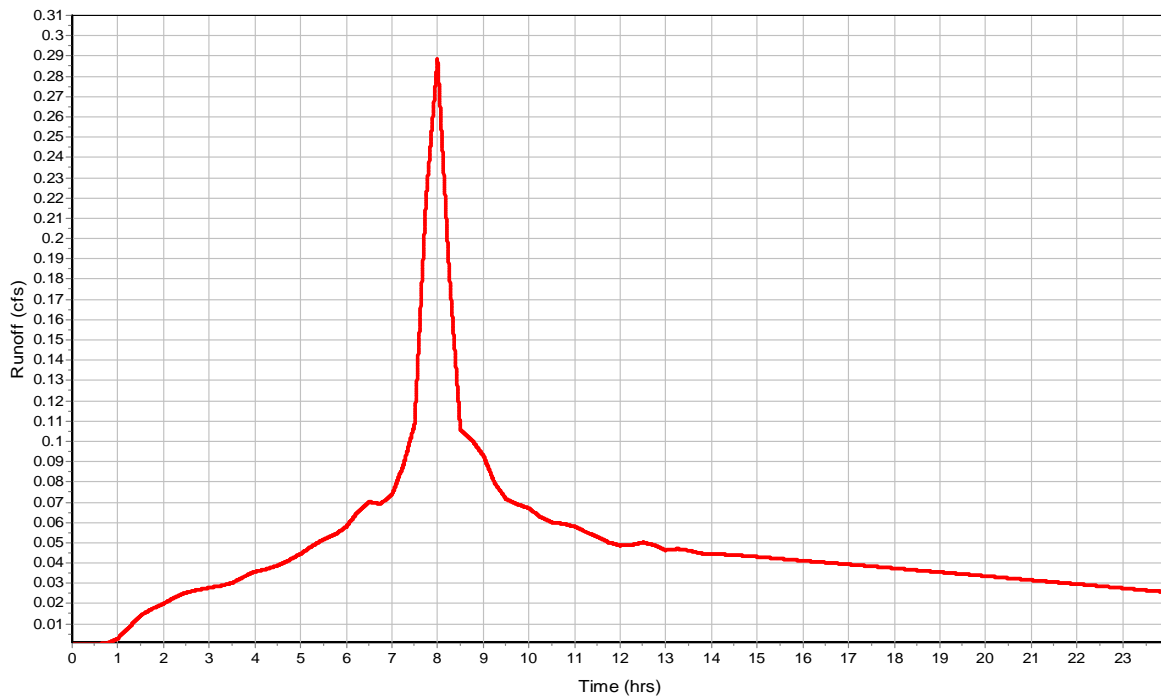



**Subbasin : SDCB 20**

**Input Data**

Area (ac) ..... 0.12  
Impervious Area (%) ..... 79  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.12		93.38


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.84  
Peak Runoff (cfs) ..... 0.08  
Weighted Curve Number ..... 93.38  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 20

Rainfall Intensity Graph

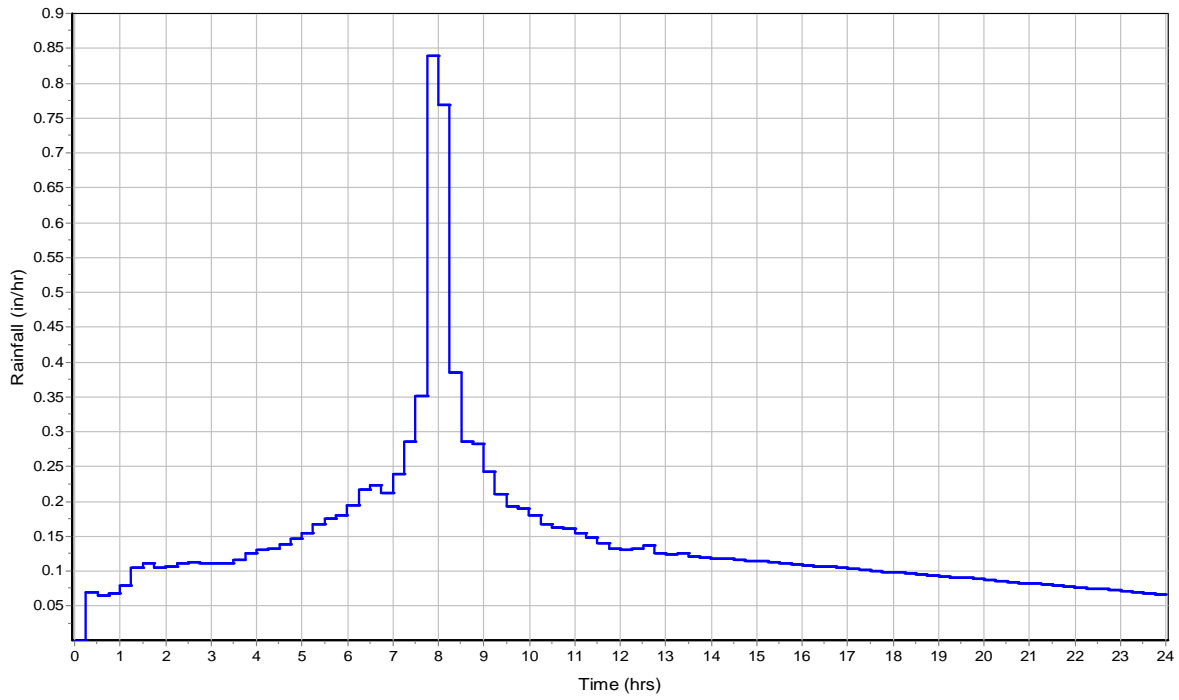

Runoff Hydrograph

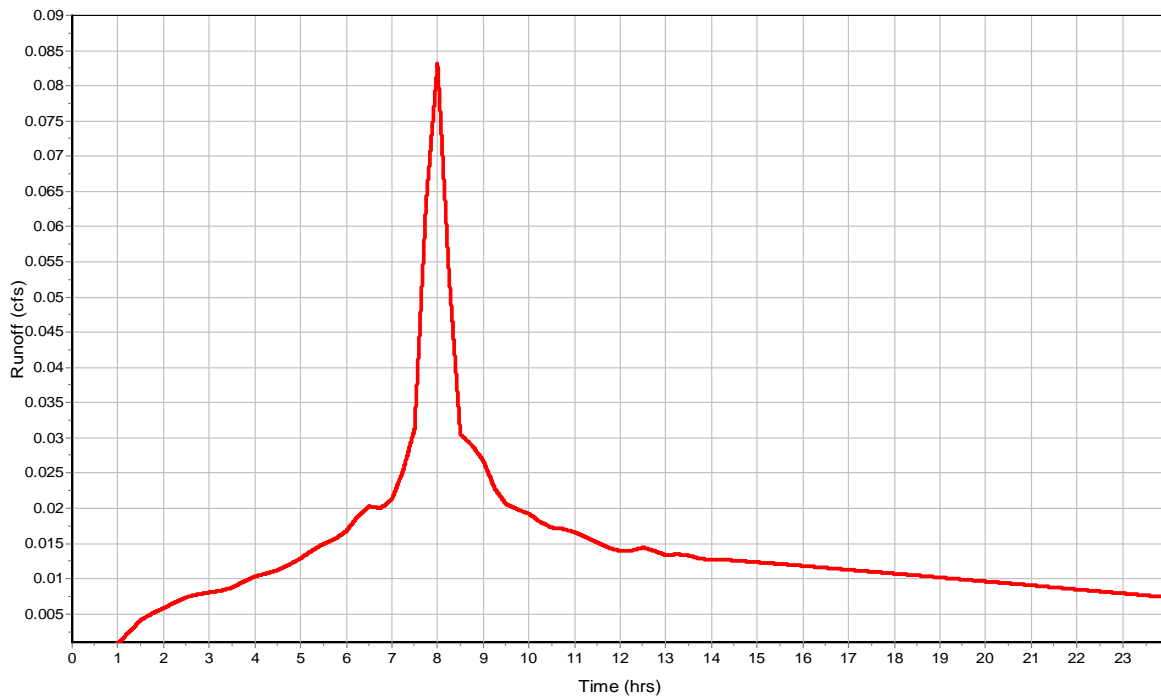

**Subbasin : SDCB 21**

**Input Data**

Area (ac) ..... 0.1  
Impervious Area (%) ..... 93  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.1		96.46


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.11  
Peak Runoff (cfs) ..... 0.08  
Weighted Curve Number ..... 96.46  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 21

Rainfall Intensity Graph

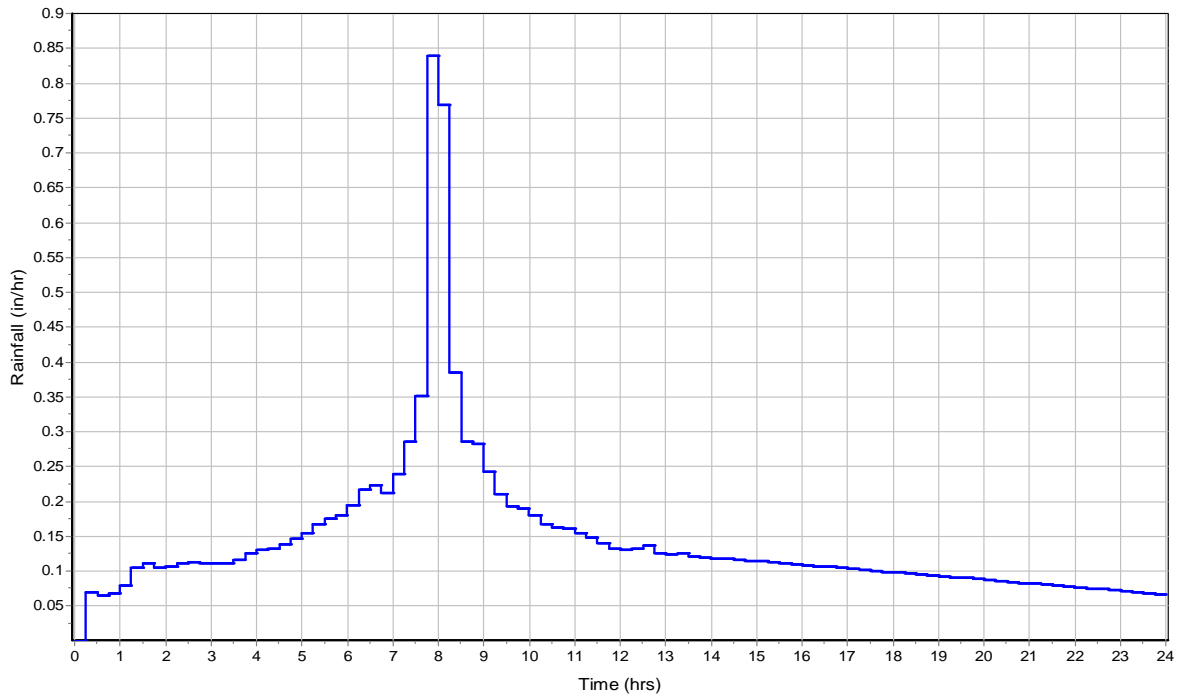

Runoff Hydrograph

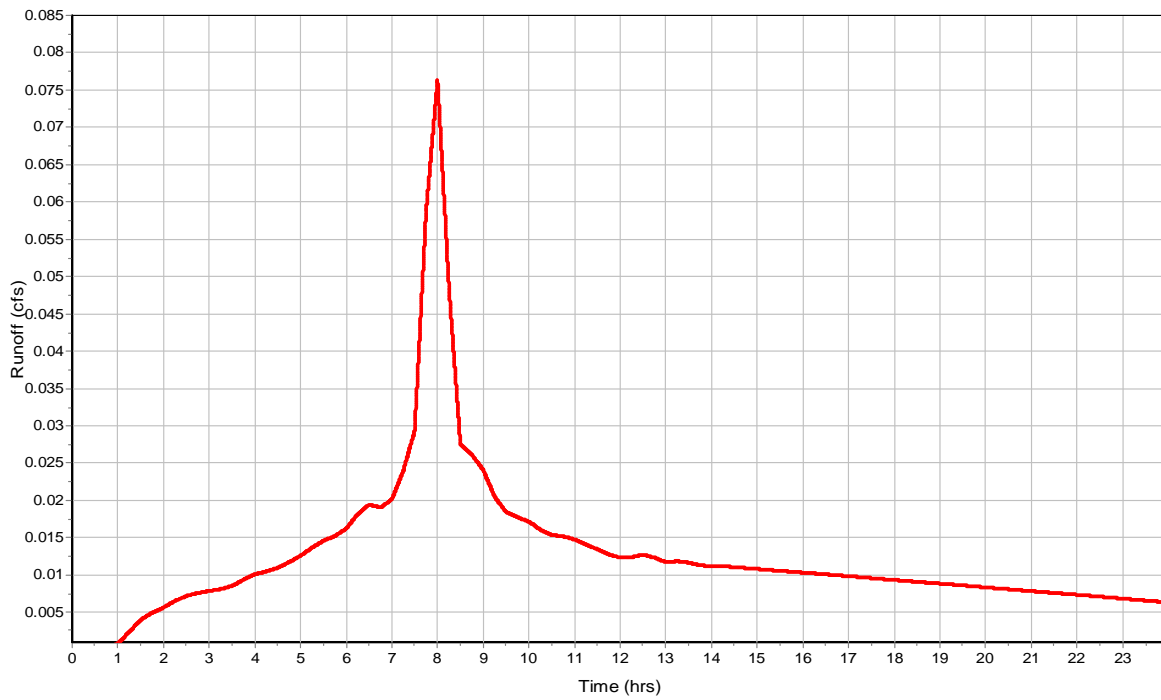

**Subbasin : SDCB 22**

**Input Data**

Area (ac) ..... 0.16  
Impervious Area (%) ..... 82  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.16		94.04


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.9  
Peak Runoff (cfs) ..... 0.12  
Weighted Curve Number ..... 94.04  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 22

Rainfall Intensity Graph

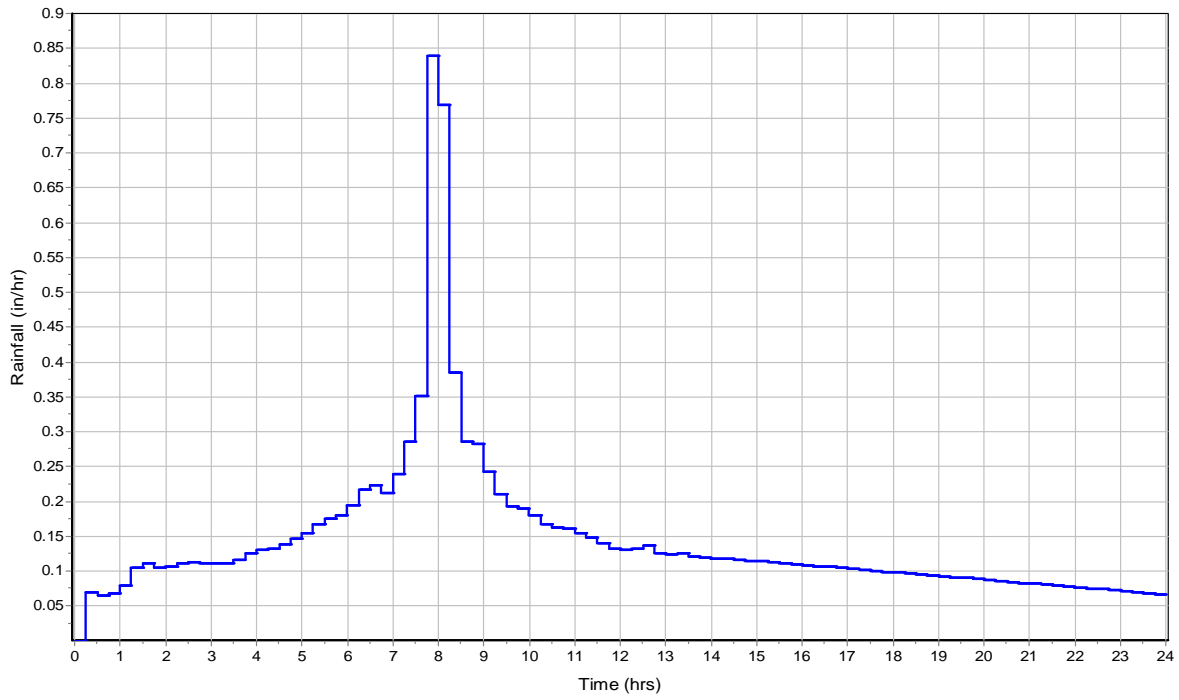

Runoff Hydrograph

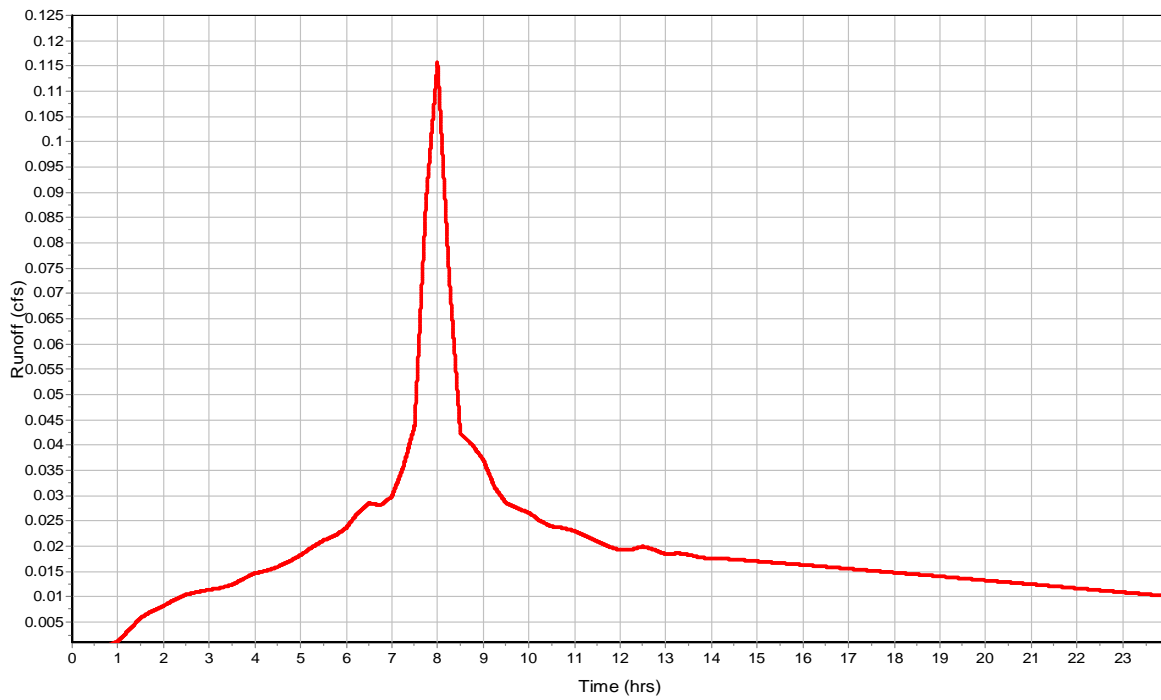

**Subbasin : SDCB 23**

**Input Data**

Area (ac) ..... 0.22  
Impervious Area (%) ..... 86  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.22		94.92


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.97  
Peak Runoff (cfs) ..... 0.17  
Weighted Curve Number ..... 94.92  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 23

Rainfall Intensity Graph

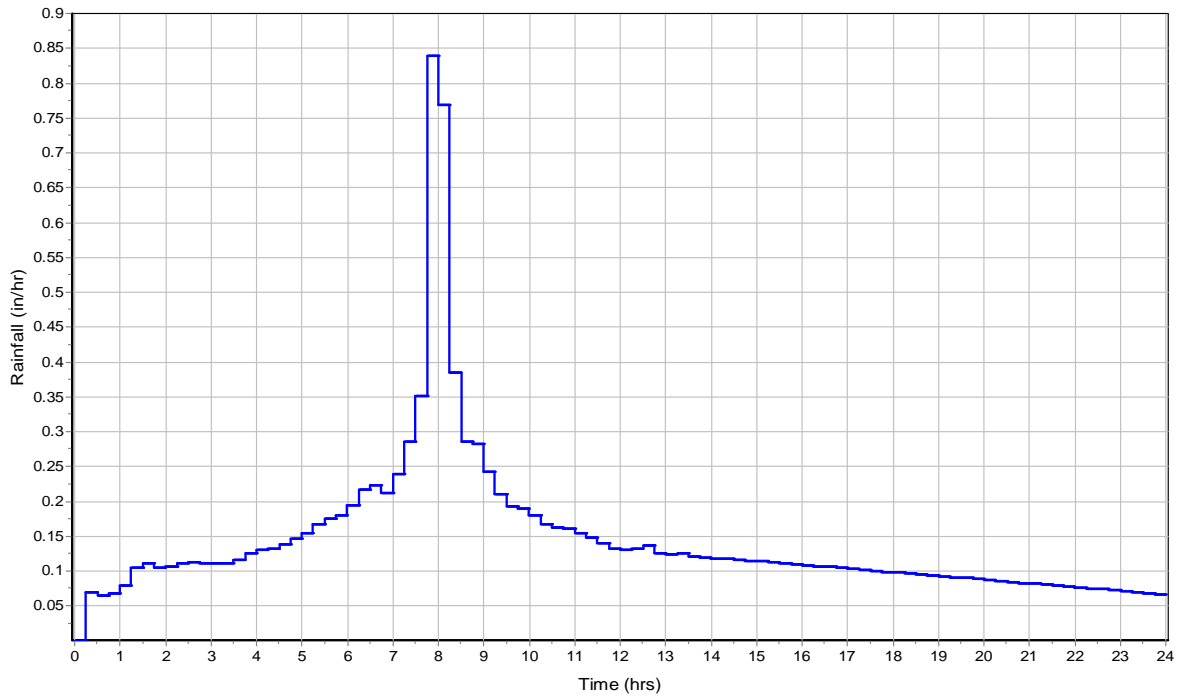

Runoff Hydrograph

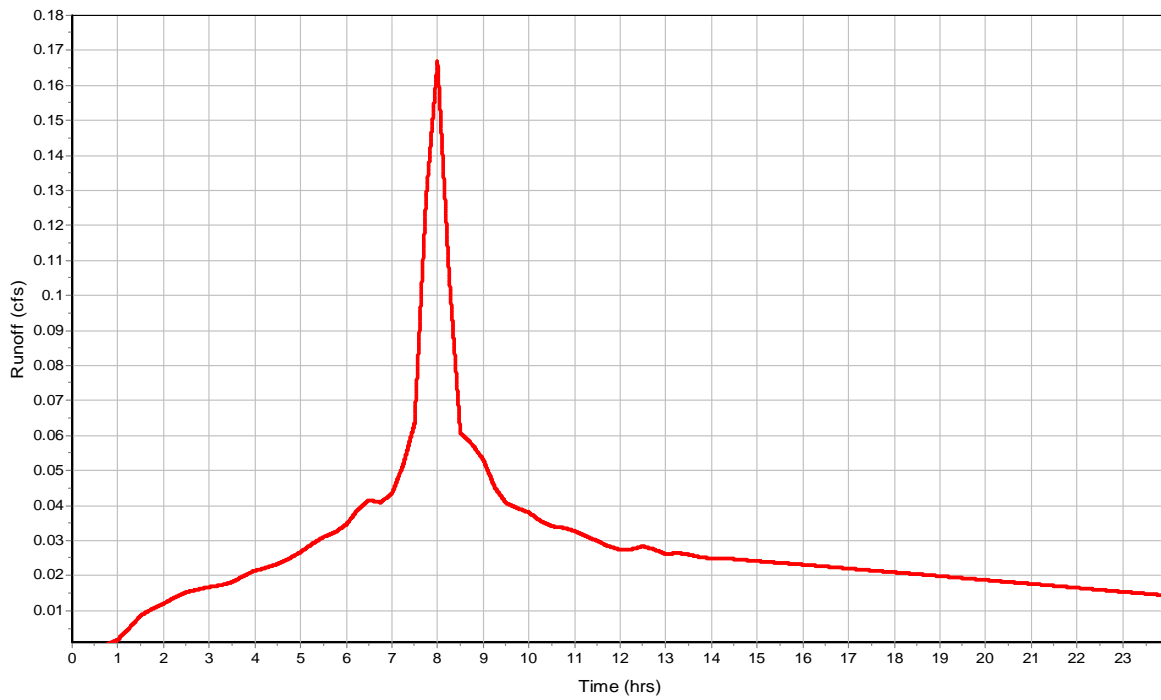



**Subbasin : SDCB 24**

**Input Data**

Area (ac) ..... 0.09  
Impervious Area (%) ..... 85  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.09		94.7


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.95  
Peak Runoff (cfs) ..... 0.07  
Weighted Curve Number ..... 94.7  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 24

Rainfall Intensity Graph

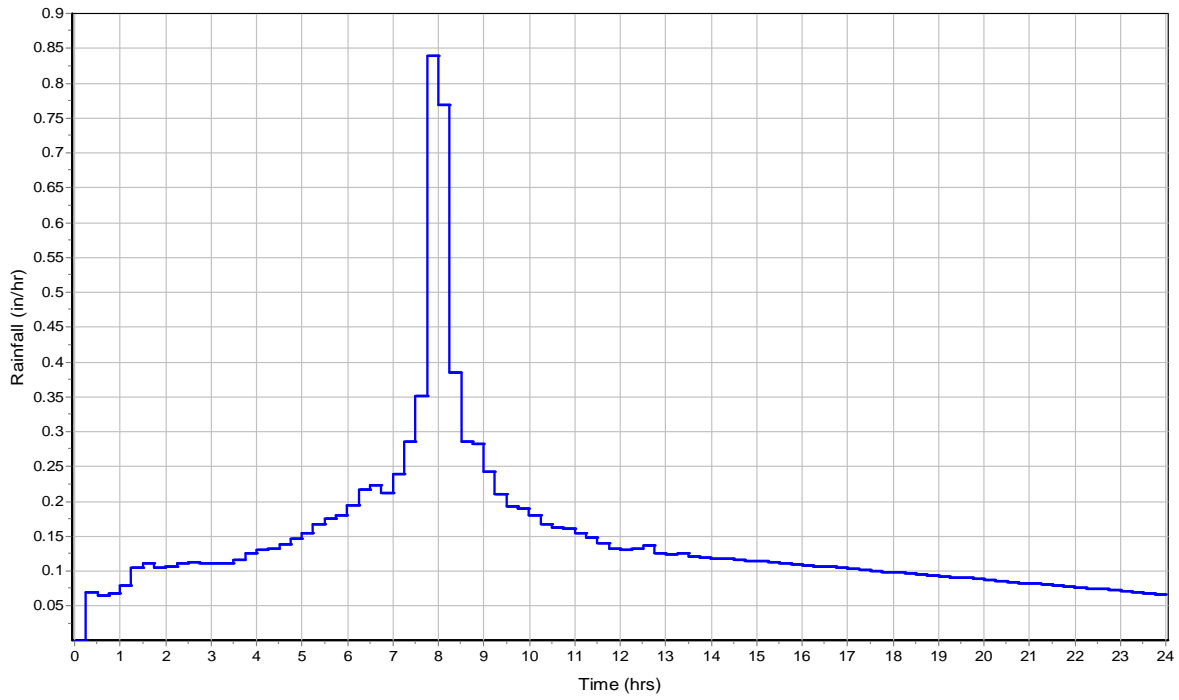

Runoff Hydrograph

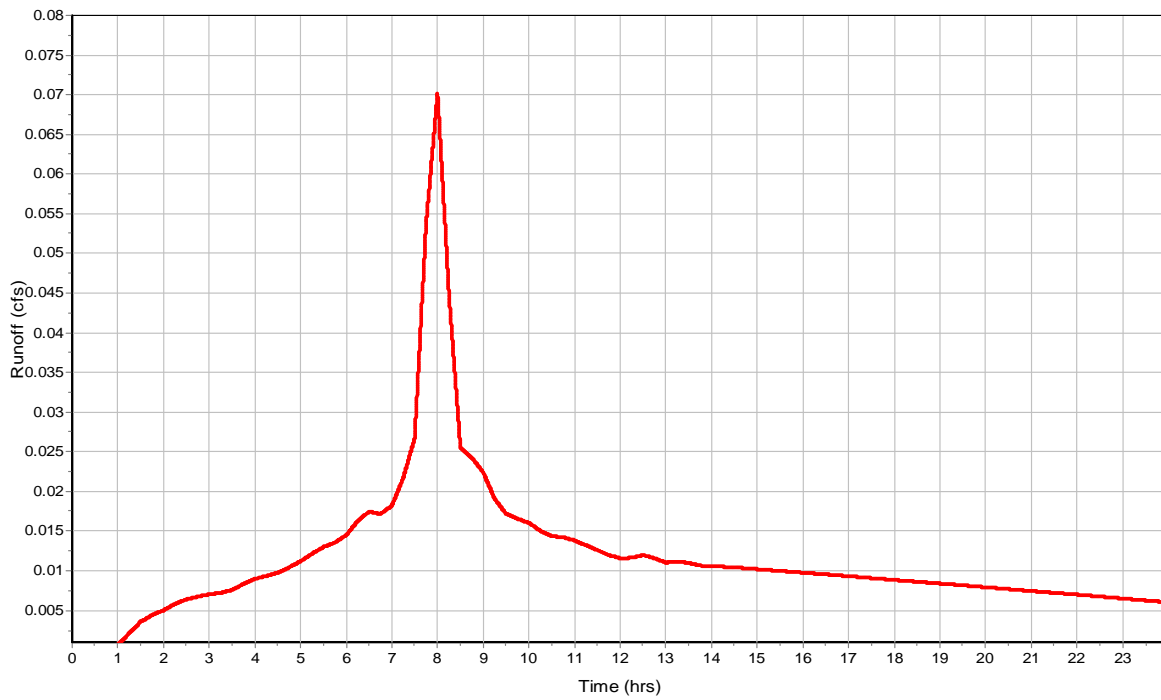

**Subbasin : SDCB 27**

**Input Data**

Area (ac) ..... 0.44  
Impervious Area (%) ..... 76  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.44		92.72


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.78  
Peak Runoff (cfs) ..... 0.3  
Weighted Curve Number ..... 92.72  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 27

Rainfall Intensity Graph

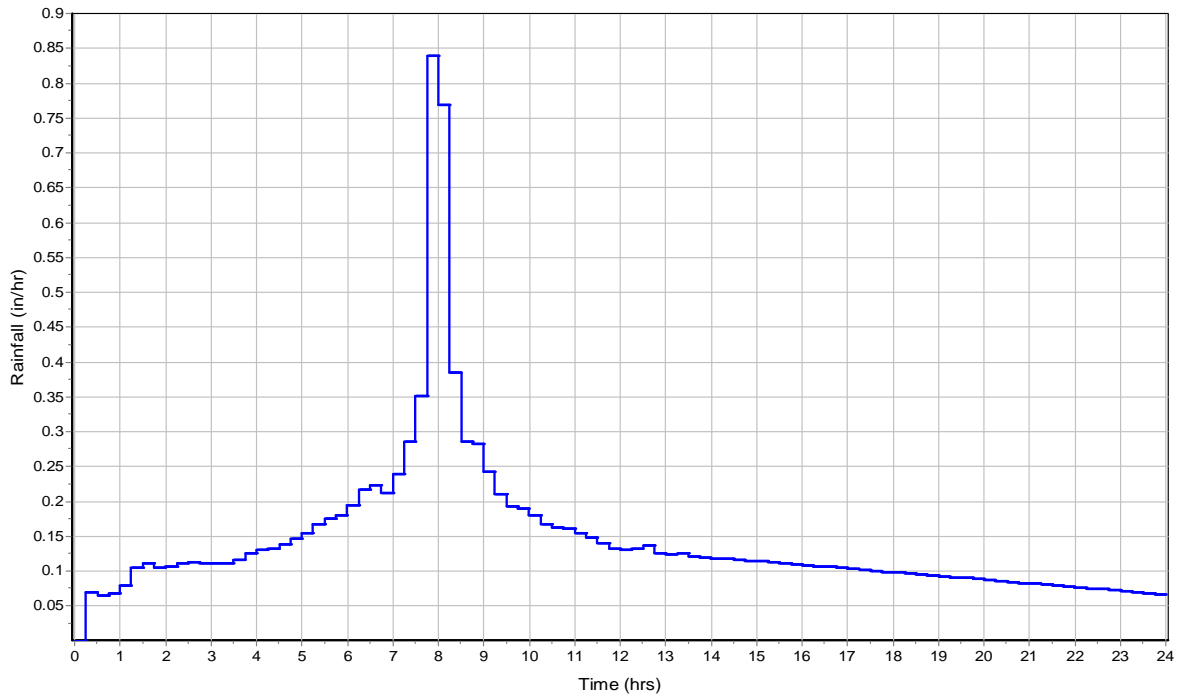

Runoff Hydrograph

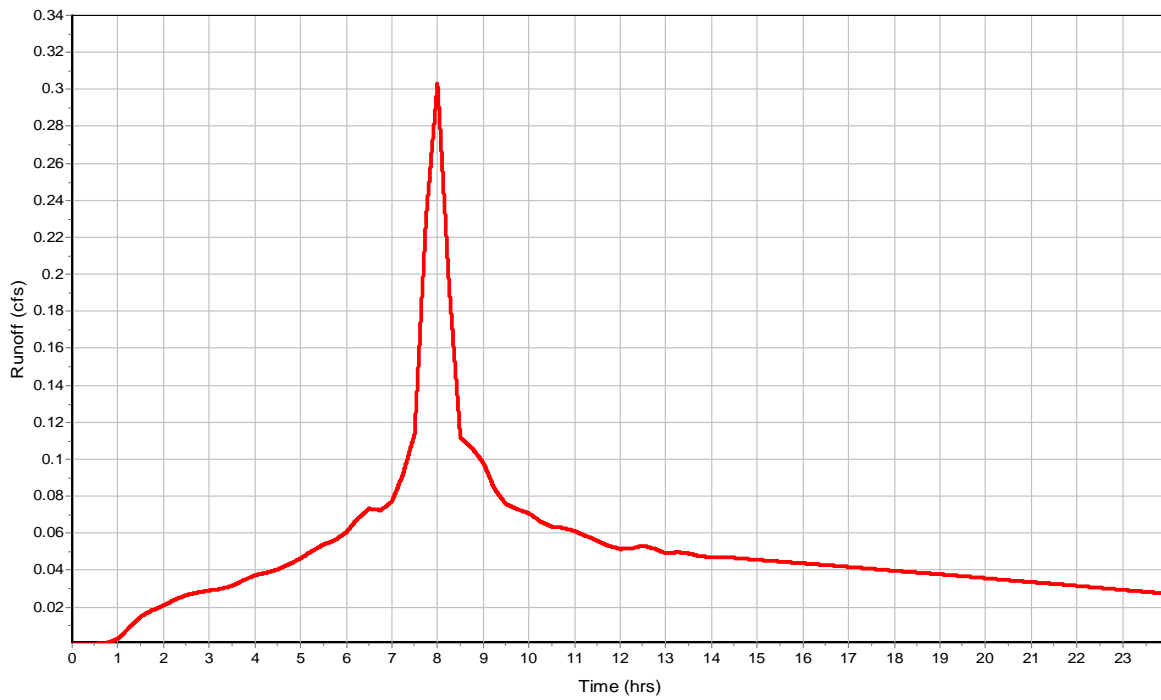

**Subbasin : SDCB 28**

**Input Data**

Area (ac) ..... 0.15  
Impervious Area (%) ..... 73  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.15		92.06


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.73  
Peak Runoff (cfs) ..... 0.11  
Weighted Curve Number ..... 92.06  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 28

Rainfall Intensity Graph

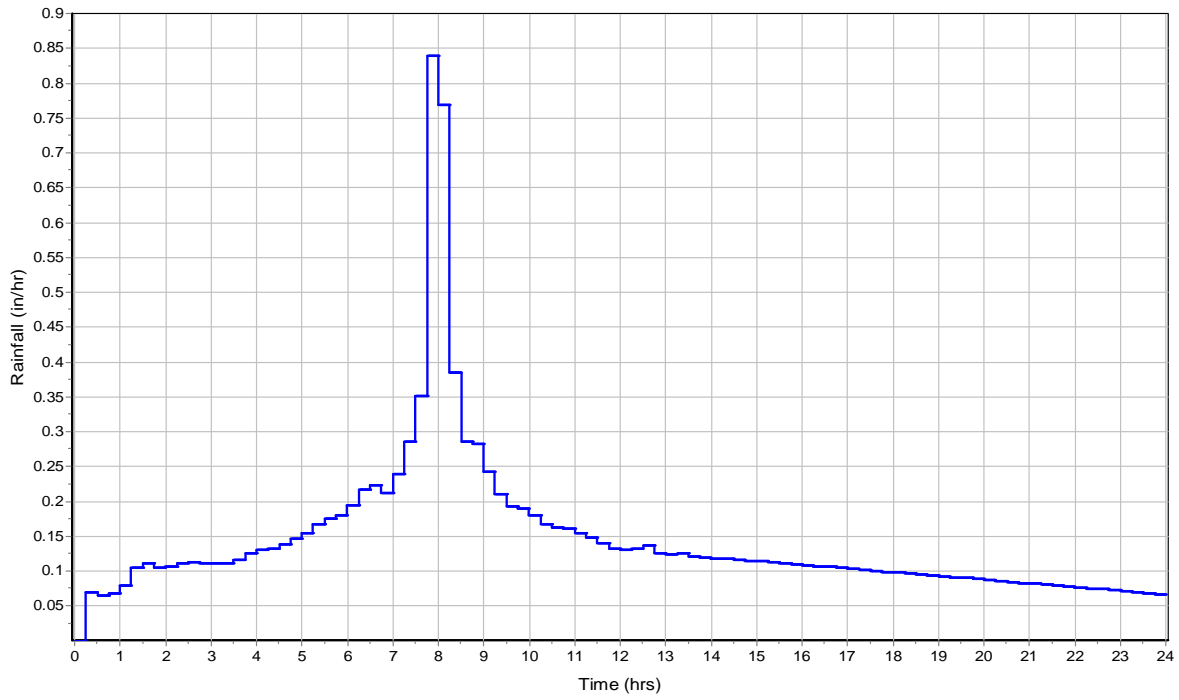

Runoff Hydrograph

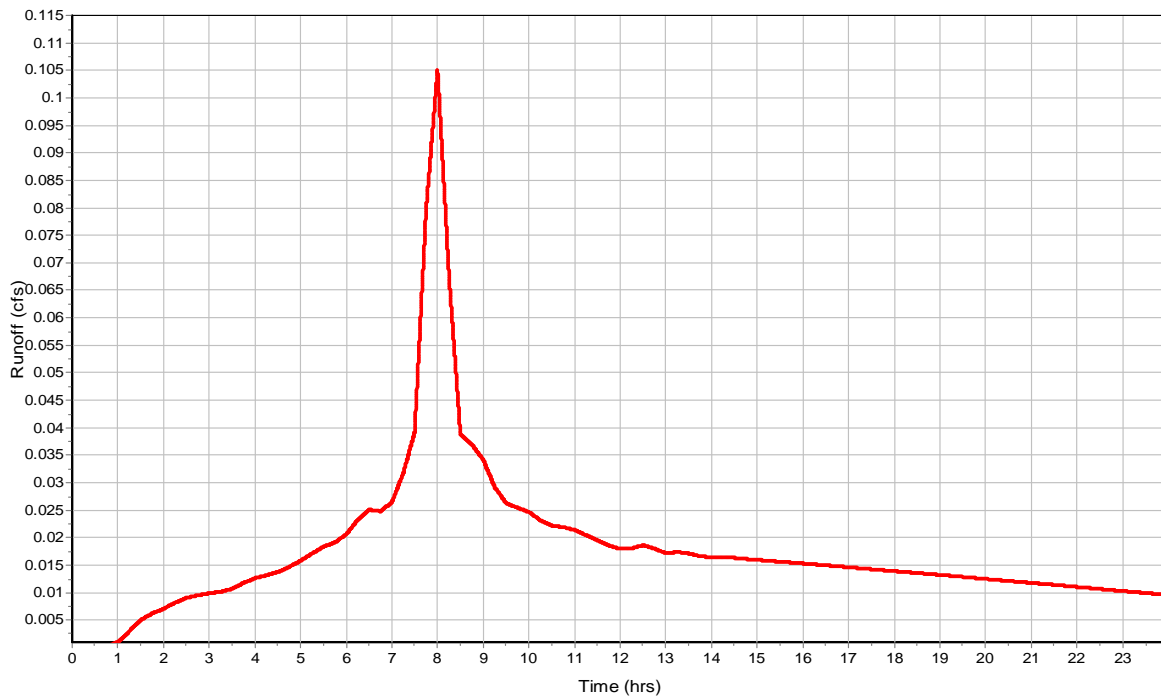

**Subbasin : SDCB 29**

**Input Data**

Area (ac) ..... 0.31  
Impervious Area (%) ..... 79  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.31		93.38


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.84  
Peak Runoff (cfs) ..... 0.22  
Weighted Curve Number ..... 93.38  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 29

Rainfall Intensity Graph

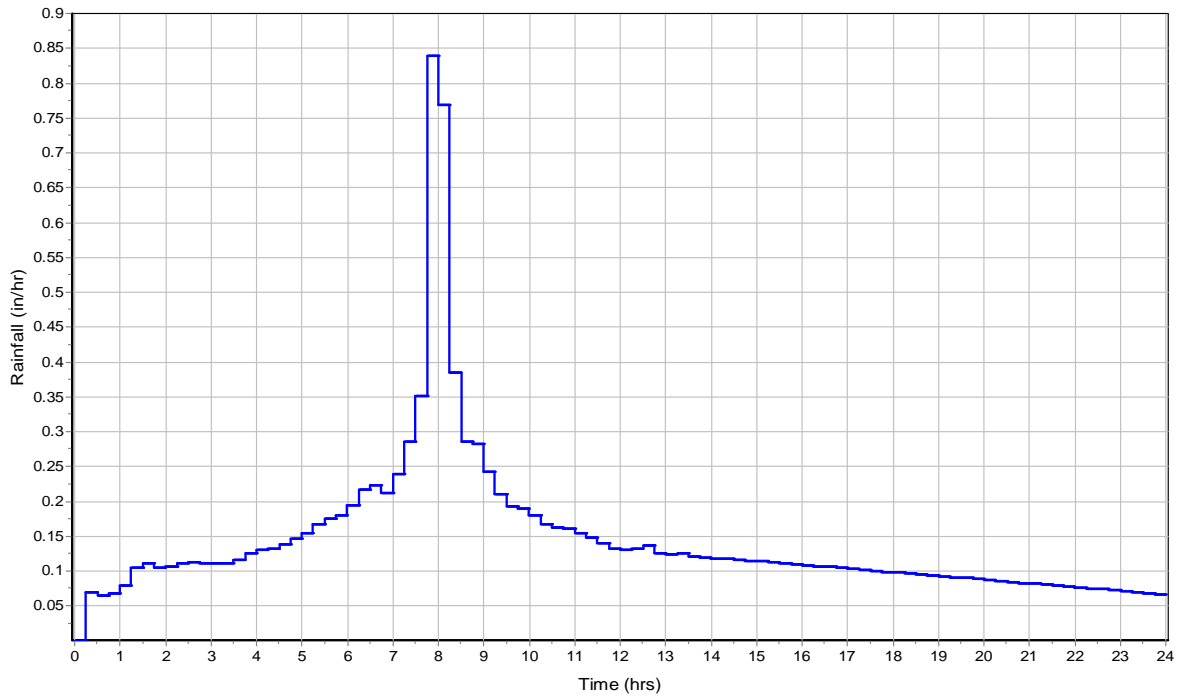

Runoff Hydrograph

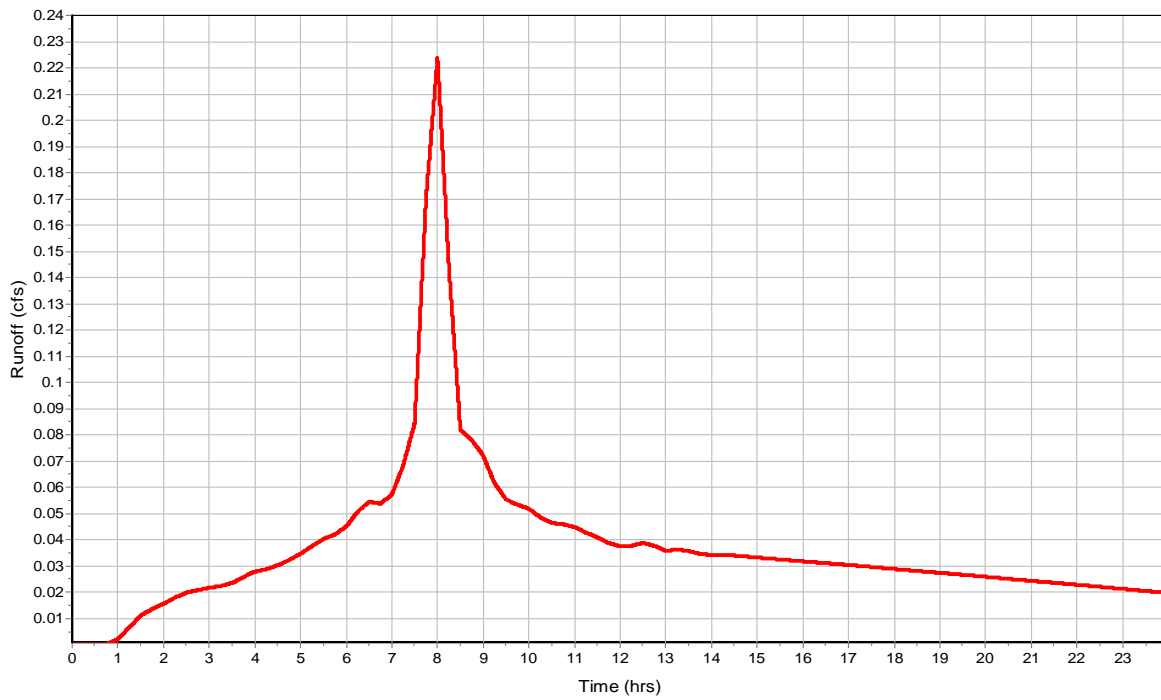



**Subbasin : SDCB 30**

**Input Data**

Area (ac) ..... 0.36  
Impervious Area (%) ..... 70  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.36		91.4


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.67  
Peak Runoff (cfs) ..... 0.24  
Weighted Curve Number ..... 91.4  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 30

Rainfall Intensity Graph

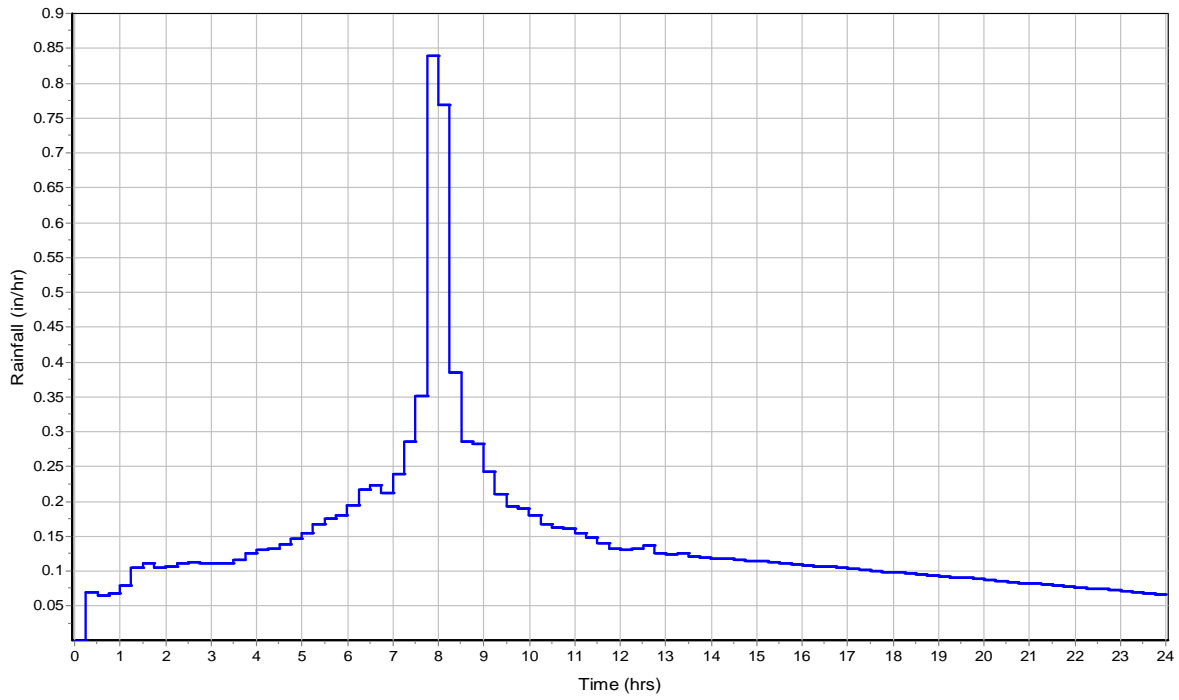

Runoff Hydrograph

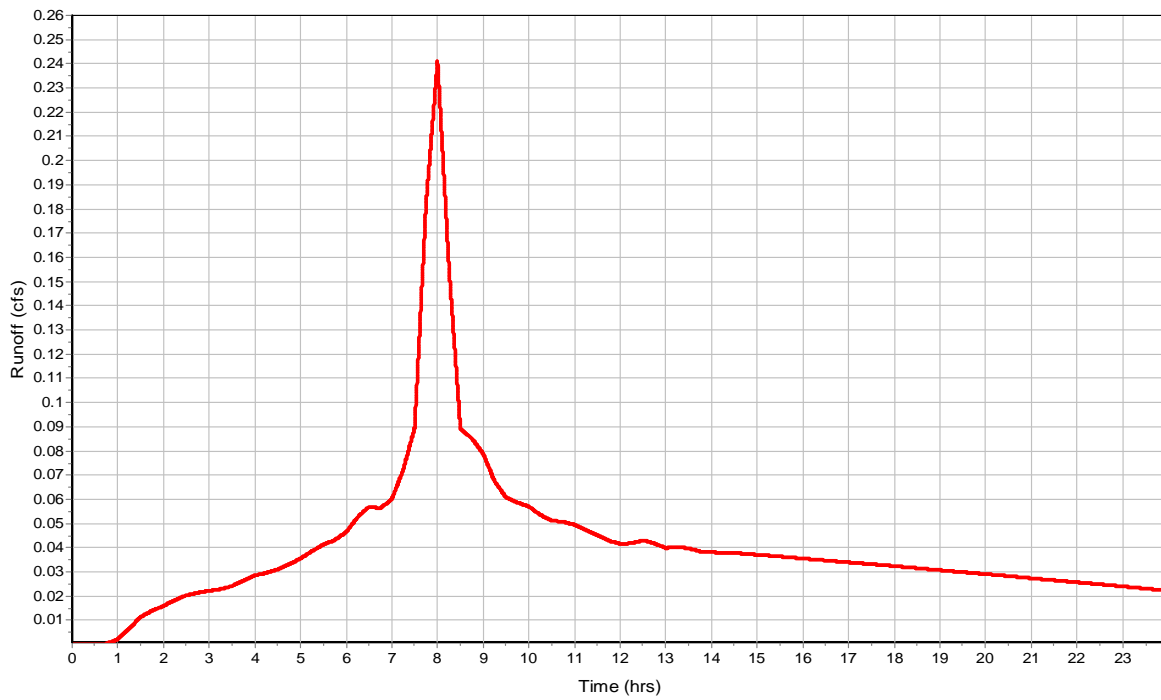

**Subbasin : SDCB 33**

**Input Data**

Area (ac) ..... 0.32  
Impervious Area (%) ..... 83  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.32		94.26


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.92  
Peak Runoff (cfs) ..... 0.23  
Weighted Curve Number ..... 94.26  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 33

Rainfall Intensity Graph

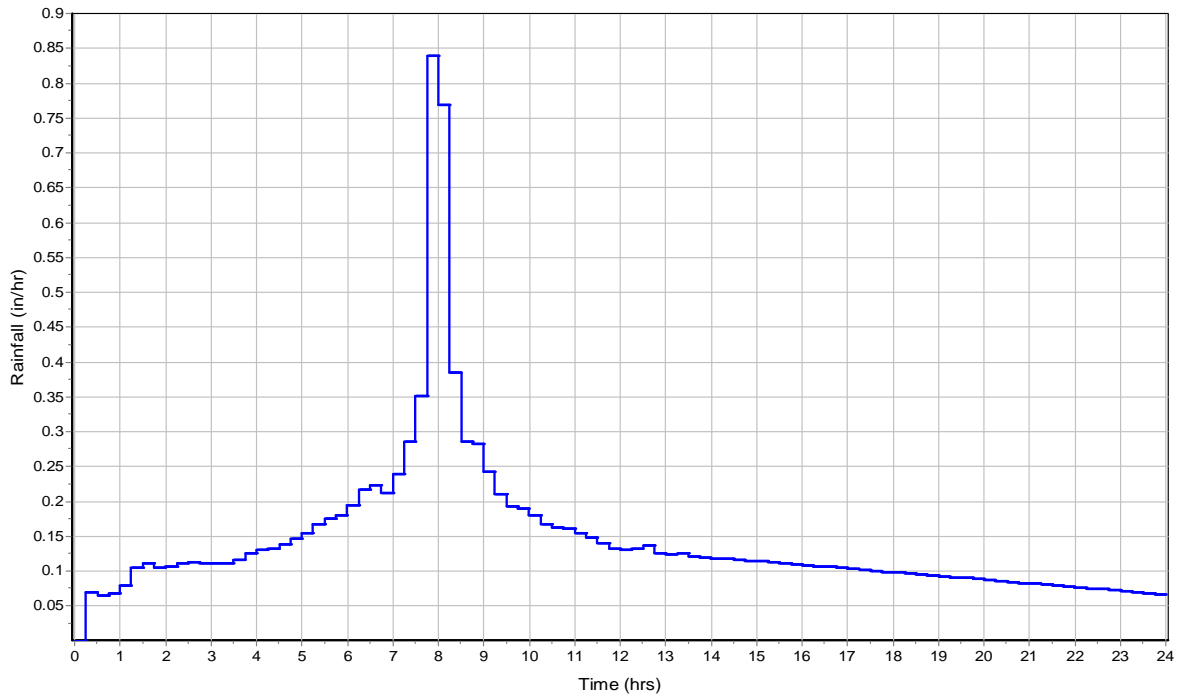

Runoff Hydrograph

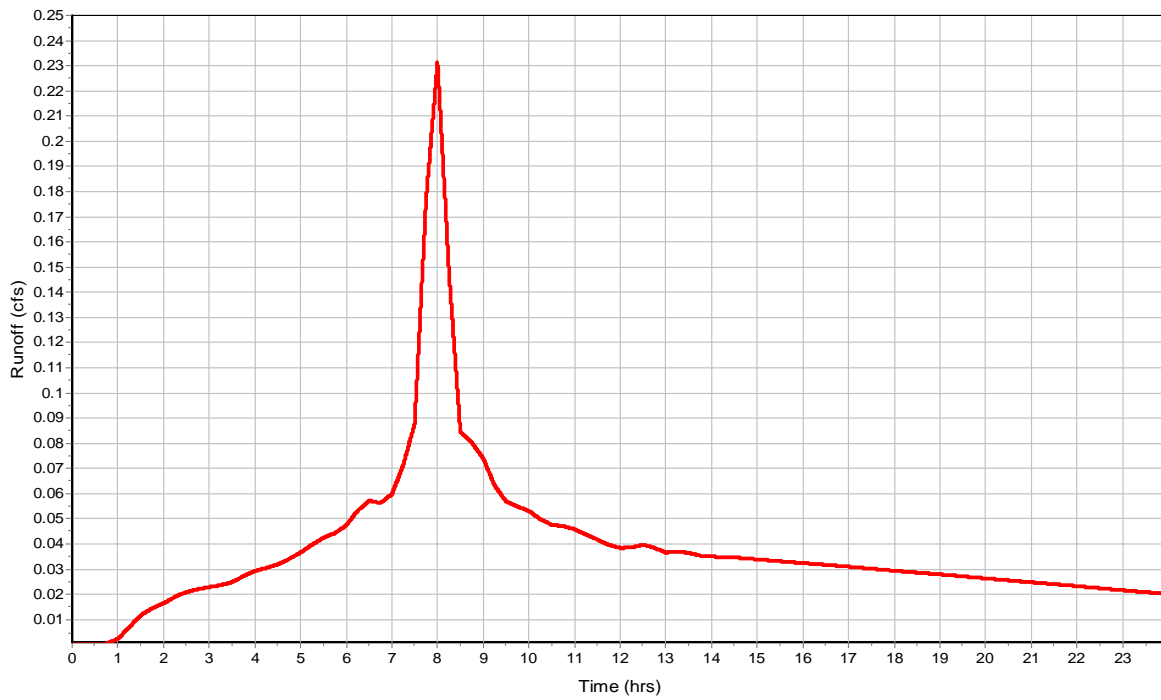

**Subbasin : SDCB 34**

**Input Data**

Area (ac) .....	0.21
Impervious Area (%) .....	76
Impervious Area Curve Number .....	98
Pervious Area Curve Number .....	76
Rain Gage ID .....	Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.21		92.72


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) .....	3.46
Total Runoff (in) .....	2.78
Peak Runoff (cfs) .....	0.15
Weighted Curve Number .....	92.72
Time of Concentration (days hh:mm:ss) .....	0 00:00:00

Subbasin : SDCB 34

Rainfall Intensity Graph

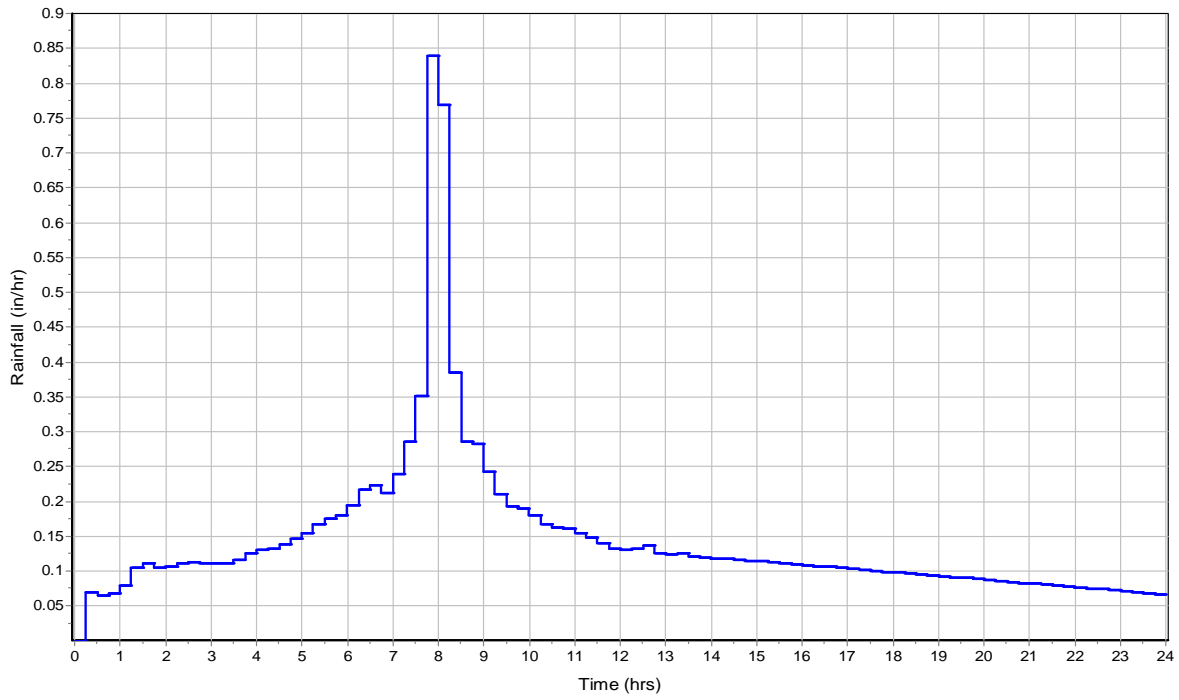

Runoff Hydrograph

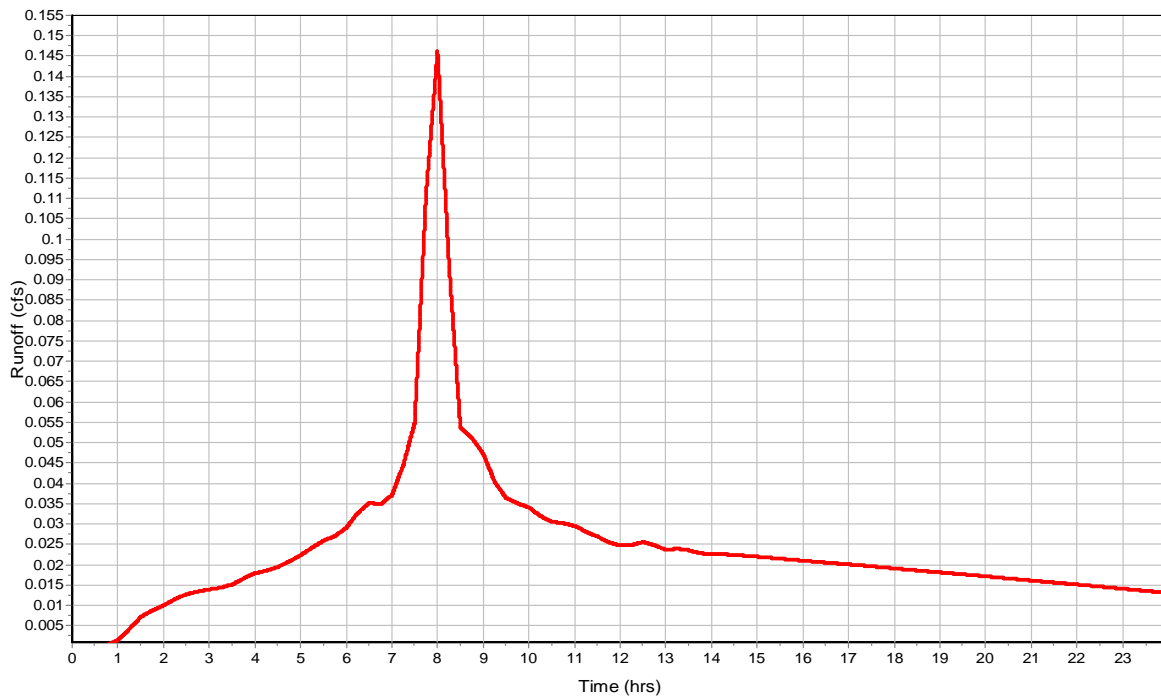

**Subbasin : SDCB 36**

**Input Data**

Area (ac) ..... 0.1  
Impervious Area (%) ..... 79  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.1		93.38


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.84  
Peak Runoff (cfs) ..... 0.07  
Weighted Curve Number ..... 93.38  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 36

Rainfall Intensity Graph

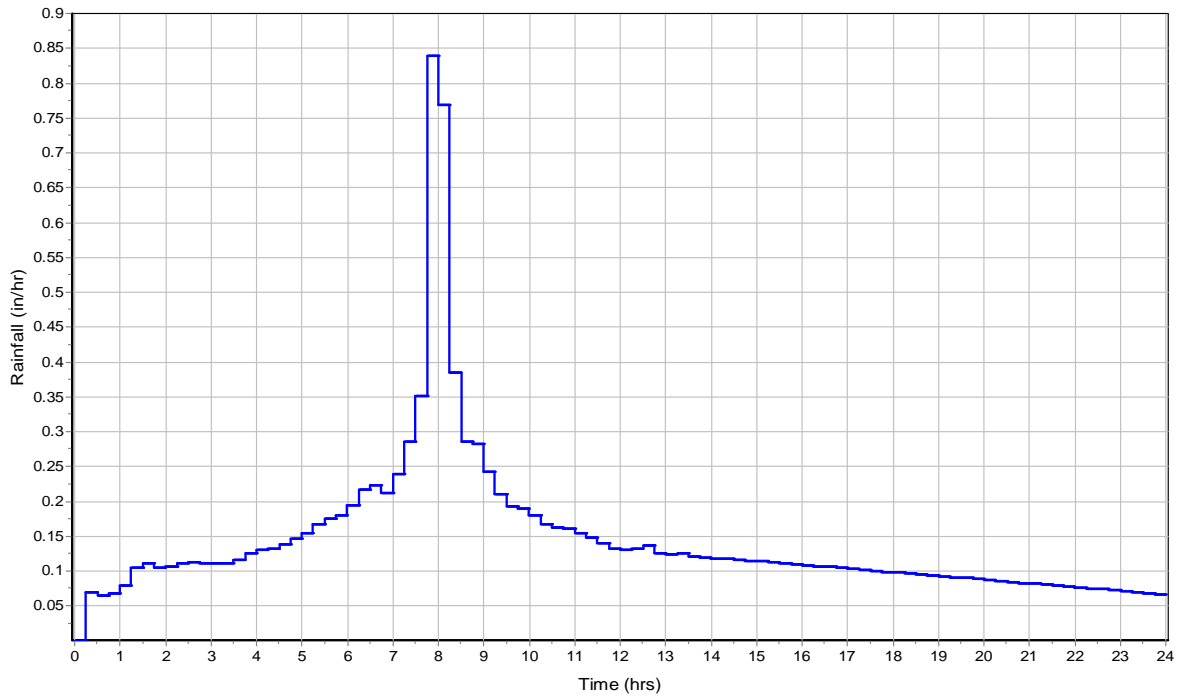

Runoff Hydrograph

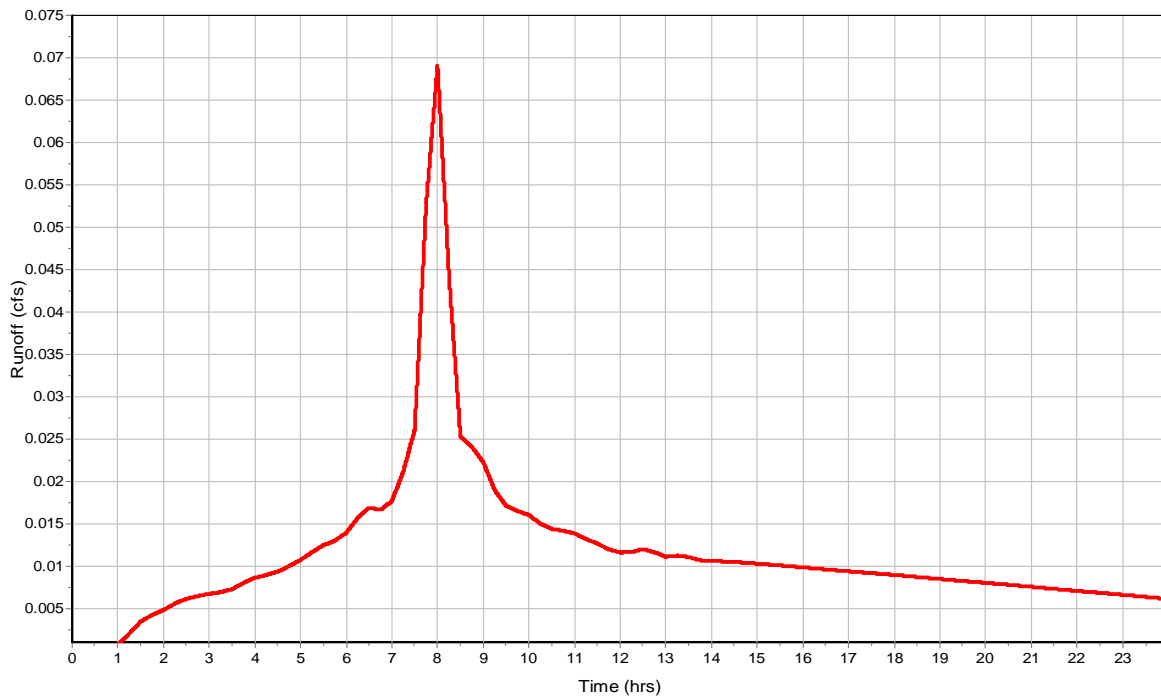



**Subbasin : SDCB 37**

**Input Data**

Area (ac) ..... 0.08  
Impervious Area (%) ..... 96  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.08		97.12


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.16  
Peak Runoff (cfs) ..... 0.06  
Weighted Curve Number ..... 97.12  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 37

Rainfall Intensity Graph

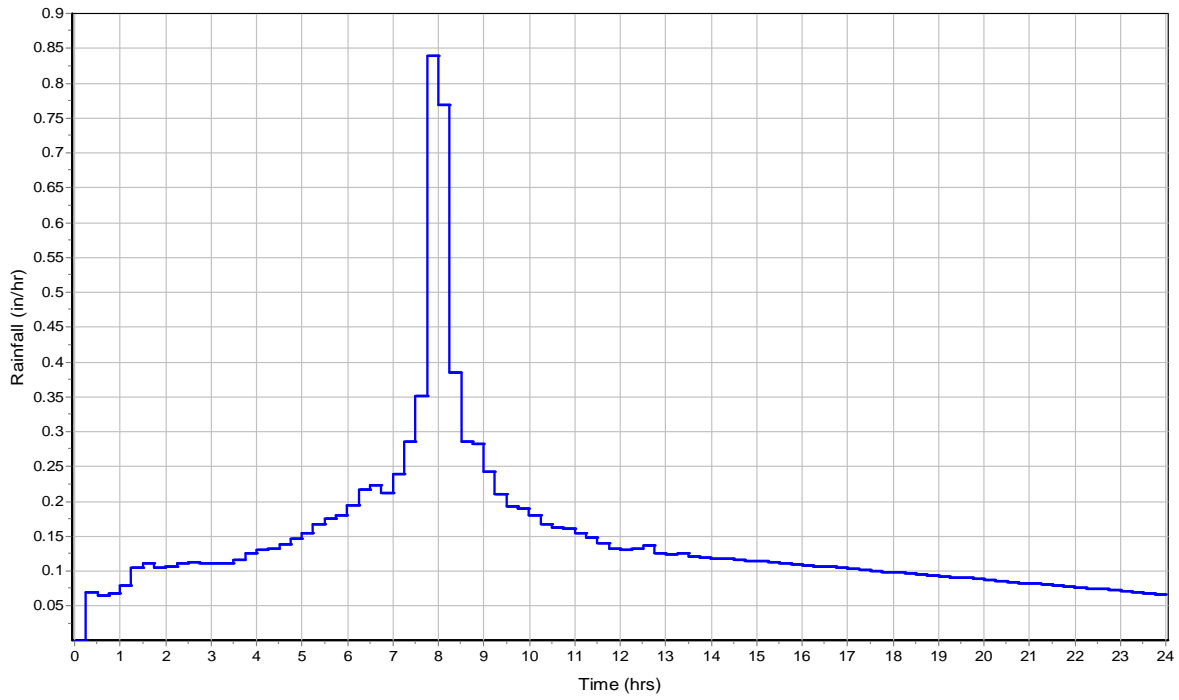

Runoff Hydrograph

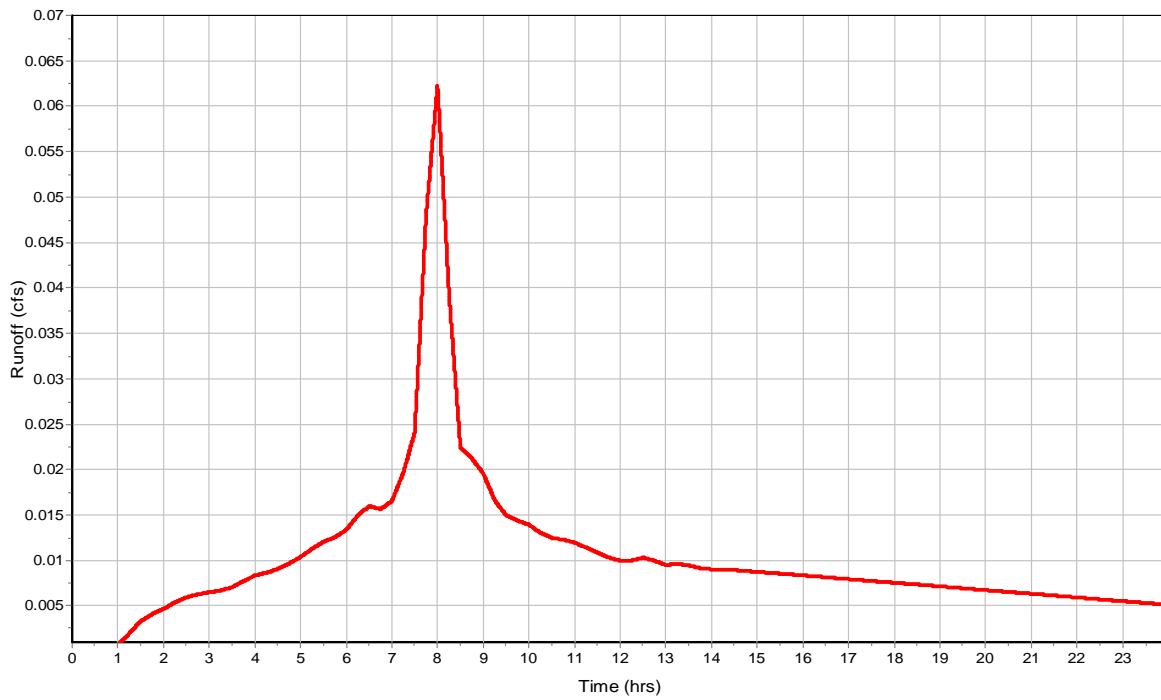

**Subbasin : SDCB 38**

**Input Data**

Area (ac) ..... 0.09  
Impervious Area (%) ..... 72  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.09		91.84


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.71  
Peak Runoff (cfs) ..... 0.06  
Weighted Curve Number ..... 91.84  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 38

Rainfall Intensity Graph

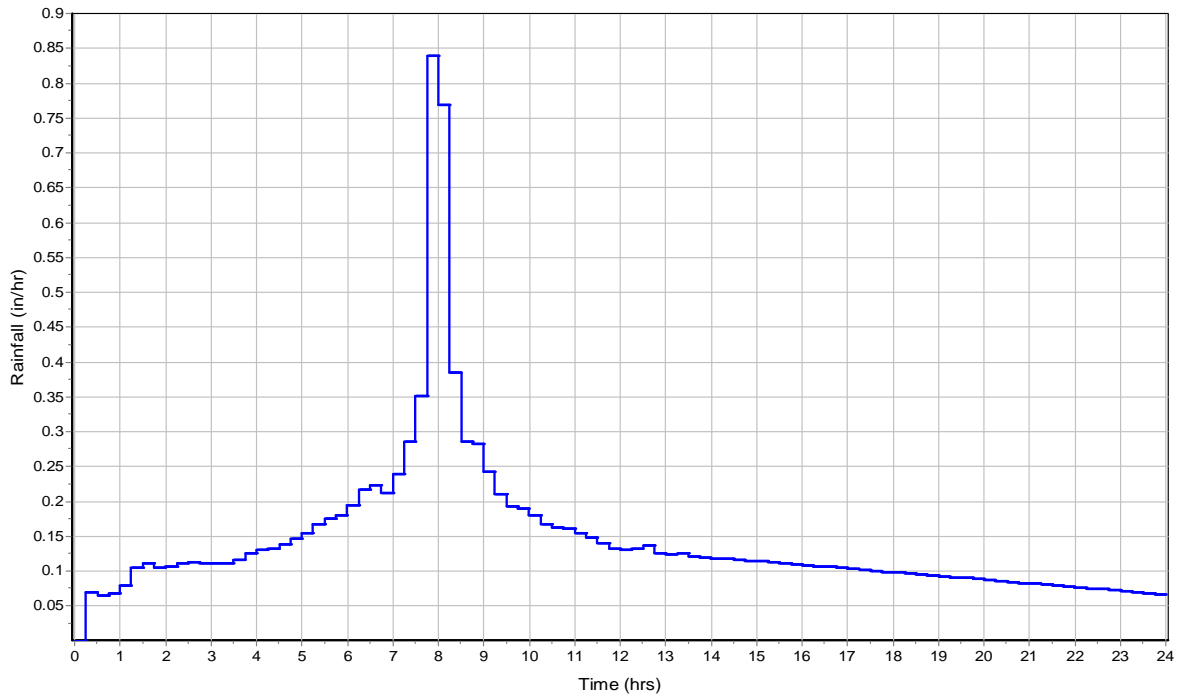

Runoff Hydrograph

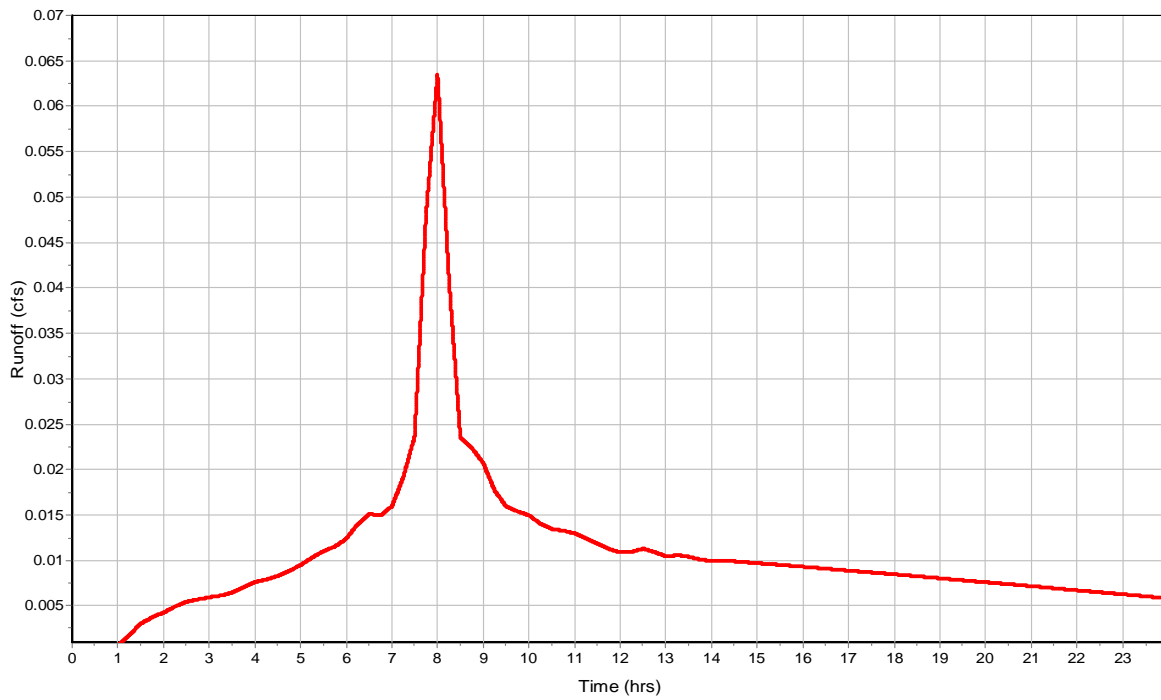

**Subbasin : SDCB 40**

**Input Data**

Area (ac) ..... 0.14  
Impervious Area (%) ..... 0  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.14		76


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 1.34  
Peak Runoff (cfs) ..... 0.04  
Weighted Curve Number ..... 76  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 40

Rainfall Intensity Graph

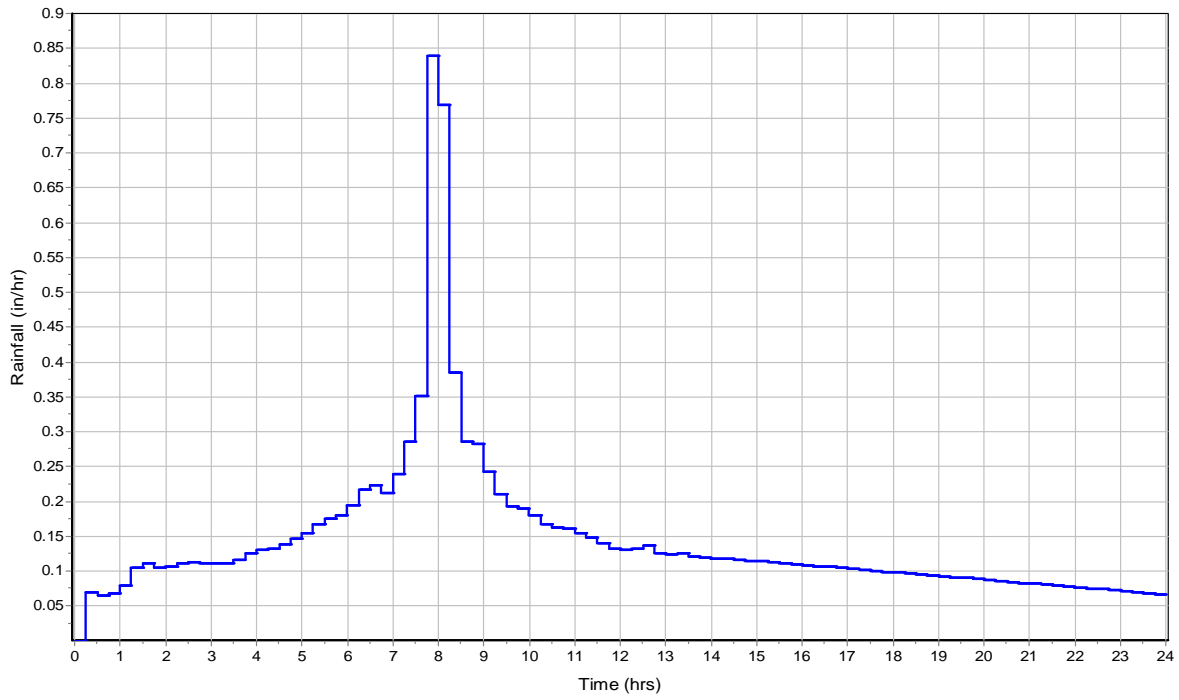

Runoff Hydrograph

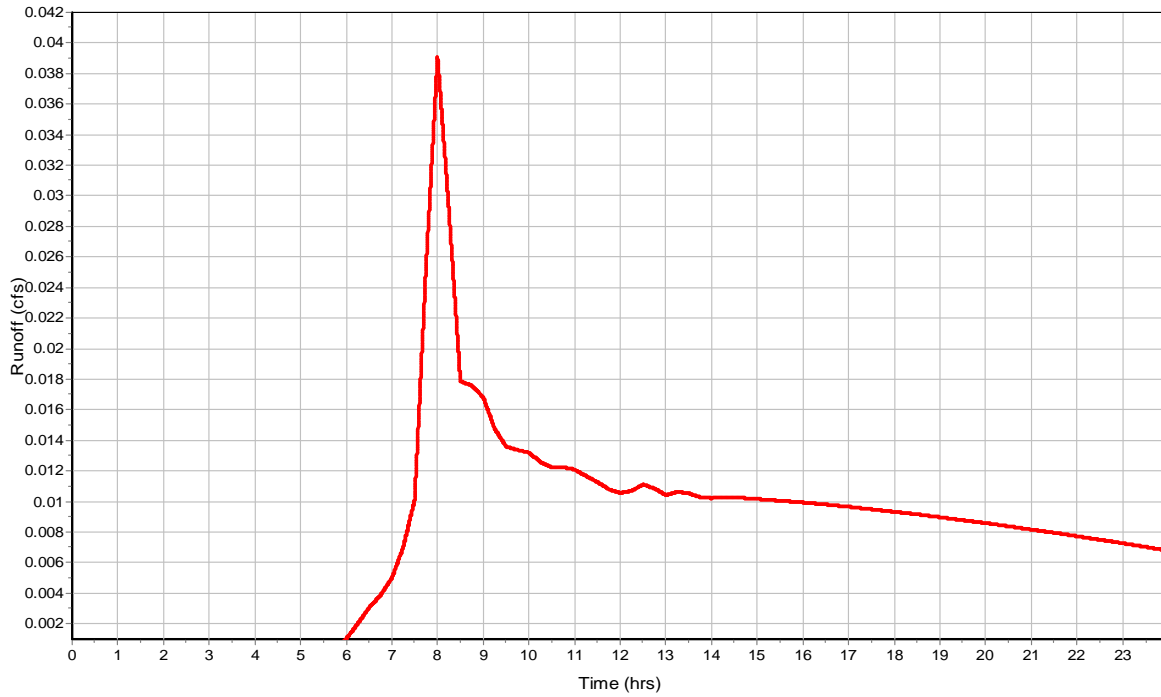

**Subbasin : SDCB 41**

**Input Data**

Area (ac) ..... 0.16  
Impervious Area (%) ..... 60  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.16		89.2


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 2.48  
Peak Runoff (cfs) ..... 0.1  
Weighted Curve Number ..... 89.2  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 41

Rainfall Intensity Graph

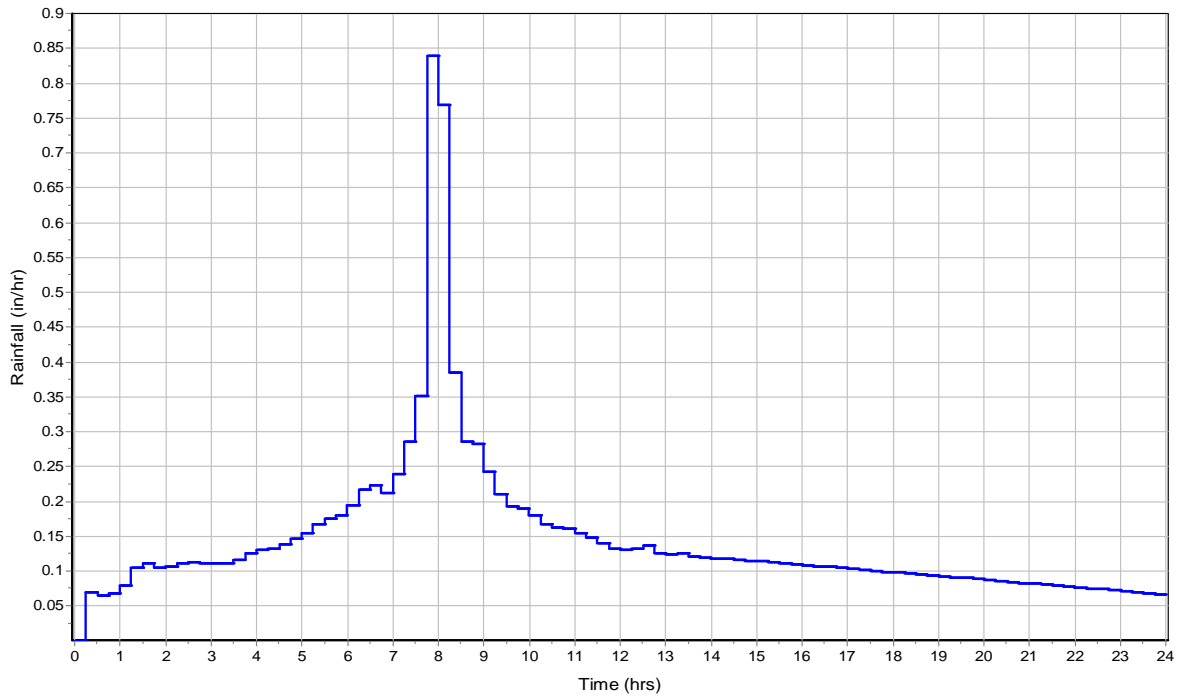

Runoff Hydrograph

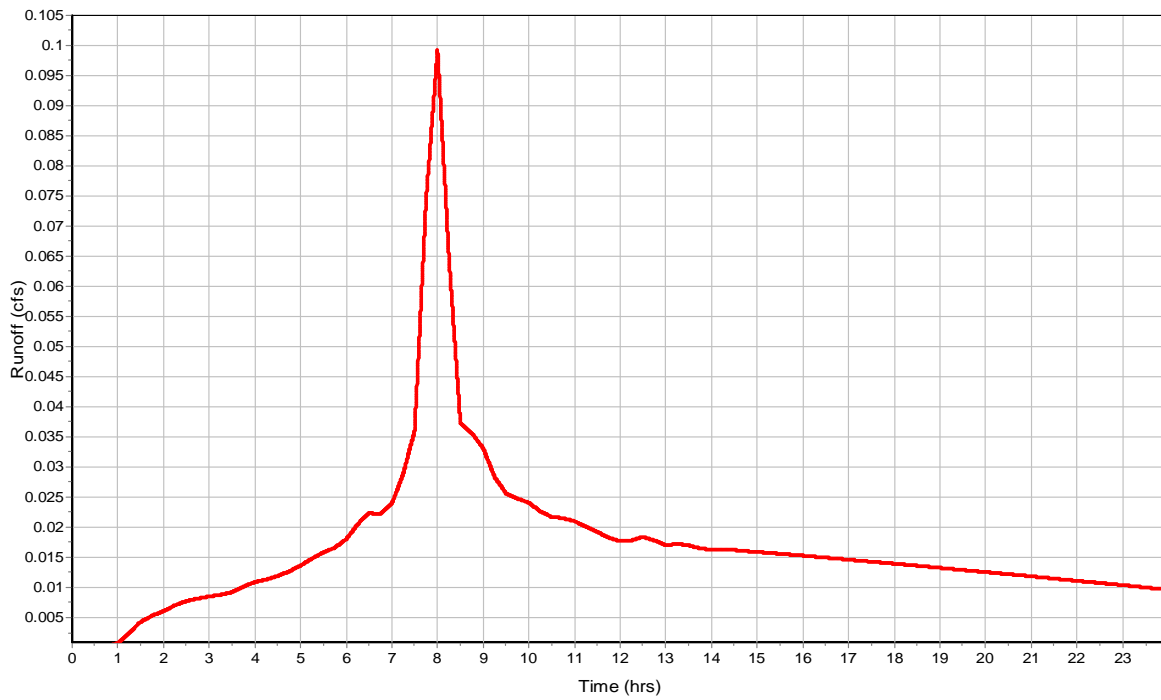



**Subbasin : SDCB 42**

**Input Data**

Area (ac) ..... 0.14  
Impervious Area (%) ..... 100  
Impervious Area Curve Number ..... 98  
Pervious Area Curve Number ..... 76  
Rain Gage ID ..... Rain Gage-01

**Composite Curve Number**

Soil/Surface Description	32	Area (acres)	Soil Group	Curve Number
Composite Area & Weighted CN		0.14		98


**Time of Concentration**

**Subbasin Runoff Results**


Total Rainfall (in) ..... 3.46  
Total Runoff (in) ..... 3.24  
Peak Runoff (cfs) ..... 0.12  
Weighted Curve Number ..... 98  
Time of Concentration (days hh:mm:ss) ..... 0 00:00:00

Subbasin : SDCB 42

Rainfall Intensity Graph

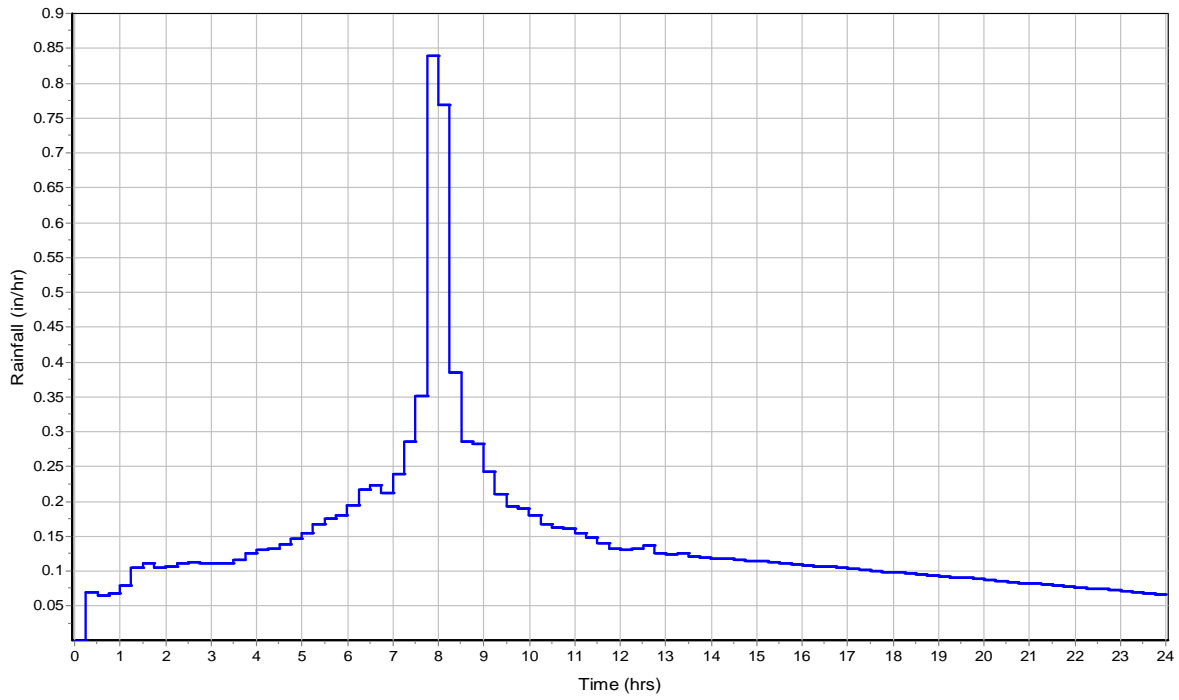

Runoff Hydrograph

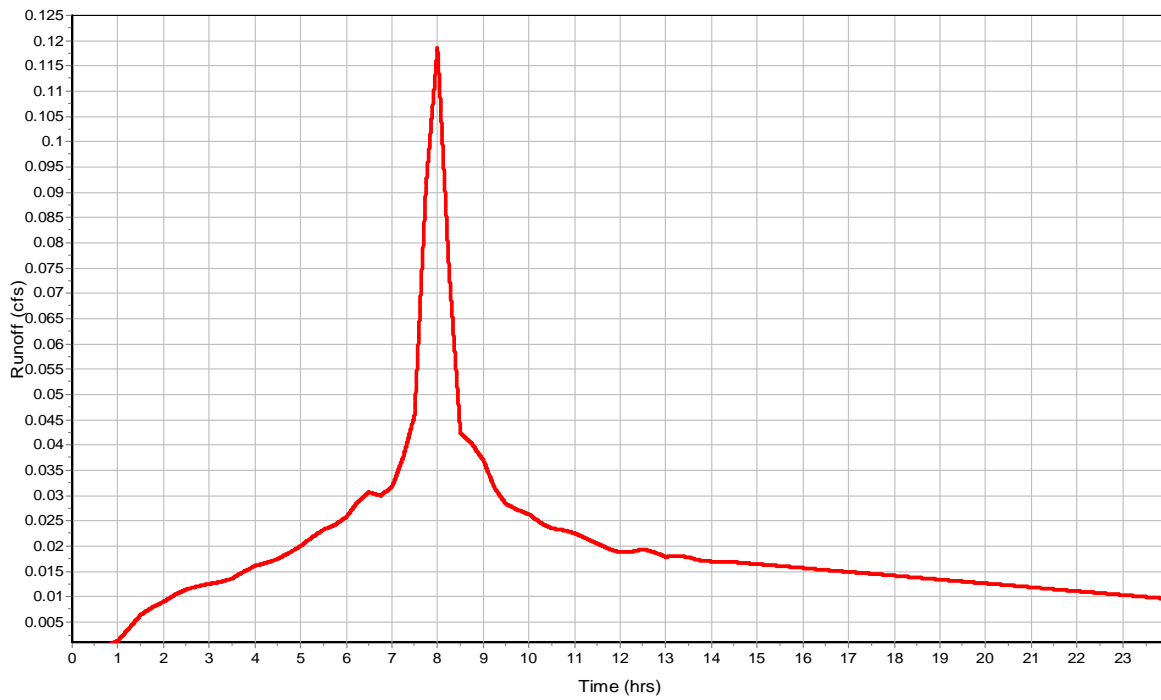

# Junction Input

SN Element ID	Invert Elevation (ft)	Ground/Rim (Max) Elevation (ft)	Ground/Rim (Max) Offset (ft)	Initial Water Elevation (ft)	Initial Water Depth (ft)	Surcharge Elevation (ft)	Surcharge Depth (ft)	Ponded Area (ft <sup>2</sup> )	Minimum Pipe Cover (in)
1 AREA DRAIN G1 (SD - Phase 1)	73.07	77.13	4.05	73.07	0.00	77.13	0.00	0.00	0.00
2 AREA DRAIN G2 (SD - Phase 1)	72.78	77.43	4.65	72.78	0.00	77.43	0.00	0.00	0.00
3 AREA DRAIN H1 (SD - Phase 1)	72.33	77.10	4.77	72.33	0.00	77.10	0.00	0.00	0.00
4 AREA DRAIN H2 (SD - Phase 1)	72.58	77.04	4.46	72.58	0.00	77.04	0.00	0.00	0.00
5 SDCB#01 (SD - Phase 1)	67.40	75.51	8.11	67.40	0.00	75.51	0.00	0.00	0.00
6 SDCB#02 (SD - Phase 1)	69.50	72.50	3.00	69.50	0.00	72.50	0.00	0.00	0.00
7 SDCB#03 (SD - Phase 1)	70.52	72.19	1.67	70.52	0.00	72.19	0.00	0.00	0.00
8 SDCB#04 (SD - Phase 1)	70.79	72.72	1.93	70.79	0.00	72.72	0.00	0.00	0.00
9 SDCB#05 (SD - Phase 1)	68.96	72.50	3.54	68.96	0.00	72.50	0.00	0.00	0.00
10 SDCB#06 (SD - Phase 1)	69.06	72.68	3.63	69.06	0.00	72.68	0.00	0.00	0.00
11 SDCB#07 (SD - Phase 1)	69.42	71.79	2.37	69.42	0.00	71.79	0.00	0.00	0.00
12 SDCB#08 (SD - Phase 1)	69.67	72.48	2.81	69.67	0.00	72.48	0.00	0.00	0.00
13 SDCB#09 (SD - Phase 1)	68.51	72.28	3.77	68.51	0.00	72.28	0.00	0.00	0.00
14 SDCB#10 (SD - Phase 1)	67.90	77.20	9.30	68.40	0.50	77.20	0.00	0.00	0.00
15 SDCB#11 (SD - Phase 1)	72.01	76.68	4.67	72.01	0.00	76.68	0.00	0.00	0.00
16 SDCB#12 (SD - Phase 1)	72.98	76.60	3.62	72.98	0.00	76.60	0.00	0.00	0.00
17 SDCB#13 (SD - Phase 1)	73.13	76.62	3.49	73.13	0.00	76.62	0.00	0.00	0.00
18 SDCB#14 (SD - Phase 1)	71.89	76.84	4.95	71.89	0.00	76.84	0.00	0.00	0.00
19 SDCB#15 (SD - Phase 1)	71.68	76.30	4.62	71.68	0.00	76.30	0.00	0.00	0.00
20 SDCB#16 (SD - Phase 1)	72.23	76.89	4.66	72.23	0.00	76.89	0.00	0.00	0.00
21 SDCB#17 (SD - Phase 1)	72.75	76.64	3.89	72.75	0.00	76.64	0.00	0.00	0.00
22 SDCB#18 (SD - Phase 1)	68.40	76.69	8.29	68.40	0.00	76.69	0.00	0.00	0.00
23 SDCB#19 (SD - Phase 1)	68.35	75.25	6.91	68.35	0.00	75.25	0.00	0.00	0.00
24 SDCB#20 (SD - Phase 1)	68.98	75.25	6.27	68.98	0.00	75.25	0.00	0.00	0.00
25 SDCB#21 (SD - Phase 1)	71.60	75.25	3.65	71.60	0.00	75.25	0.00	0.00	0.00
26 SDCB#22 (SD - Phase 1)	69.36	75.25	5.89	69.36	0.00	75.25	0.00	0.00	0.00
27 SDCB#23 (SD - Phase 1)	71.93	75.25	3.32	71.93	0.00	75.25	0.00	0.00	0.00
28 SDCB#24 (SD - Phase 1)	72.28	74.30	2.02	72.28	0.00	74.30	0.00	0.00	0.00
29 SDCB#26 (SD - Phase 1)	68.40	76.79	8.39	68.40	0.00	76.79	0.00	0.00	0.00
30 SDCB#27 (SD - Phase 1)	71.20	75.52	4.32	71.20	0.00	75.52	0.00	0.00	0.00
31 SDCB#28 (SD - Phase 1)	72.15	75.25	3.10	72.15	0.00	75.25	0.00	0.00	0.00
32 SDCB#29 (SD - Phase 1)	71.72	75.40	3.68	71.72	0.00	75.40	0.00	0.00	0.00
33 SDCB#30 (SD - Phase 1)	72.69	75.40	2.71	72.69	0.00	75.40	0.00	0.00	0.00
34 SDCB#31	68.52	77.06	8.54	68.52	0.00	77.06	0.00	0.00	0.00
35 SDCB#32 (SD - Phase 2)	72.57	75.89	3.32	72.57	0.00	75.89	0.00	0.00	0.00
36 SDCB#33 (SD - Phase 2)	70.35	74.69	4.34	70.35	0.00	74.69	0.00	0.00	0.00
37 SDCB#34 (SD - Phase 2)	71.03	74.49	3.46	71.03	0.00	74.49	0.00	0.00	0.00
38 SDCB#35 (SD - Phase 2)	68.40	77.15	8.75	68.40	0.00	77.15	0.00	0.00	0.00
39 SDCB#36 (SD - Phase 2)	71.23	75.31	4.08	71.23	0.00	75.31	0.00	0.00	0.00
40 SDCB#37 (SD - Phase 2)	71.83	75.35	3.52	71.83	0.00	75.35	0.00	0.00	0.00
41 SDCB#38 (SD - Phase 2)	72.10	75.30	3.20	72.10	0.00	75.30	0.00	0.00	0.00
42 SDCB#40 (SD - Phase 1)	72.24	76.45	4.21	72.24	0.00	76.45	0.00	0.00	0.00
43 SDCB#41 (SD - Phase 2)	72.41	75.30	2.89	72.41	0.00	75.30	0.00	0.00	0.00
44 SDCB#42 (SD - Phase 2)	71.89	75.19	3.30	71.89	0.00	75.19	0.00	0.00	0.00
45 SDCO#A1 (SD - Phase 2)	72.80	76.33	3.54	72.80	0.00	76.33	0.00	0.00	0.00
46 SDCO#A2 (SD - Phase 2)	72.94	76.51	3.57	72.94	0.00	76.51	0.00	0.00	0.00
47 SDCO#A3 (SD - Phase 2)	73.57	76.45	2.87	73.57	0.00	76.45	0.00	0.00	0.00
48 SDCO#A4 (SD - Phase 2)	73.72	75.96	2.24	73.72	0.00	75.96	0.00	0.00	0.00
49 SDCO#A5 (SD - Phase 2)	73.42	75.48	2.06	73.42	0.00	75.48	0.00	0.00	0.00
50 SDCO#B1 (SD - Phase 1)	74.10	77.21	3.11	74.10	0.00	77.21	0.00	0.00	0.00
51 SDCO#B2 (SD - Phase 1)	75.07	77.58	2.51	75.07	0.00	77.58	0.00	0.00	0.00
52 SDCO#B3 (SD - Phase 1)	75.14	77.26	2.12	75.14	0.00	77.26	0.00	0.00	0.00
53 SDCO#B4 (SD - Phase 1)	75.19	77.67	2.48	75.19	0.00	77.67	0.00	0.00	0.00
54 SDCO#B5 (SD - Phase 1)	72.05	77.74	5.69	72.05	0.00	77.74	0.00	0.00	0.00
55 SDCO#B6 (SD - Phase 1)	72.88	77.61	4.73	72.88	0.00	77.61	0.00	0.00	0.00
56 SDCO#B7 (SD - Phase 1)	72.97	77.70	4.73	72.97	0.00	77.70	0.00	0.00	0.00
57 SDCO#B8 (SD - Phase 1)	72.88	77.62	4.74	72.88	0.00	77.62	0.00	0.00	0.00
58 SDCO#C1 (SD - Phase 1)	73.04	76.84	3.80	73.04	0.00	76.84	0.00	0.00	0.00
59 SDCO#C10 (SD - Phase 1)	72.92	76.81	3.89	72.92	0.00	76.81	0.00	0.00	0.00
60 SDCO#C2 (SD - Phase 1)	73.50	76.87	3.37	73.50	0.00	76.87	0.00	0.00	0.00
61 SDCO#C3 (SD - Phase 1)	73.57	76.93	3.37	73.57	0.00	76.93	0.00	0.00	0.00
62 SDCO#C4 (SD - Phase 1)	74.29	76.87	2.58	74.29	0.00	76.87	0.00	0.00	0.00
63 SDCO#C5 (SD - Phase 1)	71.44	76.87	5.43	71.44	0.00	76.87	0.00	0.00	0.00
64 SDCO#C6 (SD - Phase 1)	72.62	77.07	4.45	72.62	0.00	77.07	0.00	0.00	0.00
65 SDCO#C7 (SD - Phase 1)	72.72	77.06	4.34	72.72	0.00	77.06	0.00	0.00	0.00
66 SDCO#C8 (SD - Phase 1)	72.24	76.87	4.63	72.24	0.00	76.87	0.00	0.00	0.00
67 SDCO#C9 (SD - Phase 1)	72.37	76.85	4.48	72.37	0.00	76.85	0.00	0.00	0.00
68 SDCO#CLUB1 (SD - Phase 2)	72.10	75.59	3.49	72.10	0.00	75.59	0.00	0.00	0.00
69 SDCO#CLUB2 (SD - Phase 2)	72.44	76.23	3.79	72.44	0.00	76.23	0.00	0.00	0.00
70 SDCO#CLUB3 (SD - Phase 2)	73.00	76.51	3.51	73.00	0.00	76.51	0.00	0.00	0.00
71 SDCO#CLUB4 (SD - Phase 2)	72.39	76.11	3.72	72.39	0.00	76.11	0.00	0.00	0.00
72 SDCO#CLUB5 (SD - Phase 2)	72.85	76.47	3.62	72.85	0.00	76.47	0.00	0.00	0.00
73 SDCO#COM01 (SD - Phase 1)	70.74	73.56	2.82	70.74	0.00	73.56	0.00	0.00	0.00
74 SDCO#COM02 (SD - Phase 1)	71.22	73.55	2.33	71.22	0.00	73.55	0.00	0.00	0.00
75 SDCO#COM04 (SD - Phase 1)	70.14	73.55	3.41	70.14	0.00	73.55	0.00	0.00	0.00

## Junction Input

SN Element ID	Invert Elevation (ft)	Ground/Rim (Max) Elevation (ft)	Ground/Rim (Max) Offset (ft)	Initial Water Elevation (ft)	Initial Water Depth (ft)	Surcharge Elevation (ft)	Surcharge Depth (ft)	Ponded Area (ft <sup>2</sup> )	Minimum Pipe Cover (in)
76 SDCO#COM05 (SD - Phase 1)	70.58	73.54	2.96	70.58	0.00	73.54	0.00	0.00	0.00
77 SDCO#COM06 (SD - Phase 1)	71.21	73.56	2.35	71.21	0.00	73.56	0.00	0.00	0.00
78 SDCO#COM07 (SD - Phase 1)	70.91	73.15	2.24	70.91	0.00	73.15	0.00	0.00	0.00
79 SDCO#COM08 (SD - Phase 1)	71.45	73.68	2.23	71.45	0.00	73.68	0.00	0.00	0.00
80 SDCO#COM09 (SD - Phase 1)	70.17	73.64	3.46	70.17	0.00	73.64	0.00	0.00	0.00
81 SDCO#COM10 (SD - Phase 1)	71.09	73.64	2.55	71.09	0.00	73.64	0.00	0.00	0.00
82 SDCO#COM11 (SD - Phase 1)	71.09	73.61	2.52	71.09	0.00	73.61	0.00	0.00	0.00
83 SDCO#COM12 (SD - Phase 1)	69.76	72.88	3.13	69.76	0.00	72.88	0.00	0.00	0.00
84 SDCO#COM13 (SD - Phase 1)	70.39	73.57	3.18	70.39	0.00	73.57	0.00	0.00	0.00
85 SDCO#D1 (SD - Phase 1)	72.84	77.28	4.44	72.84	0.00	77.28	0.00	0.00	0.00
86 SDCO#D2 (SD - Phase 1)	74.65	77.33	2.69	74.65	0.00	77.33	0.00	0.00	0.00
87 SDCO#D3 (SD - Phase 1)	74.71	77.20	2.49	74.71	0.00	77.20	0.00	0.00	0.00
88 SDCO#D4 (SD - Phase 1)	73.43	77.45	4.02	73.43	0.00	77.45	0.00	0.00	0.00
89 SDCO#D5 (SD - Phase 1)	73.83	77.41	3.58	73.83	0.00	77.41	0.00	0.00	0.00
90 SDCO#D6 (SD - Phase 1)	73.89	77.38	3.49	73.89	0.00	77.38	0.00	0.00	0.00
91 SDCO#D7 (SD - Phase 1)	74.62	77.45	2.82	74.62	0.00	77.45	0.00	0.00	0.00
92 SDCO#E1 (SD - Phase 2)	71.90	76.52	4.62	71.90	0.00	76.52	0.00	0.00	0.00
93 SDCO#E2 (SD - Phase 2)	72.28	76.76	4.48	72.28	0.00	76.76	0.00	0.00	0.00
94 SDCO#E3 (SD - Phase 2)	72.99	76.50	3.51	72.99	0.00	76.50	0.00	0.00	0.00
95 SDCO#E4 (SD - Phase 2)	72.45	76.31	3.86	72.45	0.00	76.31	0.00	0.00	0.00
96 SDCO#E5 (SD - Phase 2)	72.69	76.43	3.74	72.69	0.00	76.43	0.00	0.00	0.00
97 SDCO#E6 (SD - Phase 2)	73.46	76.48	3.02	73.46	0.00	76.48	0.00	0.00	0.00
98 SDCO#E7 (SD - Phase 2)	74.08	76.71	2.63	74.08	0.00	76.71	0.00	0.00	0.00
99 SDCO#F1 (SD - Phase 2)	72.28	76.98	4.69	72.28	0.00	76.98	0.00	0.00	0.00
100 SDCO#F2 (SD - Phase 2)	72.50	77.19	4.69	72.50	0.00	77.19	0.00	0.00	0.00
101 SDCO#F3 (SD - Phase 2)	73.46	77.18	3.71	73.46	0.00	77.18	0.00	0.00	0.00
102 SDCO#G2 (SD - Phase 1)	73.98	76.84	2.85	73.98	0.00	76.84	0.00	0.00	0.00
103 SDCO#G3 (SD - Phase 1)	73.16	77.18	4.02	73.16	0.00	77.18	0.00	0.00	0.00
104 SDCO#G4 (SD - Phase 1)	74.38	76.92	2.54	74.38	0.00	76.92	0.00	0.00	0.00
105 SDCO#H3 (SD - Phase 1)	73.73	76.96	3.24	73.73	0.00	76.96	0.00	0.00	0.00
106 SDCO#H4 (SD - Phase 1)	72.33	77.17	4.84	72.33	0.00	77.17	0.00	0.00	0.00
107 SDCO#H5 (SD - Phase 1)	72.94	75.97	3.04	72.94	0.00	75.97	0.00	0.00	0.00
108 SDCO#H6 (SD - Phase 1)	74.06	76.54	2.48	74.06	0.00	76.54	0.00	0.00	0.00
109 WQ#2 OUTLET (SD - Phase 1)	69.73	76.80	7.07	0.00	-69.73	76.80	0.00	0.00	0.00
110 WQ#3 OUTLET (SD - Phase 1)	68.90	76.50	7.60	0.00	-68.90	76.50	0.00	0.00	0.00
111 WQ#4 OUTLET (SD - Phase 1)	69.60	76.00	6.40	0.00	-69.60	76.00	0.00	0.00	0.00
112 WQ#6 OUTLET (SD - Phase 2)	68.84	75.50	6.66	0.00	-68.84	75.50	0.00	0.00	0.00
113 WQ#7 OUTLET (SD - Phase 2)	69.60	76.00	6.40	0.00	-69.60	76.00	0.00	0.00	0.00
114 WQ1 OUTLET (SD - Phase 1)	67.73	72.78	5.05	0.00	-67.73	72.78	0.00	0.00	0.00
115 WQ5 OUTLET (SD - Phase 1)	70.30	76.26	5.96	0.00	-70.30	76.26	0.00	0.00	0.00

## Junction Results

SN	Element ID	Peak Inflow	Peak Lateral Inflow	Max HGL Elevation Attained	Max HGL Depth Attained	Max Surge Depth Attained	Min Freeboard Attained	Average HGL Elevation Attained	Average HGL Depth Attained	Time of Max HGL Occurrence	Time of Peak Flooding Occurrence	Total Flooded Volume	Total Time Flooded
		(cfs)	(cfs)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(days hh:mm)	(days hh:mm)	(ac-in)	(min)
1	AREA DRAIN G1 (SD - Phase 1)	0.00	0.00	73.07	0.00	0.00	4.05	73.07	0.00	0 00:00	0 00:00	0.00	0.00
2	AREA DRAIN G2 (SD - Phase 1)	0.11	0.03	72.93	0.15	0.00	4.51	72.84	0.06	0 08:00	0 00:00	0.00	0.00
3	AREA DRAIN H1 (SD - Phase 1)	2.52	0.00	77.10	4.77	0.00	0.00	72.34	0.01	0 20:31	0 21:01	0.00	0.00
4	AREA DRAIN H2 (SD - Phase 1)	0.11	0.03	72.69	0.11	0.00	4.34	72.63	0.05	0 08:00	0 00:00	0.00	0.00
5	SDCB#01 (SD - Phase 1)	27.91	0.00	70.02	2.62	0.00	5.49	68.45	1.05	0 21:17	0 00:00	0.00	0.00
6	SDCB#02 (SD - Phase 1)	0.42	0.14	69.78	0.28	0.00	2.72	69.62	0.12	0 08:00	0 00:00	0.00	0.00
7	SDCB#03 (SD - Phase 1)	0.19	0.11	70.71	0.19	0.00	1.48	70.60	0.08	0 08:00	0 00:00	0.00	0.00
8	SDCB#04 (SD - Phase 1)	0.08	0.05	70.93	0.14	0.00	1.80	70.85	0.06	0 08:00	0 00:00	0.00	0.00
9	SDCB#05 (SD - Phase 1)	0.68	0.21	69.31	0.35	0.00	3.19	69.10	0.14	0 08:00	0 00:00	0.00	0.00
10	SDCB#06 (SD - Phase 1)	0.26	0.12	69.33	0.27	0.00	3.35	69.17	0.11	0 08:00	0 00:00	0.00	0.00
11	SDCB#07 (SD - Phase 1)	0.14	0.06	69.60	0.18	0.00	2.18	69.50	0.08	0 08:00	0 00:00	0.00	0.00
12	SDCB#08 (SD - Phase 1)	0.08	0.05	69.80	0.13	0.00	2.67	69.72	0.05	0 08:00	0 00:00	0.00	0.00
13	SDCB#09 (SD - Phase 1)	1.09	0.15	69.06	0.55	0.00	3.22	68.79	0.28	0 08:01	0 00:00	0.00	0.00
14	SDCB#10 (SD - Phase 1)	16.47	0.00	76.24	8.34	0.00	0.96	70.09	2.19	0 16:29	0 00:00	0.00	0.00
15	SDCB#11 (SD - Phase 1)	0.27	0.10	72.14	0.13	0.00	4.54	72.06	0.05	0 08:00	0 00:00	0.00	0.00
16	SDCB#12 (SD - Phase 1)	0.08	0.08	73.09	0.11	0.00	3.51	73.03	0.05	0 08:00	0 00:00	0.00	0.00
17	SDCB#13 (SD - Phase 1)	0.09	0.09	73.24	0.11	0.00	3.38	73.18	0.05	0 08:00	0 00:00	0.00	0.00
18	SDCB#14 (SD - Phase 1)	4.57	0.06	72.68	0.79	0.00	4.16	72.03	0.14	0 20:49	0 00:00	0.00	0.00
19	SDCB#15 (SD - Phase 1)	23.91	0.10	74.14	2.46	0.00	2.16	71.86	0.18	0 21:01	0 00:00	0.00	0.00
20	SDCB#16 (SD - Phase 1)	0.50	0.06	72.56	0.33	0.00	4.33	72.34	0.11	0 20:49	0 00:00	0.00	0.00
21	SDCB#17 (SD - Phase 1)	0.16	0.08	72.96	0.21	0.00	3.68	72.84	0.09	0 08:00	0 00:00	0.00	0.00
22	SDCB#18 (SD - Phase 1)	1.66	0.00	70.68	2.28	0.00	6.02	70.08	1.68	1 00:00	0 00:00	0.00	0.00
23	SDCB#19 (SD - Phase 1)	1.12	0.29	70.88	2.54	0.00	4.37	70.58	2.24	0 08:01	0 00:00	0.00	0.00
24	SDCB#20 (SD - Phase 1)	0.84	0.08	71.38	2.40	0.00	3.87	71.13	2.15	0 08:01	0 00:00	0.00	0.00
25	SDCB#21 (SD - Phase 1)	0.08	0.08	71.74	0.14	0.00	3.51	71.66	0.06	0 08:00	0 00:00	0.00	0.00
26	SDCB#22 (SD - Phase 1)	0.68	0.12	71.74	2.38	0.00	3.51	71.50	2.14	0 08:01	0 00:00	0.00	0.00
27	SDCB#23 (SD - Phase 1)	0.42	0.17	72.20	0.27	0.00	3.05	72.04	0.11	0 08:00	0 00:00	0.00	0.00
28	SDCB#24 (SD - Phase 1)	0.07	0.07	72.40	0.12	0.00	1.89	72.33	0.05	0 08:00	0 00:00	0.00	0.00
29	SDCB#26 (SD - Phase 1)	1.49	0.00	70.68	2.28	0.00	6.11	70.08	1.68	1 00:00	0 00:00	0.00	0.00
30	SDCB#27 (SD - Phase 1)	1.21	0.30	71.74	0.54	0.00	3.78	71.41	0.21	0 08:01	0 00:00	0.00	0.00
31	SDCB#28 (SD - Phase 1)	0.21	0.11	72.38	0.23	0.00	2.87	72.25	0.10	0 08:01	0 00:00	0.00	0.00
32	SDCB#29 (SD - Phase 1)	0.67	0.22	72.05	0.33	0.00	3.35	71.86	0.14	0 08:00	0 00:00	0.00	0.00
33	SDCB#30 (SD - Phase 1)	0.24	0.24	72.94	0.25	0.00	2.46	72.80	0.11	0 08:00	0 00:00	0.00	0.00
34	SDCB#31	0.46	0.00	70.68	2.16	0.00	6.38	70.08	1.56	1 00:00	0 00:00	0.00	0.00
35	SDCB#32 (SD - Phase 2)	0.08	0.00	72.71	0.14	0.00	3.18	72.63	0.06	0 08:02	0 00:00	0.00	0.00
36	SDCB#33 (SD - Phase 2)	0.38	0.23	70.68	0.33	0.00	4.01	70.54	0.19	1 00:00	0 00:00	0.00	0.00
37	SDCB#34 (SD - Phase 2)	0.15	0.15	71.23	0.20	0.00	3.26	71.11	0.08	0 08:00	0 00:00	0.00	0.00
38	SDCB#35 (SD - Phase 2)	0.50	0.00	70.68	2.28	0.00	6.47	70.08	1.68	1 00:00	0 00:00	0.00	0.00
39	SDCB#36 (SD - Phase 2)	0.41	0.07	71.54	0.31	0.00	3.77	71.36	0.13	0 08:00	0 00:00	0.00	0.00
40	SDCB#37 (SD - Phase 2)	0.22	0.06	72.08	0.25	0.00	3.27	71.93	0.10	0 08:00	0 00:00	0.00	0.00
41	SDCB#38 (SD - Phase 2)	0.16	0.06	72.30	0.20	0.00	3.00	72.19	0.09	0 08:00	0 00:00	0.00	0.00
42	SDCB#40 (SD - Phase 1)	0.04	0.04	72.31	0.07	0.00	4.14	72.27	0.03	0 08:00	0 00:00	0.00	0.00
43	SDCB#41 (SD - Phase 2)	0.10	0.10	72.56	0.15	0.00	2.74	72.48	0.07	0 08:00	0 00:00	0.00	0.00
44	SDCB#42 (SD - Phase 2)	0.12	0.12	72.06	0.17	0.00	3.12	71.96	0.07	0 08:00	0 00:00	0.00	0.00
45	SDCO#A1 (SD - Phase 2)	0.08	0.00	72.93	0.13	0.00	3.40	72.85	0.05	0 08:01	0 00:00	0.00	0.00
46	SDCO#A2 (SD - Phase 2)	0.04	0.00	73.03	0.09	0.00	3.49	72.98	0.04	0 08:00	0 00:00	0.00	0.00
47	SDCO#A3 (SD - Phase 2)	0.04	0.04	73.66	0.09	0.00	2.78	73.61	0.04	0 08:00	0 00:00	0.00	0.00
48	SDCO#A4 (SD - Phase 2)	0.04	0.04	73.81	0.09	0.00	2.15	73.75	0.03	0 08:00	0 00:00	0.00	0.00
49	SDCO#A5 (SD - Phase 2)	0.04	0.00	73.51	0.09	0.00	1.97	73.46	0.04	0 08:00	0 00:00	0.00	0.00
50	SDCO#B1 (SD - Phase 1)	0.11	0.00	74.18	0.08	0.00	3.03	74.13	0.03	0 08:00	0 00:00	0.00	0.00
51	SDCO#B2 (SD - Phase 1)	0.05	0.00	75.18	0.11	0.00	2.40	75.12	0.05	0 08:00	0 00:00	0.00	0.00
52	SDCO#B3 (SD - Phase 1)	0.05	0.05	75.26	0.12	0.00	2.00	75.19	0.05	0 08:00	0 00:00	0.00	0.00
53	SDCO#B4 (SD - Phase 1)	0.05	0.05	75.30	0.11	0.00	2.37	75.24	0.05	0 08:00	0 00:00	0.00	0.00
54	SDCO#B5 (SD - Phase 1)	0.11	0.00	72.21	0.16	0.00	5.52	72.12	0.07	0 08:01	0 00:00	0.00	0.00
55	SDCO#B6 (SD - Phase 1)	0.05	0.00	72.98	0.10	0.00	4.63	72.92	0.04	0 08:00	0 00:00	0.00	0.00
56	SDCO#B7 (SD - Phase 1)	0.05	0.05	73.09	0.12	0.00	4.61	73.02	0.05	0 08:00	0 00:00	0.00	0.00
57	SDCO#B8 (SD - Phase 1)	0.05	0.05	72.98	0.10	0.00	4.64	72.92	0.04	0 08:00	0 00:00	0.00	0.00
58	SDCO#C1 (SD - Phase 1)	0.11	0.00	73.16	0.12	0.00	3.68	73.09	0.05	0 08:00	0 00:00	0.00	0.00
59	SDCO#C10 (SD - Phase 1)	0.05	0.05	73.02	0.10	0.00	3.79	72.96	0.04	0 08:00	0 00:00	0.00	0.00
60	SDCO#C2 (SD - Phase 1)	0.05	0.00	73.61	0.11	0.00	3.25	73.54	0.04	0 08:00	0 00:00	0.00	0.00
61	SDCO#C3 (SD - Phase 1)	0.05	0.05	73.69	0.12	0.00	3.25	73.61	0.04	0 08:00	0 00:00	0.00	0.00
62	SDCO#C4 (SD - Phase 1)	0.05	0.05	74.39	0.10	0.00	2.48	74.33	0.04	0 08:00	0 00:00	0.00	0.00
63	SDCO#C5 (SD - Phase 1)	0.11	0.00	71.62	0.18	0.00	5.24	71.52	0.08	0 08:01	0 00:00	0.00	0.00
64	SDCO#C6 (SD - Phase 1)	0.05	0.00	72.73	0.11	0.00	4.34	72.67	0.05	0 08:00	0 00:00	0.00	0.00
65	SDCO#C7 (SD - Phase 1)	0.05	0.05	72.84	0.12	0.00	4.22	72.77	0.05	0 08:00	0 00:00	0.00	0.00
66	SDCO#C8 (SD - Phase 1)	0.05	0.00	72.32	0.08	0.00	4.54	72.27	0.03	0 08:01	0 00:00	0.00	0.00
67	SDCO#C9 (SD - Phase 1)	0.05	0.00	72.48	0.11	0.00	4.36	72.42	0.05	0 08:00	0 00:00	0.00	0.00
68	SDCO#CLUB1 (SD - Phase 2)	0.05	0.00	72.18	0.08	0.00	3.41	72.13	0.03	0 08:01	0 00:00	0.00	0.00
69	SDCO#CLUB2 (SD - Phase 2)	0.02	0.00	72.51	0.07	0.00	3.72	72.47	0.03	0 08:00	0 00:00	0.00	0.00
70	SDCO#CLUB3 (SD - Phase 2)	0.02	0.02	73.07	0.07	0.00	3.44	73.03	0.03	0 08:00	0 00:00	0.00	0.00
71	SDCO#CLUB4 (SD - Phase 2)	0.02	0.00	72.46	0.07	0.00	3.65	72.42	0.03	0 08:00	0 00:00	0.00	0.00
72	SDCO#CLUB5 (SD - Phase 2)	0.02	0.02	72.92	0.07	0.00	3.55	72.88	0.03	0 08:00	0 00:00	0.00	0.00
73	SDCO#COM01 (SD - Phase 1)	0.05	0.00	70.84	0.10	0.00	2.72	70.78	0.04	0 08:00	0 00:00	0.00	0.00
74	SDCO#COM02 (SD - Phase 1)	0.05	0.05	71.32	0.10	0.00	2.23	71.26	0.04	0 08:00	0 00:00	0.00	0.00

# Junction Results

SN Element ID	Peak Inflow	Peak Lateral Inflow	Max HGL Elevation Attained	Max HGL Depth Attained	Max Surge Depth Attained	Min Freeboard Attained	Average HGL Elevation Attained	Average HGL Depth Attained	Time of Max HGL Occurrence	Time of Peak Flooding Occurrence	Total Flooded Volume	Total Time Flooded
	(cfs)	(cfs)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(days hh:mm)	(days hh:mm)	(ac-in)	(min)
75 SDCO#COM04 (SD - Phase 1)	0.10	0.00	70.29	0.15	0.00	3.26	70.20	0.06	0 08:01	0 00:00	0.00	0.00
76 SDCO#COM05 (SD - Phase 1)	0.05	0.00	70.68	0.10	0.00	2.86	70.62	0.04	0 08:00	0 00:00	0.00	0.00
77 SDCO#COM06 (SD - Phase 1)	0.05	0.05	71.31	0.10	0.00	2.25	71.25	0.04	0 08:00	0 00:00	0.00	0.00
78 SDCO#COM07 (SD - Phase 1)	0.03	0.00	71.00	0.09	0.00	2.16	70.95	0.04	0 08:00	0 00:00	0.00	0.00
79 SDCO#COM08 (SD - Phase 1)	0.03	0.03	71.53	0.08	0.00	2.15	71.48	0.03	0 08:00	0 00:00	0.00	0.00
80 SDCO#COM09 (SD - Phase 1)	0.06	0.00	70.25	0.08	0.00	3.38	70.21	0.04	0 08:00	0 00:00	0.00	0.00
81 SDCO#COM10 (SD - Phase 1)	0.03	0.03	71.16	0.07	0.00	2.48	71.12	0.03	0 08:00	0 00:00	0.00	0.00
82 SDCO#COM11 (SD - Phase 1)	0.03	0.03	71.17	0.08	0.00	2.44	71.12	0.03	0 08:00	0 00:00	0.00	0.00
83 SDCO#COM12 (SD - Phase 1)	0.03	0.00	69.84	0.08	0.00	3.04	69.79	0.03	0 08:00	0 00:00	0.00	0.00
84 SDCO#COM13 (SD - Phase 1)	0.03	0.03	70.47	0.08	0.00	3.10	70.42	0.03	0 08:00	0 00:00	0.00	0.00
85 SDCO#D1 (SD - Phase 1)	0.10	0.00	72.96	0.12	0.00	4.32	72.89	0.05	0 08:01	0 00:00	0.00	0.00
86 SDCO#D2 (SD - Phase 1)	0.10	0.00	74.80	0.15	0.00	2.53	74.71	0.06	0 08:00	0 00:00	0.00	0.00
87 SDCO#D3 (SD - Phase 1)	0.11	0.11	74.89	0.18	0.00	2.31	74.78	0.07	0 08:00	0 00:00	0.00	0.00
88 SDCO#D4 (SD - Phase 1)	0.11	0.00	73.54	0.11	0.00	3.91	73.48	0.05	0 08:01	0 00:00	0.00	0.00
89 SDCO#D5 (SD - Phase 1)	0.05	0.00	73.94	0.11	0.00	3.47	73.87	0.04	0 08:00	0 00:00	0.00	0.00
90 SDCO#D6 (SD - Phase 1)	0.05	0.05	74.01	0.12	0.00	3.37	73.93	0.04	0 08:00	0 00:00	0.00	0.00
91 SDCO#D7 (SD - Phase 1)	0.05	0.05	74.73	0.11	0.00	2.72	74.67	0.05	0 08:00	0 00:00	0.00	0.00
92 SDCO#E1 (SD - Phase 2)	0.11	0.00	72.07	0.17	0.00	4.45	71.97	0.07	0 08:02	0 00:00	0.00	0.00
93 SDCO#E2 (SD - Phase 2)	0.11	0.00	72.44	0.16	0.00	4.32	72.34	0.06	0 08:01	0 00:00	0.00	0.00
94 SDCO#E3 (SD - Phase 2)	0.11	0.00	73.14	0.15	0.00	3.35	73.05	0.06	0 08:00	0 00:00	0.00	0.00
95 SDCO#E4 (SD - Phase 2)	0.11	0.00	72.62	0.17	0.00	3.69	72.52	0.07	0 08:01	0 00:00	0.00	0.00
96 SDCO#E5 (SD - Phase 2)	0.11	0.00	72.86	0.17	0.00	3.57	72.76	0.07	0 08:00	0 00:00	0.00	0.00
97 SDCO#E6 (SD - Phase 2)	0.11	0.11	73.61	0.15	0.00	2.86	73.52	0.06	0 08:00	0 00:00	0.00	0.00
98 SDCO#E7 (SD - Phase 2)	0.11	0.11	74.23	0.15	0.00	2.48	74.14	0.06	0 08:00	0 00:00	0.00	0.00
99 SDCO#F1 (SD - Phase 2)	0.09	0.09	72.40	0.12	0.00	4.58	72.33	0.05	0 08:00	0 00:00	0.00	0.00
100 SDCO#F2 (SD - Phase 2)	0.09	0.00	72.57	0.07	0.00	4.62	72.53	0.03	0 08:00	0 00:00	0.00	0.00
101 SDCO#F3 (SD - Phase 2)	0.09	0.09	73.61	0.15	0.00	3.56	73.53	0.07	0 08:00	0 00:00	0.00	0.00
102 SDCO#G2 (SD - Phase 1)	0.08	0.08	74.11	0.13	0.00	2.73	74.04	0.06	0 08:00	0 00:00	0.00	0.00
103 SDCO#G3 (SD - Phase 1)	0.08	0.00	73.29	0.13	0.00	3.89	73.21	0.05	0 08:01	0 00:00	0.00	0.00
104 SDCO#G4 (SD - Phase 1)	0.08	0.08	74.51	0.13	0.00	2.41	74.43	0.05	0 08:00	0 00:00	0.00	0.00
105 SDCO#H3 (SD - Phase 1)	0.08	0.08	73.86	0.13	0.00	3.11	73.78	0.05	0 08:00	0 00:00	0.00	0.00
106 SDCO#H4 (SD - Phase 1)	1.67	0.00	73.23	0.90	0.00	3.94	72.83	0.50	0 21:01	0 00:00	0.00	0.00
107 SDCO#H5 (SD - Phase 1)	0.17	0.00	73.08	0.14	0.00	2.90	73.00	0.06	0 08:00	0 00:00	0.00	0.00
108 SDCO#H6 (SD - Phase 1)	0.08	0.08	74.18	0.12	0.00	2.36	74.11	0.05	0 08:00	0 00:00	0.00	0.00
109 WQ#2 OUTLET (SD - Phase 1)	6.40	0.00	72.47	2.74	0.00	4.33	70.21	0.48	0 21:08	0 00:00	0.00	0.00
110 WQ#3 OUTLET (SD - Phase 1)	30.88	0.00	76.50	7.60	0.00	0.00	70.10	1.20	0 19:51	0 19:51	0.00	0.00
111 WQ#4 OUTLET (SD - Phase 1)	1.12	0.00	70.68	1.08	0.00	5.32	70.24	0.64	1 00:00	0 00:00	0.00	0.00
112 WQ#6 OUTLET (SD - Phase 2)	0.38	0.00	70.68	1.84	0.00	4.82	70.09	1.25	1 00:00	0 00:00	0.00	0.00
113 WQ#7 OUTLET (SD - Phase 2)	0.41	0.00	70.68	1.08	0.00	5.32	70.20	0.60	1 00:00	0 00:00	0.00	0.00
114 WQ1 OUTLET (SD - Phase 1)	1.09	0.00	68.92	1.19	0.00	3.86	68.48	0.75	0 21:19	0 00:00	0.00	0.00
115 WQ5 OUTLET (SD - Phase 1)	1.21	0.00	70.68	0.38	0.00	5.58	70.53	0.23	0 08:01	0 00:00	0.00	0.00

# Pipe Input

SN Element ID	Length (ft)	Inlet		Outlet		Total Drop (ft)	Average Pipe Slope Shape		Pipe Diameter or Height (in)	Pipe Width (in)	Manning's Roughness	Entrance Losses	Exit/Bend Losses
		Invert Elevation (ft)	Invert Offset (ft)	Invert Elevation (ft)	Invert Offset (ft)		Slope (%)	Shape					
1 {SD - Phase 1}.Pipe - (132) (SD - Phase 1)	5.71	71.48	-0.53	71.37	1.64	0.11	1.9300	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
2 {SD - Phase 1}.Pipe - (133) (1) (SD - Phase 1)	5.62	69.20	-0.53	68.87	0.97	0.33	5.8800	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
3 {SD - Phase 1}.Pipe - (134) (SD - Phase 1)	6.67	71.68	0.00	71.65	2.75	0.03	0.4500	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
4 {SD - Phase 1}.Pipe - (135) (1) (SD - Phase 1)	5.46	68.90	0.00	68.87	0.97	0.03	0.5500	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
5 {SD - Phase 1}.PIPE 1 (SD - Phase 1)	108.10	69.50	0.00	68.96	0.00	0.54	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
6 {SD - Phase 1}.PIPE 10 (SD - Phase 1)	42.41	69.06	0.00	68.84	0.34	0.21	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
7 {SD - Phase 1}.PIPE 12 (SD - Phase 1)	64.21	72.45	-0.53	71.81	-0.20	0.64	1.0000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
8 {SD - Phase 1}.PIPE 13 (SD - Phase 1)	79.19	72.60	-0.53	71.81	-0.20	0.79	1.0000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
9 {SD - Phase 1}.PIPE 140	14.56	72.33	0.00	72.18	0.50	0.15	1.0300	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
10 {SD - Phase 1}.PIPE 141	15.44	73.07	0.00	72.92	0.17	0.15	0.9700	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
11 {SD - Phase 1}.PIPE 15 (SD - Phase 1)	43.35	71.89	0.00	71.68	0.00	0.21	0.4800	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
12 {SD - Phase 1}.PIPE 16 (SD - Phase 1)	67.76	72.23	0.00	71.89	0.00	0.34	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
13 {SD - Phase 1}.PIPE 17 (SD - Phase 1)	36.06	72.75	0.00	72.57	0.34	0.18	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
14 {SD - Phase 1}.PIPE 18 (SD - Phase 1)	25.89	68.40	0.00	68.40	0.50	0.00	0.0000	CIRCULAR	24.000	24.000	0.0130	0.5000	0.5000
15 {SD - Phase 1}.PIPE 19 (SD - Phase 1)	40.09	69.60	0.00	69.40	1.00	0.20	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
16 {SD - Phase 1}.PIPE 19.1	49.00	70.35	2.00	70.10	0.50	0.25	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
17 {SD - Phase 1}.PIPE 2 (SD - Phase 1)	71.71	70.52	0.00	69.88	0.38	0.64	0.8900	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
18 {SD - Phase 1}.PIPE 20 (SD - Phase 1)	126.79	70.98	2.00	70.35	2.01	0.63	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
19 {SD - Phase 1}.PIPE 21 (SD - Phase 1)	57.67	71.60	0.00	71.31	2.33	0.29	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
20 {SD - Phase 1}.PIPE 22 (SD - Phase 1)	75.77	71.36	2.00	70.98	2.00	0.38	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
21 {SD - Phase 1}.PIPE 23 (SD - Phase 1)	113.35	71.93	0.00	71.36	2.00	0.57	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
22 {SD - Phase 1}.PIPE 24 (SD - Phase 1)	69.19	72.28	0.00	71.93	0.00	0.35	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
23 {SD - Phase 1}.PIPE 26 (SD - Phase 1)	104.96	68.40	0.00	68.40	0.00	0.00	0.0000	CIRCULAR	24.000	24.000	0.0130	0.5000	0.5000
24 {SD - Phase 1}.PIPE 26 TO RT3 (SD - Phase 1)	400.00	68.40	0.50	68.40	0.00	0.00	0.0000	CIRCULAR	24.000	24.000	0.0150	0.5000	0.5000
25 {SD - Phase 1}.PIPE 27 (SD - Phase 1)	80.37	71.20	0.00	70.80	0.50	0.40	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
26 {SD - Phase 1}.PIPE 27 TO WD (SD - Phase 1)	52.19	72.24	0.00	71.20	0.00	1.04	2.0000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
27 {SD - Phase 1}.PIPE 27.1	45.11	70.30	0.00	69.40	1.00	0.90	2.0000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
28 {SD - Phase 1}.PIPE 28 (SD - Phase 1)	122.99	72.15	0.00	71.54	0.34	0.62	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
29 {SD - Phase 1}.PIPE 29 (SD - Phase 1)	82.06	71.72	0.00	71.20	0.00	0.52	0.6300	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
30 {SD - Phase 1}.PIPE 3 (SD - Phase 1)	34.93	70.14	0.00	69.88	0.38	0.26	0.7500	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
31 {SD - Phase 1}.PIPE 30 (SD - Phase 1)	128.14	72.69	0.00	72.05	0.33	0.64	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
32 {SD - Phase 1}.PIPE 4 (SD - Phase 1)	54.09	70.79	0.00	70.52	0.00	0.27	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
33 {SD - Phase 1}.PIPE 5 (SD - Phase 1)	89.22	68.96	0.00	68.51	0.00	0.45	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
34 {SD - Phase 1}.PIPE 6 (SD - Phase 1)	34.89	70.17	0.00	69.29	0.33	0.88	2.5300	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
35 {SD - Phase 1}.PIPE 8 (SD - Phase 1)	72.16	69.42	0.00	69.06	0.01	0.36	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
36 {SD - Phase 1}.PIPE 9 (SD - Phase 1)	48.66	69.67	0.00	69.42	0.00	0.25	0.5100	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
37 {SD - Phase 1}.PIPE E1	42.57	71.90	0.00	71.69	2.33	0.21	0.4900	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
38 {SD - Phase 1}.PIPE E4	37.89	72.45	0.00	72.26	0.34	0.19	0.4900	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
39 {SD - Phase 1}.PIPE RT1 TO CS (SD - Phase 1)	4.18	67.40	0.50	67.40	0.00	0.00	0.0000	CIRCULAR	24.000	24.000	0.0130	0.5000	0.5000
40 {SD - Phase 1}.PIPE RT2 TO CS (SD - Phase 1)	5.00	68.40	0.50	68.40	0.50	0.00	0.0000	CIRCULAR	24.000	24.000	0.0130	0.5000	0.5000
41 {SD - Phase 1}.PIPE RT3 TO 32 (SD - Phase 1)	9.11	68.52	0.00	68.40	0.50	0.12	1.3200	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
42 {SD - Phase 1}.PIPE RT3 TO RD43 (SD - Phase 1)	8.98	72.05	0.00	71.94	4.04	0.11	1.2500	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
43 {SD - Phase 1}.PIPE130	21.39	68.51	0.00	68.40	0.67	0.11	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
44 {SD - Phase 1}.PIPE131	10.34	67.63	-0.10	67.58	0.68	0.05	0.5000	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
45 {SD - Phase 1}.RD1 (SD - Phase 1)	47.75	71.22	0.00	70.74	0.00	0.48	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
46 {SD - Phase 1}.RD10 (SD - Phase 1)	48.43	71.09	0.00	70.34	0.17	0.75	1.5500	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
47 {SD - Phase 1}.RD11 (SD - Phase 1)	74.63	71.09	0.00	70.34	0.17	0.75	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
48 {SD - Phase 1}.RD12 (SD - Phase 1)	24.70	72.79	0.46	72.18	0.50	0.61	2.4700	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
49 {SD - Phase 1}.RD13 (SD - Phase 1)	14.98	72.94	0.00	72.79	0.46	0.15	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
50 {SD - Phase 1}.RD14 (SD - Phase 1)	112.34	74.06	0.00	72.94	0.00	1.12	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
51 {SD - Phase 1}.RD16 (SD - Phase 1)	12.65	72.58	0.00	72.22	0.33	0.36	2.8500	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
52 {SD - Phase 1}.RD17 (SD - Phase 1)	120.85	73.73	0.00	72.58	0.00	1.15	0.9500	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
53 {SD - Phase 1}.RD18 (SD - Phase 1)	22.10	72.78	0.00	72.56	0.33	0.22	1.0000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
54 {SD - Phase 1}.RD19 (SD - Phase 1)	120.31	73.98	0.00	72.78	0.00	1.20	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
55 {SD - Phase 1}.RD20 (SD - Phase 1)	24.27	73.16	0.00	72.92	0.17	0.24	0.9900	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
56 {SD - Phase 1}.RD21 (SD - Phase 1)	121.90	74.38	0.00	73.16	0.00	1.22	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
57 {SD - Phase 1}.RD22 (SD - Phase 1)	37.09	74.10	0.00	69.73	1.33	4.37	11.7800	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
58 {SD - Phase 1}.RD23 (SD - Phase 1)	80.06	75.07	0.00	74.27	0.17	0.80	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
59 {SD - Phase 1}.RD24 (SD - Phase 1)	7.08	75.14	0.00	75.07	0.00	0.07	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
60 {SD - Phase 1}.RD25 (SD - Phase 1)	92.11	75.19	0.00	74.27	0.17	0.92	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
61 {SD - Phase 1}.RD29	20.21	72.10	0.00	71.69	2.33	0.41	2.0100	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
62 {SD - Phase 1}.RD3 (SD - Phase 1)	60.09	70.14	0.00	70.74	0.00	-0.60	-1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
63 {SD - Phase 1}.RD4 (SD - Phase 1)	44.23	70.58	0.00	70.14	0.00	0.44	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
64 {SD - Phase 1}.RD43 (SD - Phase 1)	83.04	72.05	0.00	72.88	0.00	-0.83	-1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
65 {SD - Phase 1}.RD44 (SD - Phase 1)	9.22	72.88	0.00	72.97	0.00	-0.09	-1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
66 {SD - Phase 1}.RD45 (SD - Phase 1)	82.68	72.88	0.00	72.05	0.00	0.83	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
67 {SD - Phase 1}.RD49 (SD - Phase 1)	118.19	71.44	0.00	72.63	0.01	-1.18	-1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
68 {SD - Phase 1}.RD5 (SD - Phase 1)	62.68	71.21	0.00	70.58	0.00	0.63	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
69 {SD - Phase 1}.RD50 (SD - Phase 1)	10.45	72.62	0.00	72.72	0.00	-0.10	-1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
70 {SD - Phase 1}.RD51 (SD - Phase 1)	39.88	72.24	0.00	71.44	0.00	0.80	2.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
71 {SD - Phase 1}.RD52 (SD - Phase 1)	13.12	72.37	0.00	72.24	0.00	0.13	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
72 {SD - Phase 1}.RD53 (SD - Phase 1)	54.84	72.92	0.00	72.37	0.00	0.55	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
73 {SD - Phase 1}.RD54 (SD - Phase 1)	45.31	73.04	0.00	72.05	0.33	0.99	2.1900	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
74 {SD - Phase 1}.RD55 (SD - Phase 1)	36.88	73.50	0.00	73.21	0.17	0.29	0.7800	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
75 {SD - Phase 1}.RD56 (SD - Phase 1)	6.22	73.57	0.00	73.50	0.00	0.07	1.0900	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000





# Pipe Input

SN Element ID	Length	Inlet Invert	Inlet Invert Offset	Outlet Invert Elevation	Outlet Invert Offset	Total Drop	Average Pipe Slope	Pipe Shape	Pipe Diameter or Height	Pipe Width	Manning's Roughness	Entrance Losses	Exit/Bend Losses
	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(%)		(in)	(in)			
76 {SD - Phase 1}.RD57 (SD - Phase 1)	97.20	74.29	0.00	73.21	0.17	1.08	1.1100	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
77 {SD - Phase 1}.RD58 (SD - Phase 1)	47.81	72.84	0.00	72.15	0.00	0.69	1.4500	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
78 {SD - Phase 1}.RD59 (SD - Phase 1)	163.61	74.65	0.00	73.01	0.17	1.64	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
79 {SD - Phase 1}.RD6 (SD - Phase 1)	24.45	70.91	0.00	70.79	0.00	0.12	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
80 {SD - Phase 1}.RD60 (SD - Phase 1)	6.36	74.71	0.00	74.65	0.00	0.06	1.0100	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
81 {SD - Phase 1}.RD61 (SD - Phase 1)	39.98	73.83	0.00	73.43	0.00	0.40	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
82 {SD - Phase 1}.RD61A (SD - Phase 1)	54.63	73.43	0.00	72.05	0.33	1.38	2.5200	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
83 {SD - Phase 1}.RD62 (SD - Phase 1)	5.69	73.89	0.00	73.83	0.00	0.06	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
84 {SD - Phase 1}.RD63 (SD - Phase 1)	119.29	74.62	0.00	73.43	0.00	1.19	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
85 {SD - Phase 1}.RD7 (SD - Phase 1)	36.57	71.45	0.00	71.08	0.17	0.37	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
86 {SD - Phase 1}.RD8 (SD - Phase 1)	45.72	70.39	0.00	69.93	0.17	0.46	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
87 {SD - Phase 1}.RD9 (SD - Phase 1)	17.28	69.76	0.00	69.67	0.00	0.09	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
88 {SD - Phase 1}.RT3 TO RD49 (SD - Phase 1)	7.93	71.44	0.00	71.40	3.50	0.04	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
89 {SD - Phase 2}.PIPE 31 (SD - Phase 2)	60.86	72.57	0.00	72.26	0.33	0.31	0.5100	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
90 {SD - Phase 2}.PIPE 33 (SD - Phase 2)	65.81	68.84	0.00	68.52	0.00	0.32	0.4900	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
91 {SD - Phase 2}.PIPE 33.1 (SD - Phase 2)	18.46	70.35	0.00	70.26	1.42	0.09	0.4900	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
92 {SD - Phase 2}.PIPE 34 (SD - Phase 2)	69.89	71.03	0.00	70.68	0.33	0.35	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
93 {SD - Phase 2}.PIPE 35 (SD - Phase 2)	83.10	68.40	0.00	68.40	0.50	0.00	0.0000	CIRCULAR	24.000	24.000	0.0130	0.5000	0.5000
94 {SD - Phase 2}.PIPE 36 (SD - Phase 2)	26.75	71.23	0.00	71.10	1.50	0.13	0.4900	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
95 {SD - Phase 2}.PIPE 36.1 (SD - Phase 2)	40.73	69.60	0.00	69.40	1.00	0.20	0.4900	CIRCULAR	12.000	12.000	0.0130	0.5000	0.5000
96 {SD - Phase 2}.PIPE 37 (SD - Phase 2)	54.00	71.83	0.00	71.56	0.33	0.27	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
97 {SD - Phase 2}.PIPE 38 (SD - Phase 2)	54.50	72.10	0.00	71.83	0.00	0.27	0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
98 {SD - Phase 2}.PIPE 39 (SD - Phase 2)	62.25	72.10	0.00	72.41	0.00	-0.31	-0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
99 {SD - Phase 2}.PIPE 40 (SD - Phase 2)	65.00	71.56	0.33	71.89	0.00	-0.33	-0.5000	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
100 {SD - Phase 2}.PIPE E2	38.23	72.28	0.00	71.90	0.00	0.38	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
101 {SD - Phase 2}.PIPE E3	71.20	72.99	0.00	72.28	0.00	0.71	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
102 {SD - Phase 2}.PIPE E5	24.49	72.70	0.01	72.45	0.00	0.24	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
103 {SD - Phase 2}.PIPE E6	77.14	73.46	0.00	72.69	0.00	0.77	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
104 {SD - Phase 2}.PIPE E7	108.92	74.08	0.00	72.99	0.00	1.09	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
105 {SD - Phase 2}.RD30 (SD - Phase 2)	34.29	72.44	0.00	72.10	0.00	0.34	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
106 {SD - Phase 2}.RD31 (SD - Phase 2)	56.29	73.00	0.00	72.44	0.00	0.56	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
107 {SD - Phase 2}.RD32 (SD - Phase 2)	29.06	72.39	0.00	72.10	0.00	0.29	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
108 {SD - Phase 2}.RD33 (SD - Phase 2)	45.67	72.85	0.00	72.39	0.00	0.46	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
109 {SD - Phase 2}.RD38 (SD - Phase 2)	39.39	72.80	0.00	72.57	0.00	0.23	0.5800	CIRCULAR	8.040	8.040	0.0130	0.5000	0.5000
110 {SD - Phase 2}.RD39 (SD - Phase 2)	13.80	72.94	0.00	72.80	0.00	0.14	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
111 {SD - Phase 2}.RD40 (SD - Phase 2)	63.18	73.57	0.00	72.94	0.00	0.63	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
112 {SD - Phase 2}.RD41 (SD - Phase 2)	29.48	73.72	0.00	73.42	0.00	0.30	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
113 {SD - Phase 2}.RD42 (SD - Phase 2)	61.99	73.42	0.00	72.80	0.00	0.62	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
114 {SD - Phase 2}.RD46 (SD - Phase 2)	163.24	72.28	0.00	69.02	0.50	3.26	2.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
115 {SD - Phase 2}.RD47 (SD - Phase 2)	17.66	72.50	0.00	69.90	1.50	2.60	14.7200	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000
116 {SD - Phase 2}.RD48 (SD - Phase 2)	96.18	73.46	0.00	72.50	0.00	0.96	1.0000	CIRCULAR	6.000	6.000	0.0130	0.5000	0.5000



## Pipe Results

SN Element ID	Peak Flow (cfs)	Time of Peak Flow Occurrence (days hh:mm)	Design Flow Capacity (cfs)	Peak Flow/Design Flow Ratio	Peak Flow Velocity (ft/sec)	Travel Time (min)	Peak Flow Depth (ft)	Peak Flow Depth/Total Depth Ratio	Total Time Surcharged (min)	Froude Number
1 {SD - Phase 1}.Pipe - (132) (SD - Phase 1)	0.27	0 08:00	11.93	0.02	6.62	0.01	0.39	0.52	0.00	
2 {SD - Phase 1}.Pipe - (133) (1) (SD - Phase 1)	6.79	0 21:19	13.94	0.49	10.13	0.01	1.00	1.00	9.00	
3 {SD - Phase 1}.Pipe - (134) (SD - Phase 1)	23.83	0 20:45	2.39	9.98	50.00	0.00	0.96	1.00	0.00	
4 {SD - Phase 1}.Pipe - (135) (1) (SD - Phase 1)	35.97	0 19:56	2.64	13.62	45.80	0.00	1.00	1.00	810.00	
5 {SD - Phase 1}.PIPE 1 (SD - Phase 1)	0.42	0 08:00	2.52	0.17	1.99	0.91	0.31	0.31	0.00	
6 {SD - Phase 1}.PIPE 10 (SD - Phase 1)	0.26	0 08:00	0.86	0.30	2.11	0.33	0.25	0.38	0.00	
7 {SD - Phase 1}.PIPE 12 (SD - Phase 1)	0.08	0 08:00	1.49	0.06	1.97	0.54	0.12	0.18	0.00	
8 {SD - Phase 1}.PIPE 13 (SD - Phase 1)	0.09	0 08:00	1.44	0.06	2.05	0.64	0.12	0.18	0.00	
9 {SD - Phase 1}.PIPE 140	6.43	0 19:51	0.57	11.29	32.75	0.01	0.48	1.00	1.00	
10 {SD - Phase 1}.PIPE 141	0.00	0 00:00	0.56	0.00	0.00		0.02	0.04	0.00	
11 {SD - Phase 1}.PIPE 15 (SD - Phase 1)	4.51	0 21:01	2.48	1.82	10.11	0.07	0.70	0.79	0.00	
12 {SD - Phase 1}.PIPE 16 (SD - Phase 1)	0.47	0 20:49	2.52	0.18	1.82	0.62	0.47	0.47	0.00	
13 {SD - Phase 1}.PIPE 17 (SD - Phase 1)	0.16	0 08:00	0.85	0.19	1.85	0.32	0.20	0.29	0.00	
14 {SD - Phase 1}.PIPE 18 (SD - Phase 1)	1.64	0 08:01	1.41	1.17	1.17	0.37	2.00	1.00	372.00	
15 {SD - Phase 1}.PIPE 19 (SD - Phase 1)	1.12	0 08:01	2.52	0.44	2.91	0.23	1.00	1.00	174.00	
16 {SD - Phase 1}.PIPE 19.1	1.12	0 08:01	2.52	0.44	2.94	0.28	0.49	0.49	0.00	
17 {SD - Phase 1}.PIPE 2 (SD - Phase 1)	0.19	0 08:00	1.14	0.16	2.34	0.51	0.19	0.28	0.00	
18 {SD - Phase 1}.PIPE 20 (SD - Phase 1)	0.84	0 08:01	2.52	0.33	2.37	0.89	0.46	0.46	0.00	
19 {SD - Phase 1}.PIPE 21 (SD - Phase 1)	0.08	0 08:00	0.86	0.09	1.54	0.62	0.13	0.20	0.00	
20 {SD - Phase 1}.PIPE 22 (SD - Phase 1)	0.68	0 08:01	2.52	0.27	2.40	0.53	0.39	0.39	0.00	
21 {SD - Phase 1}.PIPE 23 (SD - Phase 1)	0.42	0 08:00	2.52	0.16	1.86	1.02	0.33	0.33	0.00	
22 {SD - Phase 1}.PIPE 24 (SD - Phase 1)	0.07	0 08:00	0.86	0.08	0.79	1.46	0.20	0.30	0.00	
23 {SD - Phase 1}.PIPE 26 (SD - Phase 1)	1.33	0 20:13	0.70	1.91	0.42	4.17	2.00	1.00	371.00	
24 {SD - Phase 1}.PIPE 26 TO RT3 (SD - Phase 1)	1.44	0 20:13	0.31	4.63	0.46	14.49	2.00	1.00	372.00	
25 {SD - Phase 1}.PIPE 27 (SD - Phase 1)	1.21	0 08:01	2.52	0.48	3.06	0.44	0.50	0.50	0.00	
26 {SD - Phase 1}.PIPE 27 TO WD (SD - Phase 1)	0.04	0 08:00	5.04	0.01	0.21	4.14	0.30	0.30	0.00	
27 {SD - Phase 1}.PIPE 27.1	1.21	0 08:01	5.03	0.24	4.82	0.16	0.69	0.69	0.00	
28 {SD - Phase 1}.PIPE 28 (SD - Phase 1)	0.21	0 08:01	0.86	0.24	2.04	1.00	0.22	0.33	0.00	
29 {SD - Phase 1}.PIPE 29 (SD - Phase 1)	0.67	0 08:00	2.84	0.24	2.04	0.67	0.44	0.44	0.00	
30 {SD - Phase 1}.PIPE 3 (SD - Phase 1)	0.10	0 08:01	1.05	0.09	1.81	0.32	0.14	0.21	0.00	
31 {SD - Phase 1}.PIPE 30 (SD - Phase 1)	0.24	0 08:00	0.86	0.28	2.13	1.00	0.24	0.36	0.00	
32 {SD - Phase 1}.PIPE 4 (SD - Phase 1)	0.08	0 08:00	0.86	0.09	1.17	0.77	0.16	0.24	0.00	
33 {SD - Phase 1}.PIPE 5 (SD - Phase 1)	0.68	0 08:00	2.52	0.27	1.99	0.75	0.45	0.45	0.00	
34 {SD - Phase 1}.PIPE 6 (SD - Phase 1)	0.06	0 08:00	1.92	0.03	2.41	0.24	0.08	0.12	0.00	
35 {SD - Phase 1}.PIPE 8 (SD - Phase 1)	0.14	0 08:00	0.86	0.17	1.36	0.88	0.23	0.34	0.00	
36 {SD - Phase 1}.PIPE 9 (SD - Phase 1)	0.08	0 08:00	0.86	0.09	1.23	0.66	0.16	0.24	0.00	
37 {SD - Phase 1}.PIPE E1	0.11	0 08:02	0.85	0.13	1.68	0.42	0.16	0.24	0.00	
38 {SD - Phase 1}.PIPE E4	0.11	0 08:01	0.85	0.13	1.67	0.38	0.16	0.24	0.00	
39 {SD - Phase 1}.PIPE RT1 TO CS (SD - Phase 1)	121.46	0 21:08	3.50	34.71	42.68	0.00	1.82	1.00	0.00	
40 {SD - Phase 1}.PIPE RT2 TO CS (SD - Phase 1)	570.02	0 20:08	3.20	178.17	50.00	0.00	2.00	1.00	371.00	
41 {SD - Phase 1}.PIPE RT3 TO 32 (SD - Phase 1)	0.45	0 08:00	4.09	0.11	1.45	0.10	1.00	1.00	958.00	
42 {SD - Phase 1}.PIPE RT3 TO RD43 (SD - Phase 1)	0.10	0 08:01	0.63	0.17	2.13	0.07	0.15	0.30	0.00	
43 {SD - Phase 1}.PIPE130	1.09	0 08:01	2.52	0.43	2.82	0.13	0.49	0.49	0.00	
44 {SD - Phase 1}.PIPE131	1.09	0 08:01	4.32	0.25	2.72	0.06	1.00	1.00	200.00	
45 {SD - Phase 1}.RD1 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.72	0.46	0.10	0.20	0.00	
46 {SD - Phase 1}.RD10 (SD - Phase 1)	0.03	0 08:00	0.70	0.04	1.73	0.47	0.07	0.14	0.00	
47 {SD - Phase 1}.RD11 (SD - Phase 1)	0.03	0 08:00	0.56	0.05	1.49	0.83	0.08	0.15	0.00	
48 {SD - Phase 1}.RD12 (SD - Phase 1)	1.66	0 21:01	0.88	1.88	12.20	0.03	0.47	1.00	0.00	
49 {SD - Phase 1}.RD13 (SD - Phase 1)	0.16	0 19:51	0.56	0.29	1.87	0.13	0.30	0.63	0.00	
50 {SD - Phase 1}.RD14 (SD - Phase 1)	0.08	0 08:00	0.56	0.14	1.88	1.00	0.13	0.26	0.00	
51 {SD - Phase 1}.RD16 (SD - Phase 1)	0.11	0 08:00	2.04	0.05	2.85	0.07	0.26	0.40	0.00	
52 {SD - Phase 1}.RD17 (SD - Phase 1)	0.08	0 08:00	0.55	0.14	1.94	1.04	0.13	0.25	0.00	
53 {SD - Phase 1}.RD18 (SD - Phase 1)	0.11	0 08:00	1.21	0.09	2.02	0.18	0.14	0.21	0.00	
54 {SD - Phase 1}.RD19 (SD - Phase 1)	0.08	0 08:00	0.56	0.14	1.79	1.12	0.14	0.27	0.00	
55 {SD - Phase 1}.RD20 (SD - Phase 1)	0.08	0 08:01	0.56	0.14	1.90	0.21	0.13	0.26	0.00	
56 {SD - Phase 1}.RD21 (SD - Phase 1)	0.08	0 08:00	0.56	0.14	1.91	1.06	0.13	0.26	0.00	
57 {SD - Phase 1}.RD22 (SD - Phase 1)	0.10	0 08:00	4.15	0.03	4.80	0.13	0.35	0.52	0.00	
58 {SD - Phase 1}.RD23 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.77	0.75	0.10	0.21	0.00	
59 {SD - Phase 1}.RD24 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.61	0.07	0.11	0.22	0.00	
60 {SD - Phase 1}.RD25 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.77	0.87	0.10	0.21	0.00	
61 {SD - Phase 1}.RD29	0.05	0 08:01	1.72	0.03	2.07	0.16	0.08	0.12	0.00	
62 {SD - Phase 1}.RD3 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.30	0.77	0.12	0.25	0.00	
63 {SD - Phase 1}.RD4 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.30	0.57	0.12	0.25	0.00	
64 {SD - Phase 1}.RD43 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.25	1.11	0.13	0.27	0.00	
65 {SD - Phase 1}.RD44 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.66	0.09	0.11	0.22	0.00	
66 {SD - Phase 1}.RD45 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.25	1.10	0.13	0.27	0.00	
67 {SD - Phase 1}.RD49 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.16	1.70	0.14	0.28	0.00	
68 {SD - Phase 1}.RD5 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.72	0.61	0.10	0.20	0.00	
69 {SD - Phase 1}.RD50 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.62	0.11	0.11	0.22	0.00	
70 {SD - Phase 1}.RD51 (SD - Phase 1)	0.05	0 08:01	0.79	0.07	1.23	0.54	0.13	0.27	0.00	
71 {SD - Phase 1}.RD52 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.68	0.13	0.11	0.22	0.00	
72 {SD - Phase 1}.RD53 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.67	0.55	0.11	0.22	0.00	
73 {SD - Phase 1}.RD54 (SD - Phase 1)	0.11	0 08:00	1.79	0.06	2.72	0.28	0.11	0.17	0.00	
74 {SD - Phase 1}.RD55 (SD - Phase 1)	0.05	0 08:00	0.50	0.11	1.60	0.38	0.11	0.22	0.00	



# Pipe Results

SN Element ID	Peak Flow (cfs)	Time of Peak Flow Occurrence (days hh:mm)	Design Flow Capacity (cfs)	Peak Flow/Design Flow Ratio	Peak Flow Velocity (ft/sec)	Travel Time (min)	Peak Flow Depth (ft)	Peak Flow Depth/Total Depth Ratio	Total Time Surcharged (min)	Froude Number
75 {SD - Phase 1}.RD56 (SD - Phase 1)	0.05	0 08:00	0.59	0.09	1.55	0.07	0.11	0.23	0.00	
76 {SD - Phase 1}.RD57 (SD - Phase 1)	0.05	0 08:00	0.59	0.09	1.84	0.88	0.10	0.20	0.00	
77 {SD - Phase 1}.RD58 (SD - Phase 1)	0.10	0 08:01	1.46	0.07	1.40	0.57	0.18	0.27	0.00	
78 {SD - Phase 1}.RD59 (SD - Phase 1)	0.10	0 08:00	0.56	0.18	2.16	1.26	0.15	0.29	0.00	
79 {SD - Phase 1}.RD6 (SD - Phase 1)	0.03	0 08:00	0.85	0.03	0.77	0.53	0.11	0.16	0.00	
80 {SD - Phase 1}.RD60 (SD - Phase 1)	0.10	0 08:00	0.56	0.19	1.88	0.06	0.16	0.33	0.00	
81 {SD - Phase 1}.RD61 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.70	0.39	0.11	0.22	0.00	
82 {SD - Phase 1}.RD61A (SD - Phase 1)	0.10	0 08:01	1.92	0.05	2.88	0.32	0.11	0.16	0.00	
83 {SD - Phase 1}.RD62 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.58	0.06	0.11	0.23	0.00	
84 {SD - Phase 1}.RD63 (SD - Phase 1)	0.05	0 08:00	0.56	0.09	1.73	1.15	0.11	0.21	0.00	
85 {SD - Phase 1}.RD7 (SD - Phase 1)	0.03	0 08:00	0.56	0.05	1.47	0.41	0.08	0.16	0.00	
86 {SD - Phase 1}.RD8 (SD - Phase 1)	0.03	0 08:00	0.56	0.05	1.48	0.51	0.08	0.16	0.00	
87 {SD - Phase 1}.RD9 (SD - Phase 1)	0.03	0 08:00	0.85	0.03	0.78	0.37	0.11	0.16	0.00	
88 {SD - Phase 1}.RT3 TO RD49 (SD - Phase 1)	0.10	0 08:01	0.86	0.12	1.58	0.08	0.16	0.24	0.00	
89 {SD - Phase 2}.PIPE 31 (SD - Phase 2)	0.08	0 08:02	0.86	0.09	1.54	0.66	0.13	0.20	0.00	
90 {SD - Phase 2}.PIPE 33 (SD - Phase 2)	0.37	0 08:00	2.50	0.15	1.20	0.91	1.00	1.00	853.00	
91 {SD - Phase 2}.PIPE 33.1 (SD - Phase 2)	0.38	0 08:00	2.49	0.15	2.12	0.15	0.37	0.37	0.00	
92 {SD - Phase 2}.PIPE 34 (SD - Phase 2)	0.15	0 08:00	0.86	0.17	1.84	0.63	0.18	0.28	0.00	
93 {SD - Phase 2}.PIPE 35 (SD - Phase 2)	0.48	0 08:01	0.78	0.62	0.54	2.56	2.00	1.00	372.00	
94 {SD - Phase 2}.PIPE 36 (SD - Phase 2)	0.41	0 08:00	2.48	0.16	2.20	0.20	0.29	0.29	0.00	
95 {SD - Phase 2}.PIPE 36.1 (SD - Phase 2)	0.41	0 08:01	2.52	0.16	2.25	0.30	1.00	1.00	168.00	
96 {SD - Phase 2}.PIPE 37 (SD - Phase 2)	0.22	0 08:01	0.86	0.26	2.04	0.44	0.23	0.35	0.00	
97 {SD - Phase 2}.PIPE 38 (SD - Phase 2)	0.16	0 08:00	0.85	0.19	1.58	0.57	0.22	0.33	0.00	
98 {SD - Phase 2}.PIPE 39 (SD - Phase 2)	0.10	0 08:00	0.86	0.12	1.34	0.77	0.18	0.26	0.00	
99 {SD - Phase 2}.PIPE 40 (SD - Phase 2)	0.12	0 08:00	0.86	0.14	1.73	0.63	0.17	0.25	0.00	
100 {SD - Phase 2}.PIPE E2	0.11	0 08:01	0.56	0.19	1.95	0.33	0.16	0.33	0.00	
101 {SD - Phase 2}.PIPE E3	0.11	0 08:01	0.56	0.19	2.10	0.57	0.15	0.31	0.00	
102 {SD - Phase 2}.PIPE E5	0.11	0 08:00	0.56	0.19	1.90	0.21	0.17	0.33	0.00	
103 {SD - Phase 2}.PIPE E6	0.11	0 08:00	0.56	0.19	2.04	0.63	0.16	0.32	0.00	
104 {SD - Phase 2}.PIPE E7	0.11	0 08:00	0.56	0.19	2.14	0.85	0.15	0.31	0.00	
105 {SD - Phase 2}.RD30 (SD - Phase 2)	0.02	0 08:01	0.56	0.04	1.28	0.45	0.08	0.15	0.00	
106 {SD - Phase 2}.RD31 (SD - Phase 2)	0.02	0 08:00	0.56	0.04	1.37	0.68	0.07	0.14	0.00	
107 {SD - Phase 2}.RD32 (SD - Phase 2)	0.02	0 08:01	0.56	0.04	1.28	0.38	0.08	0.15	0.00	
108 {SD - Phase 2}.RD33 (SD - Phase 2)	0.02	0 08:00	0.56	0.04	1.38	0.55	0.07	0.14	0.00	
109 {SD - Phase 2}.RD38 (SD - Phase 2)	0.08	0 08:01	0.92	0.08	1.47	0.45	0.14	0.20	0.00	
110 {SD - Phase 2}.RD39 (SD - Phase 2)	0.04	0 08:00	0.56	0.07	1.19	0.19	0.11	0.22	0.00	
111 {SD - Phase 2}.RD40 (SD - Phase 2)	0.04	0 08:00	0.56	0.07	1.60	0.66	0.09	0.18	0.00	
112 {SD - Phase 2}.RD41 (SD - Phase 2)	0.04	0 08:00	0.56	0.07	1.59	0.31	0.09	0.18	0.00	
113 {SD - Phase 2}.RD42 (SD - Phase 2)	0.04	0 08:00	0.56	0.07	1.19	0.87	0.11	0.22	0.00	
114 {SD - Phase 2}.RD46 (SD - Phase 2)	0.09	0 08:00	0.79	0.11	1.76	1.55	0.31	0.61	0.00	
115 {SD - Phase 2}.RD47 (SD - Phase 2)	0.09	0 08:00	2.15	0.04	5.24	0.06	0.26	0.53	0.00	
116 {SD - Phase 2}.RD48 (SD - Phase 2)	0.09	0 08:00	0.56	0.16	2.73	0.59	0.11	0.23	0.00	



## Storage Nodes

### Storage Node : R-TANK 1 OUTLET (SD - Phase 1)

#### Input Data


Invert Elevation (ft) .....	66.90
Max (Rim) Elevation (ft) .....	73.73
Max (Rim) Offset (ft) .....	6.83
Initial Water Elevation (ft) .....	67.40
Initial Water Depth (ft) .....	0.50
Ponded Area (ft <sup>2</sup> ) .....	0.00
Evaporation Loss .....	0.00

#### Storage Area Volume Curves

Storage Curve : rtank 1

Stage (ft)	Storage Area (ft <sup>2</sup> )	Storage Volume (ft <sup>3</sup> )
0	0	0
0.5	3971	992.75
3.98	50099	95074.55

### Storage Area Volume Curves

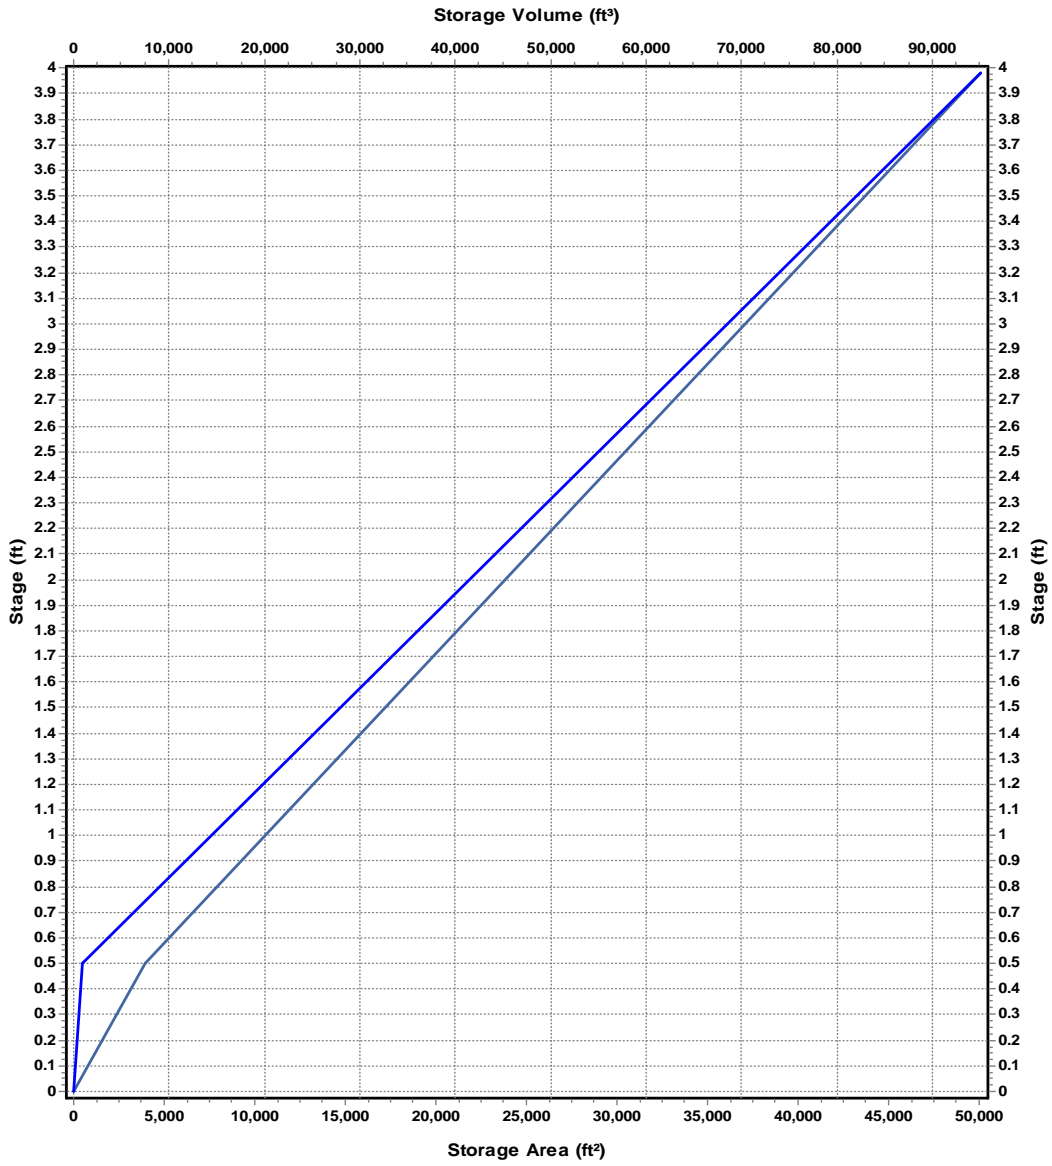

— Storage Area — Storage Volume



**Storage Node : R-TANK 1 OUTLET (SD - Phase 1) (continued)**

**Output Summary Results**

Peak Inflow (cfs) .....	121.62
Peak Lateral Inflow (cfs) .....	0
Peak Outflow (cfs) .....	27.91
Peak Exfiltration Flow Rate (cfm) .....	0
Max HGL Elevation Attained (ft) .....	68.89
Max HGL Depth Attained (ft) .....	1.99
Average HGL Elevation Attained (ft) .....	68.45
Average HGL Depth Attained (ft) .....	1.55
Time of Max HGL Occurrence (days hh:mm) .....	0 21:22
Total Exfiltration Volume (1000-ft <sup>3</sup> ) .....	0
Total Flooded Volume (ac-in) .....	0
Total Time Flooded (min) .....	0
Total Retention Time (sec) .....	0

**Storage Node : R-TANK 2 OUTLET (SD - Phase 1)**

**Input Data**


Invert Elevation (ft) .....	67.90
Max (Rim) Elevation (ft) .....	77.71
Max (Rim) Offset (ft) .....	9.81
Initial Water Elevation (ft) .....	68.40
Initial Water Depth (ft) .....	0.50
Ponded Area (ft <sup>2</sup> ) .....	0.00
Evaporation Loss .....	0.00

**Storage Area Volume Curves**

Storage Curve : rtank 2

Stage (ft)	Storage Area (ft <sup>2</sup> )	Storage Volume (ft <sup>3</sup> )
0	0	0
0.5	4100	1025
6.87	78829	265153.87

### Storage Area Volume Curves

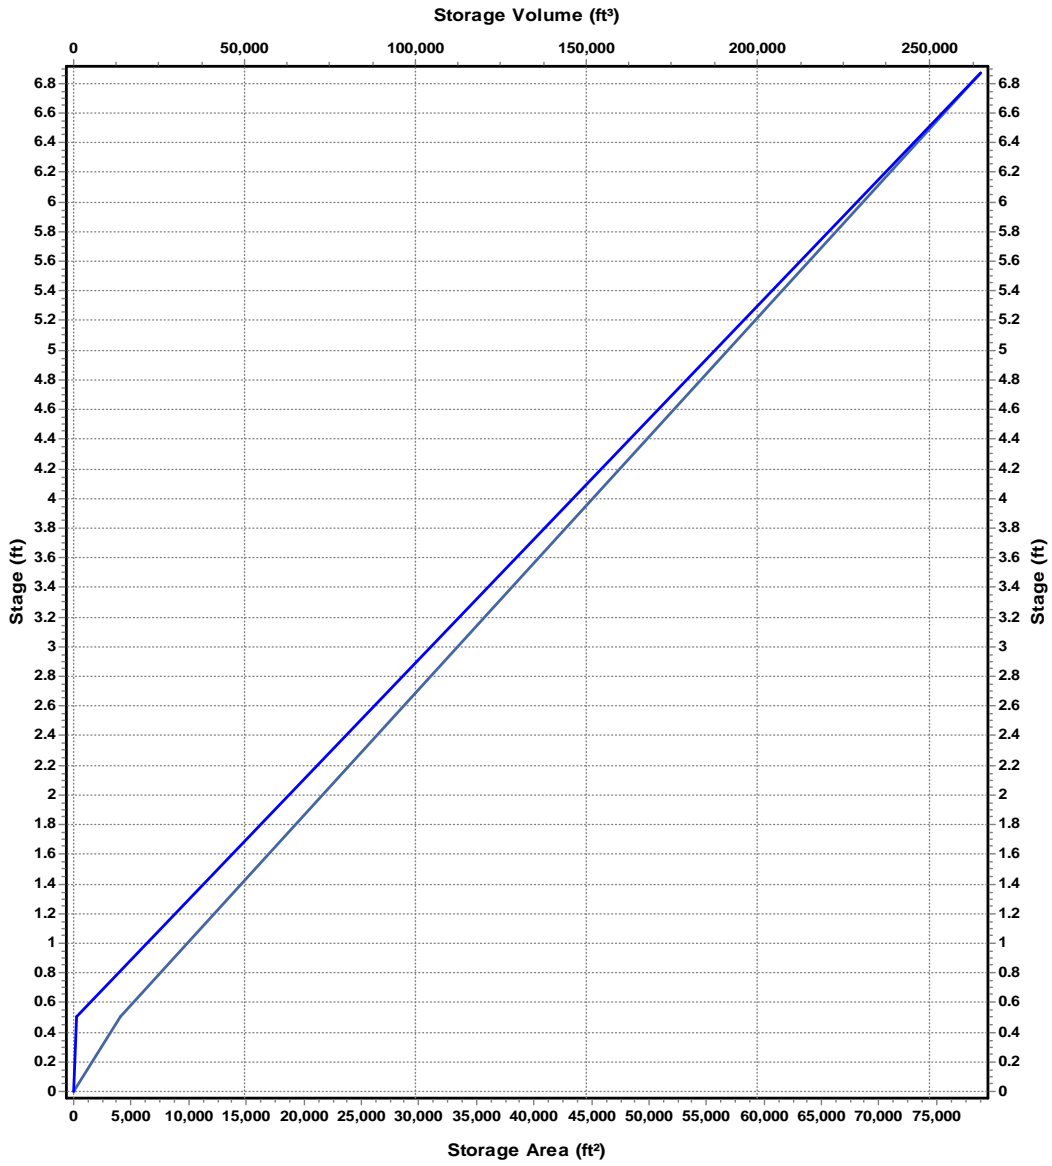

— Storage Area — Storage Volume

**Storage Node : R-TANK 2 OUTLET (SD - Phase 1) (continued)**

**Output Summary Results**

Peak Inflow (cfs) .....	572.89
Peak Lateral Inflow (cfs) .....	0
Peak Outflow (cfs) .....	21.21
Peak Exfiltration Flow Rate (cfm) .....	0
Max HGL Elevation Attained (ft) .....	70.68
Max HGL Depth Attained (ft) .....	2.78
Average HGL Elevation Attained (ft) .....	70.07
Average HGL Depth Attained (ft) .....	2.17
Time of Max HGL Occurrence (days hh:mm) .....	1 00:00
Total Exfiltration Volume (1000-ft <sup>3</sup> ) .....	0
Total Flooded Volume (ac-in) .....	0
Total Time Flooded (min) .....	0
Total Retention Time (sec) .....	0

## Storage Node : R-TANK 3

### Input Data


Invert Elevation (ft) .....	67.90
Max (Rim) Elevation (ft) .....	76.75
Max (Rim) Offset (ft) .....	8.85
Initial Water Elevation (ft) .....	68.40
Initial Water Depth (ft) .....	0.50
Ponded Area (ft <sup>2</sup> ) .....	0.00
Evaporation Loss .....	0.00

### Storage Area Volume Curves

Storage Curve : rtank 3

Stage (ft)	Storage Area (ft <sup>2</sup> )	Storage Volume (ft <sup>3</sup> )
0	0	0
0.5	2263	565.75
7.33	62623	222151.44

### Storage Area Volume Curves

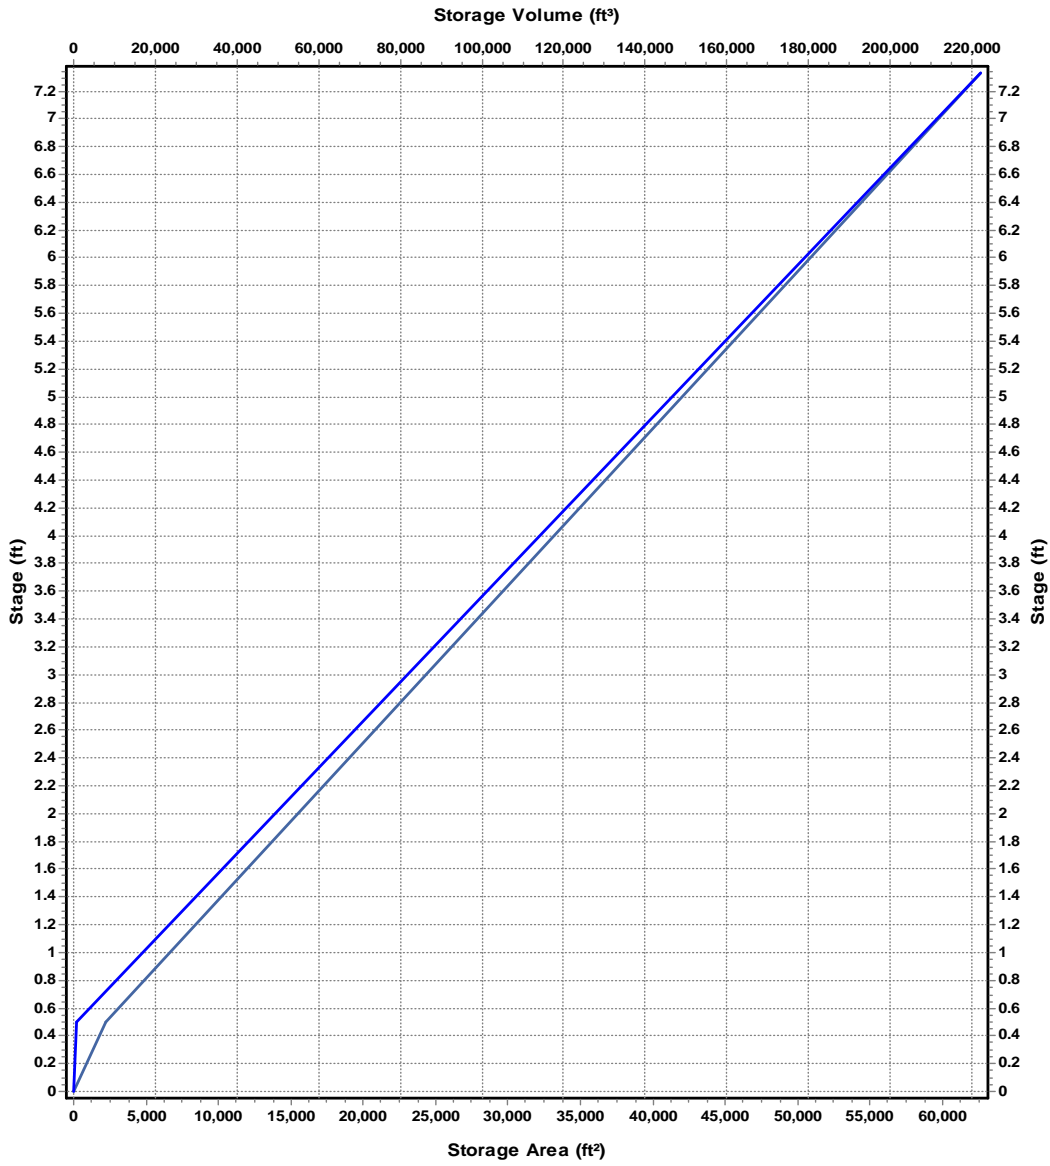


— Storage Area — Storage Volume

**Storage Node : R-TANK 3 (continued)**

**Output Summary Results**

Peak Inflow (cfs) .....	1.84
Peak Lateral Inflow (cfs) .....	0
Peak Outflow (cfs) .....	0.33
Peak Exfiltration Flow Rate (cfm) .....	0
Max HGL Elevation Attained (ft) .....	70.68
Max HGL Depth Attained (ft) .....	2.78
Average HGL Elevation Attained (ft) .....	70.07
Average HGL Depth Attained (ft) .....	2.17
Time of Max HGL Occurrence (days hh:mm) .....	1 00:00
Total Exfiltration Volume (1000-ft <sup>3</sup> ) .....	0
Total Flooded Volume (ac-in) .....	0
Total Time Flooded (min) .....	0
Total Retention Time (sec) .....	0

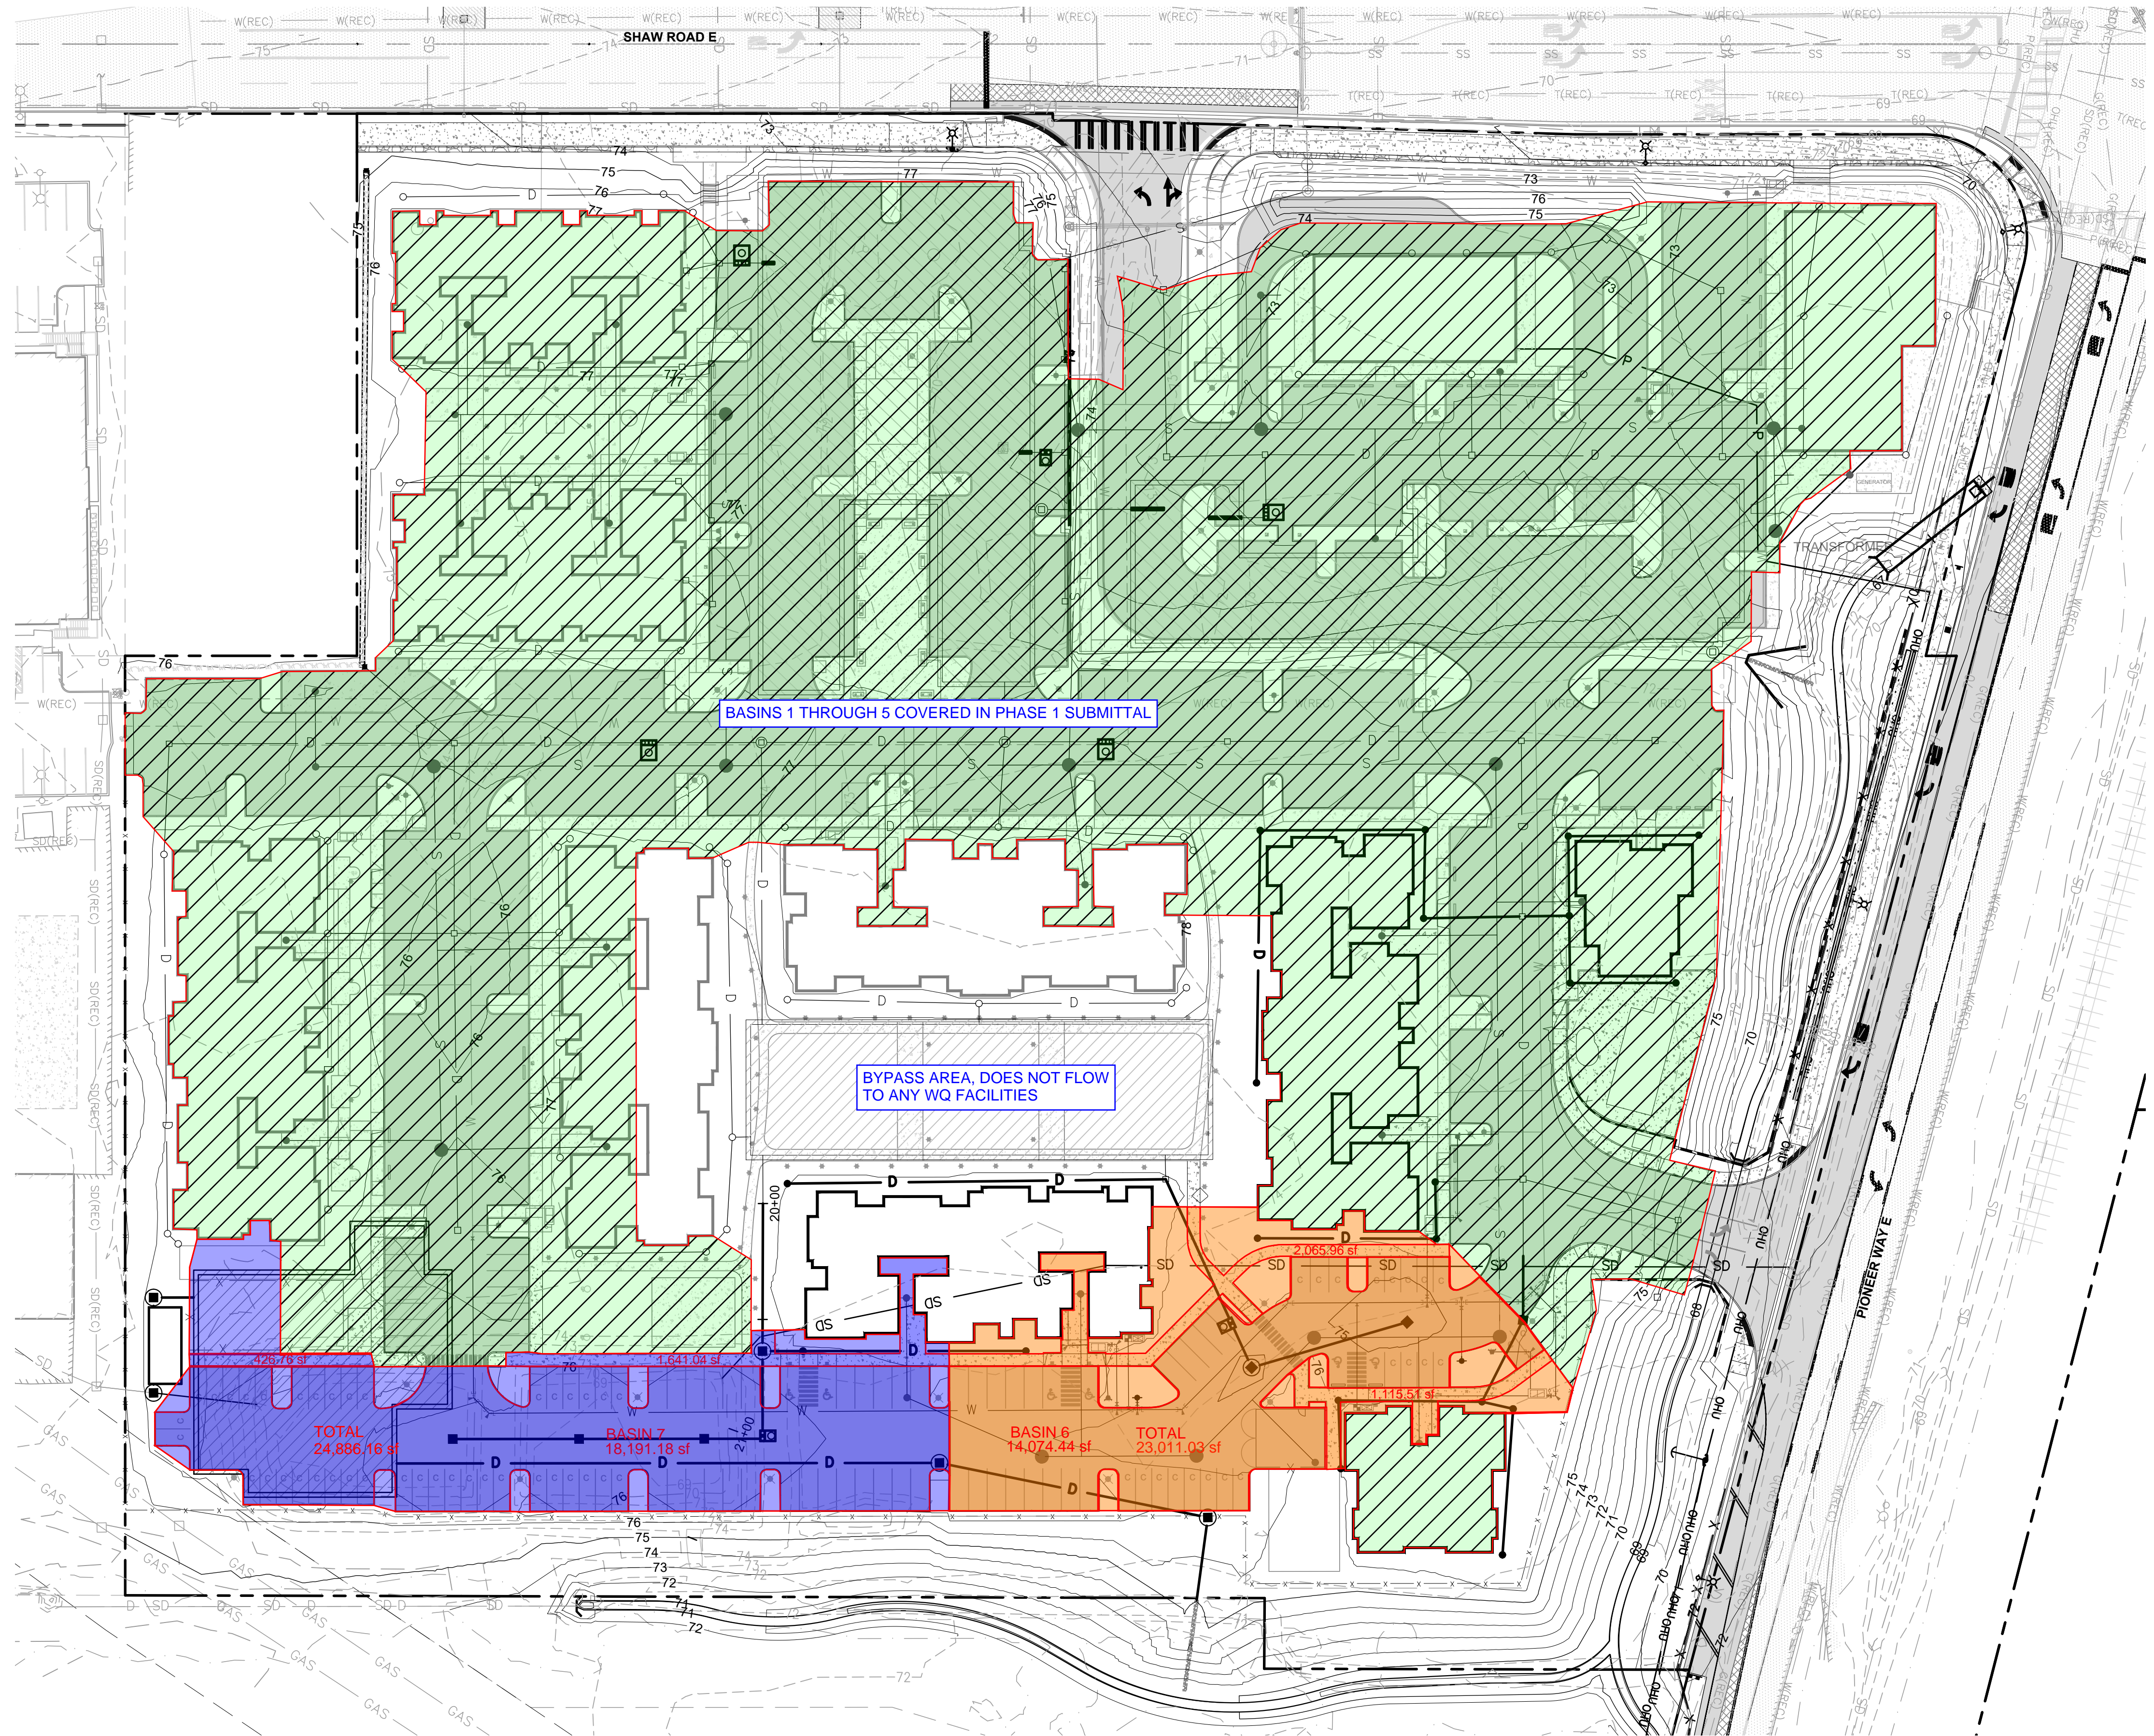

BASINS 1 THROUGH 5 COVERED IN PHASE 1 SUBMITTAL

BYPASS AREA, DOES NOT FLOW TO ANY WQ FACILITIES


TOTAL  
24,886.16 sf

BASIN 7  
18,191.18 sf

BASIN 6  
14,074.44 sf

TOTAL  
23,011.03 sf

<b>BASIN 6:</b>	<b>0.53 AC TOTAL</b>
- ASPHALT:	0.33 AC
- LANDSCAPE:	0.13 AC
- ROOF:	0.00 AC
- PERVIOUS SIDEWALK:	0.07 AC
<b>BASIN 7:</b>	<b>0.57 AC TOTAL</b>
- ASPHALT:	0.42 AC
- LANDSCAPE:	0.10 AC
- ROOF:	0.00 AC
- PERVIOUS SIDEWALK:	0.05 AC

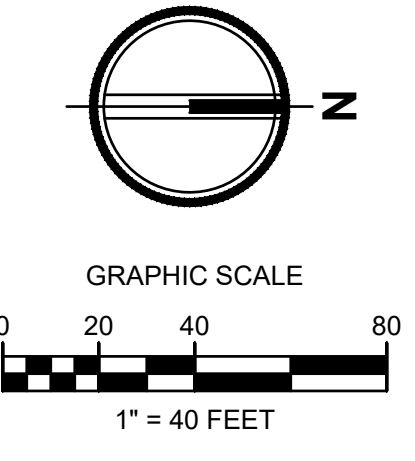

Civil Engineers  
Structural Engineers  
Landscape Architects  
Community Planners  
Land Surveyors  
Historians

WQ BASIN MAP	D-2
EAST TOWN CROSSING PHASE 2	2230752



**Basin 1 Mitigated**

Subbasin Name: Basin 6

Flows To: Surface, Interflow, Groundwater

Area in Basin

Available Pervious	Acres	Available Impervious	Acres
<input checked="" type="checkbox"/> A/B, Lawn, Flat	13	<input checked="" type="checkbox"/> SIDEWALKS/FLAT	07
		<input checked="" type="checkbox"/> PARKING/FLAT	33

Water Quality

On-Line BMP: 24 hour Volume (ac-ft) 0.0429, Standard Flow Rate (cfs) 0.0592

Off-Line BMP: Standard Flow Rate (cfs) 0.0341

Pervious Total: 0.13 Acres  
Impervious Total: 0.4 Acres  
Basin Total: 0.53 Acres

BASIN 6: OFFLINE FLOW RATE = 0.0341 CFS

4X6 BIOPOD PERFORMANCE SPECIFICATIONS WITH WQ FLOW CAPACITY HIGHLIGHTED. SEE FOLLOWING PAGE FOR FULL DETAIL FROM OLDCASTLE

PERFORMANCE SPECIFICATIONS	
Treatment Flow Capacities:*	
NJDEP 80% Removal, 75 micron	0.064 cfs
WA Ecology GULD - Basic, Enhanced & Phosphorus	0.057 cfs
Bypass Capacity	5.0 cfs

\*Contact Oldcastle for alternative treatment flow capacities.

BASIN 6: 0.0341 CFS < 0.057 CFS  
BASIN 7: 0.0401 CFS < 0.057 CFS

**Basin 2 Mitigated**

Subbasin Name: Basin 7

Flows To: Surface, Interflow, Groundwater

Area in Basin

Available Pervious	Acres	Available Impervious	Acres
<input checked="" type="checkbox"/> A/B, Lawn, Flat	1	<input checked="" type="checkbox"/> SIDEWALKS/FLAT	05
		<input checked="" type="checkbox"/> PARKING/FLAT	42

Water Quality

On-Line BMP: 24 hour Volume (ac-ft) 0.0504, Standard Flow Rate (cfs) 0.0696

Off-Line BMP: Standard Flow Rate (cfs) 0.0401

Pervious Total: 0.1 Acres  
Impervious Total: 0.47 Acres  
Basin Total: 0.57 Acres

BASIN 7: OFFLINE FLOW RATE = 0.0401 CFS




Civil Engineers  
Structural Engineers  
Landscape Architects  
Community Planners  
Land Surveyors  
Historians


WQ CALCS FOR 4X6 BIOPOD  
EAST TOWN CROSSING PHASE 2

D-2  
2230752


SITE SPECIFIC DATA				
Structure ID	ID			
Treatment Flow Rate (cfs)	-			
Peak Flow Rate (cfs)	-			
Rim Elevation	-			
Top of Vault Elevation	-			
Pipe Data	Pipe Location	Pipe Size	Pipe Type	Invert Elevation
Inlet	-	-	-	-
Outlet	-	-	-	-
Notes:				
PERFORMANCE SPECIFICATIONS				
Treatment Flow Capacities:*				
NJDEP 80% Removal, 75 micron	0.064 cfs			
WA Ecology GULD - Basic, Enhanced & Phosphorus	0.057 cfs			
Bypass Capacity	5.0 cfs			
*Contact Oldcastle for alternative treatment flow capacities.				

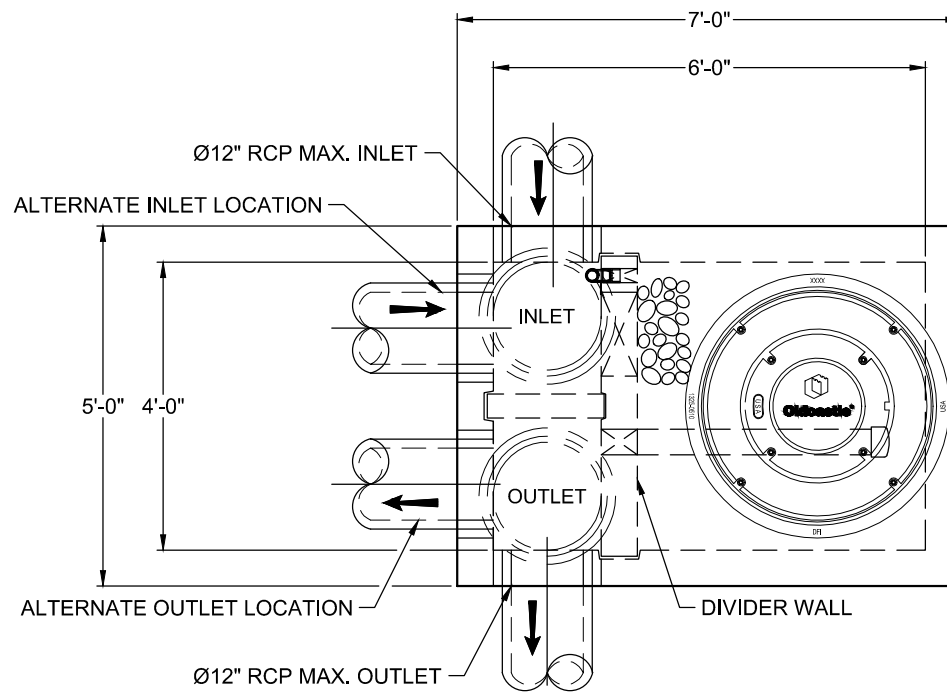

PLAN VIEW

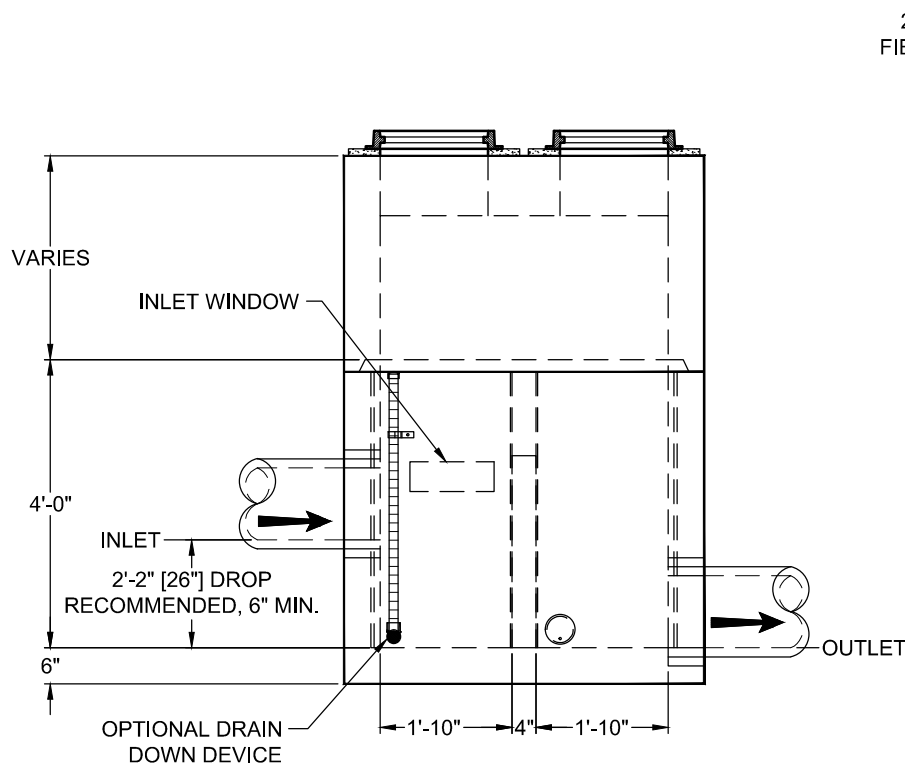

LEFT END VIEW

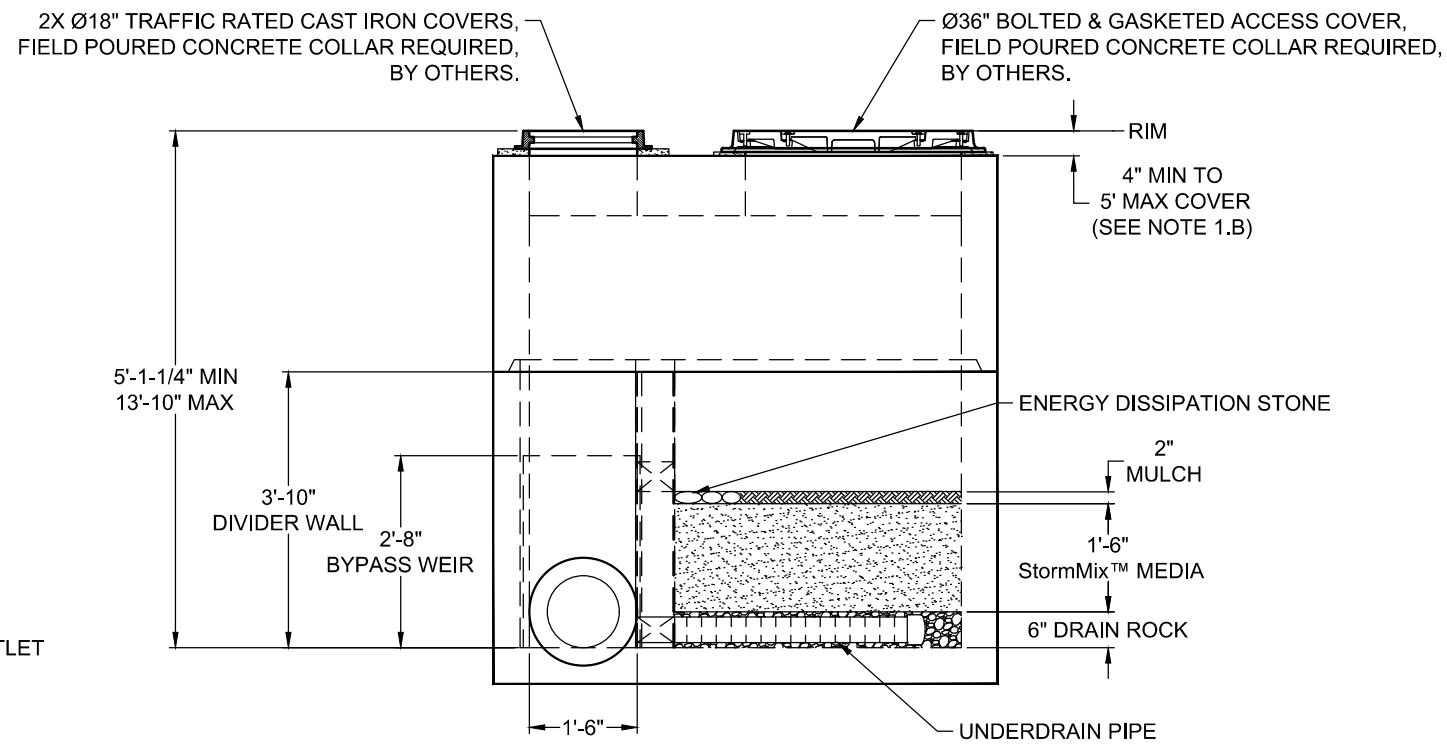

ELEVATION VIEW

NOTES:

- DESIGN LOADINGS:
  - AASHTO HS-20-44 (WITH IMPACT)
  - DESIGN SOIL COVER: 5'-0" MAXIMUM
  - ASSUMED WATER TABLE: BELOW BASE OF PRECAST (ENGINEER-OF-RECORD TO CONFIRM SITE WATER TABLE ELEVATION)
  - LATERAL EARTH PRESSURE: 45 PCF (DRAINED)
  - LATERAL LIVE LOAD SURCHARGE: 80 PSF (APPLIED TO 8'-0" BELOW GRADE)
  - NO LATERAL SURCHARGE FROM ADJACENT BUILDINGS, WALLS, PIERS, OR FOUNDATIONS.
- CONCRETE 28-DAY MINIMUM COMPRESSIVE STRENGTH: 5,000 PSI MINIMUM.
- REINFORCING: REBAR, ASTM A615/A706, GRADE 60
- CEMENT: ASTM C150
- REQUIRED ALLOWABLE SOIL BEARING CAPACITY: 2,500 PSF
- REFERENCE STANDARD:
  - ASTM C890
  - ASTM C913
  - ACI 318-14
- THIS STRUCTURE IS DESIGNED TO THE PARAMETERS NOTED HEREIN. ENGINEER-OF-RECORD SHALL VERIFY THAT NOTED PARAMETERS MEET OR EXCEED PROJECT REQUIREMENTS. IF DESIGN PARAMETERS ARE INCORRECT, REVIEWING ENGINEER/AUTHORITY SHALL NOTIFY OLDCASTLE INFRASTRUCTURE UPON REVIEW.
- INLET AND OUTLET HOLES WILL BE FACTORY CORED/CAST PER PLANS AND CUSTOMER REQUIREMENTS. INLET AND OUTLET LOCATIONS CAN BE MIRRORED.
- CONTRACTOR RESPONSIBLE TO VERIFY ALL SIZES, LOCATIONS, AND ELEVATIONS OF OPENINGS.
- CONTRACTOR RESPONSIBLE TO ENSURE ADEQUATE BEARING SURFACE IS PROVIDED (I.E. COMPACTED AND LEVEL PER PROJECT SPECIFICATIONS).
- SECTION HEIGHTS, SLAB/WALL THICKNESSES, AND KEYWAYS ARE SUBJECT TO CHANGE AS REQUIRED FOR SITE REQUIREMENTS AND/OR DUE TO PRODUCT AVAILABILITY AND PRODUCTION FACILITY CONSTRAINTS.
- MAXIMUM PICK WEIGHTS\*:
  - TOP: XX,XXX LBS
  - BASE: XX,XXX LBS\* (\* COMBINED WEIGHT OF BASE INCLUDES BYPASS WEIR, DIVIDER WALL, ROCK & MEDIA)
- INTERNALS SHALL CONSIST OF UNDERDRAIN PIPE, ROCK, STORMMIX™ MEDIA, MULCH, DIVIDER WALL, BYPASS WEIR AND OPTIONAL DRAIN DOWN.



Ph: 800.579.8819 | www.oldcastleinfrastructure.com/stormwater  
 THIS DOCUMENT IS THE PROPERTY OF OLDCASTLE INFRASTRUCTURE, INC. IT IS CONFIDENTIAL, SUBMITTED FOR REFERENCE PURPOSES ONLY AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF, OR WITHOUT THE WRITTEN PERMISSION OF OLDCASTLE INFRASTRUCTURE, INC. COPYRIGHT © 2021 OLDCASTLE INFRASTRUCTURE, INC. ALL RIGHTS RESERVED.

BioPod™ Biofilter System (STANDARD)  
 Underground Vault with Internal Bypass

CUSTOMER -  
 PROJECT NAME -

SHEET NAME	REVISION	SHEET
Specifier Drawing BPU-461B	-	1 OF 1
	REV DATE	



CUSTOM 8 X 24 BIOPOD PERFORMANCE SPECIFICATIONS WITH WQ FLOW CAPACITY HIGHLIGHTED. SEE FOLLOWING PAGE FOR FULL DETAIL FROM OLDCASTLE

DRAWING PROPERTIES	
Structure ID	-
Model Size	8x24
Treatment Flow Rate (cfs)	0.60
Peak Flow Rate (cfs)	-

UPSTREAM BASIN EXISTING WATER QUALITY FLOW = 0.5029 CFS  
 8X24 BIOPOD PROVIDES 0.60 CFS WATER QUALITY TREATMENT FLOW RATE  
 0.60 CFS BIOPOD TREATMENT FLOW > 0.5029 CFS EXISTING WATER QUALITY  
 THEREFORE, THE PROPOSED BIOPOD IS ADEQUATE TO PROVIDE WATER QUALITY TREATMENT FOR THE EXISTING BASIN

Subbasin Name: South Existing Commercial Basin  Designate as Bypass for PDC

Flows To :  Surface  Interflow  Groundwater

Area in Basin  Show Only Selected

Available Pervious	Acres	Available Impervious	Acres
<input checked="" type="checkbox"/> C, Pasture, Flat	1.8	<input checked="" type="checkbox"/> ROADS/FLAT	5.22
		<input checked="" type="checkbox"/> POND	.73

REFER TO EXHIBIT B-2 WITHIN APPENDIX D-5 FOR THE EXISTING AREAS INPUT INTO WWHM FOR THE WQ FLOW RATE

Water Quality

Run Analysis


On-Line BMP	Off-Line BMP
24 hour Volume (ac-ft) 0.6819	
Standard Flow Rate (cfs) 0.8746	Standard Flow Rate (cfs) 0.5029






Civil Engineers  
 Structural Engineers  
 Landscape Architects  
 Community Planners  
 Land Surveyors  
 Negotiators

WQ CALCS FOR 8X24 BIOPOD	D-2
EAST TOWN CROSSING PHASE 2	2230752

DRAWING PROPERTIES	
Structure ID	-
Model Size	8x24
Treatment Flow Rate (cfs)	0.60
Peak Flow Rate (cfs)	-
Notes:	
-	
PERFORMANCE SPECIFICATIONS	
Peak Treatment Capacities (cfs)	
NJDEP 80% Removal, 75micron	-
WA Ecology GULD - Basic, Enhanced, & Phosphorus	-
Peak Bypass Capacity	-



BILL OF MATERIALS						
ITEM	STD	BY	INSTALL	QTY	UNIT	DESCRIPTION/ERP ID
4.0 FT BASE		OI	GC	2	EA	-
DIVIDER WALL		OI	OI	2	EA	-
WEIR WALL		OI	OI	1	EA	-
DRAIN ROCK		OI	GC	-	LBS	SUPER SAK/5000015   1 TON/SACK
MEDIA		OI	GC	-	TON	STORMMIX MEDIA, 1 TON/SACK
MULCH		OI	GC	-	CF	3 CUFT/BAG
RIVERROCK		OI	GC	-	CY	ENERGY DISSIPATION STONE
UNDERDRAIN KIT		OI	GC	-	EA	-
DRAIN DOWN	X	OI	GC	2	EA	COMPLETE ASSEMBLY/SK-0962
TOP SLAB		OI	GC	2	EA	-
FRAME & COVER	X	OI	GC	2	EA	36"Ø/DD-OSS-36BA
FRAME & COVER	X	OI	GC	2	EA	24"Ø/DD-OSS-24BA
PL. 1/2"x1 1/2"x0'-7"	X	OI	GC	4	EA	CONNECTION PLATE/2290633

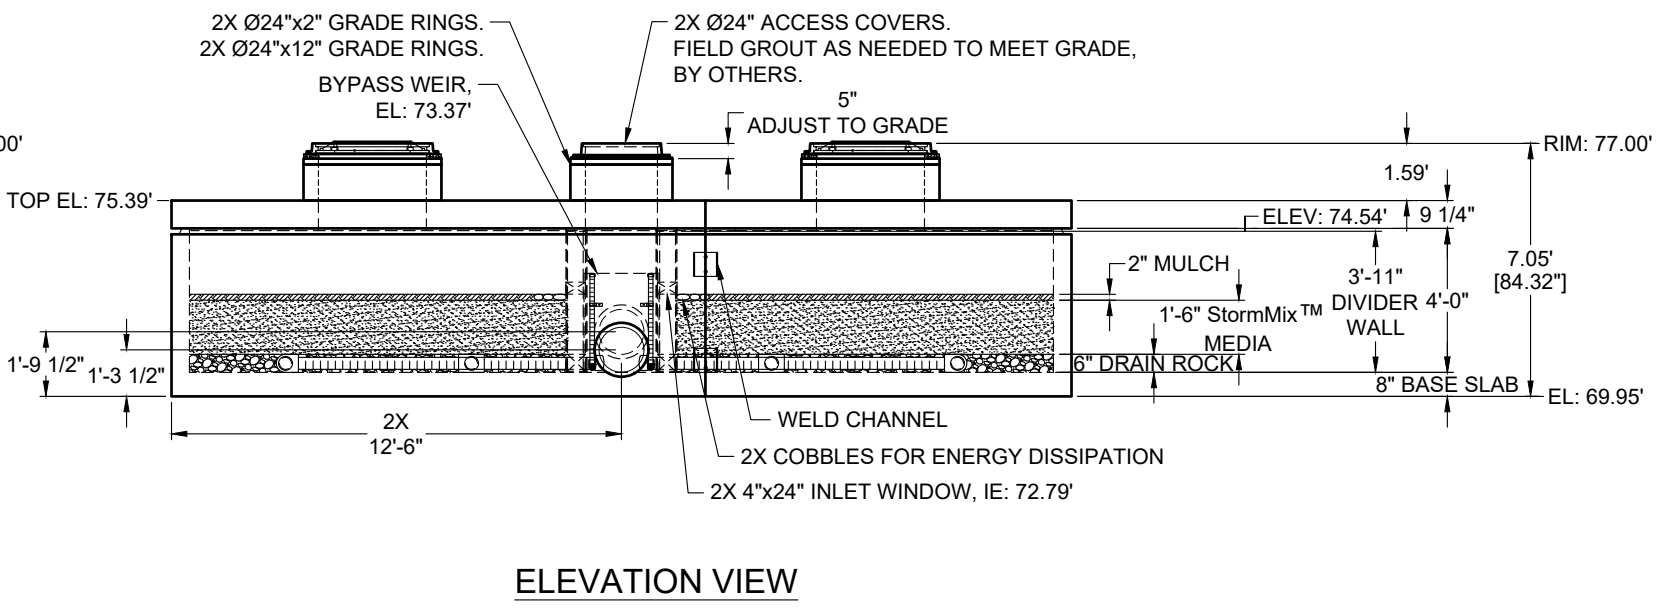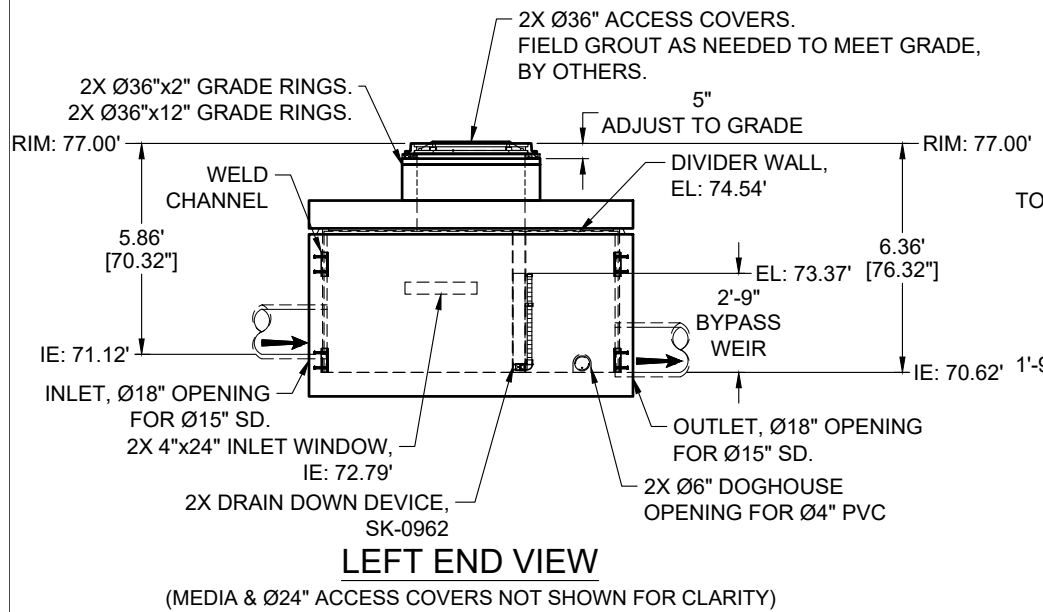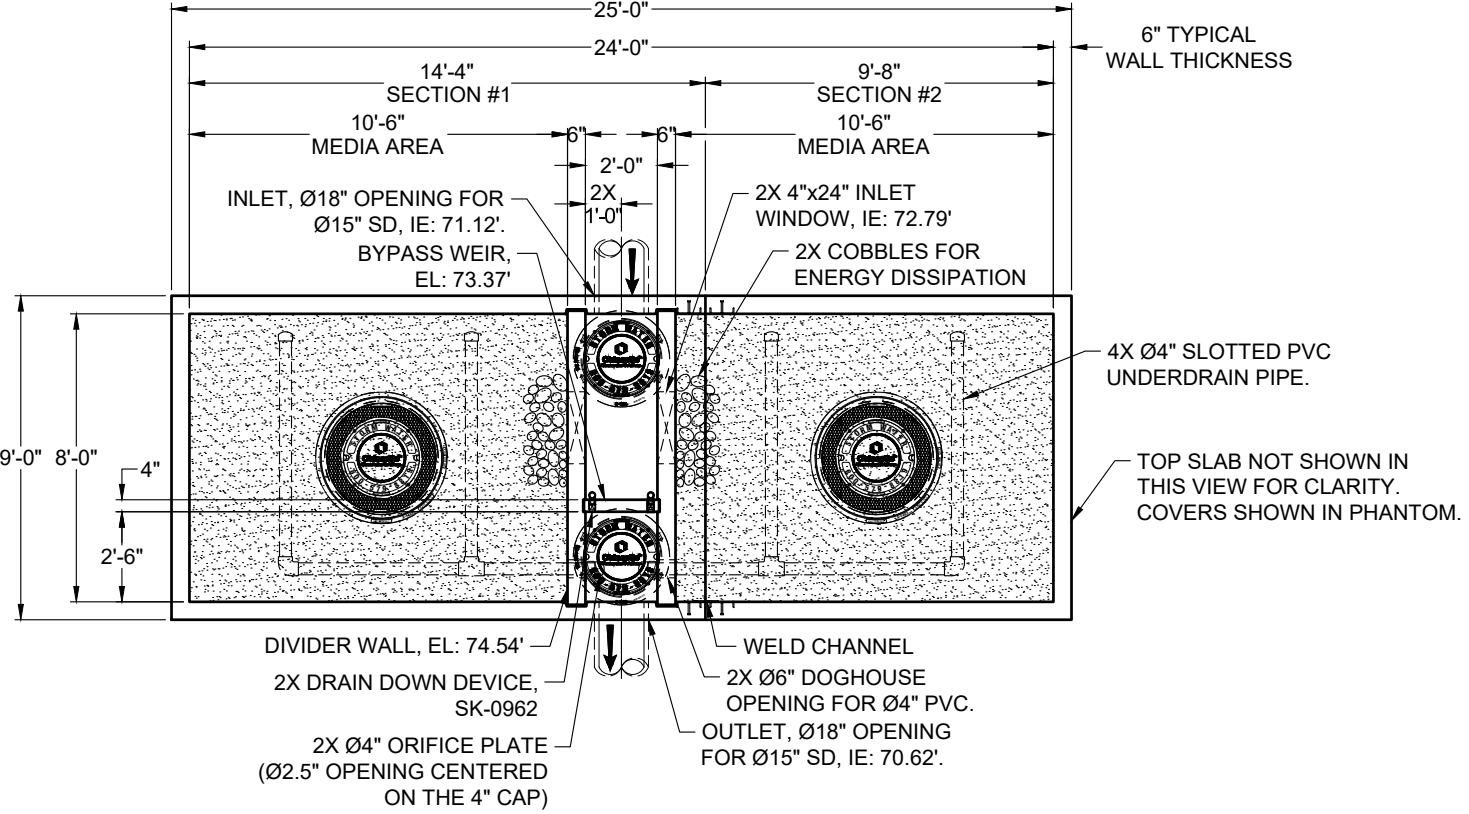

- NOTES:**
- DESIGN LOADINGS:
    - AASHTO HS-20-44 (WITH IMPACT)
    - DESIGN SOIL COVER: 5'-0" MAXIMUM
    - ASSUMED WATER TABLE: BELOW BASE OF PRECAST (ENGINEER-OF-RECORD TO CONFIRM SITE WATER TABLE ELEVATION)
    - LATERAL EARTH PRESSURE: 45 PCF (DRAINED)
    - LATERAL LIVE LOAD SURCHARGE: 80 PSF (APPLIED TO 8'-0" BELOW GRADE)
    - NO LATERAL SURCHARGE FROM ADJACENT BUILDINGS, WALLS, PIERS, OR FOUNDATIONS.
  - CONCRETE 28-DAY MINIMUM COMPRESSIVE STRENGTH: 5,000 PSI MINIMUM.
  - REINFORCING: REBAR, ASTM A615/A706, GRADE 60
  - CEMENT: ASTM C150
  - REQUIRED ALLOWABLE SOIL BEARING CAPACITY: 2,500 PSF
  - REFERENCE STANDARD:
    - ASTM C890
    - ASTM C913
    - ACI 318-14
  - THIS STRUCTURE IS DESIGNED PER NOTE 1. ENGINEER-OF-RECORD SHALL VERIFY THAT NOTED PARAMETERS MEET OR EXCEED PROJECT REQUIREMENTS. IF DESIGN PARAMETERS ARE INCORRECT, REVIEWING ENGINEER/AUTHORITY SHALL NOTIFY OLDCASTLE INFRASTRUCTURE UPON REVIEW.
  - INLET AND OUTLET HOLES WILL BE FACTORY CORED/CAST PER PLANS AND CUSTOMER REQUIREMENTS. INLET AND OUTLET LOCATIONS CAN BE MIRRORED.
  - CONTRACTOR RESPONSIBLE TO VERIFY ALL SIZES, LOCATIONS, AND ELEVATIONS OF OPENINGS.
  - CONTRACTOR RESPONSIBLE TO ENSURE ADEQUATE BEARING SURFACE IS PROVIDED (I.E. COMPACTED AND LEVEL PER PROJECT SPECIFICATIONS).
  - SECTION HEIGHTS, SLAB/WALL THICKNESSES, AND KEYWAYS ARE SUBJECT TO CHANGE AS REQUIRED FOR SITE REQUIREMENTS AND/OR DUE TO PRODUCT AVAILABILITY AND PRODUCTION FACILITY CONSTRAINTS.
  - MAXIMUM PICK WEIGHT: BASE SECTION #1 = 24,000 LBS (INTERNALS AND MEDIA SHIPPED SEPARATELY)
  - INTERNALS CONSIST OF UNDERDRAIN PIPE, ROCK, STORMMIX™ MEDIA, MULCH, DIVIDER WALL, BYPASS WEIR AND/OR DRAIN DOWN. REFERENCE BILL OF MATERIALS FOR INSTALLATION RESPONSIBILITIES. SEE ACTIVATION GUIDE WITHIN SUBMITTAL PACKAGE FOR ADDITIONAL INSTALLATION INFORMATION.


REV	DESCRIPTION	DATE

**Oldcastle Infrastructure™**  
A CRH COMPANY

Ph: 800.579.8819 | www.oldcastleinfrastructure.com/stormwater

THIS DOCUMENT IS THE PROPERTY OF OLDCASTLE INFRASTRUCTURE, INC. IT IS CONFIDENTIAL, SUBMITTED FOR REFERENCE PURPOSES ONLY AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF, OR WITHOUT THE WRITTEN PERMISSION OF OLDCASTLE INFRASTRUCTURE, INC. COPYRIGHT © 2024 OLDCASTLE INFRASTRUCTURE, INC. ALL RIGHTS RESERVED.

<b>BioPod™ Biofilter System UNDERGROUND VAULT</b>		SYSTEM ID
CUSTOMER: <b>AHBL Inc.</b>		-
JOB NAME: <b>East Town Crossing BPU1538 - Puyallap, WA</b>		JOB NUMBER: <b>24-1179846</b>
DATE: <b>11/18/24</b>	MFG LOC: <b>010-AU</b>	DRAWN: <b>PPS</b>
ENGINEER: <b>AFD</b>	CHECKED: <b>AFD</b>	SALES ORDER: <b>-</b>
DRAWING NAME: <b>CONCEPTUAL DRAWING</b>		SHEET: <b>1 OF 1</b>





**March 2022**

**GENERAL USE LEVEL DESIGNATION FOR BASIC (TSS), DISSOLVED METALS (ENHANCED), AND PHOSPHORUS TREATMENT**

**For**

**Oldcastle Infrastructure, Inc.'s  
The BioPod™ Biofilter  
(Formerly the TreePod Biofilter)**

**Ecology's Decision**

Based on Oldcastle Infrastructure, Inc. application submissions for The BioPod™ Biofilter (BioPod), Ecology hereby issues the following use level designation:

- 1) General Use Level Designation (GULD) for Basic, Enhanced, and Phosphorus Treatment:
  - Sized at a hydraulic loading rate of 1.6 gallons per minute (gpm) per square foot (sq ft) of media surface area.
  - Constructed with a minimum media thickness of 18-inches (1.5-feet)
- 2) Ecology approves the BioPod at the hydraulic loading rate listed above, to achieve the maximum water quality design flow rate. The water quality design flow rates are calculated using the following procedures:
  - Western Washington: For treatment installed upstream of detention or retention, the water quality design flow rate is the peak 15-minute flow rate as calculated using the latest version of the Western Washington Hydrology Model or other Ecology- approved continuous runoff model.
  - Eastern Washington: For treatment installed upstream of detention or retention, the water quality design flow rate is the peak 15-minute flow rate as calculated using one of the three methods described in Chapter 2.7.6 of the Stormwater Management Manual for Eastern Washington (SWMMEW) or local manual.
  - Entire State: For treatment installed downstream of detention, the water quality design flow rate is the full 2-year release rate of the detention facility.
- 3) For systems that have a drain down outlet, designers must increase the water quality design flow rate calculated in Item 2, above, to account for the water that will enter the initial bay but won't be treated by the engineered soil. Multiply the flow rate determined above by 1.05

to determine the required flowrate for the BioPod unit.

- 4) The GULD has no expiration date, but may be amended or revoked by Ecology.

### **Ecology's Conditions of Use**

The BioPod shall comply with these conditions:

- 1) Applicants shall design, assemble, install, operate, and maintain the BioPod installations in accordance with Oldcastle Infrastructure Inc.'s applicable manuals and the Ecology Decision.
- 2) The minimum size filter surface-area for use in Washington is determined by using the design water quality flow rate (as determined in Ecology Decision, Item 3, above) and the hydraulic loading rate (as identified in Ecology Decision, Item 1, above). Calculate the required area by dividing the water quality design flow rate (cu-ft/sec) by the hydraulic loading rate (converted to ft/sec) to obtain the required surface area (sq ft) of the BioPod unit.
- 3) BioPod media shall conform to the specifications submitted to and approved by Ecology.
- 4) The applicant tested the BioPod without plants. This GULD applies to the BioPod Stormwater Treatment System whether plants are included in the final product or not.
- 5) Maintenance: The required inspection/maintenance interval for stormwater treatment devices is often dependent on the efficiency of the device and the degree of pollutant loading from a particular drainage basin. Therefore, Ecology does not endorse or recommend a "one size fits all" maintenance cycle for a particular model/size of manufactured filter treatment device.
  - The BioPod is designed for a target maintenance interval of 1 year. Maintenance includes replacing the mulch, assessing plant health, removal of trash, and raking the top few inches of engineered media.
  - The BioPod system initially tested at the Lake Union Ship Canal Test Facility in Seattle, WA required maintenance after 1.5 months, or 6.3% of a water year. Monitoring personnel observed similar maintenance issues with other systems evaluated at the Test Facility. Runoff from the Test Facility may be unusual and maintenance requirements of systems installed at the Test Facility may not be indicative of typical maintenance requirements. Because of this, the initial version of the GULD required Oldcastle to subsequently "conduct hydraulic testing to obtain information about maintenance requirements on a site with runoff that is more typical of the Pacific Northwest". Quarterly testing from a 15-month maintenance frequency assessment conducted on a BioPod system installed along a roadway in Des Moines, WA indicated the system was able to treat a full water year before requiring maintenance.
  - Test results provided to Ecology from a BioPod System evaluated in a lab following New Jersey Department of Environmental Protection Laboratory Protocol for Filtration MTDs have indicated the BioPod System is capable of longer maintenance intervals.
  - Owners/operators must inspect BioPod systems for a minimum of twelve months from the start of post-construction operation to determine site-specific inspection/maintenance schedules and requirements. Owners/operators must conduct inspections monthly during the wet season, and every other month during the dry season. (According to the SWMMWW, the wet season in western Washington is October 1 to April 30. According

to the SWMMEW, the wet season in eastern Washington is October 1 to June 30.) After the first year of operation, owners/operators must conduct inspections based on the findings during the first year of inspections.

- Conduct inspections by qualified personnel, follow manufacturer's guidelines, and use methods capable of determining either a decrease in treated effluent flow rate and/or a decrease in pollutant removal ability.
- 6) Install the BioPod in such a manner that you bypass flows exceeding the maximum operating rate and you will not resuspend captured sediment.
  - 7) Discharges from the BioPod shall not cause or contribute to water quality standard violations in receiving waters.

### **Approved Alternate Configurations**

#### **BioPod Internal Bypass**

- 1) The BioPod Internal Bypass configuration may be combined with a Curb Inlet, Grated Inlet, and Piped-In Inlet. Water quality flows and peak flows are directed from the curb, overhead grate, or piped inlet to a contoured inlet rack. The inlet rack disperses water quality flows over the top surface of the biofiltration chamber. Excess flows are diverted over a curved bypass weir to the outlet area without passing through the treatment area. Both water quality flows and bypass flows are combined in the outlet area prior to being discharged out of the system.
- 2) To select a BioPod Internal Bypass unit, the designer must determine the size of the standard unit using the sizing guidance described above. Systems that have an internal bypass may use the off-line water quality design flow rate.
- 3) The internal bypass configuration has a maximum flow rate of 900 gallons per minute. Sites where the anticipated flow rate at the treatment device is larger than 900 gpm must use an external bypass, or size the treatment device for the on-line water quality design flow rate.

**Applicant:** Oldcastle Infrastructure, Inc.

**Applicant's Address:** 7100 Longe St, Suite 100  
Stockton, CA 95206

#### **Application Documents:**

*BioPod™ Stormwater Filter Maintenance Frequency Assessment*, Prepared for Oldcastle Infrastructure, Inc., Prepared by Herrera Environmental Consultants, Inc. February 2022

*Technical Evaluation Report TreePod™ BioFilter System Performance Certification Project*, Prepared for Oldcastle, Inc., Prepared by Herrera Environmental Consultants, Inc. February 2018

*Technical Memorandum: Response to Board of External Reviewers' Comments on the Technical Evaluation Report for the TreePod™ Biofilter System Performance Certification Project, Oldcastle, Inc. and Herrera Environmental Consultants, Inc., February 2018*

*Technical Memorandum: Response to Board of External Reviewers' Comments on the Technical Evaluation Report for the TreePod™ Biofilter System Performance Certification Project, Oldcastle, Inc. and Herrera Environmental Consultants, Inc., January 2018*

*Application for Pilot Use Level Designation, TreePod™ Biofilter – Stormwater Treatment System, Oldcastle Stormwater Solutions, May 2016*

*Emerging Stormwater Treatment Technologies Application for Certification: The TreePod™ Biofilter, Oldcastle Stormwater Solutions, April 2016*

### **Applicant's Use Level Request:**

- General Use Level Designation as a Basic, Enhanced, and Phosphorus Treatment device in accordance with Ecology's *Stormwater Management Manual for Western Washington*

### **Applicant's Performance Claims:**

Based on results from laboratory and field-testing, the applicant claims the BioPod™ Biofilter operating at a hydraulic loading rate of 153 inches per hour is able to remove:

- 80% of Total Suspended Solids (TSS) for influent concentrations greater than 100 mg/L and achieve a 20 mg/L effluent for influent concentrations less than 100 mg/L.
- 60% dissolved zinc for influent concentrations 0.02 to 0.3 mg/L.
- 30% dissolved copper for influent concentrations 0.005 to 0.02 mg/L.
- 50% or greater total phosphorus for influent concentrations 0.1 to 0.5 mg/L.

### **Ecology's Recommendations:**

Ecology finds that:

- Oldcastle Infrastructure, Inc. has shown Ecology, through laboratory and field testing, that the BioPod™ Biofilter is capable of attaining Ecology's Basic, Total Phosphorus, and Enhanced treatment goals.

### **Findings of Fact:**

Field Testing

- Herrera Environmental Consultants, Inc. conducted monitoring of the BioPod™ Biofilter at the Lake Union Ship Canal Test Facility in Seattle Washington between November 2016 and April 2018. Herrera collected flow-weight composite samples during 14 separate storm events and peak flow grab samples during 3 separate storm events. The system was sized at an infiltration rate of 153 inches per hour or a hydraulic loading rate of 1.6 gpm/ft<sup>2</sup>.



- The D<sub>50</sub> of the influent PSD ranged from 3 to 292 microns, with an average D<sub>50</sub> of 28 microns.
- Influent TSS concentrations ranged from 17 mg/L to 666 mg/L, with a mean concentration of 98 mg/L. For all samples (influent concentrations above and below 100 mg/L) the bootstrap estimate of the lower 95 percent confidence limit (LCL 95) of the mean TSS reduction was 84% and the bootstrap estimate of the upper 95 percent confidence limit (UCL95) of the mean TSS effluent concentration was 8.2 mg/L.
- Dissolved copper influent concentrations from the 17 events ranged from 9.0 µg/L to 21.1 µg/L. The 21.1 µg/L data point was reduced to 20.0 µg/L, the upper limit to the TAPE allowed influent concentration range, prior to calculating the pollutant removal. A bootstrap estimate of the LCL95 of the mean dissolved copper reduction was 35%.
- Dissolved zinc influent concentrations from the 17 events ranged from 26.1 µg/L to 43.3 µg/L. A bootstrap estimate of the LCL95 of the mean dissolved zinc reduction was 71%.
- Total phosphorus influent concentrations from the 17 events ranged from 0.064 mg/L to 1.56 mg/L. All influent data greater than 0.5 mg/L were reduced to 0.5 mg/L, the upper limit to the TAPE allowed influent concentration range, prior to calculating the pollutant removal. A bootstrap estimate of the LCL95 of the mean total phosphorus reduction was 64%.
- The system experienced rapid sediment loading and needed to be maintained after 1.5 months. Monitoring personnel observed similar sediment loading issues with other systems evaluated at the Test Facility. The runoff from the Test Facility may not be indicative of maintenance requirements for all sites.
- Herrera Environmental Consultants, Inc. conducted a maintenance frequency assessment of the BioPod™ installed along a roadway in Des Moines, WA between September 2020 and January 2022.
  - Herrera collected influent grab samples during 10 storm events and paired effluent samples during 5 storm events. Influent concentrations ranged from 1 mg/L to 164 mg/L, with a median concentration of 23 mg/L. Effluent concentrations ranged from 1 mg/L to 19 mg/L, with a median of 5 mg/L.
  - Herrera collected influent PSD samples during 3 storm events. The D<sub>50</sub> for the samples were 42, 1306, and 57 microns. The 1306 micron value was collected during an event with an influent TSS concentration of 1 mg/L. It is assumed this sample was atypical and that it contained a few grains of very coarse sand and almost no other particles.
  - Herrera used a water truck to conduct flow testing 7 times to assess how long the system could filter at the design flow rate without bypass. Results show the system was able to treat up to a full water year before the system needed maintenance.

#### Laboratory Testing

- Good Harbour Laboratories (GHL) conducted laboratory testing at their site in Mississauga, Ontario in October 2017 following the New Jersey Department of Environmental Protection Laboratory Protocol for Filtration MTDs. The testing evaluated a 4-foot by 6-foot standard biofiltration chamber and inlet contour rack with

bypass weir. The test sediment used during the testing was custom blended by GHIL using various commercially available silica sands, which had an average  $d_{50}$  of 69  $\mu\text{m}$ . Based on the lab test results:

- GHIL evaluated removal efficiency over 15 events at a Maximum Treatment Flow Rate (MTFR) of 37.6 gpm, which corresponds to a MTFR to effective filtration treatment area ratio of 1.80 gpm/ft<sup>2</sup>. The system, operating at 100% of the MTFR with an average influent concentration of 201.3 mg/L, had an average removal efficiency of 99 percent.
- GHIL evaluated sediment mass loading capacity over an additional 16 events using an influent SSC concentration of 400 mg/L. The first 11 runs were evaluated at 100% of the MTFR. The BioPod began to bypass, so the remaining 5 runs were evaluated at 90% of the MTFR. The total mass of the sediment captured was 245.0 lbs and the cumulative mass removal efficiency was 96.3%.
- Herrera Environmental Consultants Inc. conducted laboratory testing in September 2014 at the Seattle University Engineering Laboratory. The testing evaluated the flushing characteristics, hydraulic conductivity, and pollutant removal ability of twelve different media blends. Based on this testing, Oldcastle Infrastructure, Inc. selected one media blend, Mix 8, for inclusion in their TAPE evaluation of the BioPod™ Biofilter.
  - Herrera evaluated Mix 8 in an 8-inch diameter by 36-inch tall polyvinyl chloride (PVC) column. The column contained 18-inches of Mix 8 on top of 6-inches of pea gravel. The BioPod will normally include a 3-inch mulch layer on top of the media layer; however, this was not included in the laboratory testing.
  - Mix 8 has a hydraulic conductivity of 218 inches per hour; however, evaluation of the pollutant removal ability of the media was based on an infiltration rate of 115 inches per hour. The media was tested at 75%, 100%, and 125% of the infiltration rate. Based on the lab test results:
    - The system was evaluated using natural stormwater. The dissolved copper and dissolved zinc concentrations in the natural stormwater were lower than the TAPE influent standards; therefore, the stormwater was spiked with 66.4 mL of 100 mg/L Cu solution and 113.6 mL of 1,000 mg/L Zn solution.
    - The BioPod removed an average of 81% of TSS, with a mean influent concentration of 48.4 mg/L and a mean effluent concentration of 9.8 mg/L.
    - The BioPod removed an average of 94% of dissolved copper, with a mean influent concentration of 10.6  $\mu\text{g/L}$  and a mean effluent concentration of 0.6  $\mu\text{g/L}$ .
    - The BioPod removed an average of 97% of dissolved zinc, with a mean influent concentration of 117  $\mu\text{g/L}$  and a mean effluent concentration of 4  $\mu\text{g/L}$ .
    - The BioPod removed an average of 97% of total phosphorus, with a mean influent concentration of 2.52 mg/L and a mean effluent concentration of 0.066 mg/L. When total phosphorus influent concentrations were capped at the TAPE upper limit of 0.5 mg/L, calculations showed an average removal of 87%.

**Other BioPod Related Issues to be Addressed by the Company:**

1. None identified at this time.

**Technology Description:**

Download at  
<https://oldcastleprecast.com/stormwater/bioretention-biofiltration-applications/bioretention-biofiltration-solutions/>

**Contact Information:**

Applicant: Chris Demarest  
 Oldcastle Infrastructure, Inc.  
 (925)667-7100  
 Chris.demarest@oldcastle.com

Applicant website: <https://oldcastleprecast.com/stormwater/>

Ecology web link: <https://ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Stormwater-permittee-guidance-resources/Emerging-stormwater-treatment-technologies>

Ecology: Douglas C. Howie, P.E.  
 Department of Ecology  
 Water Quality Program  
 (360) 870-0983  
[douglas.howie@ecy.wa.gov](mailto:douglas.howie@ecy.wa.gov)

**Revision History**

<b>Date</b>	<b>Revision</b>
March 2018	GULD granted for Basic Treatment
March 2018	Provisional GULD granted for Enhanced and Phosphorus Treatment
June 2016	PULD Granted
April 2018	GULD for Basic and Provisional GULD for Enhanced and Phosphorus granted, changed name to BioPod from TreePod
July 2018	GULD for Enhanced and Phosphorus granted
September 2018	Changed Address for Oldcastle
December 2018	Added minimum media thickness requirement
May 2019	Changed language on who must Install and maintain the device from Oldcastle to Applicants
August 2019	Added text on sizing using infiltration rate and water quality design flow rate
October 2019	Added text describing ability to use off-line design water quality flow rate for sizing due to internal bypass
December 2021	Extended approval to installations without plants, added sizing adjustment when using facilities with a drawdown outlet
March 2022	Added results from the maintenance frequency assessment to the Ecology's Conditions of Use and the Findings of Fact sections

## APPENDIX D-3 BUOYANCY CALCULATIONS FOR R-TANK 4

PROJECT INFORMATION	
Project Name	East Town Crossing
City/County	Puyallup
State	WA
Project #	23-004WA / 2230752.10
Date	5/9/2024
Calculated By	CJW
Site Designation	R-Tank 4
STATIC PARAMETERS	
Soil Density (unsaturated)	100.00 lbs/cf
Stone Density	140.00 lbs/cf
Water Density	62.40 lbs/cf
R-TANK INPUT PARAMETERS	
Lowest Surface Elevation	75.82
Ground Water Elevation	71.00
R-Tank Module	SD Triple
Number of R-Tank Modules	6,829
Tank Invert Elevation	70.63
Top of Tank Elevation	72.86
R-Tank Module Height	2.23 ft
R-Tank Weight (modules only)	192,646.09 lbs
Liner Location	Excavation
Excavation Area	10,966.00 sf
Stone Base Depth	9.00 in
Stone Base Within Liner?	YES
Stone Cover Depth	12.00 in
Stone Cover Within Liner?	YES
Stone Volume	-3247.73 cf
Stone Weight	-454,682.06 lbs
Soil Cover Depth	1.96 ft
Soil Volume	21,484.22 cf
Soil Weight	2,148,422.17 lbs
RESULTS	
Buoyant Force	766,391.81 lbs
Downward Force	1,886,386.20 lbs
Safety Factor (Must be at least 1.25)	2.46
Is Design Acceptable?	YES
<b>Notes:</b>	
<ol style="list-style-type: none"> <li>1. It is the responsibility of the design engineer to evaluate and verify if these calculations are acceptable for the project. ACF West does not certify these results and are provided as a preliminary evaluation.</li> <li>2. This calculator's indication of an acceptable design is purely to signify that a safety factor of 1.25 was achieved with the data provided.</li> <li>3. These calculations assume that the system is devoid of water.</li> <li>4. The weight of additional items like Maintenance Ports, fabric, and liner were not included in the downforce calculation.</li> <li>5. Saturated soil was not factored into the soil weight when the groundwater is above the system.</li> </ol>	

**APPENDIX D-4 FLOW CONTROL CALCULATIONS FOR R-TANK 4 AND CONTROL STRUCTURE**

**R-Tank 4 Storage Volume**

Elev	Surface Area	Volume	
EL. 70.62	0.0	9650	0 95% voids (Rtank)
	0.2	9650	1833.5 95% voids (Rtank)
	0.4	9650	3667 95% voids (Rtank)
	0.6	9650	5500.5 95% voids (Rtank)
	0.8	9650	7334 95% voids (Rtank)
EL. 71.74	1.0	9650	9167.5 95% voids (Rtank)
CES 2yr	1.2	9650	11001 95% voids (Rtank)
EL. 72.15	1.4	9650	12834.5 95% voids (Rtank)
CES 10yr	1.6	9650	14668 95% voids (Rtank)
	1.8	9650	16501.5 95% voids (Rtank)
CES 100yr	2.0	9650	18335 95% voids (Rtank)
	2.2	9650	20168.5 95% voids (Rtank)
	2.7	9650	22098.5 40% voids (rock)

Calculated Q	
2 yr	0.794568
10 yr	2.950275
100 yr	4.433949

Equation:  $Q = \text{SUM} [ C A (2 g h)^{0.5} ]$

C	Coeff of Discharge	0.62	-
A	Area of orifice	variable	ft^2
h	Hydraulic Head	see below	ft
g	gravity	32.2	ft/sec^2

Head	
2-yr	1.128497 ft
10-yr	1.534756 ft
100-yr	1.805596 ft

**Info from old report:**

*pg 23 of original report active volumes at each provided storm*

2 yr	0.25 acft	=	10890 cuft
10 yr	0.34 acft	=	14810 cuft
100 yr	0.40 acft	=	17424 cuft

*pg 23 shows the Q<sub>out</sub> needing to match*

	Match Q	Old Peak Qout	
2 yr	0.7905	0.7869	cfs
10 yr	2.9478	2.3439	cfs
100 yr	4.4950	4.2406	cfs

**RLPCOMPUTE [LEVEL POOL] SUMMARY**

2 yr Match Q: 0.7905 cfs Peak Out Q: 0.7869 cfs - Peak Stg: 67.56 ft - Active Vol: 0.25 acft  
 10 yr Match Q: 2.9478 cfs Peak Out Q: 2.3439 cfs - Peak Stg: 67.94 ft - Active Vol: 0.34 acft  
 100 yr Match Q: 4.4950 cfs Peak Out Q: 4.2406 cfs - Peak Stg: 68.12 ft - Active Vol: 0.40 acft

Orifice 1		
Elevation	0 ft	EL. 68.62 (true elev)
Diameter	5.25 inches	
Orifice 2		
Elevation	1.39 ft	EL. 72.01
Diameter	14 inches	
Riser	2.7 ft	EL. 73.32
Diameter	24 inches	

*Methods of Analysis*


This section presents the methods and equations for design of **control structure restrictor devices**. Included are details for the design of orifices, rectangular sharp-crested weirs, v-notch weirs, sutro weirs, and overflow risers.

**Orifices.** Flow-through orifice plates in the standard tee section or turn-down elbow may be approximated by the general equation:

$$Q = C A \sqrt{2gh} \quad (\text{equation 4})$$

- where
- Q = flow (cfs)
  - C = coefficient of discharge (0.62 for plate orifice)
  - A = area of orifice (ft<sup>2</sup>)
  - h = hydraulic head (ft)
  - g = gravity (32.2 ft/sec<sup>2</sup>)

Figure 3.20 illustrates this simplified application of the orifice equation.

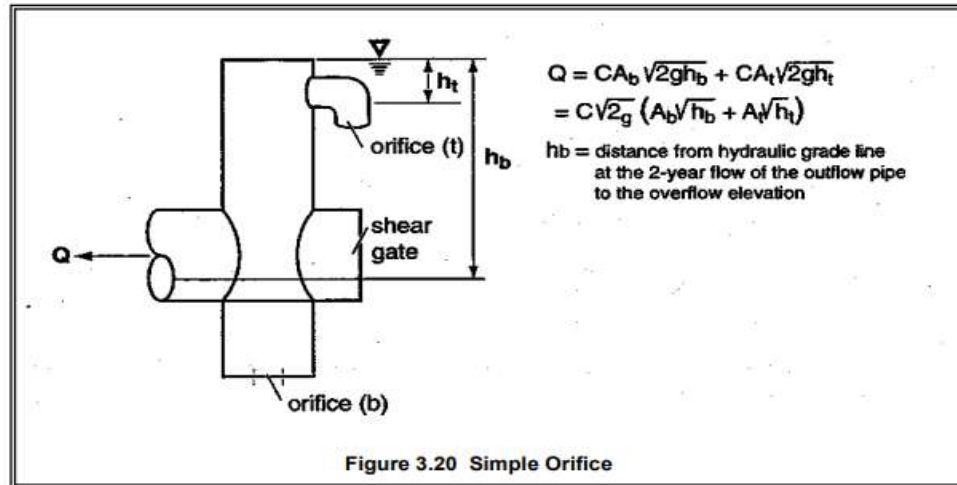

*C.E.S. NW Inc.*  
*Civil Engineering & Surveying*

STORM DRAINAGE AND  
EROSION CONTROL  
REPORT

FOR  
SHAW ROAD  
DEVELOPMENT

---

DECEMBER 2004

PREPARED FOR:

PIONEER DEVELOPMENT, LLC  
C/O ABBEY ROAD GROUP  
PO Box 207  
PUYALLUP, WA 98371

Prepared by:

---

HEATHER CASTONGUAY – DESIGN ENGINEER

---

C.E.S. NW, INC.  
5210 12TH STREET E, SUITE 200  
FIFE, WA 98424

# STORM DRAINAGE AND EROSION CONTROL REPORT

FOR

## SHAW ROAD DEVELOPEMENT Puyallup, Washington

December 2004

Prepared for:

Pioneer Development LLC  
C/O Abbey Road Group  
Contact: Gil Hulsmann  
P.O. Box 207  
Puyallup, WA 98371

Prepared by:

Heather Castonguay – Design Engineer

Approved by:

Seabrook Schilt, PE, Principal



REPORT #01197.7

EXPIRES 10/27/06

This analysis is based on data and records either supplied to, or obtained by, CES NW INC. These documents are referenced within the text of the analysis. This analysis has been prepared utilizing procedures and practices within the standard accepted practices of the industry.



# TABLE OF CONTENTS

	PAGE
<b>1.0 PROJECT OVERVIEW .....</b>	<b>1</b>
1.1 PURPOSE AND SCOPE .....	1
1.2 PRE-DEVELOPED CONDITIONS .....	1
1.3 DEVELOPED CONDITIONS .....	2
<b>2.0 OFFSITE ANALYSIS .....</b>	<b>2</b>
2.1 DOWNSTREAM .....	2
<b>3.0 FLOW CONTROL &amp; WATER QUALITY FACILITY ANALYSIS AND DESIGN.....</b>	<b>3</b>
3.1 EXISTING SITE HYDROLOGY .....	3
3.2 DEVELOPED SITE HYDROLOGY .....	3
3.3 FACILITY SIZING .....	4
3.4 FLOW CONTROL SYSTEM .....	5
3.5 WATER QUALITY SYSTEM .....	5
<b>4.0 CONVEYANCE SYSTEM ANALYSIS AND DESIGN .....</b>	<b>5</b>
<b>5.0 SPECIAL REPORTS AND STUDIES .....</b>	<b>6</b>
<b>6.0 TESC ANALYSIS AND DESIGN .....</b>	<b>6</b>
 <i>Appendix A</i> <b>General Exhibits</b>	
Vicinity Map	A-1
USDA Soil Conservation Service Soil Map	A-2
USDA Soil Conservation Service Soil Description	A-3
Hydrologic Soil Group of the Soils in King County	A-4
SCS Western Washington Runoff Curve Numbers	A-5
Design Storm Precipitation Values	A-6
 <i>Appendix B</i> <b>Basin Exhibits</b>	
Predeveloped Basin Map (11" x 17")	B-1
Developed Basin Map (11" x 17")	B-2
 <i>Appendix C</i> <b>Storm Water Calculations</b>	
Storm Shed Computer Analysis Printout (Detention Pond Design)	C-1
Detention Pond Storage Volumes	C-4
Water Works Computer Analysis Printouts (Wetpond Design)	C-5
Wetpond Design Storage Volume	C-6
Flow Capacity Calculations	C-7
Overflow Spillway Calculations	C-8

## **1.0 PROJECT OVERVIEW**

### **1.1 Purpose and Scope**

This report accompanies the civil plans as an addition to Phase 1 of the Pioneer Development LLC project as submitted to the City of Puyallup. This document provides site information and the analysis used for the storm drainage design.

The *1990 King County Surface Water Design Manual*, and the City of Puyallup addendum to that document, as well as City of Puyallup design standards establish the methodology and design criteria used for this project.

### **1.2 Pre-Developed Conditions**

The existing site consists of parcels, 0420355019, 0420355020, 0420264011, 0420264042, and 0420264043. Parcel 0420355018 currently occupied by Leroy Surveying is not part of this project but does drain to parcel 0420355019. These parcels include existing Absher construction offices and other buildings as well as associated parking. Areas not already developed are primarily pasture.

There is a previously delineated wetland southeast of the project areas, Shaw Road to the west, Pioneer Way to the north and an undeveloped area to the east. The eastern edge is also the county-city line. The property slopes at approximately 10 percent to the north. See basin maps in appendix "B" for additional information.

Most of the previously developed areas flow to an existing detention pond which is located along the northeast boundary of the site. This pond has been designed for quality

and quantity for Phase 1 of this site development. The storm report depicting the stormwater calculations was submitted with the civil plans for Phase 1 in June 2002.

The northerly portion of the site was filled to elevations that reflect the grades required for future development. A semi-permanent erosion control pond has been constructed and will be left in place until future development is approved. Both ponds discharge to the ditch along Pioneer Way via a tight lined storm main.

### **1.3 Developed Conditions**

The existing combination wetpond/detention pond will be enlarged to handle the developed and proposed areas generally located in the south end of the site. The existing wetpond/detention pond developed for the first part of Phase 1 will be resized to handle the capacity of the Phase 1 Addition of approximately 1.72 acres. The pond will continue to discharge to the ditch along Pioneer Way via a tight lined storm main.

## **2.0 OFFSITE ANALYSIS**

The site is situated so that negligible offsite flows enter the site at least for the areas to be affected by the proposed improvements. Flows from the southerly hill and wetland area generally flow through the wetland to the easterly edge of the project from where they flow north to Pioneer Way along the eastern edge of the property.

### **2.1 Downstream**

All site areas generally end up in a ditch along the south side of Pioneer Way. This ditch flows west and goes through an 18" driveway culvert then flows in open ditch another 50 feet where flow enters an 18-inch PVC storm pipe approximately 150 feet east of the

intersection with Shaw Road. The storm pipe crosses Shaw Road to the west and then crosses Pioneer Way to the north side of Pioneer Way where it again enters roadside ditch flowing west. This ditch continues maybe half a mile then goes under the railroad tracks to the north and eventually ends up in the Puyallup River.

The ditch along Pioneer way, particularly along the project frontage may back up some during larger storm events. However, there were not apparent problems of scouring or erosion at the time of our field review.

### **3.0 FLOW CONTROL & WATER QUALITY FACILITY ANALYSIS AND DESIGN**

#### **3.1 Existing Site Hydrology**

The existing site is irregularly shaped and totals approximately 7.75 acres in size (See Predeveloped Basin Map – appendix “B”). The soils have been mapped as Briscot Loam (6A) by the U.S. soil survey. Briscot Loam is classified as a hydrologic soil group type “D”. Therefore, the type “D” soil group was used in determining the curve numbers associated with this project (See appendix “A”).

#### **3.2 Developed Site Hydrology**

Phase 1 of the site is primarily developed at this time. The existing development consists of Absher construction offices and other buildings as well as associated parking. Areas not already developed are primarily pasture. The developed basin map for the proposed project is located in appendix “B”.

The existing detention pond developed for the first part of Phase 1 will be enlarged to handle the capacity of the Phase 1 Addition of approximately 1.72 acres.

Stormwater drainage from within the 7.75 acre basin will be collected onsite and conveyed to the expanded wetpond / detention pond located along the eastern property line. The wetpond has been adequately sized to store the stormwater volume produced by the 6-month 24-hour storm event. The release from the detention pond will be controlled by a multiple orifice structure. The release rates will match the existing flows from the 10-year and 100-year 24-hour storm events and half of the 2-year 24-hour storm event. Stormwater from the proposed wetpond / detention pond will be conveyed and discharged into the existing ditch along the south side of Pioneer Way.

All segments of the proposed conveyance system will be designed to adequately convey the 100-year 24-hour storm event.

### **3.3 Facility Sizing**

Storm water analysis calculations are included in appendix "C" of this report.

Assumptions and data used for developing the hydrology for the site are as follows:

Methodology:	SBUH
Rainfall Distribution:	Type 1A storm event
Runoff parameters:	Soils – Briscot Loam
Rainfall intensity:	6-month storm event = 1.28 inches/24-hour 2-year, 24-hour = 2.00 inches/24-hour 10-year, 24-hour = 3.00 inches/24-hour 100-year, 24-hour = 4.10 inches/24-hour

Runoff Curve Numbers      Developed CN = 96.33  
Predeveloped CN = 91.25

Detention Facility Correction Factor = 1.3

The 100-year, 24-hour storm type 1A event was used in considering pipe conveyance capacity. The 6-month storm was used to size the water quality facility.

### **3.4      Flow Control System**

The release from the detention pond will be controlled by a multiple orifice structure. The release rates will match the existing flows from the 10-year and 100-year 24-hour storm events and half of the 2-year 24-hour storm event. Analysis of the detention system is included in appendix "C".

### **3.5      Water Quality System**

Storm water quality mitigation is to be provided in a wetpond beneath the detention pond live storage. The wetpond volume has been set to equal and/or exceed the developed 6-month 24-hour storm event as per the 1992 Department of Ecology storm water management manual guidelines. A separate variation application has already been approved for a combination wetpond detention which was applied for during the proposed Phase 1 of the site development. See appendix "C" for wetpond calculations.

## **4.0      CONVEYANCE SYSTEM ANALYSIS AND DESIGN**

Storm main pipe used on this site ranges between 8-inch to 15-inch diameter. The 100-year peak flow to the proposed pond is 4.24 cfs. Larger 15-inch diameter main at 0.50% slope has been proposed for the mainline having a capacity of 4.95 cfs with  $n=0.12$  based

on Manning's equation. This is more than the required 4.24 cfs capacity. Analysis has been included in appendix "C".

## **5.0 SPECIAL REPORTS AND STUDIES**

A geotechnical report has been prepared for this project by Earth Consultants Inc. and was previously submitted with the storm report for Phase 1 of the site in June 2002. The need for additional special reports or studies is not anticipated.

## **6.0 TESC ANALYSIS AND DESIGN**

Soils on the site have been identified as Briscot Loam and are moisture sensitive. There will be some cut, fill, and grading necessary to construct the proposed improvements.

Temporary erosion control measures will include a construction entrance, filter fabric fencing along the project boundary, temporary interceptor ditches, semi-permanent sediment pond, and a sediment pond riser outlet. Other erosion control facilities will be provided as necessary.

# APPENDIX A

## General Exhibits

Vicinity Map	A-1
USDA Soil Conservation Service Soil Map	A-2
USDA Soil Conservation Service Soil Description	A-3
Hydrologic Soil Group of the Soils in King County	A-4
SCS Western Washington Runoff Curve Numbers	A-5
Design Storm Precipitation Values	A-6




Site



N

Not to Scale

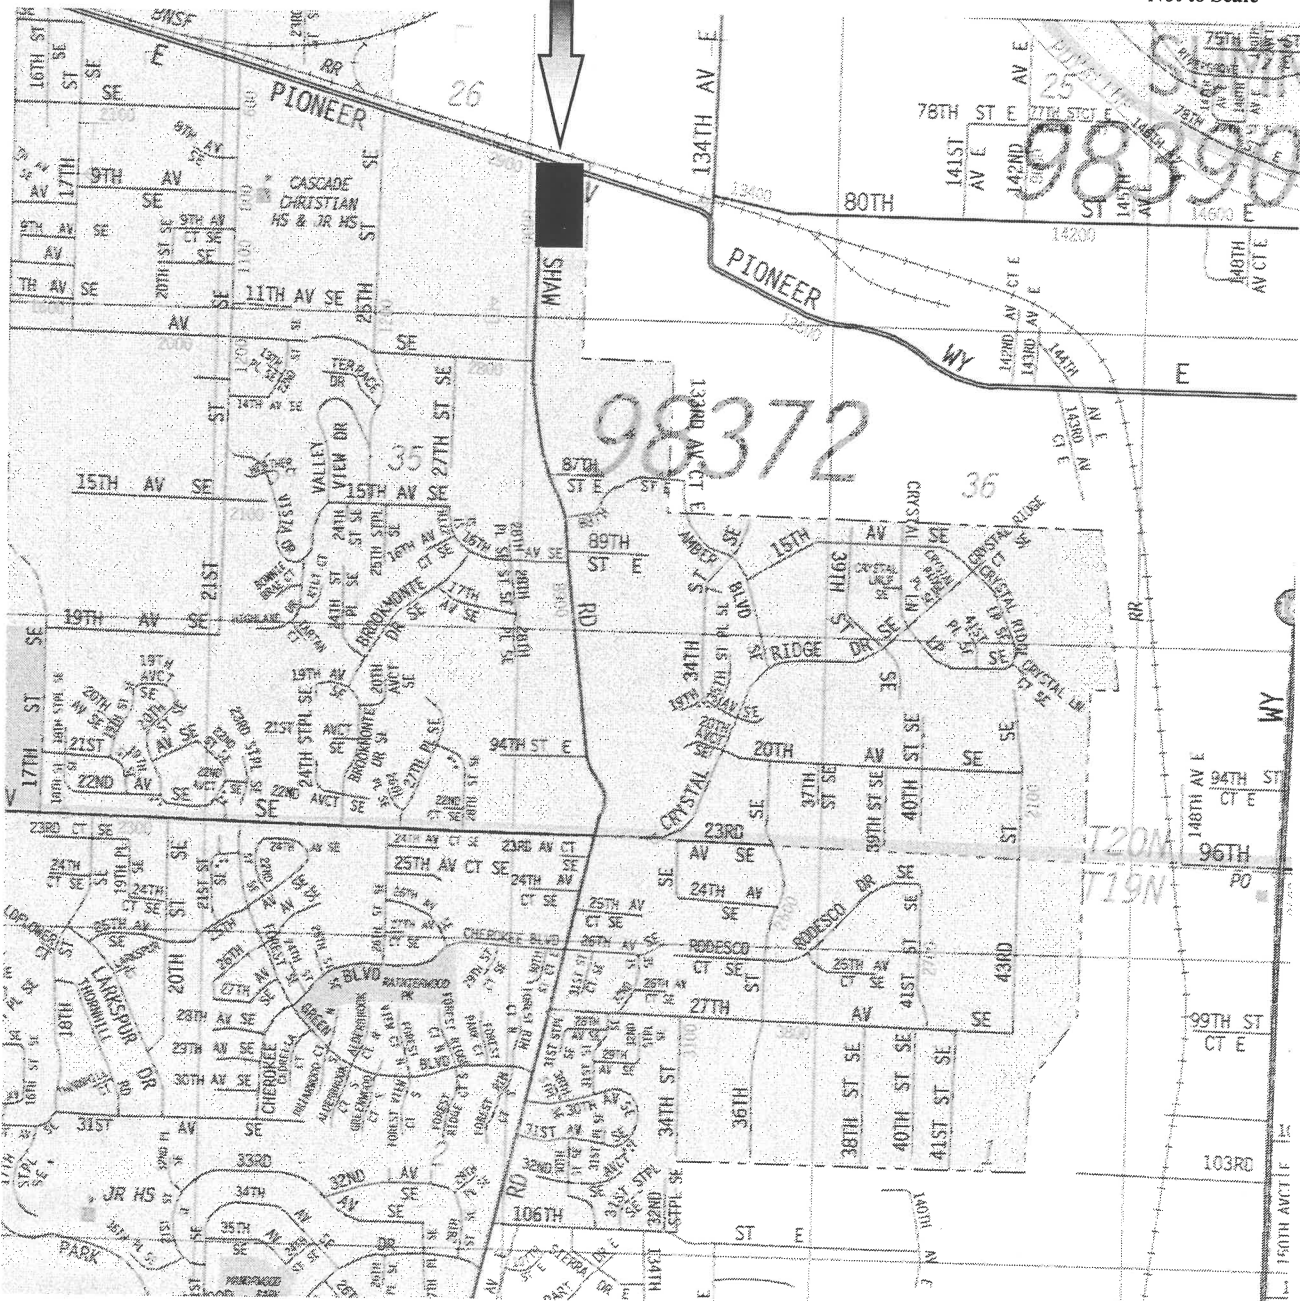



N

Not to Scale



Site

**C.E.S. NW Inc.**  
Civil Engineering & Surveying

5210 12th Street East  
Suite 200  
Fife, WA 98424

Business: (253)922-1532  
Fax: (253)922-1954  
ceservices@cesnwinc.com

Shaw Road / Pioneer Way Development

USDA Soil Conservation Service Soil Description

**A-3**

**6A – Briscot loam.** This nearly level soil is somewhat poorly drained. It formed in alluvium under hardwoods and conifers in the Puyallup River Valley. Elevation ranges from near sea level to 100 feet. Slopes are 0 to 2 percent. The annual precipitation is 35 to 50 inches, mean annual air temperature is about 53 degrees F, and the frost-free season averages about 190 days. Areas range in size from 5 to more than 300 acres; they average about 75 acres in size.

Included with this soil in mapping are about 10 percent a moderately well drained soil and 4 percent a well-drained Puyallup soil.

In a typical profile, the surface layer is a dark brown loam about 11 inches thick. The underlying material, to a depth of 29 inches, is mottled, dark grayish brown fine sandy loam and silt loam. Between depths of 29 and more than 60 inches, it is mottled, very dark grayish brown sand and gray silty clay loam. Reaction is neutral to medium acid.

Permeability is moderately slow. In undrained areas, effective rooting depth is about 30 inches. The available water capacity is high. Surface runoff is slow, and there is a slight erosion hazard.

A wide range of cultivated crops can be grown in this soil, and it is one of the more suitable soils for row crops. Daffodil bulbs, rhubarb, lettuce, sweet corn, strawberries, blackberries, and nursery plants are common crops.

Most of this soil is protected from periodic flooding by dikes. However, as a result of changing land use in the adjacent upland areas, this soil is subject to additional flooding from urban runoff.

Under good management, this soil is highly productive. Practices that maintain tilth and fertility are necessary. Drainage can be provided by tile or open ditch methods if outlets are available. Weed control and supplemental irrigation help to maximize crop yields.

The organic matter content can be maintained by using all crop residues, plowing under green manure crops, and using a suitable cropping system. A suitable cropping system includes 2 to 4 years of strawberries, bulbs, or rhubarb and 2 to 4 years of hay and pasture. Continuous cropping, that includes annual winter cover crops used as green manure, is also a suitable cropping system. When tulips are grown, a minimum rotation of 5 years is necessary to control fungus.

Most crops respond to commercial fertilizer, but a soils test is needed to determine specific fertilizer needs.

This soil is subject to residential and industrial development pressure. The soil is well suited to excavation for utility lines. It is protected from periodic flooding by dikes. Onsite sewage disposal systems function improperly or fail during the rainy season because of the high water table. The natural ability of this soil to support large loads is limited. Fill soil material is required for most types of construction. In addition, adequate drainage facilities to dispose of runoff from rooftops and pavement are necessary. Capability subclass IIw.

KING COUNTY, WASHINGTON, SURFACE WATER DESIGN MANUAL

(2) CN values can be area weighted when they apply to pervious areas of similar CN's (within 20 CN points). However, high CN areas should not be combined with low CN areas (unless the low CN areas are less than 15% of the subbasin). In this case, separate hydrographs should be generated and summed to form one hydrograph.

FIGURE 3.5.2A HYDROLOGIC SOIL GROUP OF THE SOILS IN KING COUNTY

SOIL GROUP	HYDROLOGIC GROUP*	SOIL GROUP	HYDROLOGIC GROUP*
Alderwood	C	Orcas Peat	D
Arents, Alderwood Material	C	Oridia	D
Arents, Everett Material	B	Ovall	C
Beausite	C	Pilchuck	C
Bellingham	D	Puget	D
<b>Briscot</b>	<b>D</b>	Puyallup	B
Buckley	D	Ragnar	B
Coastal Beaches	Variable	Renton	D
Earlmont Silt Loam	D	Riverwash	Variable
Edgewick	C	Salal	C
Everett	A/B	Sammamish	D
Indianola	A	Seattle	D
Kitsap	C	Shacar	D
Klaus	C	Si Silt	C
Mixed Alluvial Land	Variable	Snohomish	D
Neilton	A	Sultan	C
Newberg	B	Tukwila	D
Nooksack	C	Urban	Variable
Normal Sandy Loam	D	Woodinville	D

HYDROLOGIC SOIL GROUP CLASSIFICATIONS	
A.	(Low runoff potential). Soils having high infiltration rates, even when thoroughly wetted, and consisting chiefly of deep, well-to-excessively drained sands or gravels. These soils have a high rate of water transmission.
B.	(Moderately low runoff potential). Soils having moderate infiltration rates when thoroughly wetted, and consisting chiefly of moderately fine to moderately coarse textures. These soils have a moderate rate of water transmission.
C.	(Moderately high runoff potential). Soils having slow infiltration rates when thoroughly wetted, and consisting chiefly of soils with a layer that impedes downward movement of water, or soils with moderately fine to fine textures. These soils have a slow rate of water transmission.
D.	(High runoff potential). Soils having very slow infiltration rates when thoroughly wetted and consisting chiefly of clay soils with a high swelling potential, soils with a permanent high water table, soils with a hardpan or clay layer at or near the surface, and shallow soils over nearly impervious material. These soils have a very slow rate of water transmission.

\* From SCS, TR-55, Second Edition, June 1986, Exhibit A-1. Revisions made from SCS, Soil Interpretation Record, Form #5, September 1988.



KING COUNTY, WASHINGTON, SURFACE WATER DESIGN MANUAL

TABLE 3.5.2B SCS WESTERN WASHINGTON RUNOFF CURVE NUMBERS

SCS WESTERN WASHINGTON RUNOFF CURVE NUMBERS (Published by SCS in 1982)				
Runoff curve numbers for selected agricultural, suburban and urban land use for Type 1A rainfall distribution, 24-hour storm duration.				
LAND USE DESCRIPTION	CURVE NUMBERS BY HYDROLOGIC SOIL GROUP			
	A	B	C	D
Cultivated land(1): winter condition	86	91	94	95
Mountain open areas: low growing brush and grasslands	74	82	89	92
Meadow or pasture:	65	78	85	89
Wood or forest land: undisturbed or older second growth	42	64	76	81
Wood or forest land: young second growth or brush	55	72	81	86
Orchard: with cover crop	81	88	92	94
Open spaces, lawns, parks, golf courses, cemeteries, landscaping.				
good condition: grass cover on 75% or more of the area	68	80	86	90
fair condition: grass cover on 50% to 75% of the area	77	85	90	92
Gravel roads and parking lots	76	85	89	91
Dirt roads and parking lots	72	82	87	89
Impervious surfaces, pavement, roofs, etc.	98	98	98	98
Open water bodies: lakes, wetlands, ponds, etc.	100	100	100	100
Single Family Residential (2)				
Dwelling Unit/Gross Acre				
1.0 DU/GA				15
1.5 DU/GA				20
2.0 DU/GA				25
2.5 DU/GA				30
3.0 DU/GA				34
3.5 DU/GA				38
4.0 DU/GA				42
4.5 DU/GA				46
5.0 DU/GA				48
5.5 DU/GA				50
6.0 DU/GA				52
6.5 DU/GA				54
7.0 DU/GA				56
Planned unit developments, condominiums, apartments, commercial business and industrial areas.				% impervious must be computed
				Separate curve number shall be selected for pervious and impervious portion of the site or basin

(1) For a more detailed description of agricultural land use curve numbers refer to National Engineering Handbook, Section 4, Hydrology, Chapter 9, August 1972.  
 (2) Assumes roof and driveway runoff is directed into street/storm system.  
 (3) The remaining pervious areas (lawn) are considered to be in good condition for these curve numbers.



## DESIGN STORM PRECIPITATION VALUES

RETURN FREQUENCY 24-HOUR STORM EVENT (YEARS)	TACOMA/PUYALLUP SOUTHERN PIERCE COUNTY	GIG HARBOR	KPN*
0.5	1.28	1.6	1.92
2	2.0	2.5	3.0
5	2.5	3.0	3.5
10	3.0	3.5	4.3
25	3.5	4.0	4.5-5.0
50	3.8	4.5	5.0-5.5
100	4.1	4.8	5.5-6.0

The depth of the 7-day, 100-year storm can be determined in one of three ways:

- 1) Use 12 inches for the lowland areas between sea level and 650 MSL.
- 2) Use the U.S. Department of Commerce Technical Paper No. 49, "Two- to Ten -Day Precipitation For Return Periods Of 2 To 100 Years In The Contiguous United States."
- 3) Use the U.S. Department of Commerce NOAA Atlas 2, " Precipitation-Frequency Atlas of the Western United States," Volume IX – Washington, 24 hour, 100-year Isopluvials and add 6.0 inches to the appropriate isopluvial for the project area.

\*KPN = Key Peninsula, North


# APPENDIX B

## Basin Exhibits


Predeveloped Basin Map (11" x 17")  
Developed Basin Map (11" x 17")

B-1  
B-2

SOILS ARE HYDROLOGIC GROUP U  
 IMPERVIOUS SURFACE = 1.94 ACRES (CN=98)  
 PERVIOUS PASTURE = 5.81 ACRES (CN=89)  
 CN COMBINED =  $\frac{(1.94 \times 98) + (5.81 \times 89)}{7.75} = 91.25$



( IN FEET )  
 1 inch = 100 ft.

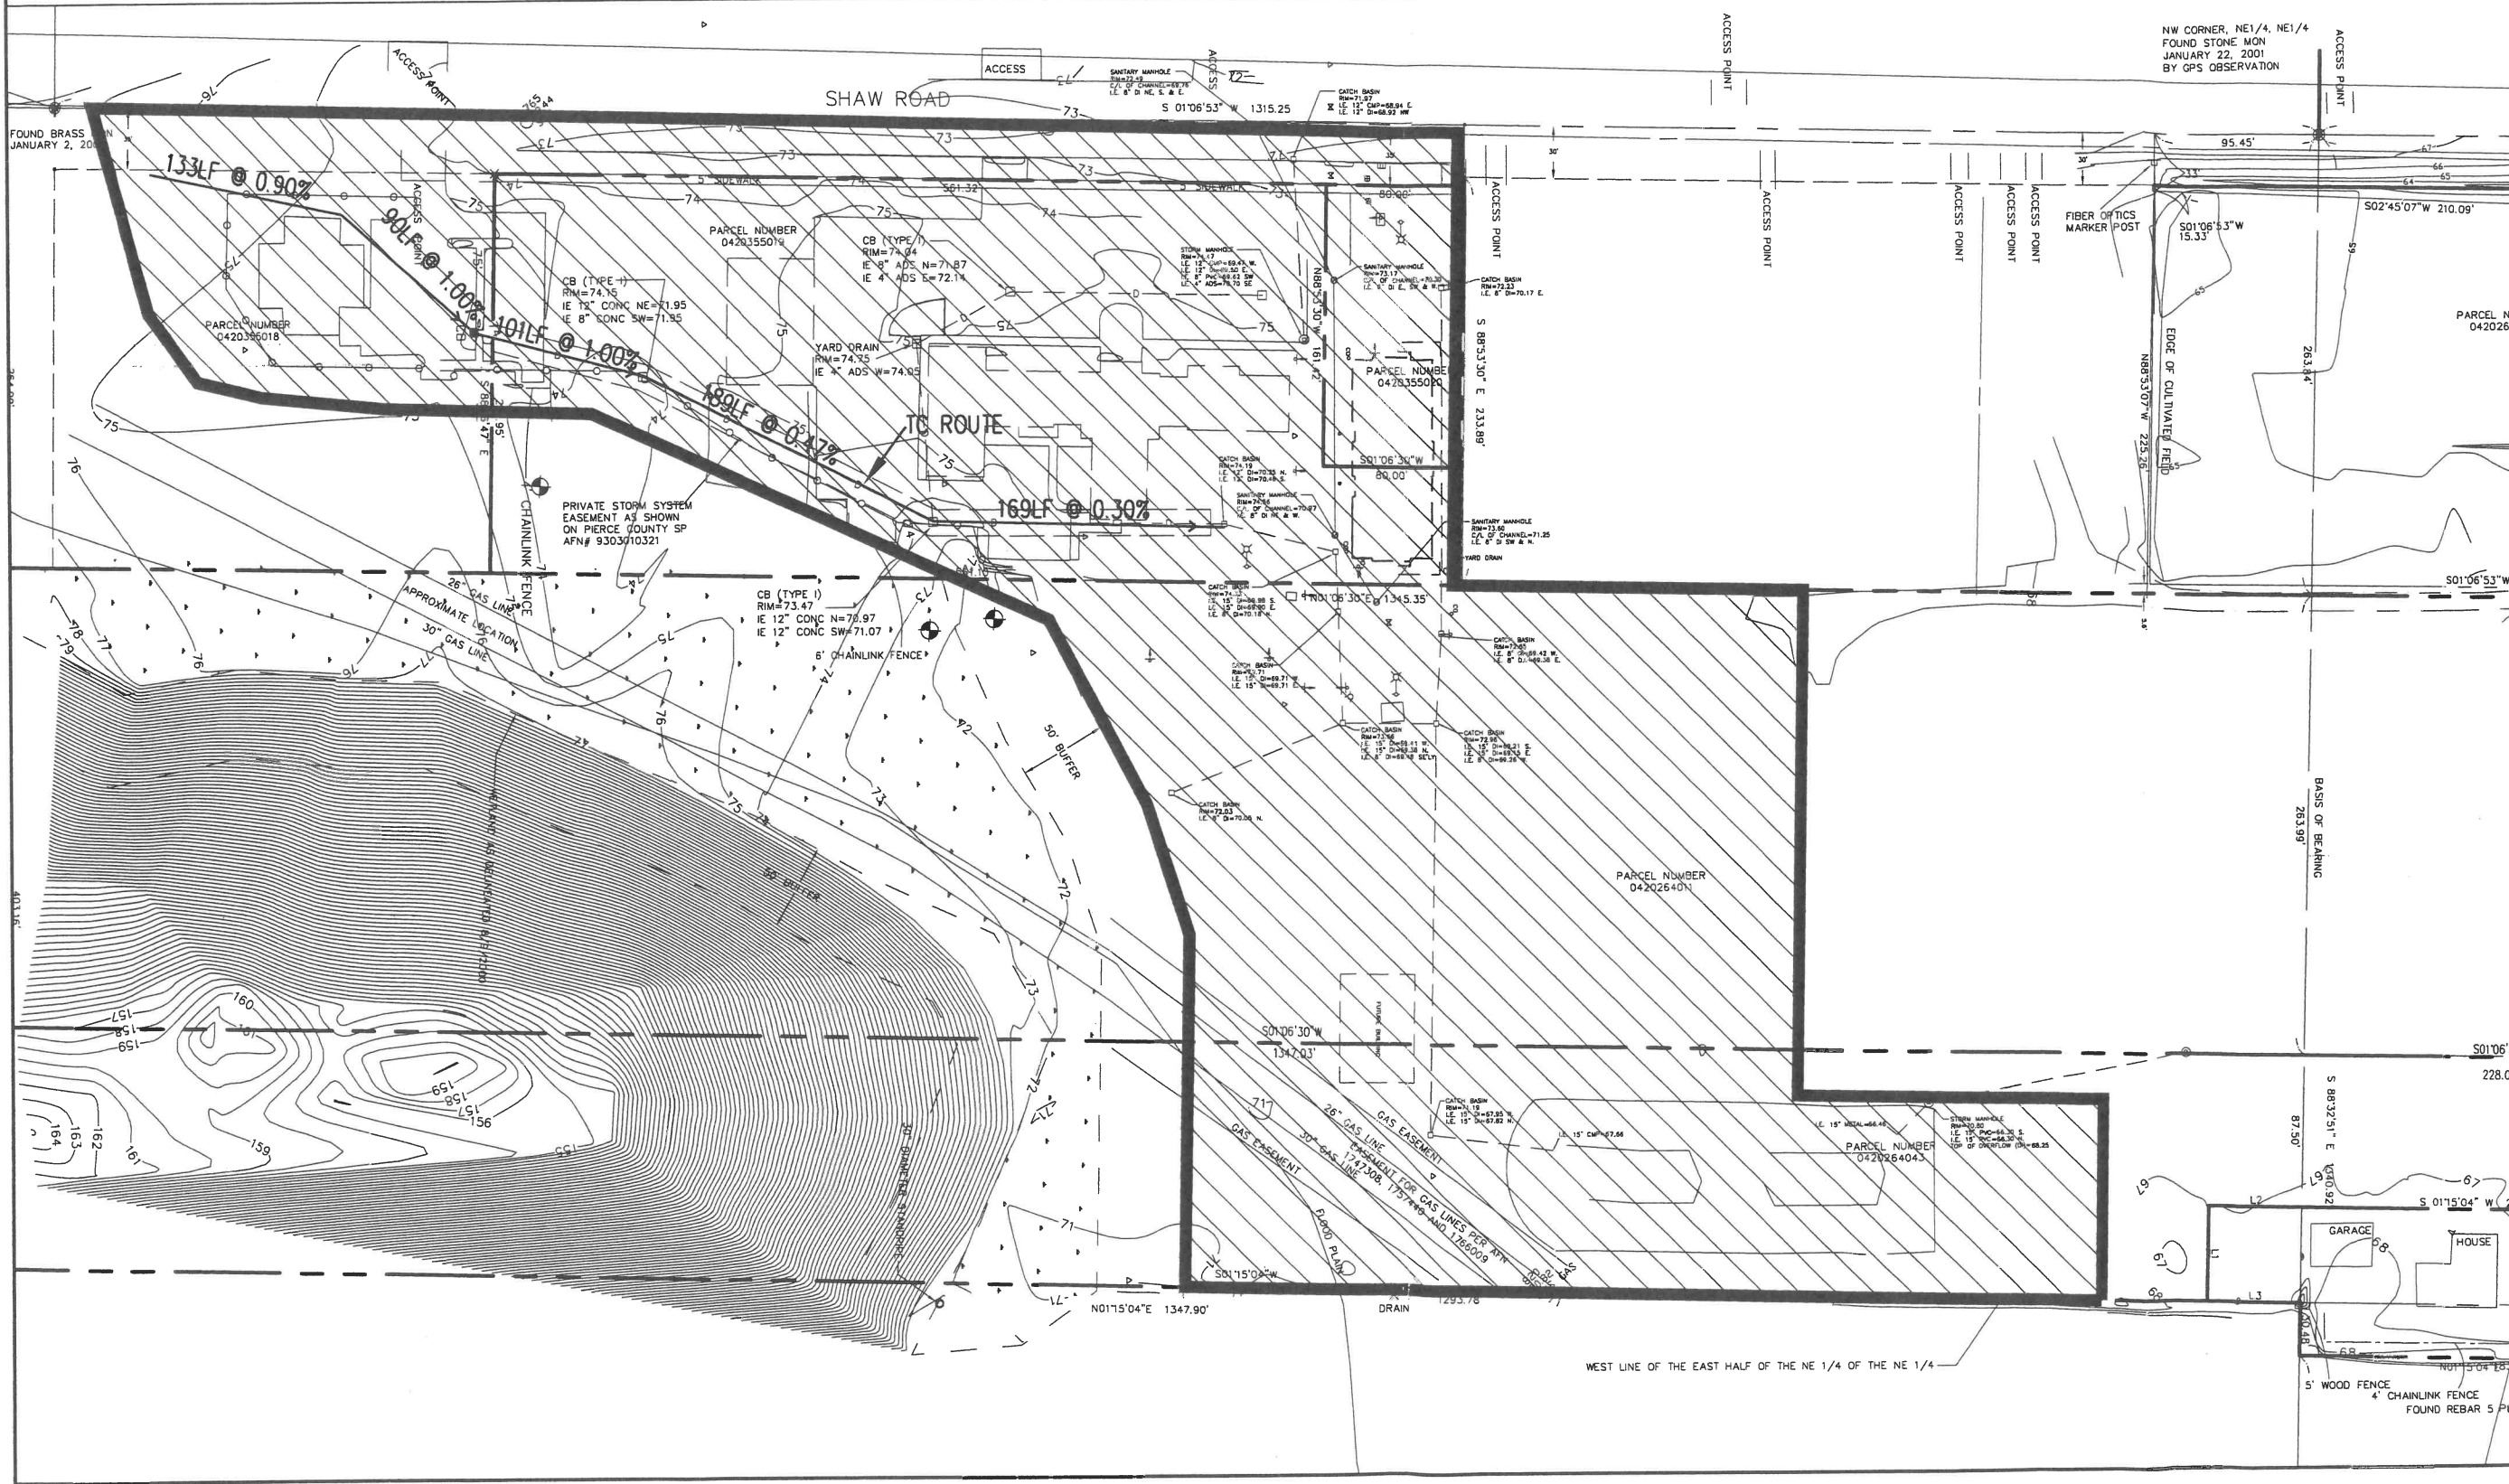

**C.E.S. NW II**  
 CIVIL ENGINEERING SERVICE

**SHAW ROAD /  
 EAST PIONEER WAY PROJECT  
 PREDEVELOPED BASIN**

Client: P.O. BOX 207 PUYALLUP, WA 98371  
 (253) 435-3699

Project: [Blank]  
 Designed: SMS  
 Drawn: HCC  
 Checked: SMS


Scale: 1" = 100'  
 Date: 11/29/04  
 Job No.: 01197.7

Sheet No.: **B1**  
 1 of 2 Sheets


5210 12TH ST. EAST, SUITE 200 BUS: (253) 921-921  
 Fife, WA 98424 Fax: (253) 921-921



IMPERVIOUS SURFACE = 5.22 ACRES (CN=98)  
 IMPERVIOUS 0.73 ACRES POND (CN=100)  
 PERVIOUS PASTURE = 1.80 ACRES (CN=90)  
 CN COMBINED =  $\frac{(5.22 \times 98) + (0.73 \times 100) + (1.80 \times 90)}{7.75} = 96.33$



( IN FEET )  
 1 inch = 100 ft.

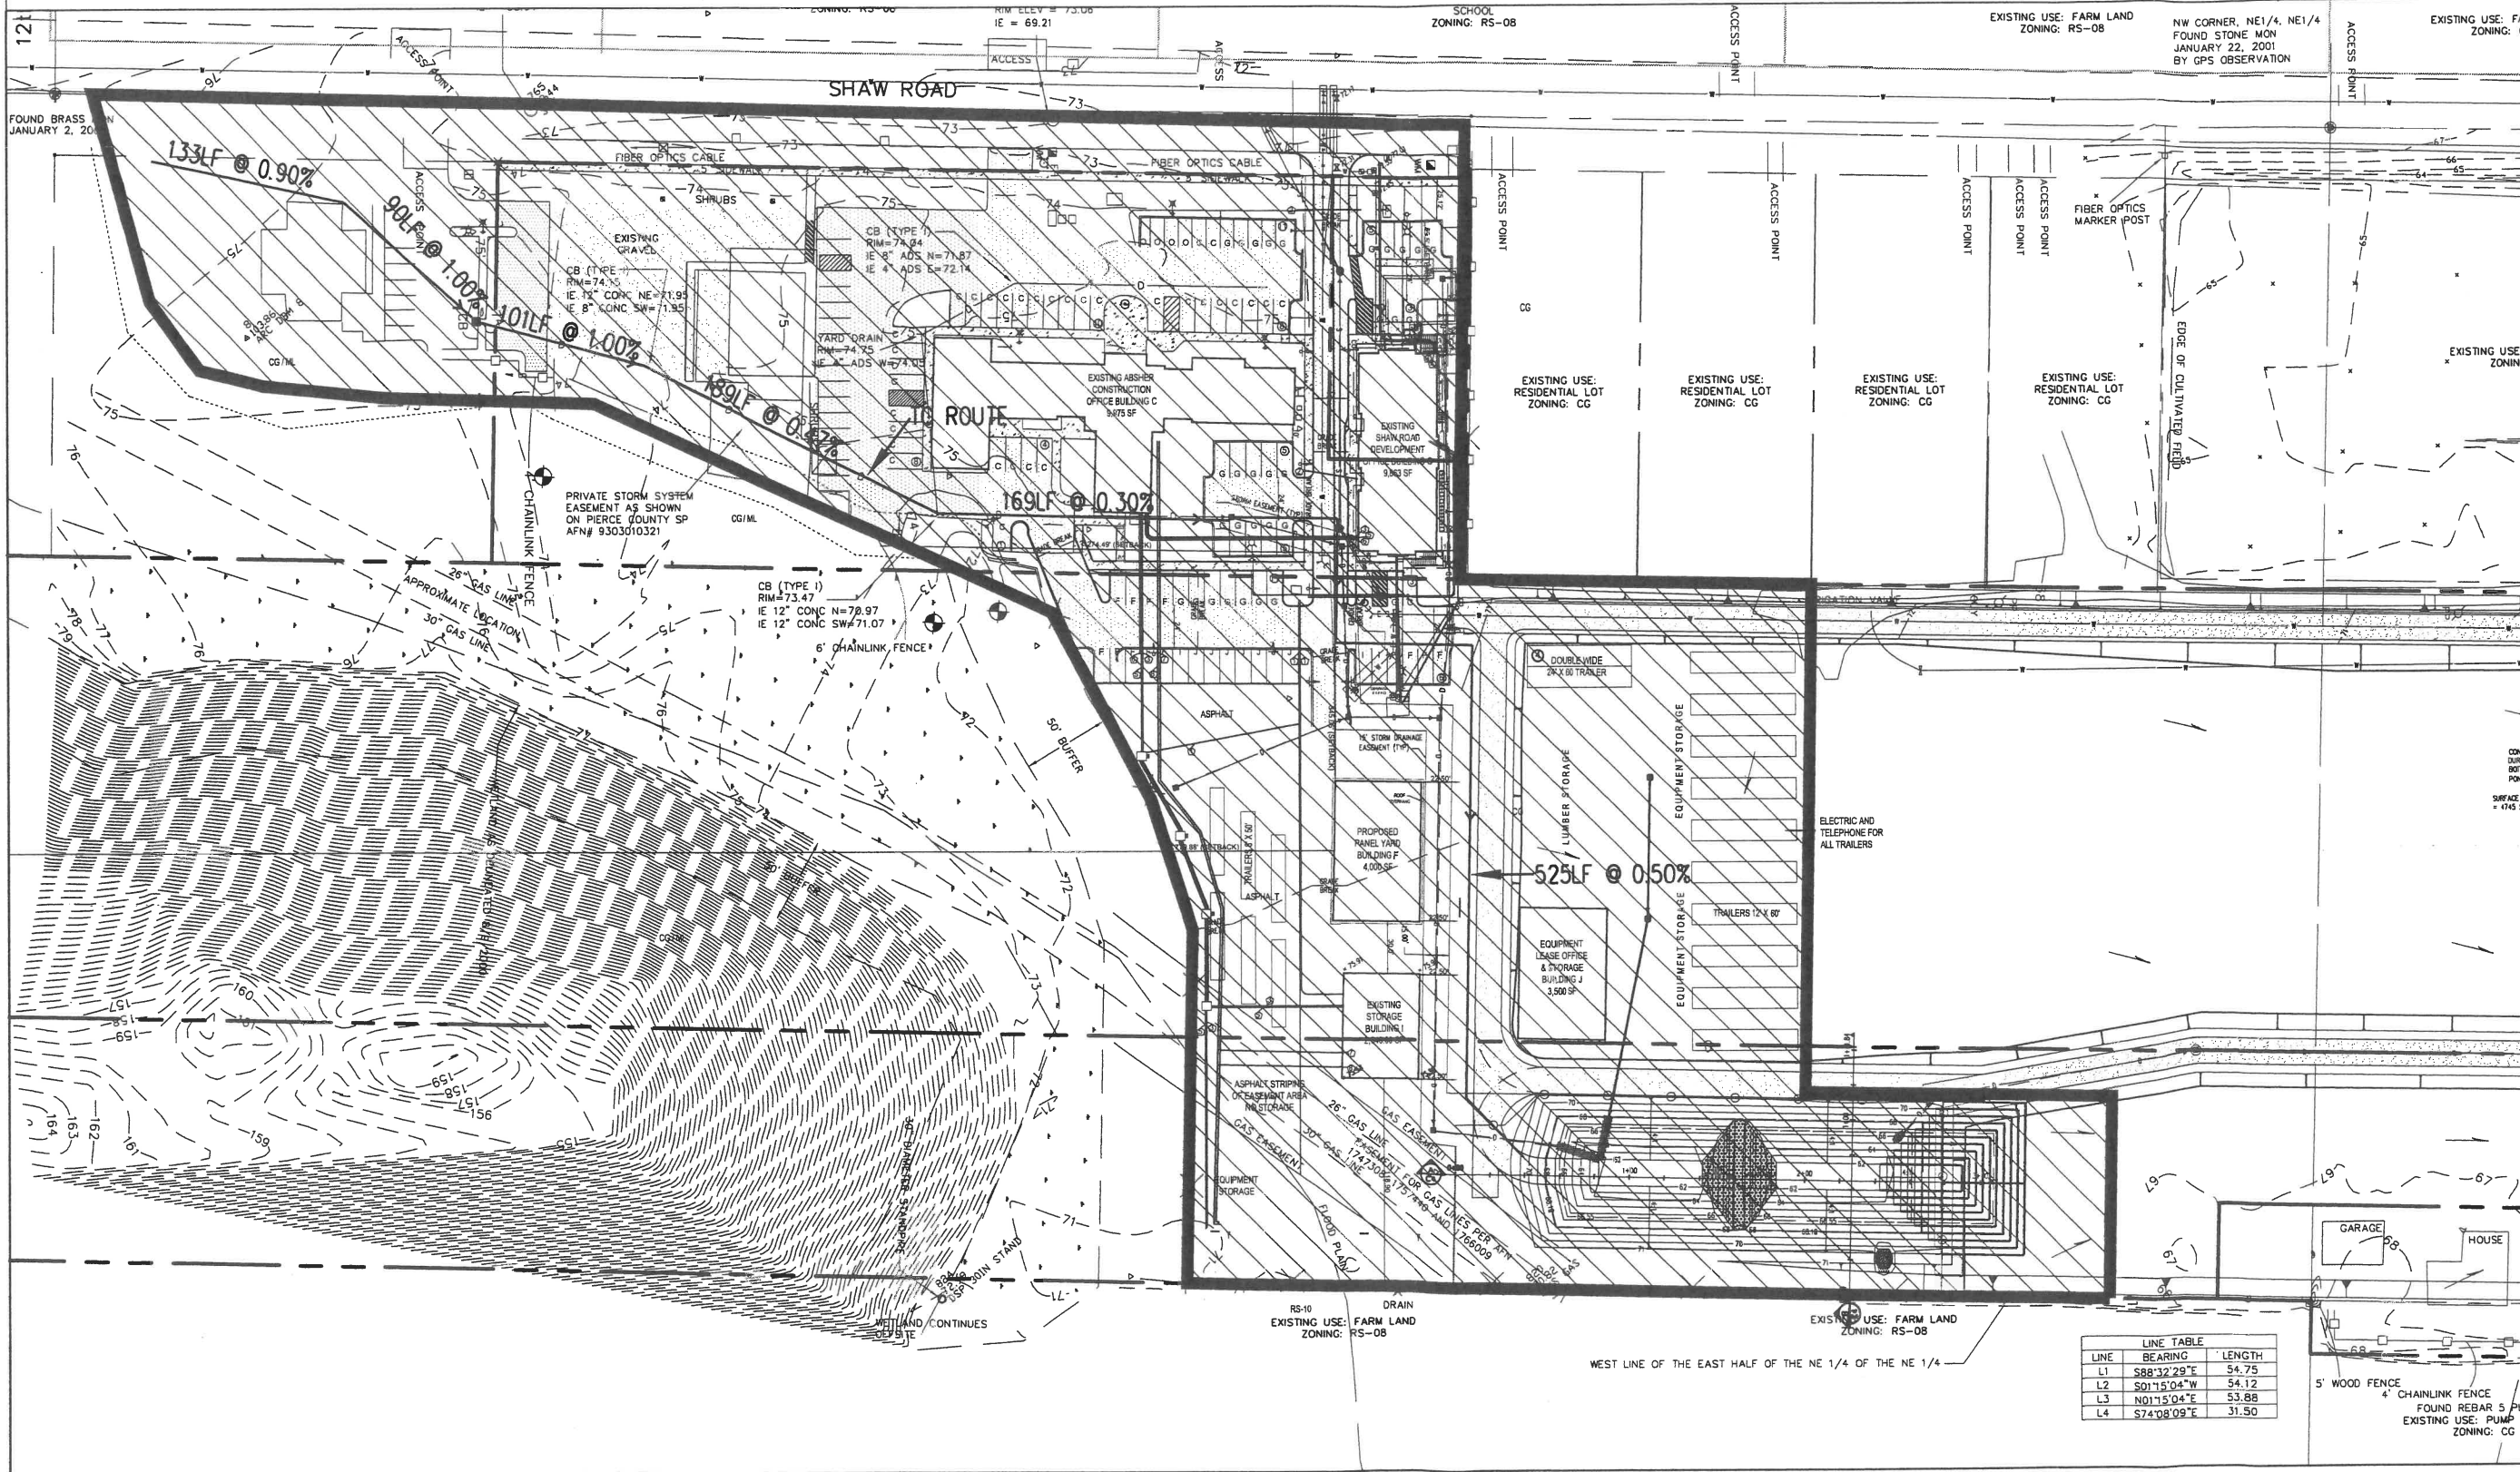

LINE	BEARING	LENGTH
L1	S88°32'29"E	54.75
L2	S01°15'04"W	54.12
L3	N01°15'04"E	53.88
L4	S74°08'09"E	31.50

**C.E.S. NW II**  
 CIVIL ENGINEERING SERVICE

**SHAW ROAD / EAST PIONEER WAY PROJECT**  
**DEVELOPED BASIN**  
 Project:  
 Client: ABBEY ROAD GROUP  
 P.O. BOX 207 PUYALLUP, WA 98371  
 (253) 435-3699

Designed: SMS  
 Drawn: HCC  
 Checked: SMS  
 Scale: 1" = 100'  
 Date: 11/29/04  
 Job No.: 01197.7

Sheet No.: **B2**  
 2 of 2 Sheets

5210 12TH ST. EAST, SUITE 200 BUS: (253) 922-9221  
 FAX: (253) 922-9221

# APPENDIX C

## Storm Water Calculations

Storm Shed Computer Analysis Printout (Detention Pond Design)	C-1
Detention Pond Storage Volumes	C-4
Water Works Computer Analysis Printouts (Wetpond Design)	C-5
Wetpond Design Storage Volume	C-6
Flow Capacity Calculations	C-7
Overflow Spillway Calculations	C-8

### Summary Report of all RLPool Data

#### Project Precips

[2 yr]	2.00 in
[5 yr]	2.50 in
[10 yr]	3.00 in
[25 yr]	3.50 in
[100 yr]	4.10 in
[6 mo]	1.28 in

BasinID	Peak Q (cfs)	Peak T (hrs)	Peak Vol (ac-ft)	Area ac	Method /Loss	Raintype	Event
PRE-DEVELOPED	1.5809	8.17	0.7631	7.75	SBUH/SCS	TYPE1A	2 yr
PRE-DEVELOPED	2.9478	8.17	1.3519	7.75	SBUH/SCS	TYPE1A	10 yr
PRE-DEVELOPED	4.4950	8.17	2.0268	7.75	SBUH/SCS	TYPE1A	100 yr
DEVELOPED	2.2431	8.17	1.0370	7.75	SBUH/SCS	TYPE1A	2 yr
DEVELOPED	3.6076	8.17	1.6705	7.75	SBUH/SCS	TYPE1A	10 yr
DEVELOPED	5.0901	8.17	2.3739	7.75	SBUH/SCS	TYPE1A	100 yr

#### Drainage Area: PRE-DEVELOPED

Hyd Method:	SBUH Hyd	Loss Method:	SCS CN Number
Peak Factor:	484.00	SCS Abs:	0.20
Storm Dur:	24.00 hrs	Intv:	10.00 min
	Area	CN	TC
Pervious	0.0000 ac	89.70	0.00 hrs
Impervious	7.7500 ac	91.25	0.43 hrs
Total	7.7500 ac		

#### Supporting Data:

##### Impervious CN Data:

Existing CN	91.25	7.7500 ac
-------------	-------	-----------

##### Impervious TC Data:

Flow type:	Description:	Length:	Slope:	Coeff:	Travel Time
Sheet	Existing Tc	133.00 ft	0.90%	0.1500	21.43 min
Sheet	Existing Tc	90.00 ft	1.00%	0.0110	1.86 min
Channel	Existing Tc	101.00 ft	1.00%	42.0000	0.40 min
Channel	Existing Tc	189.00 ft	0.47%	42.0000	1.09 min
Channel	Existing Tc	169.00 ft	0.30%	42.0000	1.22 min

**Drainage Area: DEVELOPED**

Hyd Method:	SBUH Hyd	Loss Method:	SCS CN Number
Peak Factor:	484.00	SCS Abs:	0.20
Storm Dur:	24.00 hrs	Intv:	10.00 min
	Area	CN	TC
Pervious	0.0000 ac	89.70	0.00 hrs
Impervious	7.7500 ac	96.33	0.48 hrs
Total	7.7500 ac		

**Supporting Data:**

**Impervious CN Data:**

Developed CN                      96.33                      7.7500 ac

**Impervious TC Data:**

Flow type:	Description:	Length:	Slope:	Coeff:	Travel Time
Sheet	Developed Tc	133.00 ft	0.90%	0.1500	21.43 min
Sheet	Developed Tc	90.00 ft	1.00%	0.0110	1.86 min
Channel	Developed Tc	101.00 ft	1.00%	42.0000	0.40 min
Channel	Developed Tc	189.00 ft	0.47%	42.0000	1.09 min
Channel	Developed Tc	169.00 ft	0.30%	42.0000	1.22 min
Channel	Developed Tc	525.00 ft	0.50%	42.0000	2.95 min

**HYDLIST SUMMARY**

[1] [2] [3]

**LSTEND**

HydID	Peak Q	Peak T	Peak Vol	Cont Area
-----	(cfs)	(hrs)	(ac-ft)	(ac)
1	0.79	10.50	1.0369	7.7500
2	2.34	9.00	1.6705	7.7500
3	4.24	8.50	2.3738	7.7500

**Node ID: DETENTION POND**

Desc:	Detention Pond - Stage/Storage		
Start El:	66.5500 ft	Max El:	70.0000 ft
Contrib Basin:		Contrib Hyd:	
Stage	Area	Volume	Volume
66.55	9149.17	0.00 cf	0.0000 acft
67.00	10159.20	4344.38 cf	0.0997 acft
68.00	12552.50	15700.23 cf	0.3604 acft
69.00	15177.78	29565.37 cf	0.6787 acft
70.00	17561.04	45934.78 cf	1.0545 acft

**Control Structure ID: COMBO - Combination Control Structure**

Descrip:	Multiple Orifice	
Start El	Max El	Increment
66.5500 ft	75.0000 ft	0.10
ID List:	DISCHARGE	RISER

**Control Structure ID: DISCHARGE - Multiple Orifice Structure**

Descrip:	Multiple Orifice	
Start El	Max El	Increment
66.5500 ft	75.0000 ft	0.10
Orif Coeff:	0.62	
	Bottom El:	66.55 ft
	Lowest Diam:	5.3750 in

**Control Structure ID: RISER - Overflow riser**

Descrip:	Multiple Orifice				
Start El	Max El	Increment			
67.7000 ft	75.0000 ft	0.10			
Riser Dia:	15.00 in	Orif Coeff:	3.78	Weir Coeff:	9.74

**RLPCOMPUTE [LEVEL POOL] SUMMARY**

2 yr	Match Q: 0.7905 cfs	Peak Out Q: 0.7869 cfs	- Peak Stg: 67.56 ft	- Active Vol: 0.25 acft
10 yr	Match Q: 2.9478 cfs	Peak Out Q: 2.3439 cfs	- Peak Stg: 67.94 ft	- Active Vol: 0.34 acft
100 yr	Match Q: 4.4950 cfs	Peak Out Q: 4.2406 cfs	- Peak Stg: 68.12 ft	- Active Vol: 0.40 acft

# DETENTION POND VOLUMES

## Detention Pond Design

Design Elevation	Design area (SF)	Design Volume Totals (CF)	Design Volume Totals (AC-FT)
<b>66.55</b>	<b>9,149</b>	0	0.00
<b>67.00</b>	<b>10,159</b>	4,344	0.10
<b>68.00</b>	<b>12,553</b>	15,700	0.36
<b>68.12</b>	<b>13,190</b>	17,245	0.40

## Detention Pond Provided\*

Design Elevation	Provided area (SF)	Provided Volume Totals (CF)	Provided Volume Totals (AC-FT)
<b>66.55</b>	<b>11,894</b>	0	0.00
<b>67.00</b>	<b>13,096</b>	5,623	0.13
<b>68.00</b>	<b>15,917</b>	20,129	0.46
<b>68.12</b>	<b>16,605</b>	22,081	0.51

\*Note: In accordance with the *City of Puyallup City Standards for Public Works Engineering and Construction Manual*, and the *King County Surface Water Design Manual* the Pond volume provided is 30% larger than the Pond Design Area.

**Wetpond Storage Volume Calculations:  
(6-month, 24-hour storm event)**

**DEVELOPED Event Summary:**

BasinID	Peak Q (cfs)	Peak T (hrs)	Peak Vol (ac-ft)	Area ac	Method /Loss	Raintype	Event
DEVELOPED	1.25	8.17	0.5905	7.75	SBUH/SCS	TYPE1A	6 mo

**Drainage Area: DEVELOPED**

Hyd Method:	SBUH Hyd	Loss Method:	SCS CN Number
Peak Factor:	484.00	SCS Abs:	0.20
Storm Dur:	24.00 hrs	Intv:	10.00 min
	Area	CN	TC
Pervious	0.0000 ac	89.70	0.00 hrs
Impervious	7.7500 ac	96.33	0.48 hrs
Total	7.7500 ac		

**Supporting Data:**

**Impervious CN Data:**

Developed CN	96.33	7.7500 ac
--------------	-------	-----------

**Impervious TC Data:**

Flow type:	Description:	Length:	Slope:	Coeff:	Travel Time
Sheet	Developed Tc	133.00 ft	0.90%	0.1500	21.43 min
Sheet	Developed Tc	90.00 ft	1.00%	0.0110	1.86 min
Channel	Developed Tc	101.00 ft	1.00%	42.0000	0.40 min
Channel	Developed Tc	189.00 ft	0.47%	42.0000	1.09 min
Channel	Developed Tc	169.00 ft	0.30%	42.0000	1.22 min
Channel	Developed Tc	525.00 ft	0.50%	42.0000	2.95 min

**Storage Volume Required = 25,722 cf**

**Storage Volume Provided = 30,964 cf**  
(See following calculations)

# WET POND VOLUMES

Elevation	Area (SF)	Volume Totals
62	2474	0
63	4134	3304
64	6027	8385
65	8151	15474
66	10508	24804
66.55	11894	30964



## Flow Capacity Calcs. (Manning's)

$$Q = 1.486 / n \times R^{2/3} \times S^{1/2}$$


Bold Numbers entered directly

Pipe Dia. (D)	<b>15.00 "</b>	<b>15.00 "</b>	<b>15.00 "</b>
Manning's n (n)	<b>0.014</b>	<b>0.012</b>	<b>0.014</b>
Slope (S)	<b>0.50%</b>	<b>0.50%</b>	<b>0.50%</b>
Depth (Y)	<b>1.25'</b>	<b>1.25'</b>	<b>0.95'</b>
Qactual	4.24 cfs	4.95 cfs	3.93 cfs
Vactual	3.456 fps	4.032 fps	3.924 fps

# Spillway calculations

C-8

## Emergency Overflow Spillway





$$\text{For this weir } Q_{100} = C\sqrt{2g}\left(\frac{2}{3}LH^{3/2} + \frac{8}{15}Tan\theta H^{5/2}\right)$$

(Piece County Stormwater Management Manual Appendix A Detail 2)

- C = 0.6 discharge coefficient
- L = 6.00 ft (bottom width 6 feet min.)
- tan $\theta$  = 3 Approximate slope
- H = 0.5 ft flow depth
- h = 1 ft (-0.5' freeboard required at a min)

$$\begin{aligned} Q &= C_{\text{d}} \sqrt{2g} \left( \frac{2}{3} L H^{3/2} + \frac{8}{15} z H^{5/2} \right) \\ &= 8.17 \text{ cfs (100 Year Peak 4.24 cfs)} \\ V &= 2.18 \text{ fps} \end{aligned}$$

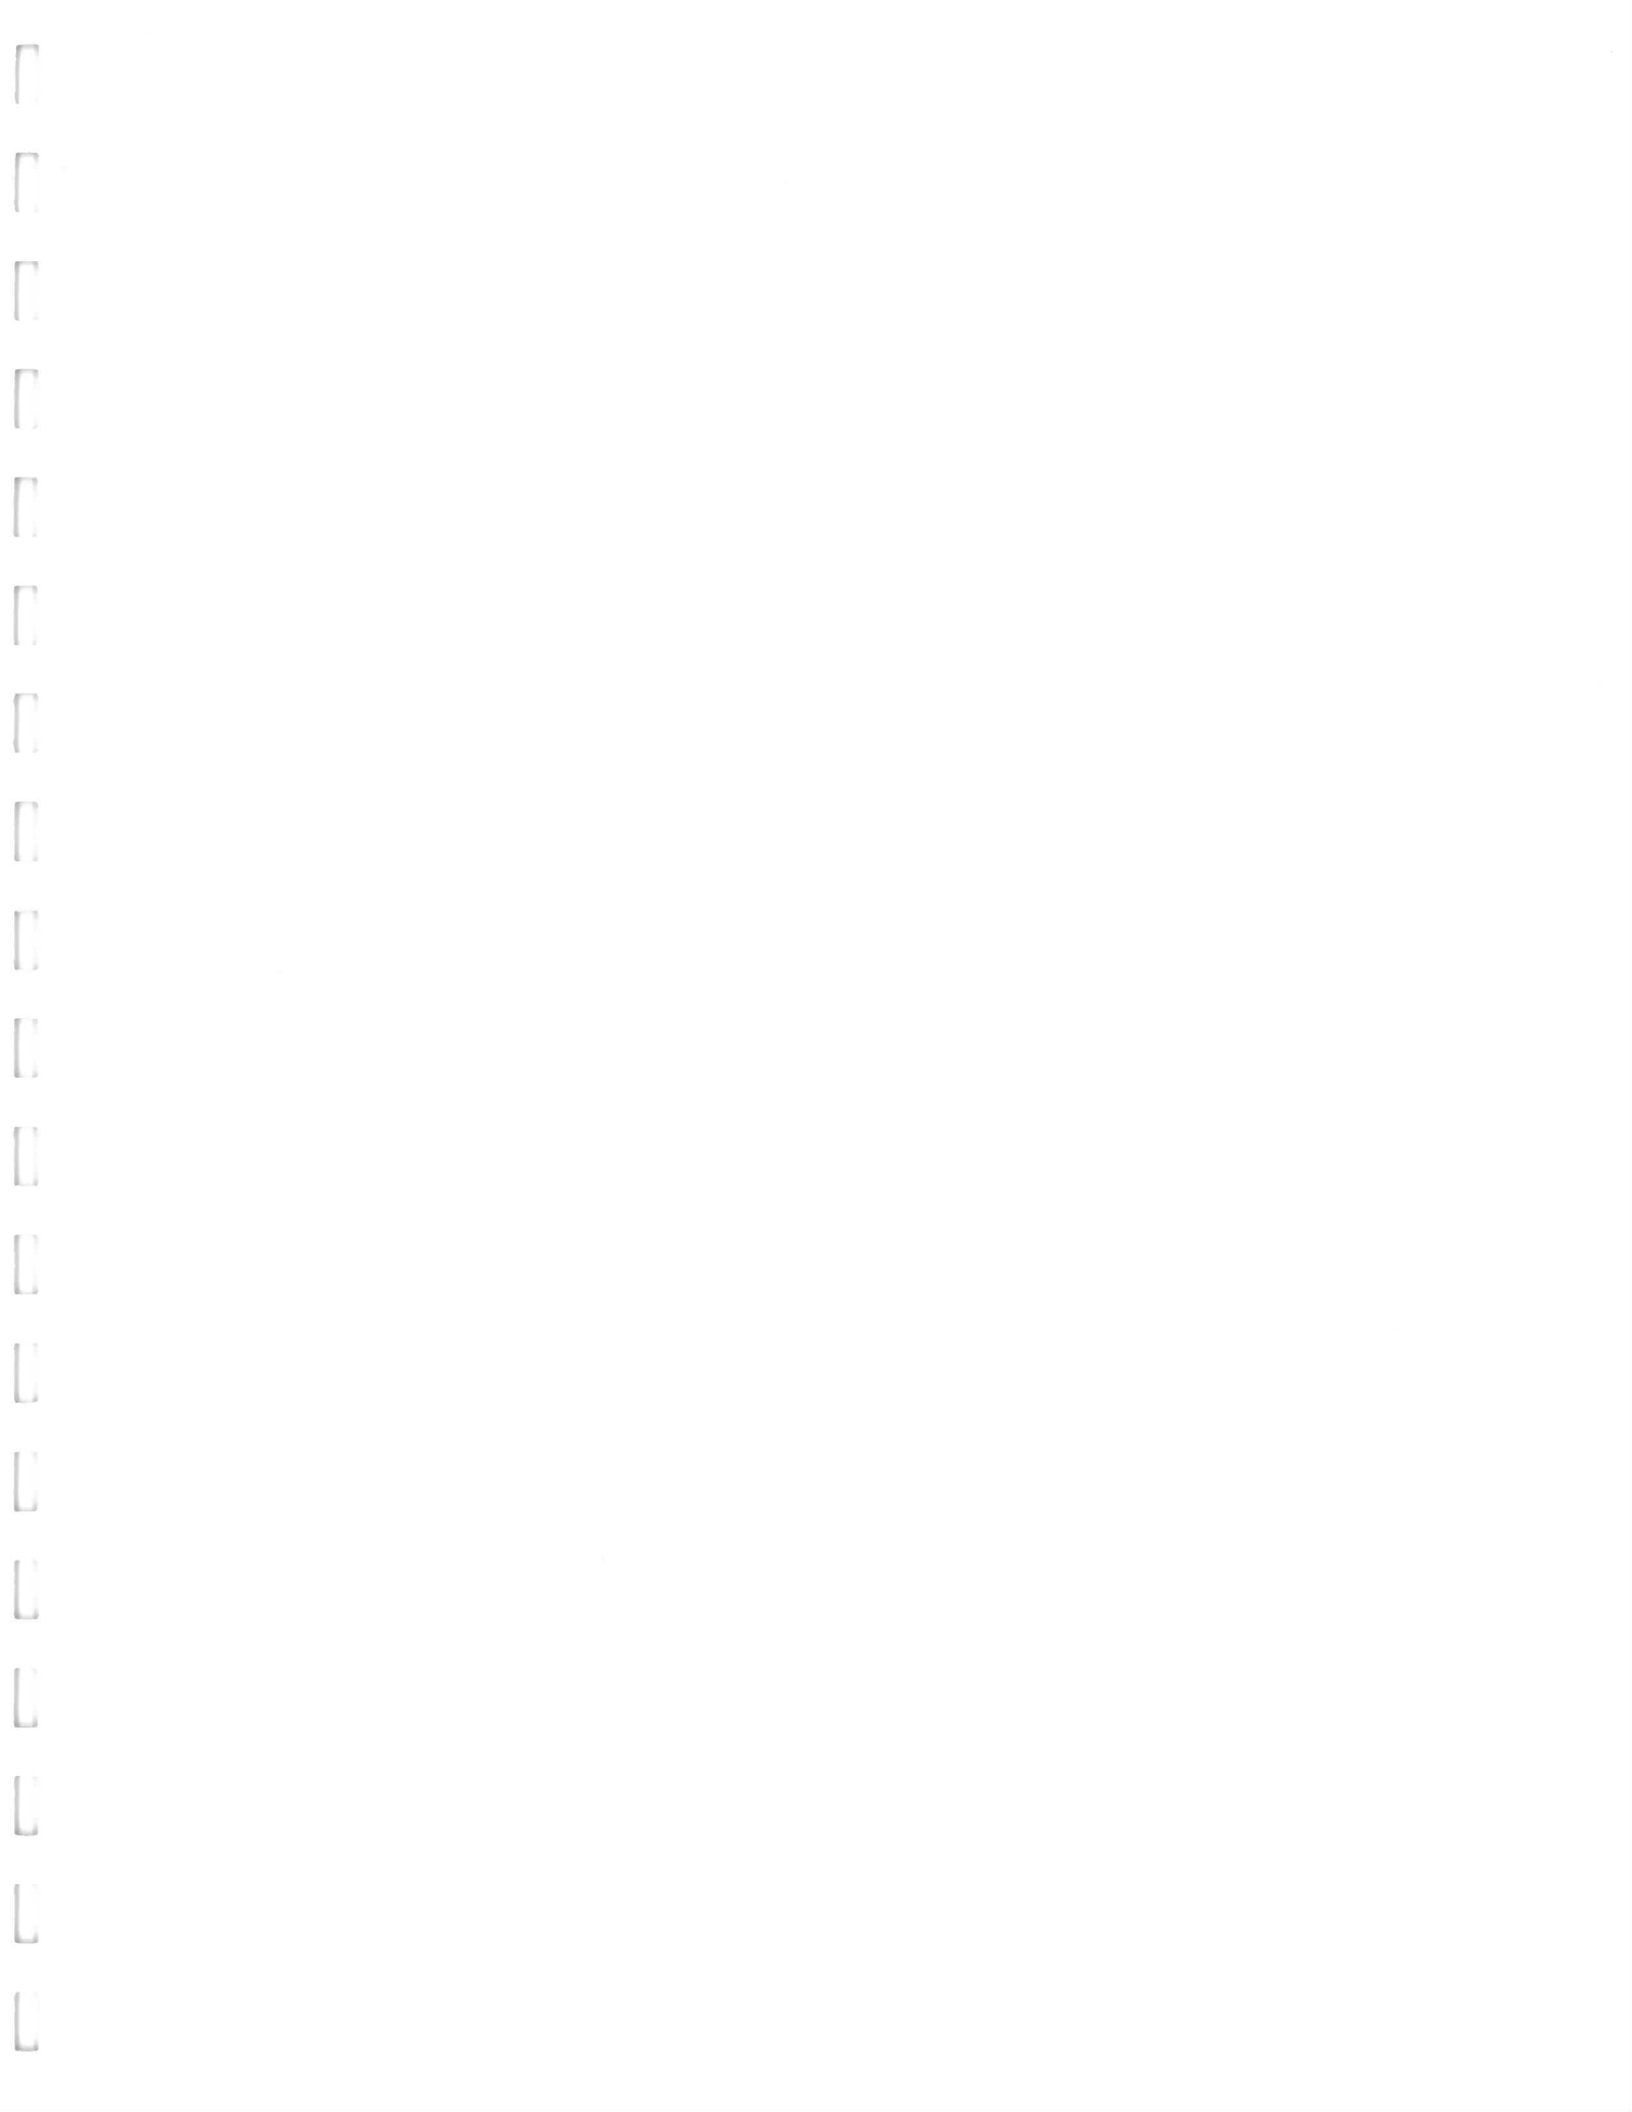

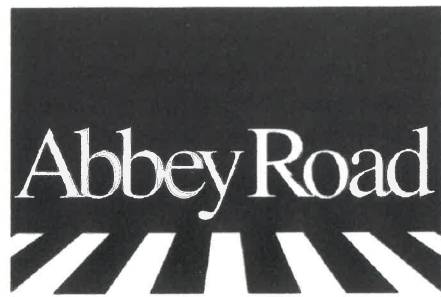

# **Shaw Pioneer Development Area**

## **Pre-Application Packet**

*Prepared By:*

**The Abbey Road Group LLC  
Land Development Manager**

**923 Shaw Road  
Puyallup, WA 98372  
Office 253.435.3699 Fax 253.446.3159**

**The Abbey Road Group LLC**

December 21, 2001

Job#: 01-127

# TABLE OF CONTENTS

Application  
Proposal Project Narrative  
Phasing Plan  
Meeting Agenda  
Vicinity Map  
Local Vicinity Map  
Adjacent Zoning/Parcel Map  
Aerial Photo  
Site Plan (8 ½ x 11)  
Development Area Key Map  
Existing Lot Chart  
Adjacent Lot Chart  
Proposed Areas (Lots/Tracts) Chart  
Proposed Building and Parking Specification Chart

## Attached Separately:

- Wetland Report
- Geotechnical Report
- Plan Set (24" x 36")
  - Cover Sheet
  - Site Plan
  - Preliminary Engineering
  - Conceptual Building Elevation Plan  
(Area D – Building A)
  - Conceptual Building Elevation Plan  
(Area D – Building B)
  - Conceptual Building Elevation Plan  
(Area A)
  - Conceptual Building Canopy Elevation
  - Topography



# REQUEST FOR PRE-APPLICATION MEETING

COMMUNITY DEVELOPMENT CENTER

330 3<sup>RD</sup> ST. SW • PUYALLUP, WA 98371 • Tel. (253)841-5537 • Fax: (253) 840-6678

The City of Puyallup encourages pre-application meetings to discuss general issues regarding a proposed development. Since little lead time is required prior to these meetings, information provided by City staff is not guaranteed to thoroughly address all issues which may arise concerning a proposal. Applicants are encouraged to bring all pertinent representatives to the meeting (i.e., architect, engineer, etc.), particularly those individuals who will actually work on the project during its design/approval phase.

**Applicant:** The Abbey Road Group for Shaw/Pioneer Commercial

**Mailing Address:** PO Box 207

**City, State, Zip:** Puyallup, WA 98371

**Phone:** 253-435-3699      **Fax:** 253-446-3159      **E-Mail:** ghulsmann@AbsherNW.com

### APPLICANT REPRESENTATIVES:

Name: Gil Hulsmann      Firm: The Abbey Road Group

Name: Greg Helle      Firm: Shaw/Pioneer Commercial

Name: Richard Gumphert      Firm: Independent Development Company

### DEVELOPMENT INFORMATION:

**Property location/site address:** The SE corner of the Shaw/Pioneer Intersection

**Proposal:** Commercial Development (See attached exhibit for Additional Information)

**Property dimension, size:** (See attached exhibit)

**Projected timeline for development:** (See attached exhibit)

**Particular issues to discuss:** (See attached exhibit)

**Requested city representation:**      Engineering    Yes         Planning    Yes         Fire    Yes     
Building    Yes         Traffic Engineer    Yes   

### REQUESTED DATE FOR MEETING: (NO MONDAY OR FRIDAY MEETINGS)


**Provide 3 Options:** 1. 1/3/02 Tu-W-Th am/pm 2. 1/8/02 Tu-W-Th am/pm 3. 1/8/02 Tu-W-Th am/pm

City staff is not responsible for taking notes during a pre-application meeting; however, we are happy to review any notes taken by the applicant for accuracy.

At least 48 hours prior to the meeting, please deliver 6 copies of this form and 6 copies of a preliminary site plan to Jessica Anderson, 330 3<sup>rd</sup> ST SW; Puyallup, WA 98371.

Gil S. Hulsmann III  
Applicant Signature

19 Dec 01  
Date



## **Proposal**

### **Project Narrative for Shaw/Pioneer Development**

The Shaw/Pioneer Development will consist of a 19.64 acres for Development Purposes and 20.96 acres for Storm Drainage Detention and Water Quality purposes. The site is located on the SE corner of Shaw and Pioneer consisting of parcel numbers 0420264021, 0420264011, 0420264043, 0420264042, 0420355020, 0420355019, and 0420355018. The overall project will be broken down into 8 proposed commercial areas. As part of this development the initial process will consist of 4 proposed areas being developed from raw ground up, and 3 existing areas having some parking and drive aisle adjustments and the other lot only being counted for the calculation of storm drainage requirements since the existing drainage detention facility will be moved.

The proposed development will consist of the following:

**Water** – Water will be provide off of a main loop line being connected from Shaw Road to Pioneer Way per the attached preliminary engineering drawings.

**Sanitary** – Sanitary will be installed in 2 phases. Phase 1 is a Sanitary Grinder pump system to be installed to provide services and to discharge at the last existing sanitary sewer manhole on Shaw Road. A man hole system mainline gravity will be installed to Pioneer Way for the future connection and construction of the proposed sanitary sewer pump station for the Shaw Pioneer Area. The developers agree to pay his/her share of the future pump station.

**Storm Water** – A Storm Water conveyance system will be connected to the existing storm water conveyance system on Lots 16 and 17. A new storm drainage detention wet pond will be constructed on the NE corner of the project (Area E) providing storm water quality and storm water detention for the entire site. The existing storm water conveyance system will be connected to the proposed new storm drainage pond and the smaller existing storm water drainage detention facility on lot #16 will be eliminated.

**Roads** – Shaw Road will have right-of-way frontage improvements and additional right-of-way dedicated for a total of 45 feet from centerline along lot #11. Pioneer Way will have half street improvements and additional right-of-way dedicated for a total of 45 feet off of centerline along lots 11, 12, 13 and 14.

**Grading** – Grading will be conducted in accordance with the City of Puyallup's Policies and Procedures for grading within flood plain areas. All development site areas will be brought to an elevation equal to or above the centerline of the adjacent road. All building first floor elevations will be brought to an elevation of 1 foot above and/or higher than the adjacent centerline of the adjacent roads.

**Building** - The specific proposed building sizes and uses can be obtained from the attached exhibits and charts for this project.

# Phasing Plan

## Initial

### A. Permit Process/Review Phase:

1. Pre-Application Meeting Packet and Submittal Review by the City of Puyallup
2. Site Plan Design and Special Reports (Traffic, Downstream Analysis, Technical Information, Wetlands, Geotechnical, Preliminary Engineering, Preliminary Landscaping, Environmental Checklist Preparation, Building Elevation Drawings, SEPA Packet.)
3. Site Plan Review, Environmental Review Submittal and Review/Process by the City of Puyallup.

### B. Construction Document Process/Review Phase:

1. Engineering Plan Submittal/Review for Area A, D, F and G and Mass Grading and Mass Utilities on Areas A, B, C, D, E, F, G, H and K
2. Building Permit Submittal for a 3,152 SF Convenience Store with Gas Station on Area A.
3. Building Permit Submittal for 2 each 24,000 SF Storage Buildings on Area D.

### C. Construction

1. Construction (Mass Grading and Utilities) of Areas A,B,C,D,E,F,G,H and K
2. Construction (Buildings) Areas A and D; (Site) Areas F and G
3. Other areas (Pad's) will be constructed in accordance with building permit submittals for areas B,C, H and L



# Meeting Agenda

- A. Introduction of City and Development Attendees**
- B. Overview Description of Project by the Abbey Road Group**
- C. Discussion of Submitted Documents , Specifications and Preliminary Plans as reviewed by the City of Puyallup specifically the following areas.**
- D. Specific Department Issues:**

## **Planning:**

- 1. Proposed Uses vs. Authorized Zoning**
- 2. Proposed Site Plan Reviewing Landscape Requirements, Setback Requirements, Parking Layouts**
- 3. Boundary line adjustment policy in regards to adjusting existing boundary lines to meet new commercial lots**
- 4. Submittal of Environmental and Site Plan Review for process prior to final annexation**
- 5. Requirements for Site Plan Submittal and Environmental Review**
- 6. Review of Process in regards to processing for Environmental Review per Phasing Plan**
- 7. 24 Hour Beer, Wine and Gas dispensing for Area A**
- 8. Planning issues such as Setbacks, Parking Site Access (curb cuts etc.), Site or Design Reviews, Signage allowed on Building(s) and Free Standing Signs on site, Landscape, Site Accessibility, Pedestrian access to streets**
- 9. List of all Permits and reviews required for review and approval of this proposal plus Fees associated and expected timelines for review completion. Including reviews such as SEPA, Site Plan, Utilities, Design reviews, Signs, etc.**
- 10. Any Neighborhood concerns or reviews that may have an effect on this proposal**

## **Traffic:**

- 1. Proposed right-of-way dimensions and improvements along Shaw Road and Pioneer Way**
- 2. Commercial Site Entrances**
- 3. Traffic issues and any Fees that may be associated with this proposal**
- 4. List of any Mitigation Fees associated with this proposal such as Traffic, Sewer, Water, Drainage, etc.**

**Engineering:**

- 1. Proposed Domestic Water System**
- 2. Proposed Sanitary Sewer System**
- 3. Proposed Storm Drainage System providing specific requirements for 100 year flood plain areas and providing Detention and Water Quality for all 12 areas and Shaw and Pioneer Road improvements**
- 4. Proposed Grading in regards to 100 year flood plain elevations**
- 5. Discuss early release of Mass Grading Plan**
- 6. List of any Mitigation Fees associated with this proposal such as Traffic, Sewer, Water, Drainage, etc.**

**Building:**

- 1. Building concerns such as Type of Construction, Separations between building and Gasoline Dispensers/Canopy, Accessibility, Exiting, Design reviews and Review Fees associated with this proposal for both Area A and Area D**


**Fire:**

- 1. Site Access**
- 2. Accessibility**
- 3. Fire Hydrant and FDC Spacing and location**


**E. General Questions and/or Answers: Development Team and City Staff**

**F. Adjournment**

# 01-127 Shaw/Pioneer Commercial Vicinity Map

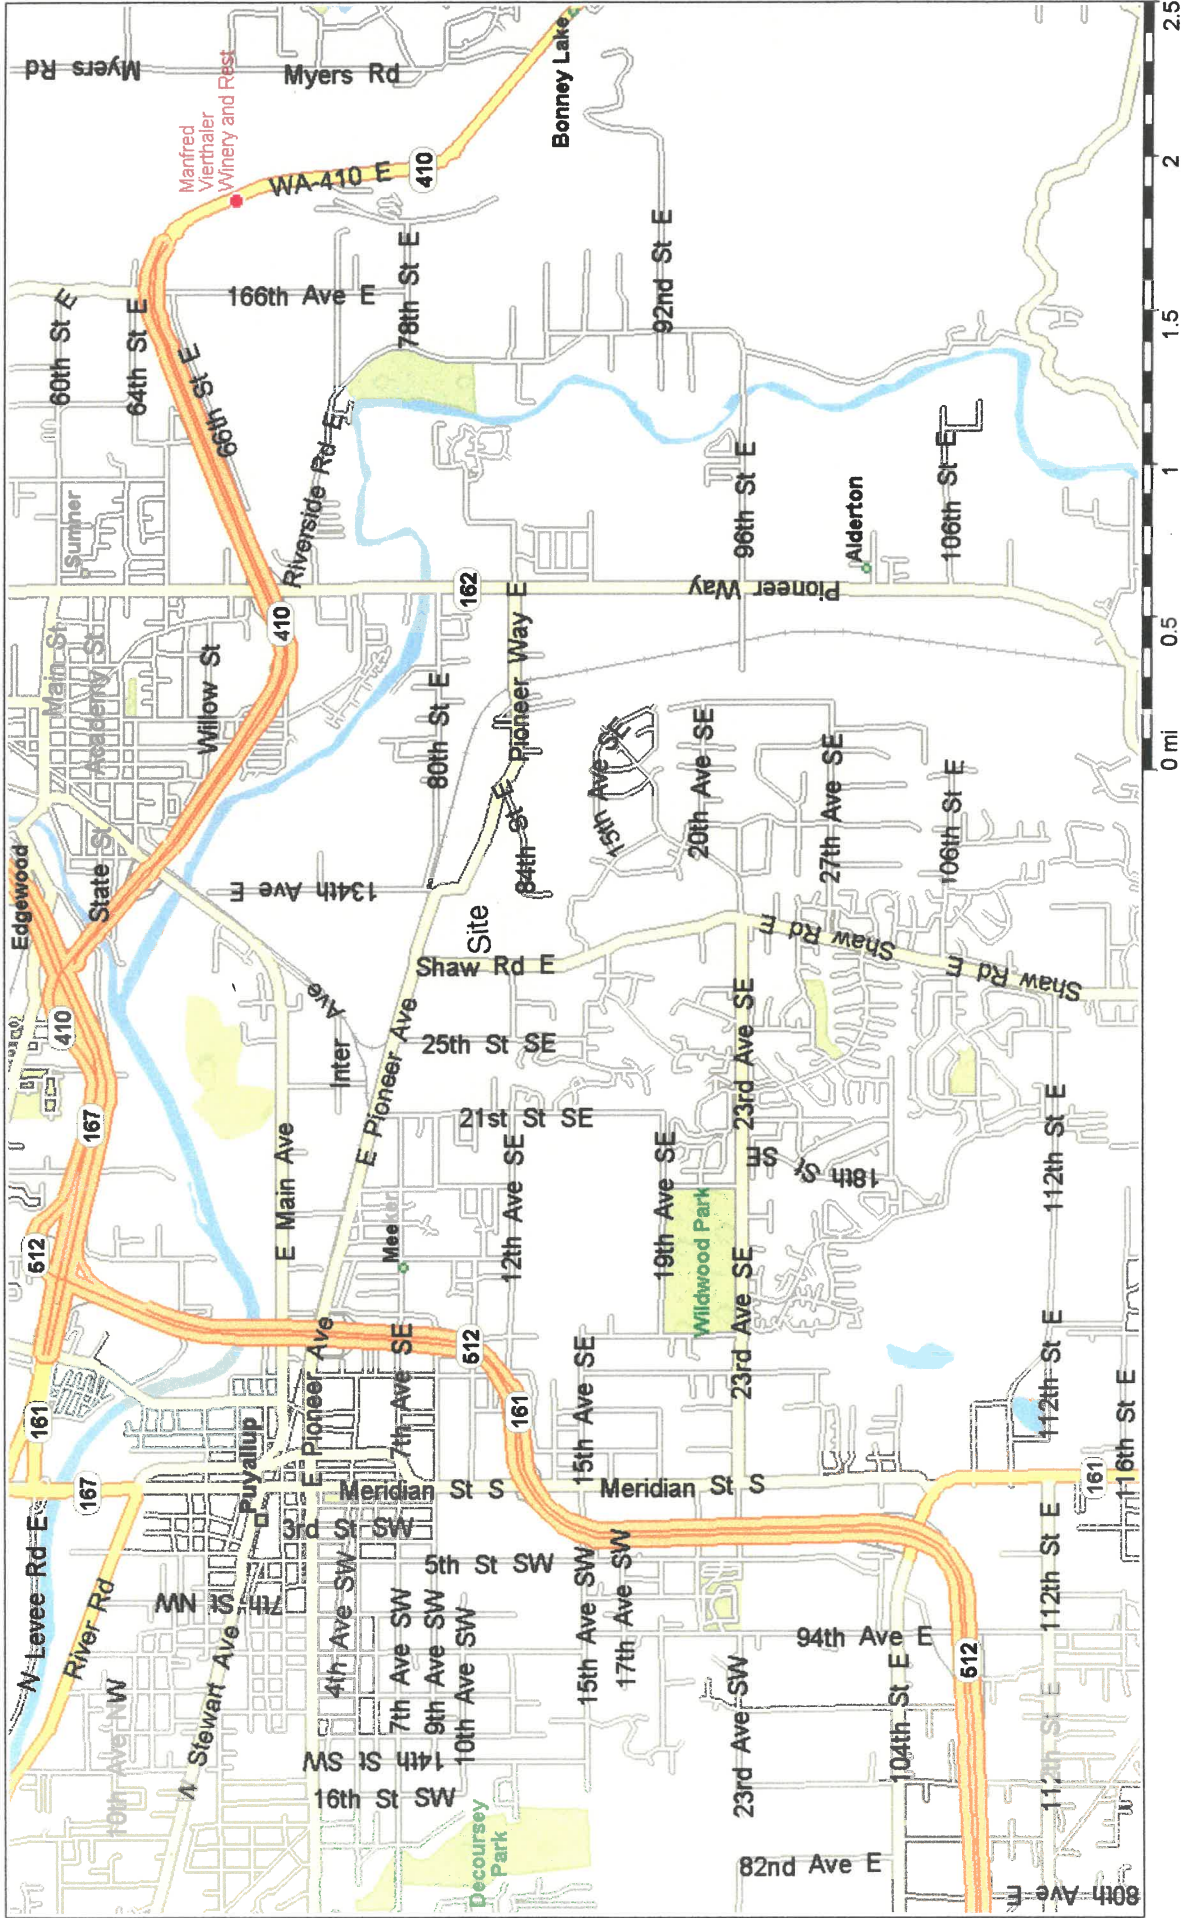


# 01-127 Shaw/Pioneer Commercial Vicinity Map

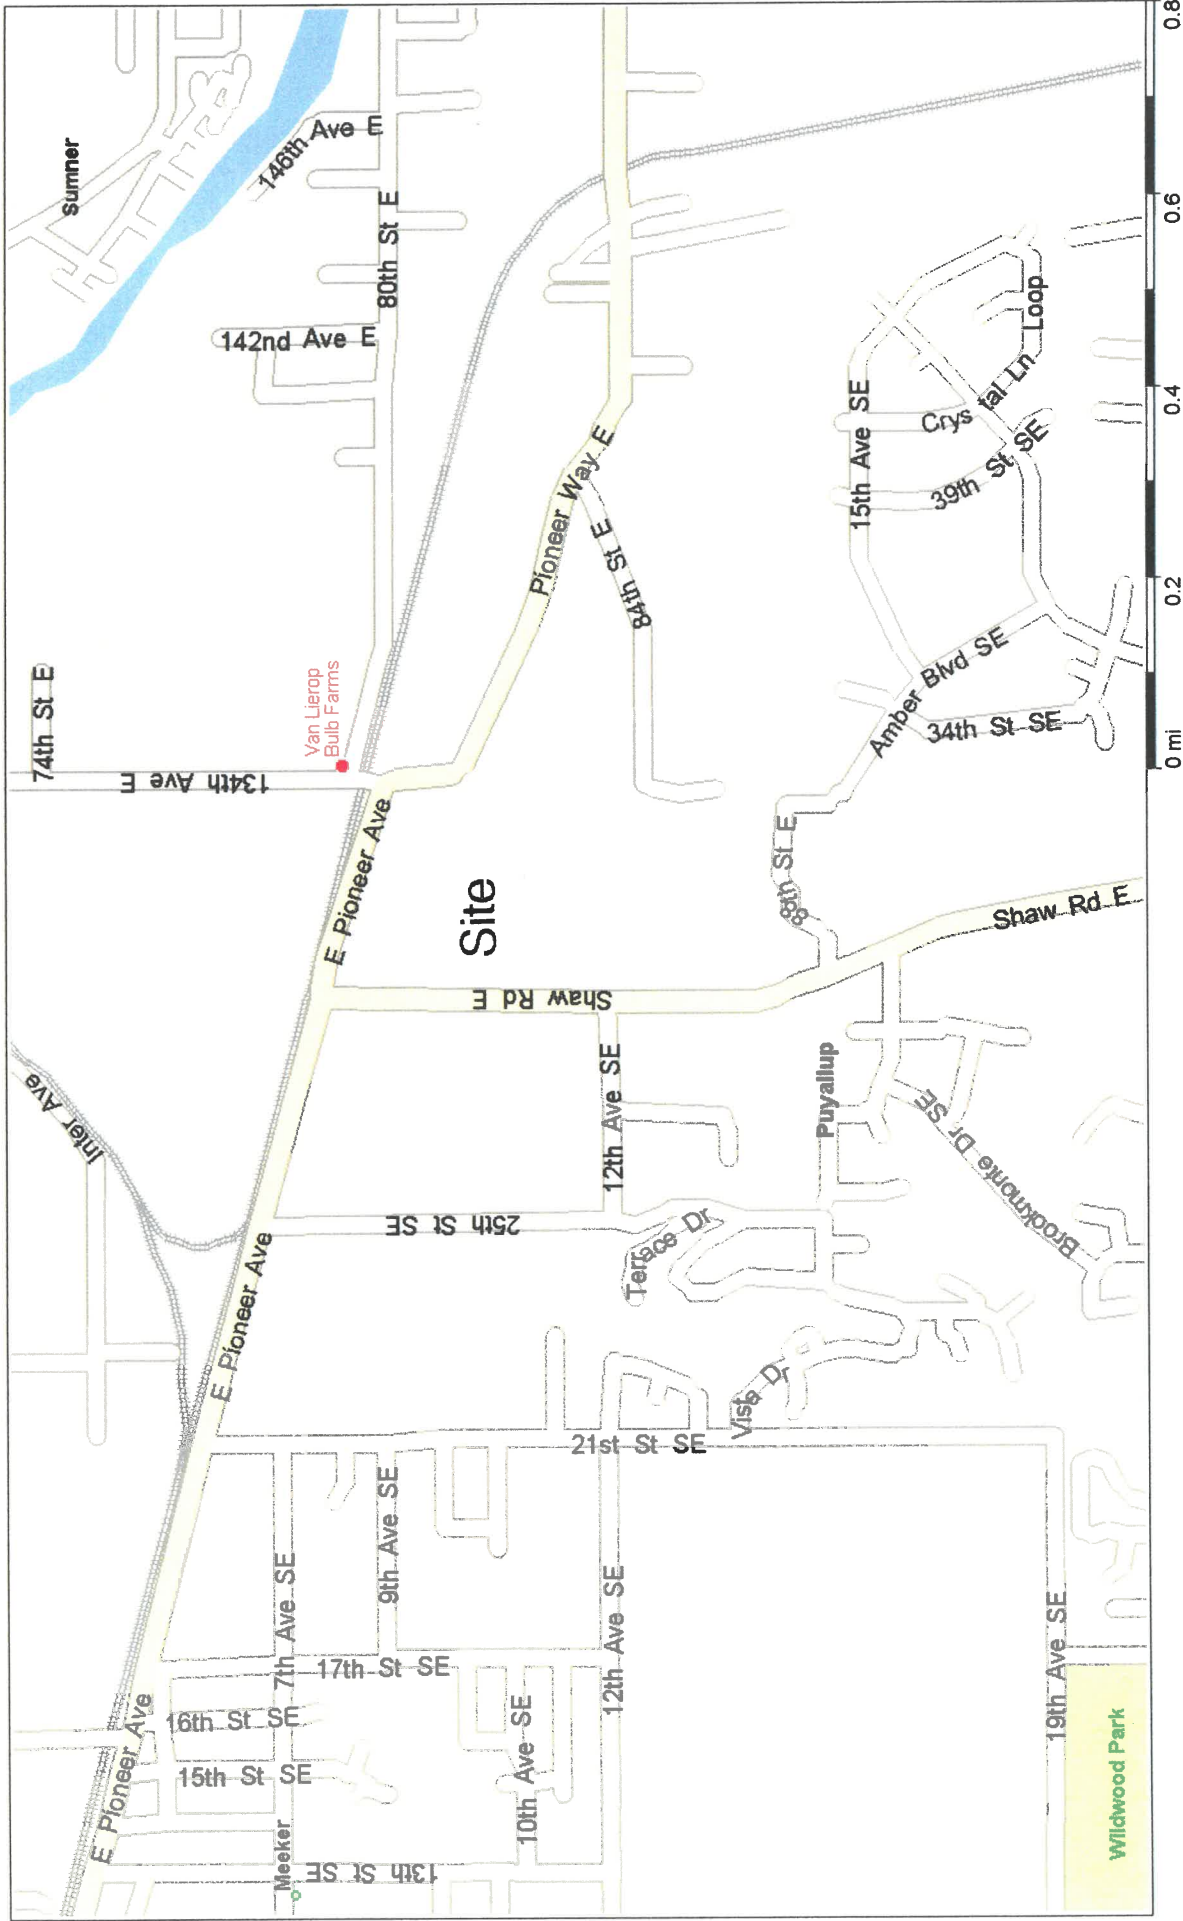

# SHAW PIONEER DEVELOPMENT AREA ADJACENT ZONING

- LEGEND**
- CG = GENERAL COMMERCIAL
  - CB = COMMUNITY BUSINESS
  - MP = BUSINESS PARK
  - ML = LIGHT MANUFACTURING/WAREHOUSING
  - RS-08 = LOW URBAN DENSITY RESIDENTIAL
  - RS-08 = SINGLE FAMILY RESIDENTIAL
  - OPEN SPACE OVERLAY
  - GAS PIPE LINES

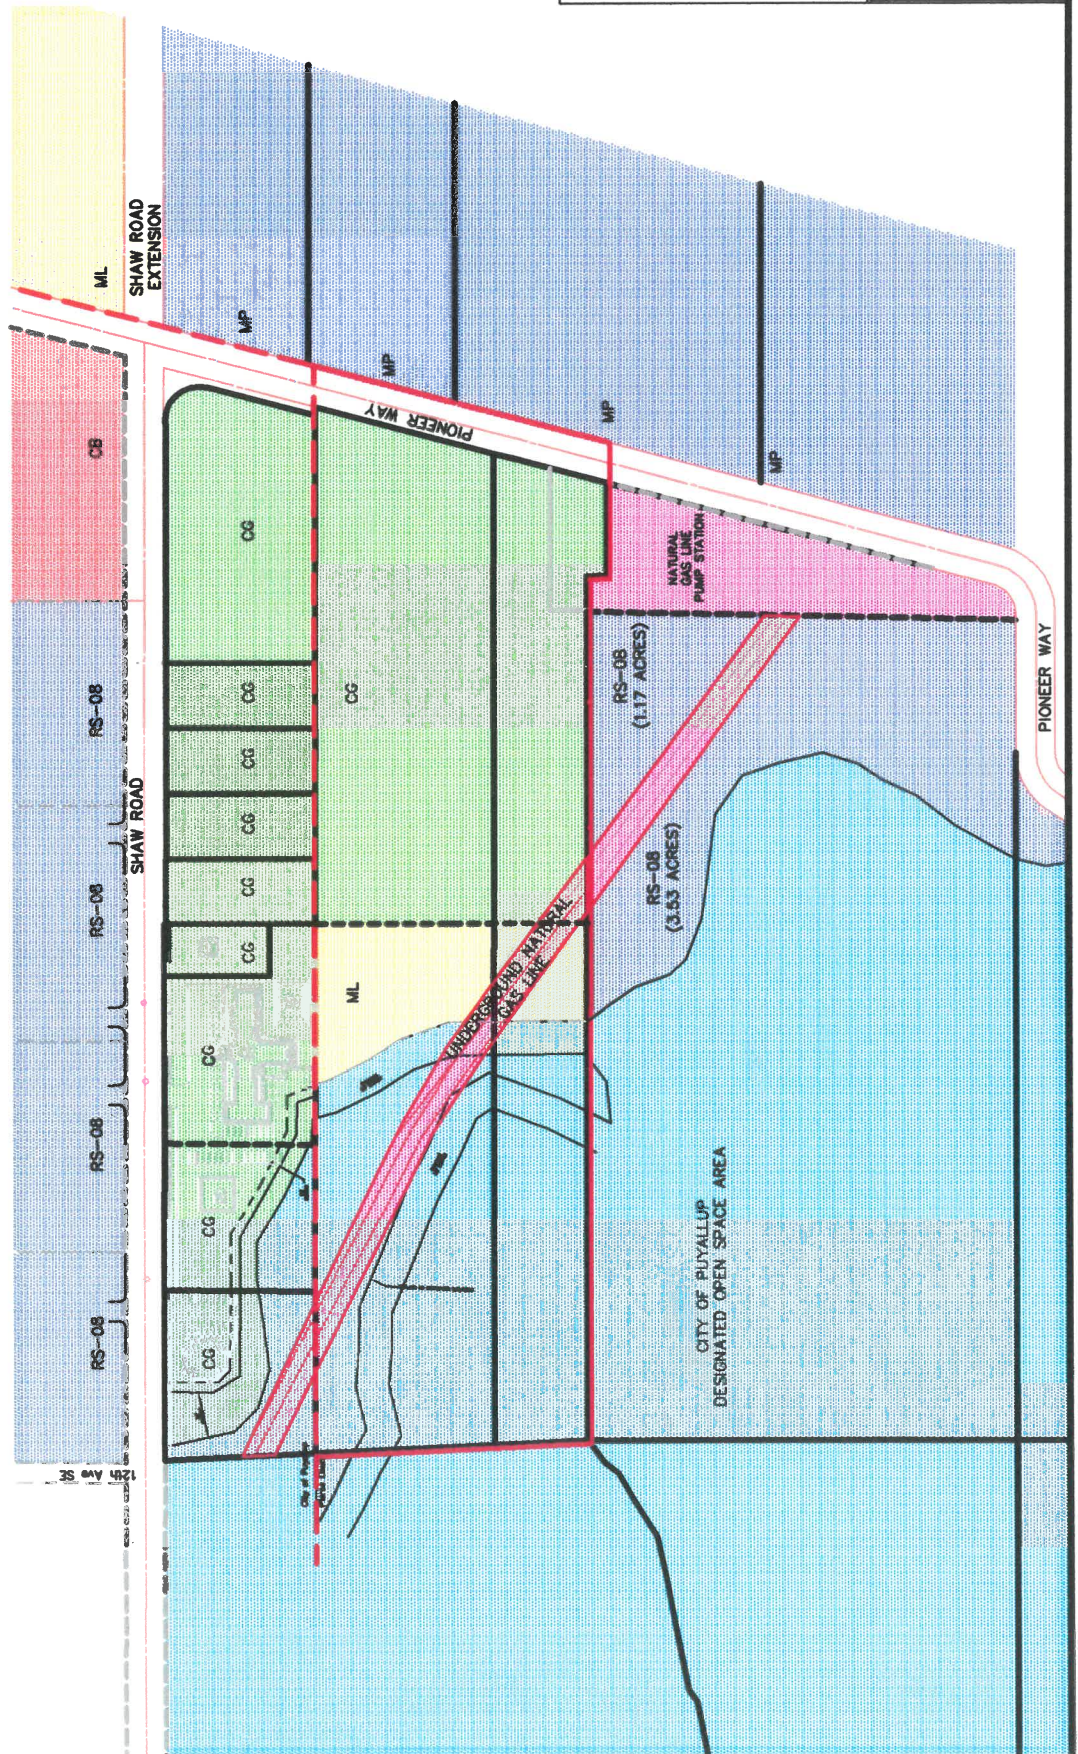

JOB # 01-177	DESIGNED BY: GJ Halteman
APPROVED BY: GJ Halteman	DATE: 21 December 2001
DRAFTED BY: Fred Swan	SHEET: 1 of 1



Abbey Road Group LLC  
 Land Development Company  
 1001 SHAW ROAD, PUYALLUP, WA 98372  
 P. O. Box 207, Puyallup, WA 98371  
 (253) 435-3699, Fax (253) 841-0925

Shaw Pioneer Development  
 1001 Shaw Road  
 Puyallup, WA 98371

Shaw Pioneer Development Zoning  
 Adjacent Zoning  
 Puyallup, Washington

# Shaw Pioneer Development Area Aerial Photo



JOB #:	01-127
DESIGNED BY:	Ol Hulsman
DEVELOPMENT REVIEW:	Ol Hulsman
APPROVED BY:	Ol Hulsman
DRAFTED BY:	Pete Swan
DATE:	21 December 2001
SHEET:	1 of 1




Abbey Road Group LLC  
 Land Development Company  
 1001 SHAW ROAD, PUYALLUP, WA 98372  
 P. O. Box 207, Puyallup, WA 98371  
 (253) 435-3699, Fax (253) 841-0925


Shaw Pioneer Development  
 1001 Shaw Road  
 Puyallup, WA 98371

Shaw Pioneer  
 Development Area  
 Site Plan  
 Puyallup, Washington

REVISIONS	BY:	CHK:	APP:	DATE:	ISS:




SHAW PIONEER  
 DEVELOPMENT AREA  
 SITE PLAN

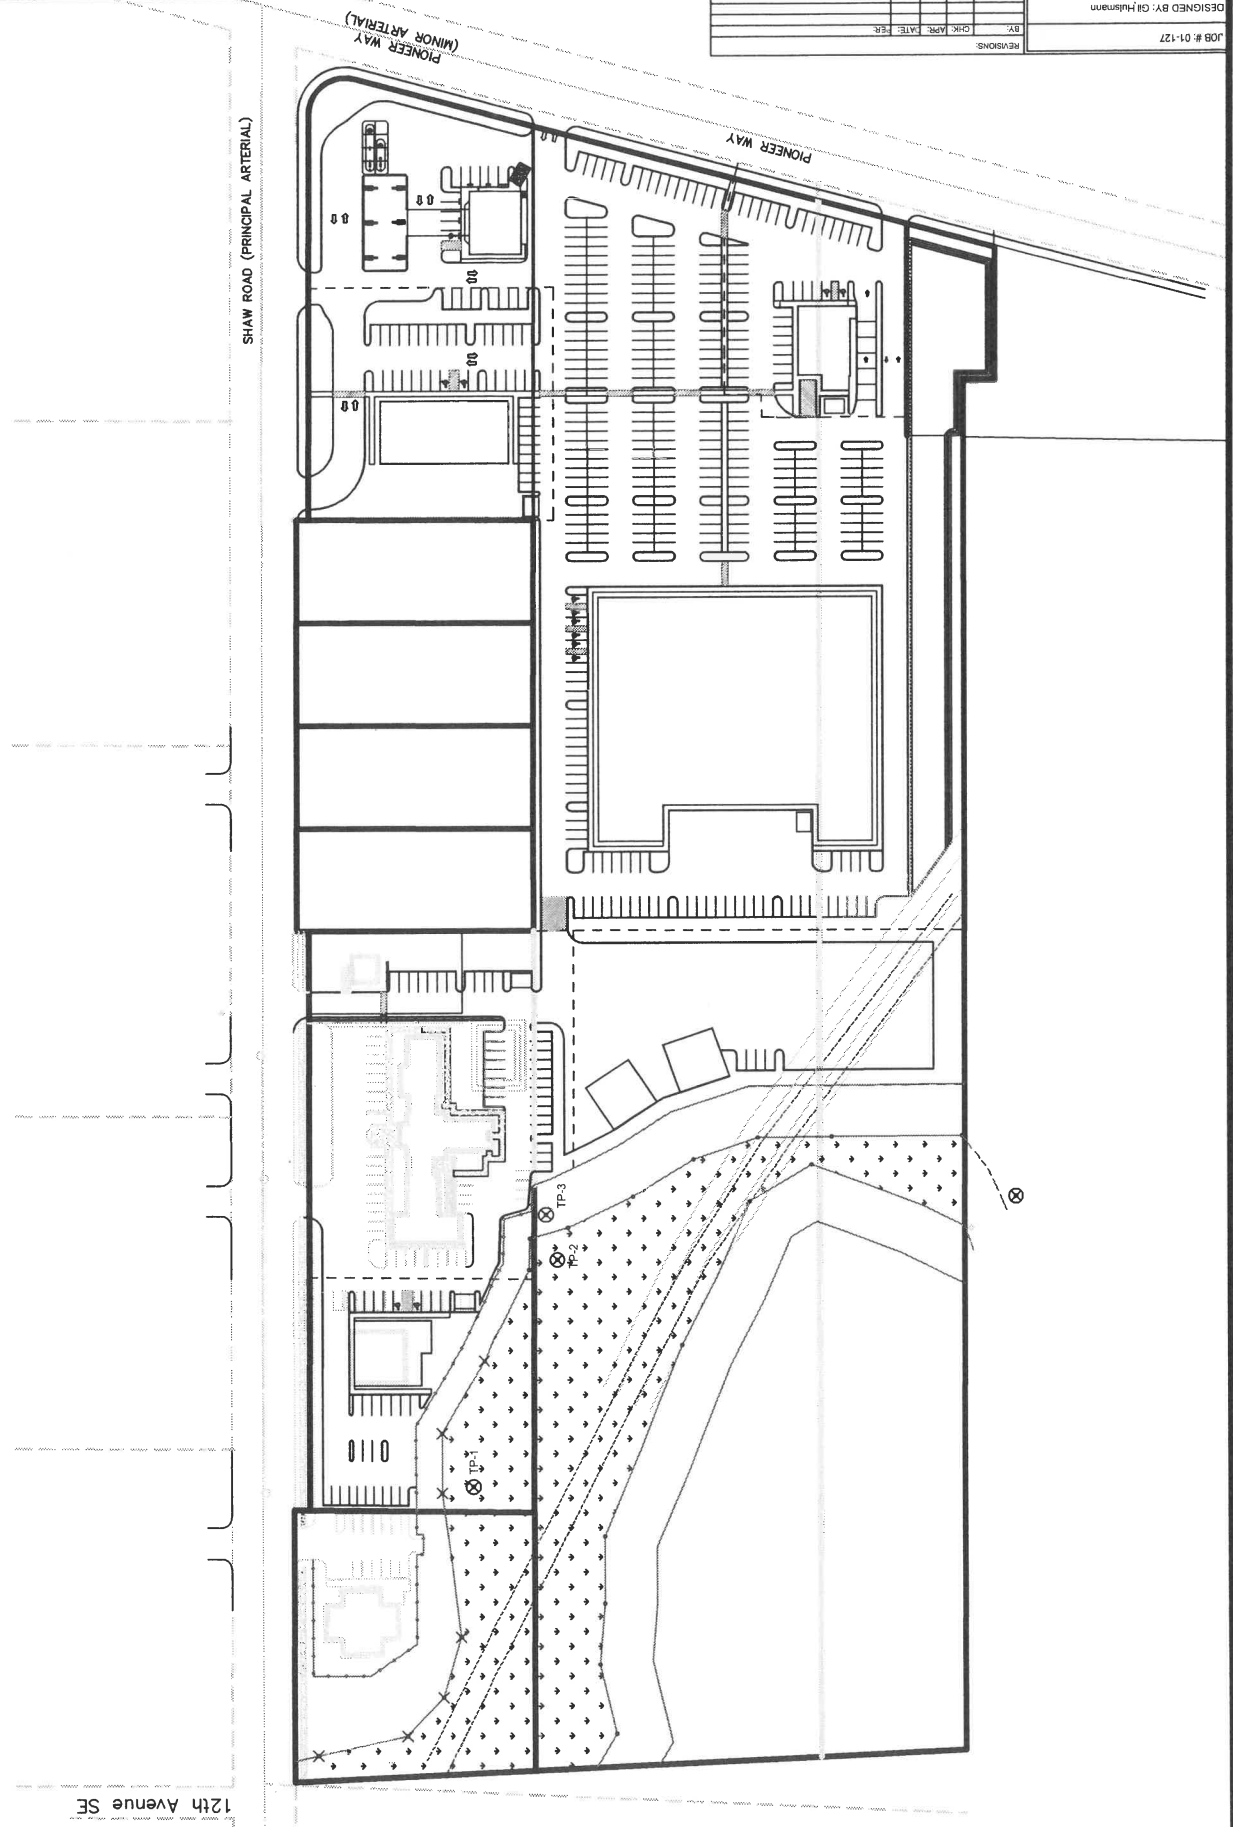

12th Avenue SE

# DEVELOPMENT AREA KEY MAP

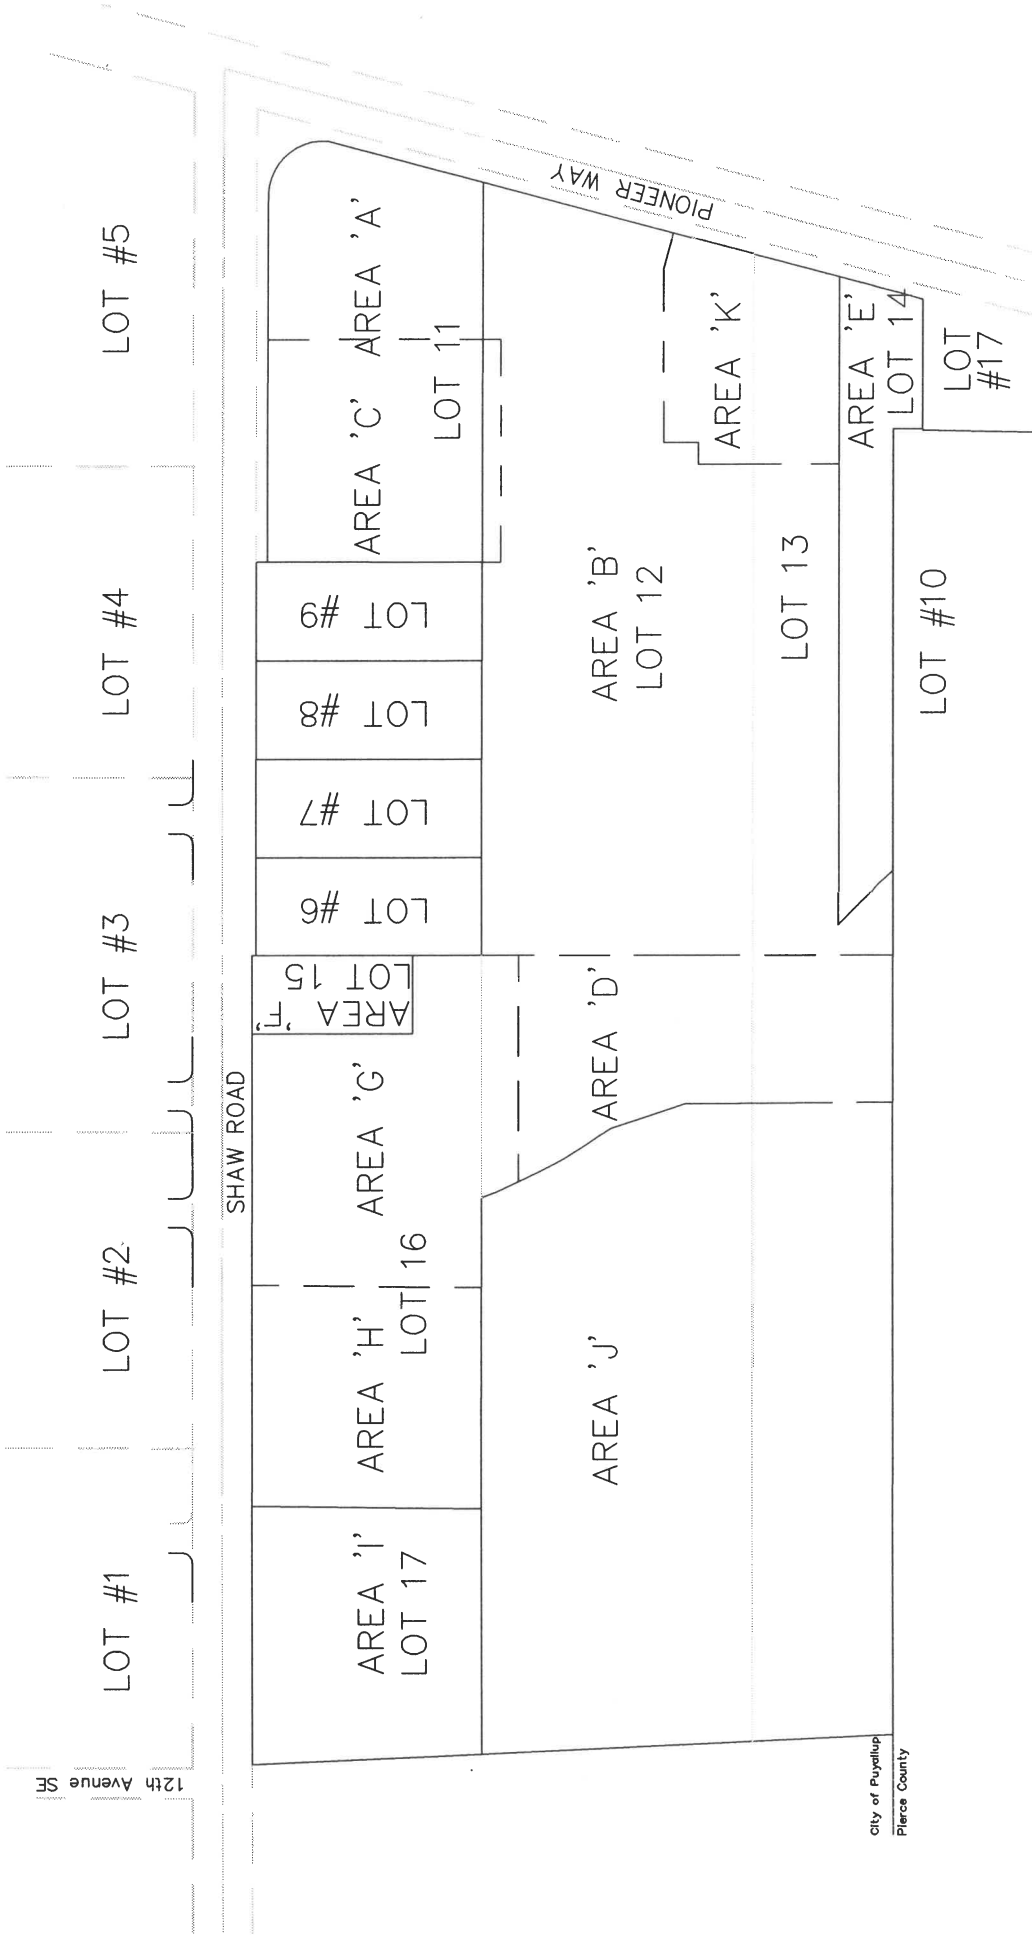



# EXISTING LOTS

AREA NAME	AREA SIZE		EXISTING USE	PARCEL NUMBER
	SF	ACRES		
LOT 11	91,159.16	2.09	FARM LAND	0420264021
LOT 12	422,839.69	9.70	FARM LAND	0420264011
LOT 13	198,509.87	4.55	FARM LAND	0420264043
LOT 14	14,984.34	0.34	SINGLE FAMILY RESIDENCE	0420264042
LOT 15	12,803.58	0.29	COMMERCIAL OFFICE BUILDING	0420355020
LOT 16	115,449.69	2.65	COMMERCIAL OFFICE BUILDING & CONTRACTOR'S YARD/BUILDING	0420355019
LOT 17	57,629.19	1.32	COMMERCIAL OFFICE BUILDING	0420355018

TOTAL:      913,375.52    20.96

# ADJACENT LOTS

AREA NAME	EXISTING USE	ZONED	PARCEL NUMBER
LOT #1	SCHOOL	RS-08	N/A
LOT #2	SCHOOL	RS-08	N/A
LOT #3	SCHOOL	RS-08	N/A
LOT #4	FARM LAND	RS-08	N/A
LOT #5	FARM LAND	CB	N/A
LOT #6	SINGLE FAMILY RESIDENTS	CG	0420351025
LOT #7	SINGLE FAMILY RESIDENTS	CG	0420351026
LOT #8	SINGLE FAMILY RESIDENTS	CG	0420351029
LOT #9	SINGLE FAMILY RESIDENTS	CG	0420351030
LOT #10	OPEN SPACE	RS-08	N/A
LOT #18	GAS PUMP STATION	MUD	N/A

# PROPOSED AREAS (LOTS/TRACT)

AREA NAME	AREA SIZE		USE	ZONING
	SF	ACRES		
AREA 'A'	38,264.29	0.88	RETAIL BUILDING	CG
AREA 'B'	230,926.46	5.30	RETAIL BUILDING	CG
AREA 'C'	52,895.68	1.21	RETAIL BUILDING	CG
AREA 'D'	62,758.41	1.44	CONTRACTOR'S YARD	ML
AREA 'E'	39,066.70	0.89	STORM DRAIN TRACT	CG
AREA 'F'	12,803.58	0.29	EXISTING OFFICE BUILDING	CG
AREA 'G'	73,022.68	1.67	EXISTING OFFICE BUILDING	CG
AREA 'H'	51,141.23	1.17	OFFICE BUILDING	CG
AREA 'I'	57,629.19	1.32	EXISTING OFFICE BUILDING	CG
AREA 'J'	257,464.62	5.91	SENSITIVE AREAS/STEEP SLOPES/WETLANDS	ML
AREA 'K'	37,348.12	0.85	FAST FOOD RESTURANT	CG

TOTAL:      913,320.96    20.96

# PROPOSED BUILDING AND PARKING SPECIFICATIONS

AREA NAME	BUILDING SF	BUILDING TYPE	CITY CODE	STALLS REQUIRED	STALLS PROVIDED	DIFFERENCE
AREA 'A'	3,152	RETAIL BUILDING (SINGLE STORY)	1 STALL PER 300 SF	11	19	+8
AREA 'B'	56,680	RETAIL BUILDING (SINGLE STORY)	1 STALL PER 300 SF	189	278	+89
AREA 'C'	7,311	RETAIL BUILDING (SINGLE STORY)	1 STALL PER 300 SF	25	41	+16
AREA 'D'	(2) 3,750	CONTRACTOR'S YARD	1 STALL PER 1,200 SF	7	7	0
AREA 'E'	N/A	STORM DRAIN TRACT	N/A	N/A	0	0
AREA 'F'	842	EXISTING OFFICE BUILDING (SINGLE STORY)	1 STALL PER 300 SF	3	11	+8
AREA 'G'	9,995	EXISTING OFFICE BUILDING (SINGLE STORY)	1 STALL PER 300 SF	34	51	+17
AREA 'H'	8,552	OFFICE BUILDING (2 STORY)	1 STALL PER 300 SF	29	29	0
AREA 'I'	3,246	EXISTING OFFICE BUILDING (SINGLE STORY)	1 STALL PER 300 SF	11	14	+3
AREA 'J'	N/A	SENSITIVE AREAS/STEEP SLOPES/WETLANDS	N/A	N/A	0	0
AREA 'K'	3,718	FAST FOOD RESTURANT (SINGLE STORY)	1 STALL PER 90 SF	42	42	0
TOTAL:	100,996			351	492	+141

# *Appendix E*

---

- Construction Stormwater Pollution Prevention Plan (CSWPPP)



## **Construction Stormwater Pollution Prevention Plan – Phase 2**

*PREPARED FOR:*

Greg Helle  
1001 Shaw Road  
Puyallup, WA 98372

*PROJECT:*

East Town Crossing  
2902 E Pioneer  
Puyallup, WA 98372  
2230723.10

*PREPARED BY:*

Zachary Perdue  
Project Engineer

*REVIEWED BY:*

Todd C. Sawin, PE, DBIA, LEED AP  
Principal

*DATE:*

May 2024

## **Construction Stormwater Pollution Prevention Plan**

*PREPARED FOR:*

Greg Helle  
1001 Shaw Road  
Puyallup, WA 98372

*PROJECT:*

East Town Crossing  
2902 E Pioneer  
Puyallup, WA 98372  
2230723.10

*PREPARED BY:*

Zachary Perdue  
Project Engineer

*REVIEWED BY:*

Todd C. Sawin, PE, DBIA, LEED AP  
Principal

*DATE:*

May 2024

I hereby state that this [Construction Stormwater Pollution Prevention Plan](#) for the [East Town Crossing – Phase 2](#) project has been prepared by me or under my supervision and meets the standard of care and expertise that is usual and customary in this community for professional engineers. I understand that [the City of Puyallup](#) does not and will not assume liability for the sufficiency, suitability, or performance of drainage facilities prepared by me.

## Table of Contents

---

Section	Page
<b>1.0 Introduction</b> .....	<b>1</b>
<b>2.0 Project Description</b> .....	<b>2</b>
<b>3.0 Existing Site Conditions</b> .....	<b>2</b>
<b>4.0 Adjacent Areas and Drainage</b> .....	<b>2</b>
<b>5.0 Critical Areas</b> .....	<b>3</b>
<b>6.0 Soils</b> .....	<b>3</b>
<b>7.0 Potential Erosion Problems</b> .....	<b>3</b>
<b>8.0 Construction Stormwater Pollution Prevention Elements</b> .....	<b>3</b>
8.1 Mark Clearing Limits .....	4
8.2 Establish Construction Access.....	4
8.3 Control Flow Rates.....	4
8.4 Install Sediment Controls .....	4
8.5 Stabilize Soils and Dust Control.....	4
8.6 Protect Slopes.....	5
8.7 Protect Drain Inlets.....	5
8.8 Stabilize Channels and Outlets.....	5
8.9 Control Pollutants.....	5
8.9.1 Required BMPs .....	6
8.10 Control Dewatering .....	7
8.11 Maintain BMPs.....	7
8.12 Manage the Project.....	7
<b>9.0 Construction Sequence and Phasing</b> .....	<b>8</b>
9.1 Construction Sequence.....	8
9.2 Construction Phasing.....	8
<b>10.0 Construction Schedule</b> .....	<b>9</b>
<b>11.0 Financial/Ownership Responsibilities</b> .....	<b>9</b>
<b>12.0 Certified Erosion and Sediment Control Lead (CESCL)</b> .....	<b>9</b>
<b>13.0 Monitoring and Sampling Requirements</b> .....	<b>10</b>



13.1	Site Inspection.....	10
13.2	Stormwater Quality Sampling .....	11
13.2.1	Turbidity Sampling .....	11
13.2.2	pH Sampling.....	11
<b>14.0</b>	<b>Conclusion.....</b>	<b>12</b>

# **Exhibits**

---

## **Appendix F**

- F-1 ..... TESC Plan
- F-2 ..... TESC Notes and Details
- F-3 ..... Trap Sizing Calculations

## **Appendix G**

### **Inspection Logs**

## **Appendix H**

### **Best Management Practices (BMPs)**

- BMP C102 ..... Buffer Zones
- BMP C103 ..... High Visibility Fence
- BMP C105 ..... Stabilized Construction Entrance
- BMP C107 ..... Construction Road / Parking Area Stabilization
- BMP C120 ..... Temporary and Permanent Seeding
- BMP C121 ..... Mulching
- BMP C122 ..... Nets and Blankets
- BMP C123 ..... Plastic Covering
- BMP C140 ..... Dust Control
- BMP C150 ..... Materials on Hand
- BMP C151 ..... Concrete Handling
- BMP C152 ..... Sawcutting and Surface Pollution Prevention
- BMP C153 ..... Material Delivery, Storage, and Containment
- BMP C160 ..... Certified Erosion and Sediment Control Lead
- BMP C209 ..... Outlet Protection
- BMP C220 ..... Storm Drain Inlet Protection
- BMP C233 ..... Silt Fence
- BMP C240 ..... Sediment Trap (Temporary)

## 1.0 Introduction

In 1972, Congress passed the Federal Water Pollution Control Act (FWPCA), also known as the Clean Water Act (CWA), to restore and maintain the quality of the nation's waterways. The ultimate goal was to make sure that rivers and streams were fishable, swimmable, and drinkable. In 1987, the Water Quality Act (WQA) added provisions to the CWA that allowed the Environmental Protection Agency to govern stormwater discharges from construction sites. The National Pollutant Discharge Elimination System (NPDES) General Permit includes provisions for development of a Stormwater Pollution Prevention Plan (SWPPP) to maximize the potential benefits of pollution prevention and sediment and erosion control measures at construction sites.

The proposed project will disturb more than 1 acre of area, and therefore is required to obtain an NPDES General Permit for Stormwater Associated with Construction Activities.

The 2019 Department of Ecology (DOE) *Stormwater Management Manual for Western Washington (SMMWW)* requires a Construction SWPPP for projects that add or replace more than 2,000 square feet of impervious surfaces. The proposed project will exceed this threshold; therefore, a Construction SWPPP is required.

Development, implementation, and maintenance of the Construction SWPPP will provide the selected General Contractor with the framework for reducing soil erosion and minimizing pollutants in stormwater during construction of the proposed project. The Construction SWPPP will:

- Define the characteristics of the site and the type of construction that will occur.
- Describe the practices that will be implemented to control erosion and the release of pollutants in stormwater.
- Create an implementation schedule to ensure that the practices described in this Construction SWPPP are in fact implemented, and to evaluate the plan's effectiveness in reducing erosion, sediment, and pollutant levels in stormwater discharged from the site.
- Describe the final stabilization/termination design to minimize erosion and prevent stormwater impacts after construction is complete.

This Construction SWPPP:

- Identifies the SWPPP Coordinator with a description of this person's duties.
- Identifies the Stormwater Pollution Prevention Team (SWPP Team) that will assist in implementation of the Construction SWPPP during construction.
- Describes the existing site conditions, including existing land use for the site, the soil types at the site, as well as the location of surface waters that are located on or next to the site.
- Identifies the body or bodies of water that will receive runoff from the construction site, including the ultimate body of water that receives the stormwater.
- Identifies the drainage areas and potential stormwater contaminants.
- Describes the stormwater management controls and various Best Management Practices (BMPs) necessary to reduce erosion, sediment, and pollutants in stormwater discharge.
- Describes the facility monitoring plan and how controls will be coordinated with construction activities.
- Describes the implementation schedule and provisions for amendment of the plan.

## 2.0 Project Description

Phase 2 of the East Town Crossing project proposes to develop an approximately 2.45-acre site located on Tax Parcels 0420351066, 0420264053, 0420264054 in the City of Puyallup, Washington. Refer to Appendix A, Exhibit A-1 for the Vicinity Map.

The developed site includes 3 multifamily buildings, and 1 property management/clubhouse building, associated parking, road access, and utilities. Perimeter and island landscaping will be provided as required by the City of Puyallup. The paved areas will drain to the proposed catch basins located the sites proposed local low points. Runoff collected in these catch basins will be treated by one of two BioPods before being conveyed to an existing R-Tank system where stormwater will be detained. Control structures will control the release rate of stormwater discharging to the enhanced channel that lines the east and north of the site. Stormwater ultimately discharges to the Puyallup River via open channels alongside E Pioneer, and Deer Creek running west.

The proposal will follow the stormwater management design criteria outlined in the DOE 2019 *SMMWW*. Control methods during construction include working during the dry season, minimizing the amount of area that is disturbed at any given time, installing a stabilized construction entrance, placing inlet protection at catch basins and culvert entrances, utilizing interceptor swales and temporary sediment trap, and utilizing silt fence, if necessary.

Refer to Appendix F, Exhibits F-1 and F-2 for the TESC Plan and TESC Notes and Details respectively. Refer to Exhibit F-3 for Temporary Sediment Trap Sizing.

## 3.0 Existing Site Conditions

The existing site area is approximately 2.45 acres and is currently a mixture of developed and undeveloped land cover. Within the three parcels, a gravel access road connects E Pioneer to the commercial property to the south. The majority of the groundcover is made up of tall grass, shrubs, and a few trees. The temporary Phase 1 hammerhead and access to Pioneer fall within the work limits of Phase 2 and will be removed/replaced.

The site contains a combined detention/wetpond that receives runoff from the commercial property to the south before overflowing into the existing channel lining the east and north of the property. Apart from the existing storm facility, the site generally slopes from southeast to northwest, with the large majority of runoff discharging to the northern portion of the channel. Small sections of the eastern part of the site discharge to the channel on to the east, but not enough to be significant. In general, the northern channel is the site's point of discharge. A topographical survey of the project was prepared by Abbey Road Group. that shows existing site conditions. See Appendix A, Exhibit A-2 for the Existing Conditions Map.

## 4.0 Adjacent Areas and Drainage

In existing conditions, the commercial property on the parcel to the south drains to the combined detention/wetpond located on the southeastern portion of our site. Due to lack of maintenance, the existing stream has breached the storm facilities eastern berm and the control structure now detains and releases the streams flow as well as the runoff from the southern property. After release from the control structure, stormwater is conveyed to the Pioneer Way ditch located at the north property line and then via a storm pipe away from the site. As a part of phase 2, the existing storm facility will be replaced and the stream will be relocated.

In existing condition, stormwater leaves the site on the northern portion of the channel that runs around the east and north of the site. A culvert collects the water from the channel and directs it

northwest under the intersection of E Pioneer and Shaw Road E. A channel then runs along E Pioneer on the roadside of the railroad before it intersects another culvert directing water through deer creek and then the Puyallup River less than a mile away.

As a part of phase 2, the existing channel will be enhanced within the bounds of the site. Stream regrading will occur under the stream grading permit.

## **5.0 Critical Areas**

There are no known critical areas on or near the project site.

## **6.0 Soils**

The National Resources Conservation Service (NRCS) classifies the onsite soils as Briscot Loam in the northern two-thirds of the site and Puyallup fine sandy loam in the lower third of the site. Appendix A, Exhibit A-4 provides the NRCS soil map. Briscot Loam is classified as hydrologic soil group B/D with poorly draining characteristics. Puyallup fine sandy loam is classified as hydrologic soil group A with well-draining characteristics.

In addition to the NRCS information, Krazan & Associates, Inc prepared a geotechnical report for the site. On March 4, 2021, two large-scale pilot infiltration tests were completed. Based on the results presented in the Geotechnical Report, it was determined that the soils at the site contain high silt content and are considered a very low to relatively impermeable layer. Due to this, in opposition of the NRCS report, the entire site is not recommended for any infiltration due to the presence of unfavorable soils.

In relation to construction efforts, original testing by Krazan & Associates, Inc. shows that the underlying soils are unsuitable for supporting traffic loads when wet. It is recommended that a Geotechnical Engineer is present to provide guidance during construction.

See Appendix B, Exhibit B-1 for the Krazan & Associates, Inc. Geotechnical Engineering Report and Appendix B-2 for the Migizi Group Geotechnical Letter.

## **7.0 Potential Erosion Problems**

Based on an investigation by Krazan & Associates, Inc., there are steep slopes located roughly 300 feet to the south and east of the site mapped as moderate to high for shallow landslide susceptibility and moderate for deep susceptibility. However, there are no historic landslides or debris mapped at the nearby slopes. Due to the presence of a developed and partially developed parcel separating the landslide hazard and the site, Krazan & Associates, Inc. believes there is minimum to no risk to the planned development from nearby slopes.

In relation to onsite soil, underlying soil is unsuitable for supporting traffic loads when wet. Appropriate measures should be taken to stabilize soils for construction work before the wet season.

## **8.0 Construction Stormwater Pollution Prevention Elements**

The purpose of this section is to describe how each of the 12 Construction Stormwater Pollution Prevention elements has been addressed and to identify the type and location of BMPs used to satisfy the required element. If an element is not applicable to the project, a reason is provided.

## **8.1 Mark Clearing Limits**

Prior to beginning land-disturbing activities, clearing limits will be marked with high visibility plastic or metal fencing (BMP C103) as shown on the TESC Plan in Appendix F, Exhibit F-1. All vegetated areas outside the marked clearing limits shall be preserved in existing conditions, as well as buffer zones (BMP C102) set up around the existing stream. Fencing will also be used to protect the existing storm facility.

## **8.2 Establish Construction Access**

A stabilized construction entrance (BMP C105) is proposed at the northeast corner of the site off E Pioneer. If sediment is transported onto the road surface, the road shall be cleaned by shoveling or sweeping prior to washing. Sediment removal by washing alone will not be allowed. If sediment is tracked from the site, the City of Puyallup may require stabilization of internal roads to contain the sediment or require the installation of wheel wash basins. Construction roads / parking areas (BMP C107) will be stabilized wherever they are used.

## **8.3 Control Flow Rates**

Straw wattles shall be provided to prevent erosion and control flow rates leaving the site. The velocity of water leaving the site shall not exceed 3 ft/s if the discharge is to the existing channel. Clearwater Services has designed a Baker Tank and filtration assembly to control the stormwater release rate and quality before its discharge to the channel. Permanent flow control systems must be constructed and functioning prior to constructing hard surfaces.

## **8.4 Install Sediment Controls**

As part of initial construction activities, BMPs will be installed to trap sediment onsite. Inlet Protection (BMP C220) for existing catch basins and proposed catch basins within the project area and in the adjacent streets that may receive runoff shall be implemented. Silt fence (BMP C233) will be placed along all downgradient boundaries of the proposed project limits to prevent sediment laden runoff from leaving the site. A temporary sediment trap (BMP C240) will also be used, of which sizing calculations are included in Appendix F, exhibit F-3.

## **8.5 Stabilize Soils and Dust Control**

Exposed areas and soil stockpiles must be stabilized according to the following schedule:

1. From April 1 to October 31, all disturbed areas at final grade and all exposed areas that are scheduled to remain unworked for more than 30 days shall be stabilized within 10 days.
2. From November 1 to March 31, all exposed soils at final grade shall be stabilized immediately using permanent or temporary measures. Exposed soils with an area greater than 5,000 square feet that are scheduled to remain unworked for more than 24 hours, and exposed areas of less than 5,000 square feet that will remain unworked for more than 7 days shall be stabilized immediately.

All disturbed areas that are not planned to be constructed on within 90 days from time of clearing and grading shall be revegetated with the native vegetation.

To stabilize soils, BMPs such as temporary and permanent seeding (BMP C120), mulching (BMP C121), nets and blankets (BMP C122), and plastic coverings (BMP C123) will be utilized. While Dust will be controlled following BMP C140.

## 8.6 Protect Slopes

The majority of the site has flat slopes of 0-3%. There are small, isolated areas with slopes greater than 3%, however, no slopes over 20% are being disturbed. All exposed soil not covered by buildings, roadway, or sidewalks will be Hydroseeded, and their slopes will be no greater than 2:1.

## 8.7 Protect Drain Inlets

Storm drain inlets shall be protected so that surface water runoff does not enter the conveyance system without first being filtered. Inlets shall be inspected weekly, at a minimum, and daily during storm events. Storm Drain Inlet Protection (BMP C220) will be provided.

## 8.8 Stabilize Channels and Outlets

There is an existing channel alongside E Pioneer that will be protected as necessary. Provide stabilization, including armoring material (if approved by the AHJ) adequate to prevent erosion of outlets, adjacent stream banks, slopes, and downstream reaches at the outlets of all conveyance systems. Outlet protection (BMP C209) will be used to prevent scour at conveyance outlets and minimize downstream erosion.

## 8.9 Control Pollutants

All waste materials will be collected and stored in a securely closed metal dumpster. All trash and construction debris from the site will be deposited in the dumpster. The dumpster will be emptied a minimum of once per week, and the trash will be hauled to the local landfill. No construction materials will be buried onsite. All personnel will be instructed regarding the correct procedure for waste disposal. All sanitary waste will be collected from the portable units a minimum of three times per week. Good housekeeping and spill control practices will be followed during construction to minimize stormwater contamination from petroleum products, fertilizers, and concrete.

Table 1 below lists several pollutants that are commonly found on construction sites that have the potential to contaminate storm runoff. These pollutants will be present, mainly in areas of building and pavement construction. The Contractor and the SWPPP/TESC Coordinator will be responsible for identifying areas where these pollutants are being used and monitor runoff coming from these areas. Pollutant sources will be covered with plastic if contaminated runoff is observed from these areas. If contaminated runoff is found in the sediment trap or soils, the Erosion Control Specialist will direct the Contractor to remove the polluted water/soil and dispose of it in an approved area offsite.

**Table 1 – Potential Construction Site Stormwater Pollutants**

Trade Name Material	Chemical/Physical Description <sup>(1)</sup>	Stormwater Pollutants <sup>(1)</sup>
Pesticides (insecticides, fungicides, herbicide, rodenticides)	Various colored to colorless liquid, powder, pellets, or grains	Chlorinated hydrocarbons, organophosphates, carbamates, arsenic
Fertilizer	Liquid or solid grains	Nitrogen, phosphorous
Plaster	White granules or powder	Calcium sulphate, calcium carbonate, sulfuric acid
Cleaning solvents	Colorless, blue, or yellow-green liquid	Perchloroethylene, methylene chloride, trichloroethylene, petroleum distillates
Asphalt	Black solid	Oil, petroleum distillates
Concrete	White solid	Limestone, sand

Trade Name Material	Chemical/Physical Description <sup>(1)</sup>	Stormwater Pollutants <sup>(1)</sup>
Glue, adhesives	White or yellow liquid	Polymers, epoxies
Paints	Various colored liquid	Metal oxides, Stoddard solvent, talc, calcium carbonate, arsenic
Curing compounds	Creamy white liquid	Naphtha
Wastewater from construction equipment washing	Water	Soil, oil & grease, solids
Wood preservatives	Clear amber or dark brown liquid	Stoddard solvent, petroleum distillates, arsenic, copper, chromium
Hydraulic oil/fluids	Brown oily petroleum hydrocarbon	Mineral oil
Gasoline	Colorless, pale brown or pink petroleum hydrocarbon	Benzene, ethyl benzene, toluene, xylene, MTBE
Diesel fuel	Clear, blue-green to yellow liquid	Petroleum distillate, oil & grease, naphthalene, xylenes
Kerosene	Pale yellow liquid petroleum hydrocarbon	Coal oil, petroleum distillates
Antifreeze/coolant	Clear green/yellow liquid	Ethylene glycol, propylene glycol, heavy metals (copper, lead, zinc)
Erosion	Solid Particles	Soil, Sediment

<sup>(1)</sup> Data obtained from MSDS when available

### 8.9.1 Required BMPs

The following BMPs or equivalent measures are required of all businesses and agencies during concrete pouring and asphalt application at temporary sites:

- Employees must be educated on the pollution hazards of concrete and asphalt application and cutting.
- Loose aggregate chunks and dust must be swept or shoveled and collected (not hosed down a storm drain) for recycling or proper disposal at the end of each workday, especially at work sites such as streets, driveways, parking lots, sidewalks, curbs, and gutters where rain can readily pick up the loose material and carry it to the nearest stormwater conveyance. Small amounts of excess concrete, grout, and mortar can be disposed of in the trash.
- Storm drain covers or similarly effective containment devices must be placed over all nearby drains at the beginning of each day. Shovel or vacuum slurry and remove from the site. All accumulated runoff and solids must be collected and properly disposed at the end of each workday, or more often if necessary.
- Exposed aggregate washing, where the top layer of unhardened concrete is hosed or scraped off to leave a rough finish, must be done with a mechanism for containment and collection of the discarded concrete slurry (such as the storm drain covers mentioned above). The easiest way to contain the washwater will be to direct the washings to a hole in the ground where the water can percolate into the ground and the solids later covered with soil.
- If directed to a drain, a catch basin filter insert must be used to remove the solids. This is especially useful if the activity must proceed on rainy days.
- Cleaning of concrete application and mixing equipment or concrete vehicles on the work site must be done in a designated area where the rinse water is controlled. The rinse water must either be collected for proper disposal or put into a hole in the ground where the water



can percolate away, and the solids later covered with soil or recovered and disposed or recycled.

The use of any treatment BMP must not result in the violation of groundwater, surface water, or drinking water quality standards.

### **8.10 Control Dewatering**

Most proposed improvements are above the observed groundwater, with the exception of some utility installment. Should groundwater be encountered during construction, dewatering control measures shall be used to prevent untreated discharge of sediment-laden water. Clean dewatering shall not be routed through stormwater sediment ponds. Measures may include vehicle transport offsite for legal disposal in a manner that does not pollute surface waters, or use of a sedimentation bag with outfall to a ditch or swale for small volumes of localized dewatering (if approved by the AHJ).

### **8.11 Maintain BMPs**

Temporary and permanent erosion and sediment control BMPs shall be maintained and repaired as needed to assure performance of their intended functions.

Sediment control BMPs such as silt fencing and drain inlet protection shall be inspected weekly or after a runoff-producing event. Temporary erosion and sediment control BMPs will be removed within 30 days after final site stabilization is achieved. The following inspection and maintenance practices will be used to maintain erosion and sediment controls:

- Built-up sediment will be removed from silt fencing when it has reached one-third the height of the fence.
- Silt fences will be inspected for depth of sediment, tears in the fabric, attachment to the fence posts, and to determine that fence posts are firmly in the ground. Accumulated sediment will be removed from behind the fence.
- Temporary and permanent seeding will be inspected for bare spots, washouts, and healthy growth.
- The Contractor Certified Erosion and Sedimentation Control Lead (CESCL) will provide erosion control inspection services and stormwater disposal monitoring through construction. The City Inspector will be notified of daily construction activities and scheduled meetings between the Erosion Control Inspector and the Contractor.

The maintenance inspection report will be made after each inspection. Copies of the report forms to be completed by the SWPPP Coordinator are attached as Appendix G of this Construction SWPPP. Completed forms will be provided to the City Inspector and will also be maintained onsite during the entire construction project. If construction activities or design modifications are made to the site plan that could impact stormwater, or if AHBL determines that the measures are not adequate to prevent erosion and the discharge of sediment from the site (based on turbidity measurements), this Construction SWPPP will be amended appropriately. The amended Construction SWPPP will have a description of the new activities that contribute to the increased pollutant loading and the planned source control activities.

### **8.12 Manage the Project**

The following practices will be required during construction to properly manage activities:

- Comply with seasonal work limitations.
- Inspect, maintain, and repair BMPs.
- Identify a Certified Erosion and Sediment Control Lead (CESCL).
- Maintain the Construction SWPPP onsite at all times, including narrative and plans.

## **9.0 Construction Sequence and Phasing**

### **9.1 Construction Sequence**

The construction sequence is described below:

1. Arrange and attend a pre-construction meeting with the City of Puyallup.
2. Stake/flag clearing and construction limits.
3. Construct all temporary erosion control BMPs according to the TESC plan. Install inlet sediment protection in existing catch basins.
4. Install construction entrance.
5. Demolish existing site features indicated for removal.
6. Maintain erosion control measures in accordance with City of Puyallup standards and manufacturer recommendations.
7. Rough grade and fill site. All grading shall be done in conformance with the grading plan.
8. Construct storm system and install inlet sediment protection to new basins.
9. Install all remaining site utilities and associated infrastructure.
10. Apply erosion control mulch and seeding, straw mulch or equal, to areas that will not be brought to final grade or permanently vegetated within 7 days of exposure during the dry season, and 2 days of exposure during the wet season (October 1 – April 30).
11. Relocate erosion control measures or install new measures so that, as the site conditions change, the erosion and sediment control is always in accordance with the City of Puyallup Construction SWPPP minimum requirements.
12. Final grade site and install final surface treatments. Ensure that surface water is positively directed toward proposed storm collection facilities.
13. Remove remaining temporary erosion control items once site has been stabilized and upon approval of the City of Puyallup.

### **9.2 Construction Phasing**

Work under this permit will be completed in two phases. Refer to the associated Plans.

## 10.0 Construction Schedule

Construction is scheduled to begin in TBD and is expected to be completed in TBD. The majority of earth moving activities will be scheduled during the dry season. During construction, measures will be taken to prevent the transportation of sediment from the site to receiving waters. These measures include the use of:

- Buffer Zones (BMP C102)
- Stabilized Construction Entrance (BMP C105)
- Construction Road / Parking Area Stabilization (BMP C107)
- Temporary and Permanent Seeding (BMP C120)
- Mulching (BMP C121)
- Nets and Blankets (BMP C122)
- Plastic Covering (BMP C123)
- Dust Control (BMP C140)
- Materials on Hand (BMP C150)
- Concrete Handling (BMP C151)
- Sawcutting and Surfacing Pollution Prevention (BMP C152)
- Material Delivery, Storage, and Containment (BMP C153)
- Outlet Protection (BMP C209)
- Storm Drain Inlet Protection (BMP C220)
- Silt Fence (BMP C233)
- Sediment Trap (Temporary) (BMP C240)

## 11.0 Financial/Ownership Responsibilities

The contractor is responsible for obtaining performance and maintenance bonds in accordance with City of Puyallup requirements.

## 12.0 Certified Erosion and Sediment Control Lead (CESCL)

The General Contractor shall be required to provide a CESCL prior to construction. Once this individual is identified, the City Inspector will be notified.

The Contractor will designate their CESCL here:

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax Number: \_\_\_\_\_

The CESCL is required to meet DOE certification requirements. The City Inspector will be provided with CESCL information.

The duties of the CESCL include:

- Implement the Construction SWPPP/TESC plan with the aid of the SWPP Team.
- Oversee maintenance practices identified as BMPs in the Construction SWPPP.

- Conduct or provide for inspection and monitoring activities.
- Sample stormwater for turbidity using a turbidity meter.
- Identify other potential pollutant sources and make sure they are added to the plan.
- Identify any deficiencies in the Construction SWPPP and make sure they are corrected.
- Ensure that any changes in construction plans are addressed in the Construction SWPPP.

To aid in the implementation of the Construction SWPPP, the members of the SWPP Team include the following: General Contractor, CESCL, City of Puyallup Inspector, City of Puyallup, the geotechnical engineering consultant, and AHBL.

The General Contractor will ensure that all housekeeping and monitoring procedures are implemented, while the CESCL will ensure the integrity of the structural BMPs. The SWPP Team will observe construction and erosion control practices and recommend revisions or additions to the Construction SWPPP and drawings.

**Pollution Prevention Team**

Title	Name(s)	Phone Number
<b>Certified Erosion and Sediment Control Lead (CESL)</b>	TBD	
<b>Resident Engineer</b>	Todd Sawin (AHBL)	(253) 383-2422
<b>Emergency Ecology Contact</b>	TBD	
<b>Emergency Permittee / Owner Contact</b>	Greg Helle (Absher)	(253) 845-9544
<b>Non-Emergency Owner Contact</b>	TBD	
<b>Monitoring Personnel</b>	TBD	
<b>Ecology Regional Office</b>	Southwest Regional Office – Lacey	(360) 407-6300

**13.0 Monitoring and Sampling Requirements**

Monitoring includes visual inspection, sampling for water quality parameters of concern, and documentation of the inspection and sampling findings in a logbook. A site logbook will be maintained for all on-site construction activities and will include:

- A record of the implementation of the CSWPPP and other permit requirements
- Site inspections
- Stormwater sampling data

File a blank form from under Appendix G.

The site log book must be maintained on-site within reasonable access to the site and be made available upon request to Ecology or the City of Puyallup.

**13.1 Site Inspection**

Site inspections will be conducted at least once every calendar week and within 24 hours following any discharge from the site. For sites that are temporarily stabilized and inactive, the required frequency is reduced to once per calendar month.

## 13.2 Stormwater Quality Sampling

### 13.2.1 Turbidity Sampling

Requirements include calibrated turbidity meter to sample site discharges for compliance with DOE. Sampling will be conducted at all discharge points at least once per week.

The benchmark for turbidity value is 25 nephelometric turbidity units (NTU) and a transparency of at least 33 centimeters.

If the discharge's turbidity is 26 to 249 NTU **or** the transparency is less than 33 cm but equal to or greater than 6 cm, the following steps will be conducted:

1. Review the CSWPPP for compliance with Special Condition S9 (Stormwater Pollution Prevention Plan). Make appropriate revisions within 7 days of the date the discharge exceeded the benchmark.
2. Immediately begin the process to fully implement or maintain appropriate source control and/or treatment BMPs as soon as possible. Address the problems within 10 days of the date the discharge exceeded the benchmark. If installation of necessary treatment BMPs is not feasible within 10 days, Ecology may approve additional time when the Permittee requests an extension within the initial 10-day response period.
3. Document BMP implementation and maintenance in the site logbook

If turbidity exceeds 250 NTU **or** the transparency is 6 cm or less at any time, the following steps will be conducted:

1. Telephone or submit an electronic report to the applicable Ecology Region's Environmental Report Tracking System (ERTS) within 24 hours.
  - <https://www.ecology.wa.gov/About-us/Get-involved/Report-an-environmental-issue>
  - Southwest Region (Pierce): (360) 407-6300
2. Immediately begin the process to fully implement and maintain appropriate source control and/or treatment BMPs as soon as possible. Address the problems within 10 days of the date the discharge exceeded the benchmark. If installation of necessary treatment BMPs is not feasible within 10 days, Ecology may approve additional time when the Permittee requests an extension within the initial 10-day response period
3. Document BMP implementation and maintenance in the site log book.
4. Continue to sample discharges daily until one of the following is true:
  - Turbidity is 25 NTU (or lower).
  - Transparency is 33 cm (or greater).
  - Compliance with the water quality limit for turbidity is achieved.
    - 1 - 5 NTU over background turbidity, if background is less than 50 NTU
    - 1% - 10% over background turbidity, if background is 50 NTU or greater
  - The discharge stops or is eliminated.

### 13.2.2 pH Sampling

pH monitoring is required for "Significant concrete work" (i.e. greater than 1000 cubic yards poured concrete or recycled concrete over the life of the project). The use of engineered soils (soil

amendments including but not limited to Portland cement-treated base [CTB], cement kiln dust [CKD] or fly ash) also requires pH monitoring.

For significant concrete work, pH sampling will start the first day concrete is poured and continue until it is cured, typically three (3) weeks after the last pour.

For engineered soils and recycled concrete, pH sampling begins when engineered soils or recycled concrete are first exposed to precipitation and continues until the area is fully stabilized.

If the measured pH is 8.5 or greater, the following measures will be taken:

1. Prevent high pH water from entering storm sewer systems or surface water.
2. Adjust or neutralize the high pH water to the range of 6.5 to 8.5 su using appropriate technology such as carbon dioxide (CO<sub>2</sub>) sparging (liquid or dry ice).
3. Written approval will be obtained from Ecology prior to the use of chemical treatment other than CO<sub>2</sub> sparging or dry ice.

Method for sampling pH: pH meter, pH test kit, or wide range pH indicator paper

## 14.0 Conclusion

This analysis is based on data and records either supplied to or obtained by AHBL, Inc. These documents are referenced within the text of the analysis. The analysis has been prepared utilizing procedures and practices within the standard accepted practices of the industry. We conclude that this project, as proposed, will not create any new problems within the existing downstream drainage system. This project will not noticeably aggravate any existing downstream problems due to either water quality or quantity.

AHBL, Inc.



Zachary Perdue  
Project Engineer

ZCP/ CJW

May 2024

Q:\2023\2230752\10\_CIV\NON\_CAD\REPORTS\SSP - Phase 2\CSWPPP\20240426 PHASE 2 Rpt (CSWPPP) 2230752.10.docx

# ***Appendix F***

---

F-1 ..... TESC Plan  
F-2 ..... TESC Notes and Details  
F-3 ..... Trap Sizing Calculations

# EAST TOWN CROSSING PHASE 2


## SEC. 26,35/ TWP. 20 N./ RGE. 4 E., W.M.

APPROVED

BY  
CITY OF PUYALLUP  
DEVELOPMENT ENGINEERING

DATE

NOTE: THIS APPROVAL IS VOID AFTER 180 DAYS FROM APPROVAL DATE. THE CITY WILL NOT BE RESPONSIBLE FOR ERRORS AND/OR OMISSIONS ON THESE PLANS. FIELD CONDITIONS MAY DICTATE CHANGES TO THESE PLANS AS DETERMINED BY THE DEVELOPMENT ENGINEERING MANAGER.

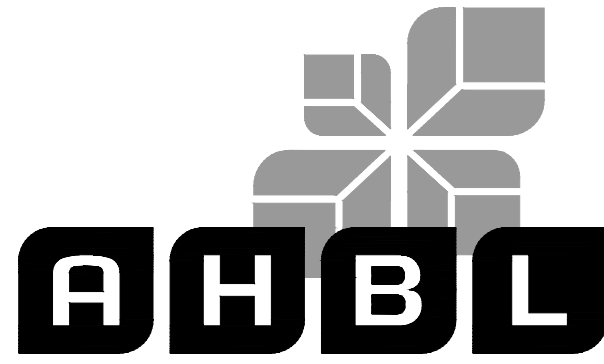

TACOMA · SEATTLE · SPOKANE · TRI-CITIES

2215 North 30th Street, Suite 300, Tacoma, WA 98403  
253.383.2422 TEL 253.383.2572 FAX www.ahbl.com WEB

Project Title:

**EAST TOWN CROSSING PHASE 2**

Project No.



2230752

01/07/2025

Sheet Title:

**DEMOLITION AND TESC PLAN**

F-1

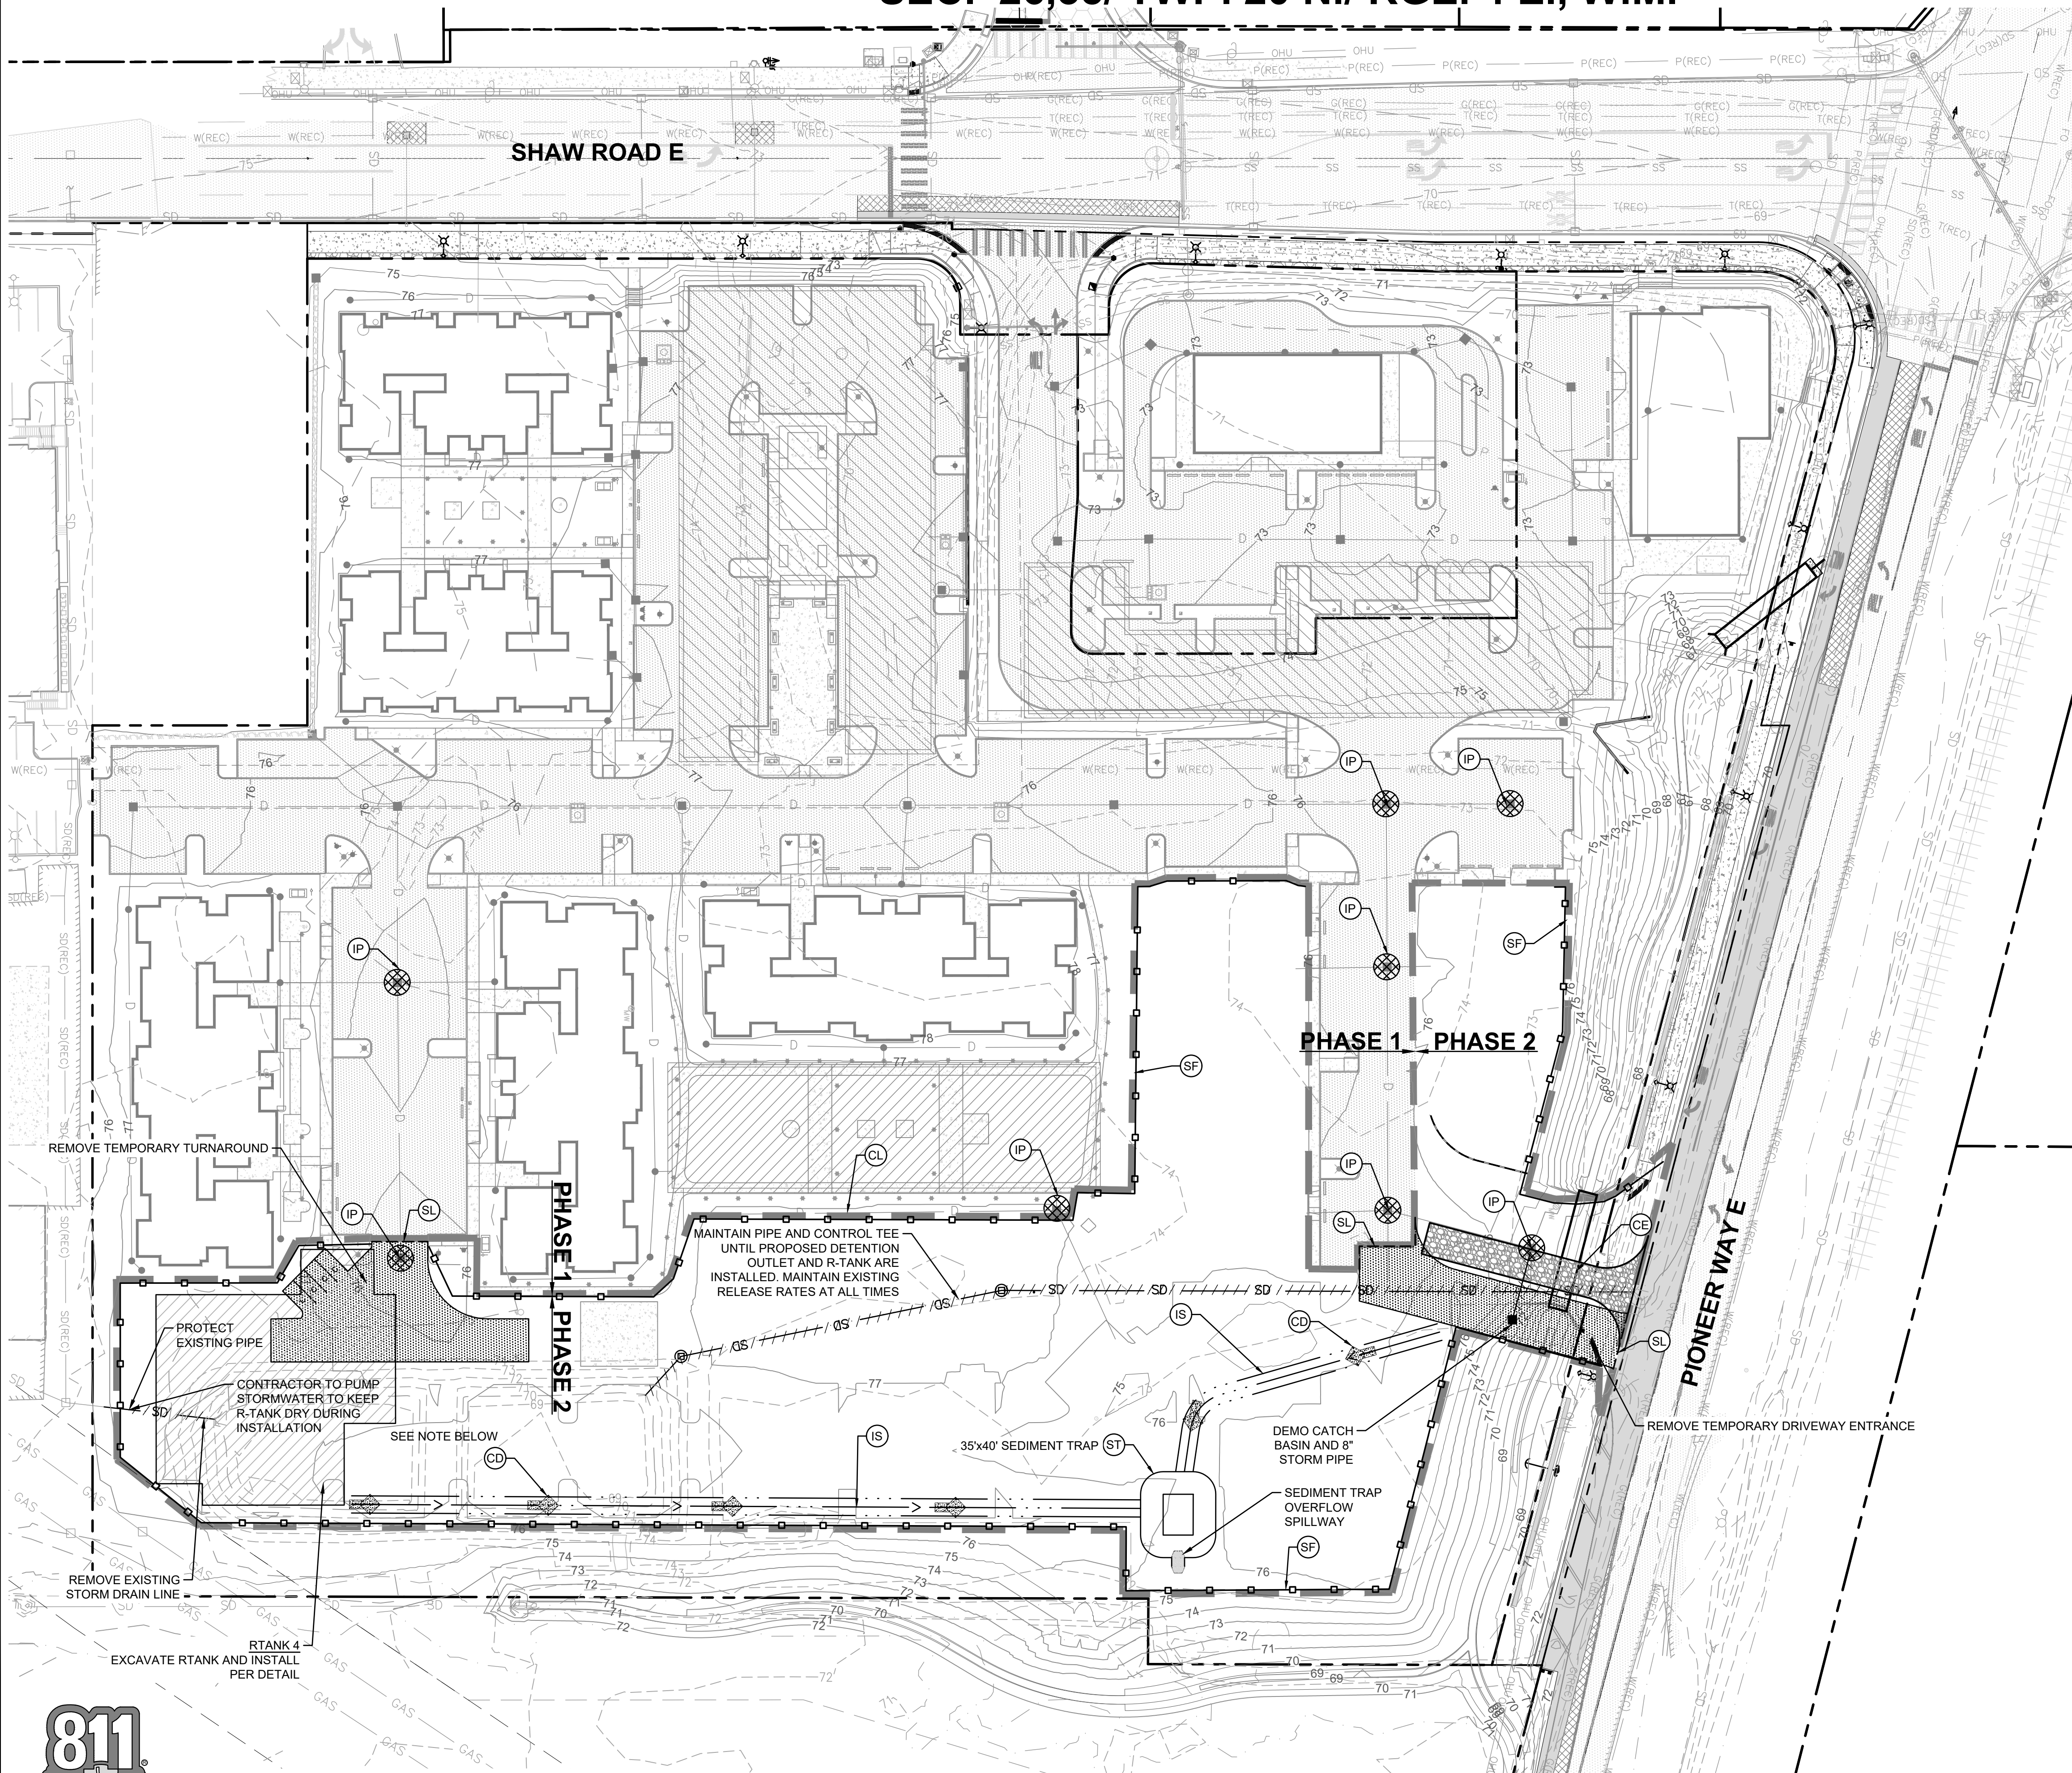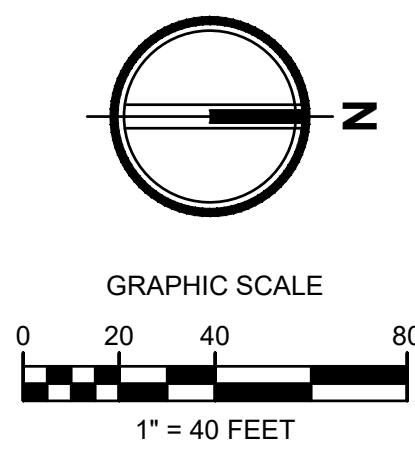

**LEGEND**

---	RIGHT-OF-WAY / PROPERTY LINE
CL	CLEARING / PROJECT LIMITS
CE	CONSTRUCTION ENTRANCE (1 C1.10)
[Pattern]	REMOVE EXISTING ASPHALT
[Pattern]	REMOVE EXISTING CONCRETE
[Pattern]	2" ASPHALT GRIND AND OVERLAY
SF	SILT FENCE (4 C1.10)
IP	INLET PROTECTION (5 C1.10)
IS	INTERCEPTOR SWALE (6 C1.10)
SL	SAWCUT LINE
CD	ROCK CHECK DAM (3 C1.10)
[Pattern]	REMOVE EXISTING UTILITY
-XXX-	EXISTING MAJOR CONTOURS
-XXX-	EXISTING MINOR CONTOURS
-101-	PROPOSED MINOR CONTOUR
-100-	PROPOSED MAJOR CONTOUR
ST	TEMPORARY SEDIMENT TRAP (1 C1.11)
[Symbol]	OVERFLOW SPILLWAY (2 C1.11)

**CLEARING LIMITS NOTE**  
THE CLEARING LIMITS SHOWN MAY NEED TO BE ADJUSTED TO PERFORM THE WORK. CONTRACTOR IS RESPONSIBLE FOR REVIEWING LIMITS AND CONFIRMING SILT FENCE LOCATION PRIOR TO WORK. ANY ADJUSTMENTS SHALL BE AT THE COST OF THE CONTRACTOR.

CONTRACTOR SHALL FURNISH, INSTALL, ADJUST, AND MAINTAIN TEMPORARY 6 FOOT CHAINLINK SECURITY FENCE AT SITE PERIMETER FOR ENTIRE DURATION OF PROJECT. SECURITY FENCE SHALL INCLUDE, BUT IS NOT NECESSARILY LIMITED TO, CHAINLINK FABRIC, RAILS, POSTS, GATES, LOCKS, AND BRACES.

NOTE: PROVIDED ARE THE EXISTING WETPOND/DETENTION SIZES. THESE MUST BE MAINTAINED UNTIL THE PROPOSED STORM SYSTEM IS CONSTRUCTED:  
EXISTING WETPOND (SOUTH CELL) STORAGE VOLUME: 30,964 SF  
EXISTING DETENTION (NORTH CELL) STORAGE VOLUME: 16,605 SF






# EAST TOWN CROSSING PHASE 2

## SEC. 26,35/ TWP. 20 N./ RGE. 4 E., W.M.

APPROVED

BY \_\_\_\_\_  
CITY OF PUYALLUP  
DEVELOPMENT ENGINEERING  
DATE \_\_\_\_\_

NOTE: THIS APPROVAL IS VOID AFTER 180 DAYS FROM APPROVAL DATE. THE CITY WILL NOT BE RESPONSIBLE FOR ERRORS AND/OR OMISSIONS ON THESE PLANS. FIELD CONDITIONS MAY DICTATE CHANGES TO THESE PLANS AS DETERMINED BY THE DEVELOPMENT ENGINEERING MANAGER.

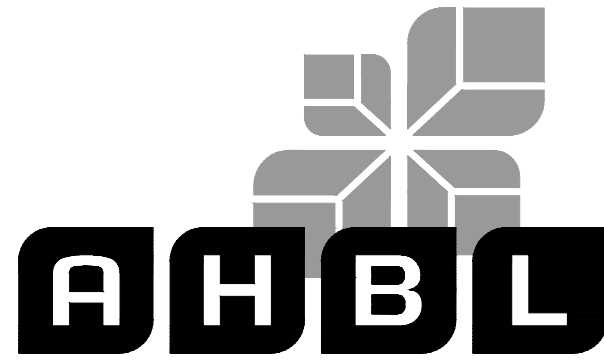

TACOMA · SEATTLE · SPOKANE · TRI-CITIES

2215 North 30th Street, Suite 300, Tacoma, WA 98403  
253.383.2422 TEL 253.383.2572 FAX www.ahbl.com WEB

Project Title:

**EAST TOWN CROSSING PHASE 2**

Project No.

2230752


9/20/2024

**TESC INSPECTION NOTES:**


- INSPECT ALL INLET PROTECTION ON CATCH BASINS. CLEAN OR REPLACE IF FULL OF SEDIMENT /DEBRIS AND REPAIR/REPLACE AS NEEDED IF DAMAGED TO MAINTAIN PROTECTION.
- INSPECT ALL PERMANENT AND TEMPORARY STABILIZED SLOPES. REPAIR ANY DAMAGED SECTIONS AND RE-VEGETATE AS NEEDED TO ENSURE THE ESTABLISHMENT OF VEGETATION AND THAT NO EROSION OF THE SLOPES OCCUR.
- INSPECT ALL FILTER FABRIC FENCING FOR SIGNS OF EROSION, DAMAGE OR FAILURES. REPAIR AND/OR REPLACE AS NEEDED. SEE FILTER FABRIC NOTES. SEDIMENT BUILD-UP ALONG FENCE SHALL BE REMOVED WHEN REACHES 1/3 THE FENCE HEIGHT. IF EROSION IS OCCURRING, CONTRACTOR SHALL INSTALL ADDITIONAL EROSION CONTROL MEASURES AS NEEDED TO PREVENT EROSION.
- ANY FILL/CUT SLOPES SHALL BE INSPECTED FOR EROSION. IF SIGNS OF EROSION ARE PRESENT, INSTALL APPROPRIATE BMP'S AS NEEDED TO STOP EROSION AND STABILIZE SLOPES.
- TESC LEAD RESPONSIBLE FOR NOTIFYING ENGINEER IF ADDITIONAL MEASURES ARE WARRANTED.

**PERMANENT STABILIZATION NOTES:**


- ALL EXPOSED SOILS AND SLOPES SHALL BE SEEDED OR OTHERWISE STABILIZED IMMEDIATELY AFTER CONSTRUCTION AND GRADING ACTIVITIES HAVE BEEN COMPLETED.
- SILT FENCE, IF DEEMED APPROPRIATE, SHALL REMAIN FOR A MINIMUM OF 30 DAYS AFTER THE FINAL STABILIZATION OF THE SLOPES HAS OCCURRED.
- ALL TEMPORARY EROSION CONTROL BMP'S SHALL BE REMOVED 30 DAYS AFTER FINAL STABILIZATION HAS OCCURRED AS DIRECTED BY CITY OR COUNTY INSPECTOR.
- CONTRACTOR SHALL REFER TO THE CONSTRUCTION SWPPP FOR APPLICABLE BMP'S.

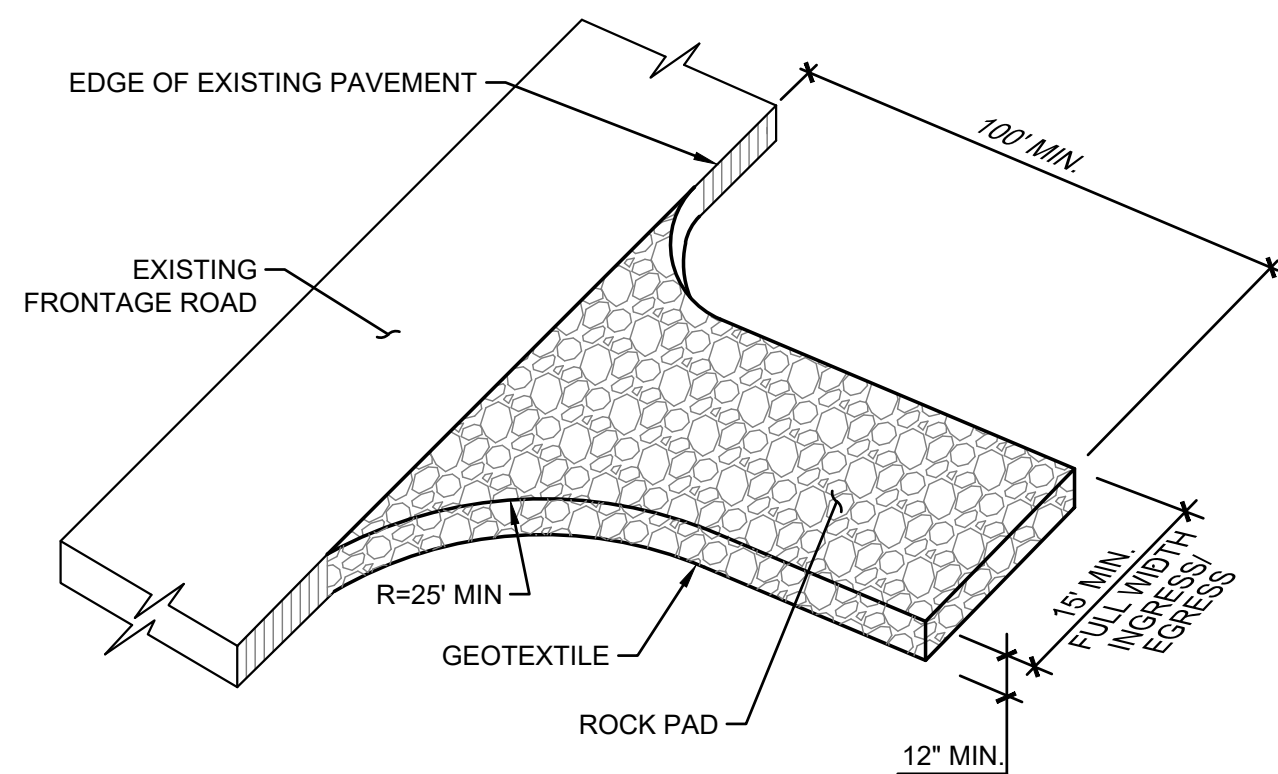

- ROCK PAD MATERIAL SHALL BE QUARRY SPALLS PER WSDOT STANDARD SPECIFICATION 9-13.1(5) AND MAY BE TOP-DRESSED WITH 1"-3" ROCK.
- THE ROCK PAD SHALL BE AT LEAST 12 INCHES THICK AND 100 FEET LONG. WIDTH SHALL BE THE FULL WIDTH OF THE VEHICLE INGRESS AND EGRESS AREA.
- ADDITIONAL ROCK SHALL BE ADDED PERIODICALLY TO MAINTAIN PROPER FUNCTION OF THE PAD.
- IF THE PAD DOES NOT ADEQUATELY REMOVE THE MUD FROM THE VEHICLE WHEELS, THE WHEELS SHALL BE HOSED OFF BEFORE THE VEHICLE ENTERS A PAVED STREET. THE WASHING SHALL BE DONE ON AN AREA COVERED WITH CRUSHED ROCK, AND WASH WATER SHALL DRAIN TO A SEDIMENT RETENTION FACILITY OR THROUGH A SILT FENCE.
- GEOTEXTILE SHALL MEET THE FOLLOWING: GRAB TENSILE STRENGTH 200 PSI MIN, GRAB TENSILE ELONGATION 30% MAX, MULLEN BURST STRENGTH 400 PSI MIN, AOS 2-45 (U.S. STANDARD SIEVE).
- THE ROCK PAD SHALL BE REMOVED UPON COMPLETION OF ALL CONSTRUCTION.
- CONSTRUCTION ACCESS IS FORBIDDEN ALONG SHAW ROAD FOR THE DURATION OF CONSTRUCTION.

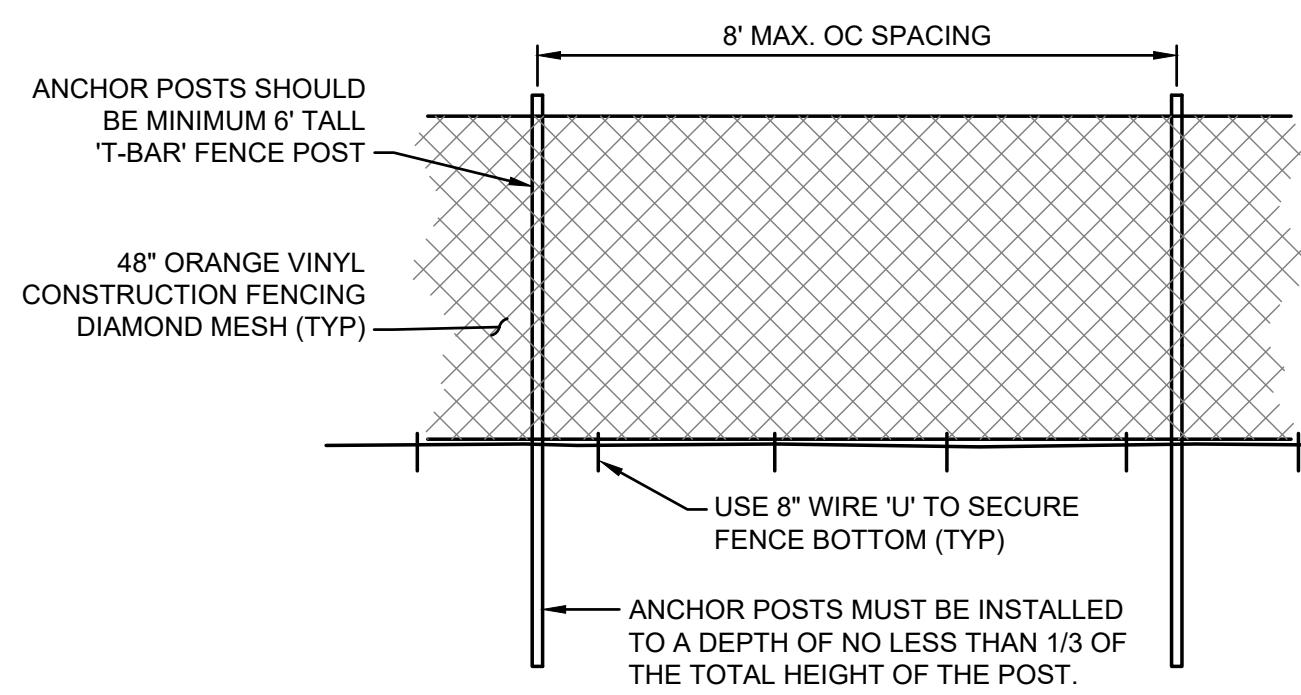


- THE TREE PROTECTION FENCE SHOULD BE MAINTAINED THROUGHOUT GRADING AND CONSTRUCTION AND SHALL NOT BE REMOVED UNTIL FINAL LANDSCAPING IS IN PROGRESS. AT NO TIME SHALL EQUIPMENT ENTER INTO THE ROOT PROTECTION ZONE (RPZ). ALL BRUSH CLEANUP WITHIN THE RPZ SHOULD BE COMPLETED BY HAND TO PREVENT DISTURBANCE OF NATIVE GROUND COVERS. NO CUTS OR FILLS OF UTILITY TRENCHING, MODIFICATIONS TO DRAINAGE, ETC. SHALL IMPACT THE RPZ. NO WIRES, CABLES, OR OTHER DEVICES SHOULD BE ATTACHED TO PROTECTED TREES DURING CONSTRUCTION.
- IF IMPACTS MUST OCCUR WITHIN THE RPZ, CONTACT THE LANDSCAPE ARCHITECT PRIOR TO THE OPERATIONS TO DETERMINE THE PROPER PROCEDURE TO PROTECT THE TREES HEALTH.
- CONTRACTOR SHALL REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- FOR FENCING PLACED ON HARDCAPED SURFACES THE ANCHOR POST SHALL BE CONNECTED TO A 24" x 48" x 7" BASE PANEL. A 50 LB CAPACITY HIGH VISIBILITY WOVEN POLYPROPYLENE SANDBAG SHALL BE PLACED ON BOTH SIDES OF ALL BASE PANELS.

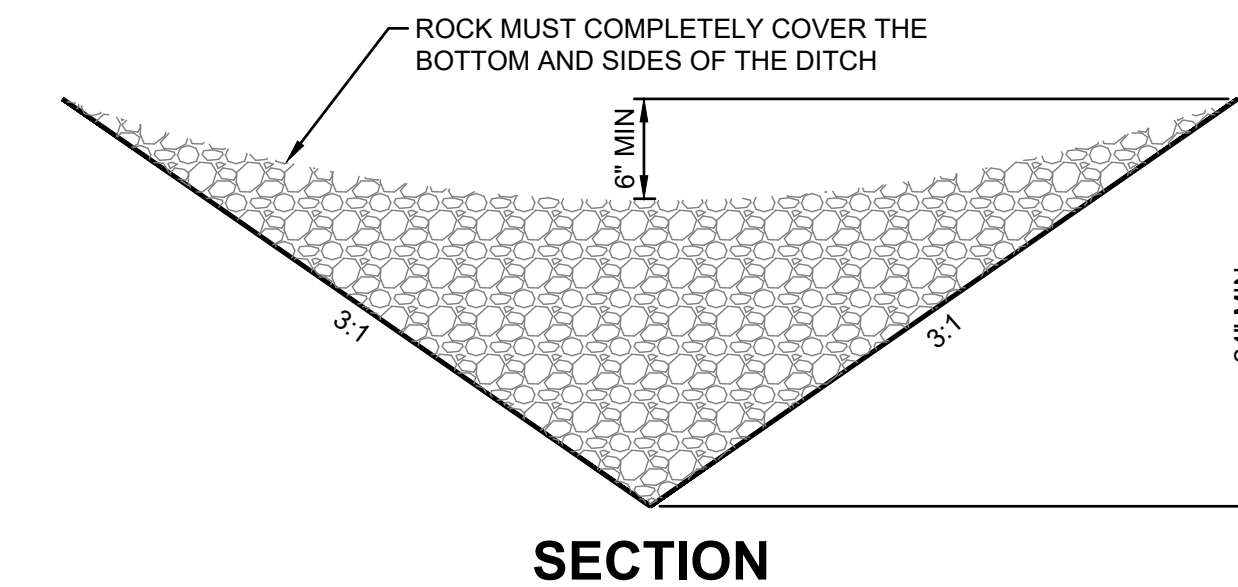


SECTION

CHECK DAM SPACING	
LONGITUDINAL GRADE	SPACING
1%	100'
2%	50'
4%	25'
5%	20'
6%	15'
10%	10'
20%	5'

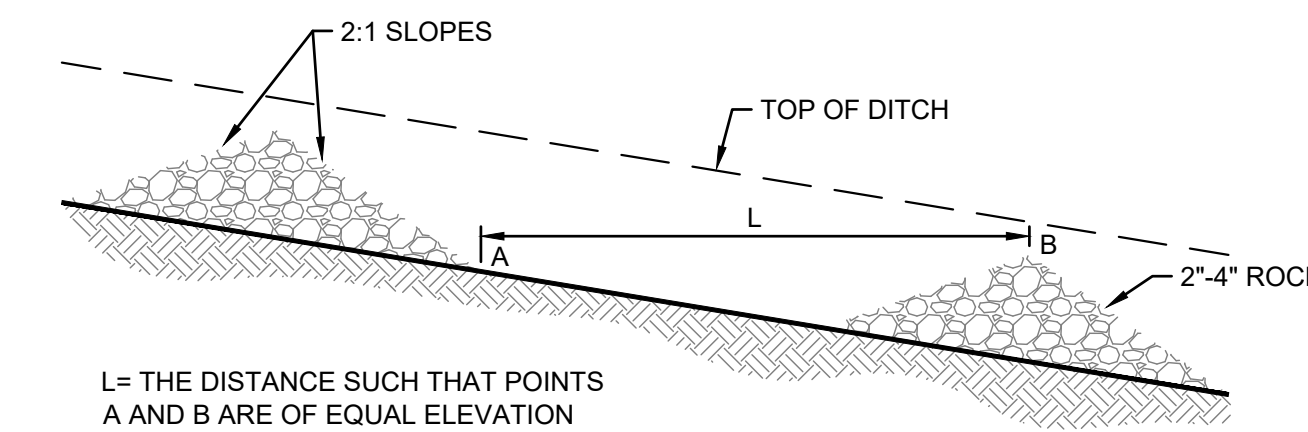


PROFILE

**3 ROCK CHECK DAM**  
NOT TO SCALE

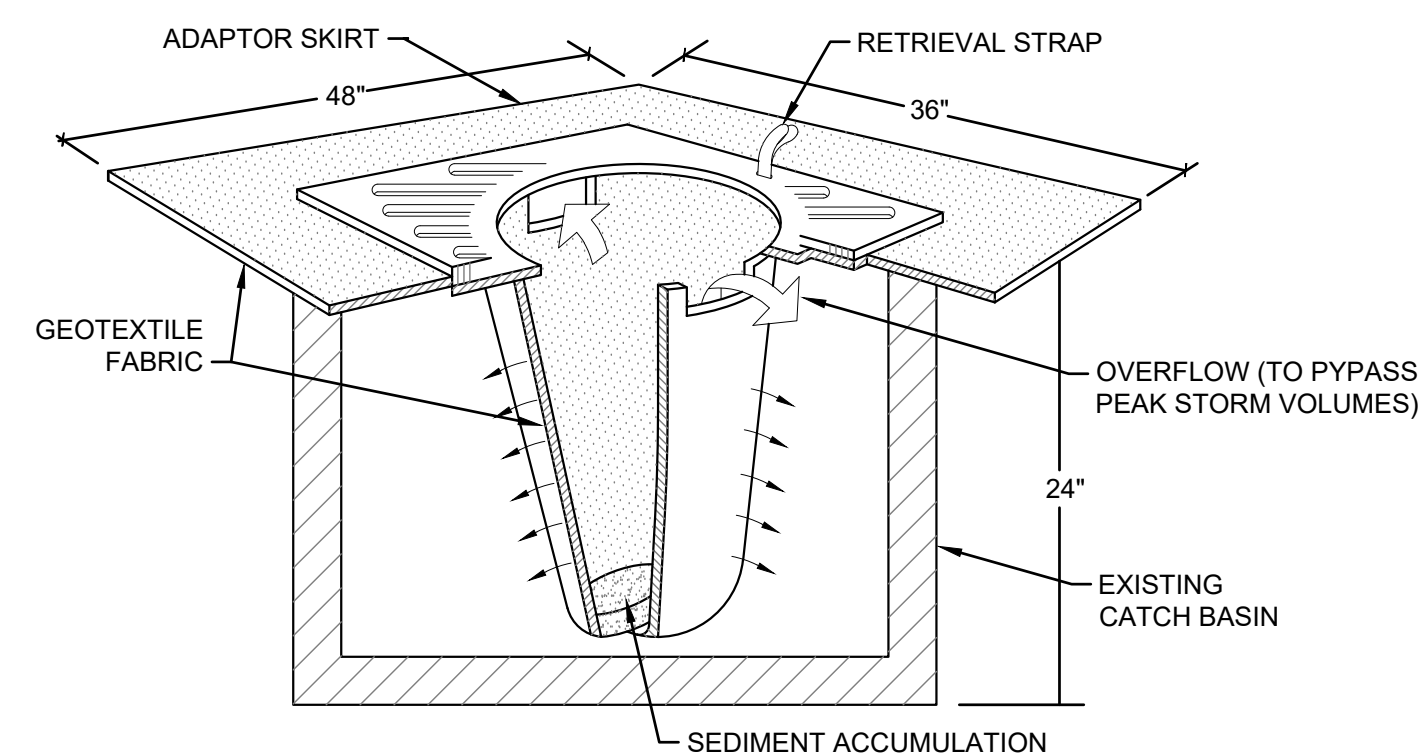


- NOTES:
- FILTERS SHALL BE INSPECTED AFTER EACH STORM EVENT AND CLEANED OR REPLACED WHEN 1/3 FULL.
  - INSTALL INLET PROTECTION IN ALL NEW STORM STRUCTURES THAT WILL COLLECT STORMWATER AS THEY ARE INSTALLED.

**5 INLET PROTECTION**  
NOT TO SCALE

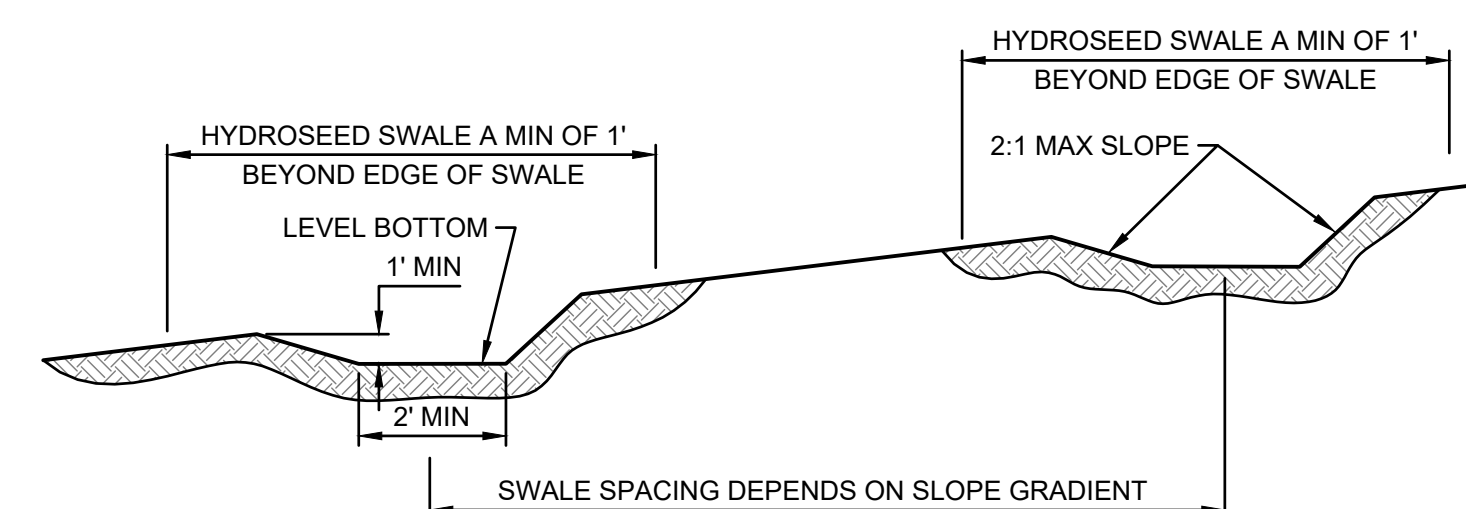

**6 INTERCEPTOR SWALE**  
NOT TO SCALE

**1 CONSTRUCTION ENTRANCE**  
NOT TO SCALE

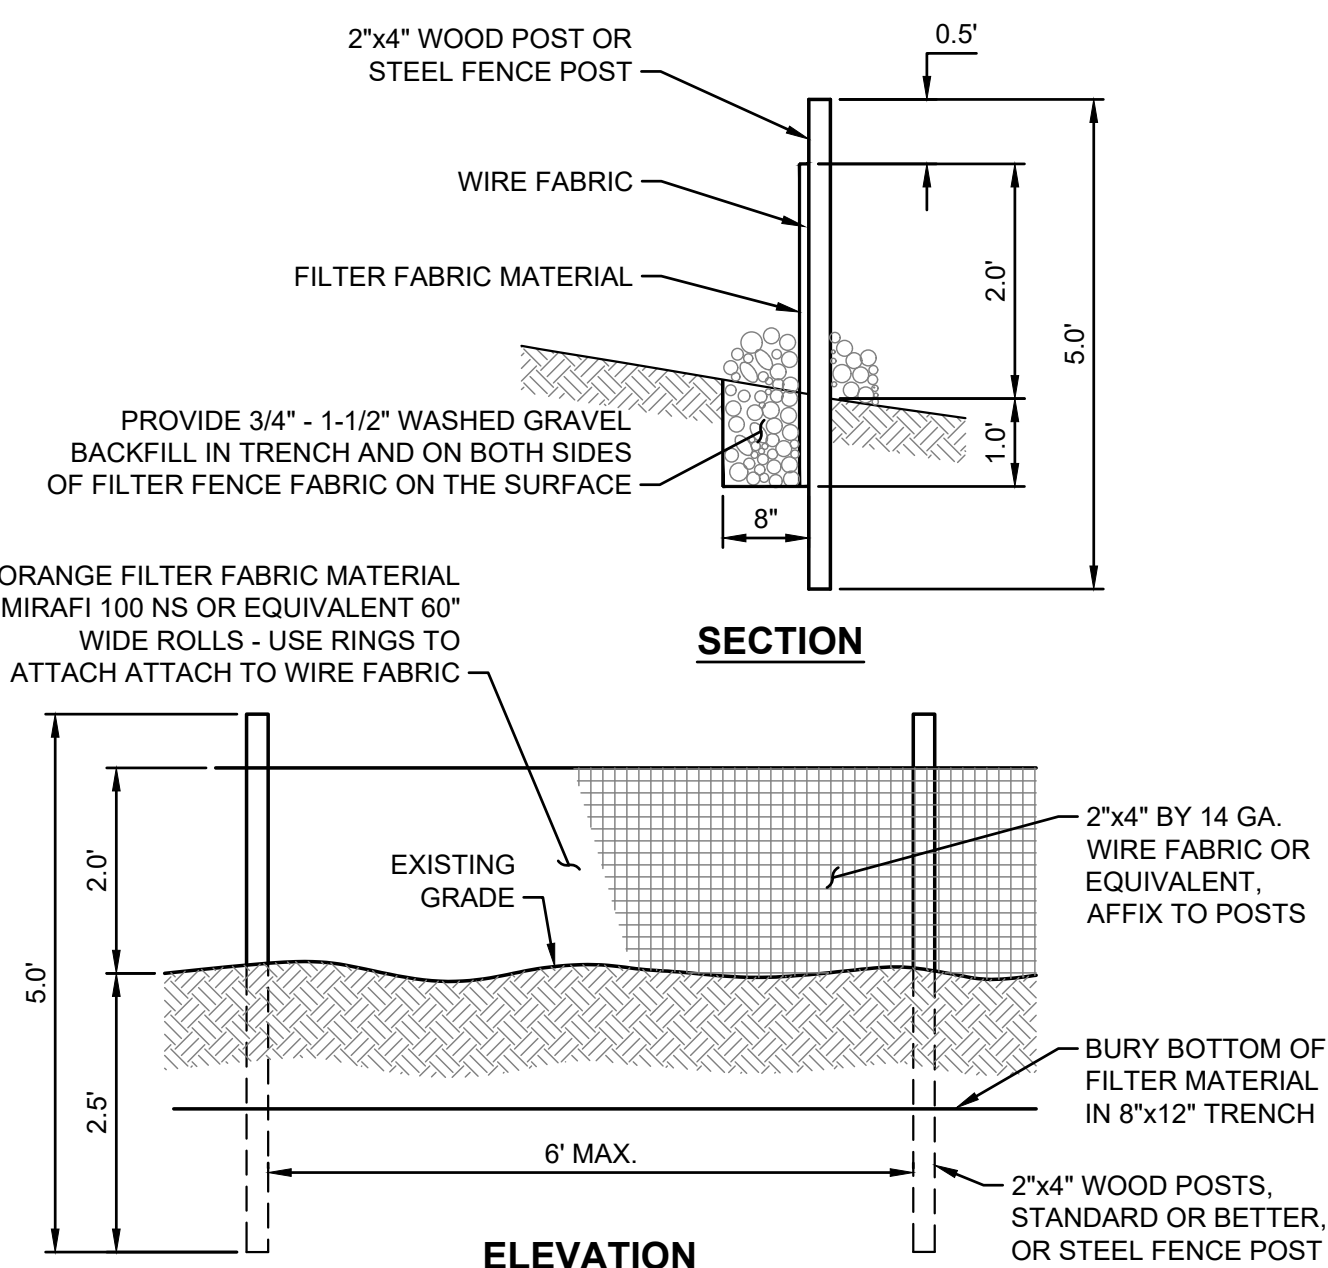

**4 SILT FENCE**  
NOT TO SCALE

**NOTES:**

- THE FILTER FABRIC SHALL BE PURCHASED IN A CONTINUOUS ROLL CUT TO THE LENGTH OF THE BARRIER TO AVOID USE OF JOINTS. WHEN JOINTS ARE NECESSARY, FILTER CLOTH SHALL BE SPLICED TOGETHER ONLY AT A SUPPORT POST WITH A MINIMUM SIX-INCH OVERLAP, AND BOTH ENDS SECURELY FASTENED TO THE POST.
- THE FILTER FABRIC FENCE SHALL BE INSTALLED TO FOLLOW THE CONTOURS (WHERE FEASIBLE), THE FENCE POSTS SHALL BE SPACED A MAXIMUM OF SIX FEET APART AND DRIVEN SECURELY INTO THE GROUND (MINIMUM OF 30").
- A TRENCH SHALL BE EXCAVATED, ROUGHLY EIGHT INCHES WIDE AND TWELVE INCHES DEEP, UPSLOPE AND ADJACENT TO THE WOOD POST TO ALLOW THE FILTER FABRIC TO BE BURIED.
- WHEN STANDARD STRENGTH FILTER FABRIC IS USED, A WIRE MESH SUPPORT FENCE SHALL BE FASTENED SECURELY TO THE UPSLOPE SIDE OF THE POSTS USING HEAVY-DUTY WIRE STAPLES AT LEAST ONE INCH LONG, TIE WIRES, OR HOG RINGS. THE WIRE SHALL EXTEND INTO THE TRENCH A MINIMUM OF FOUR INCHES AND SHALL NOT EXTEND MORE THAN THIRTY SIX INCHES ABOVE THE ORIGINAL GROUND SURFACE.
- THE STANDARD STRENGTH FILTER FABRIC SHALL BE STAPLED OR WIRED TO THE FENCE, AND TWENTY INCHES OF THE FABRIC SHALL BE EXTENDED INTO THE TRENCH. THE FABRIC SHALL NOT EXTEND MORE THAN THIRTY SIX INCHES ABOVE THE ORIGINAL GROUND SURFACE. FILTER FABRIC SHALL NOT BE STAPLED TO EXISTING TREES.
- WHEN EXTRA-STRENGTH FILTER FABRIC AND CLOSER POST SPACING ARE USED, THE WIRE MESH SUPPORT FENCE MAY BE ELIMINATED. IN SUCH A CASE, THE FILTER FABRIC IS STAPLED OR WIRED DIRECTLY TO THE POSTS WITH ALL OTHER PROVISIONS OF STANDARD NOTE (S) APPLYING.
- THE TRENCH SHALL BE BACKFILL WITH 3/4 INCH MINIMUM DIAMETER WASHED GRAVEL.
- FILTER FABRIC FENCES SHALL BE REMOVED WHEN THEY HAVE SERVED THEIR USEFUL PURPOSE, BUT NOT BEFORE THE UPSLOPE AREA HAS BEEN PERMANENTLY STABILIZED.
- FILTER FABRIC FENCES SHALL BE INSPECTED IMMEDIATELY AFTER EACH RAINFALL AND AT LEAST DAILY DURING PROLONGED RAINFALL. ANY REQUIRED REPAIRS SHALL BE MADE IMMEDIATELY.
- DO NOT INSTALL BELOW AN OUTLET PIPE OR WEIR.
- DO NOT DRIVE OVER OR FILL OVER FILTER FABRIC FENCE.



Know what's below.  
Call before you dig.

Sheet Title:

**TESC NOTES AND DETAILS**


# EAST TOWN CROSSING PHASE 2

## SEC. 26,35/ TWP. 20 N./ RGE. 4 E., W.M.

APPROVED

BY \_\_\_\_\_  
CITY OF PUYALLUP  
DEVELOPMENT ENGINEERING  
DATE \_\_\_\_\_

**NOTE:** THIS APPROVAL IS VOID AFTER 180 DAYS FROM APPROVAL DATE. THE CITY WILL NOT BE RESPONSIBLE FOR ERRORS AND/OR OMISSIONS ON THESE PLANS. FIELD CONDITIONS MAY DICTATE CHANGES TO THESE PLANS AS DETERMINED BY THE DEVELOPMENT ENGINEERING MANAGER.

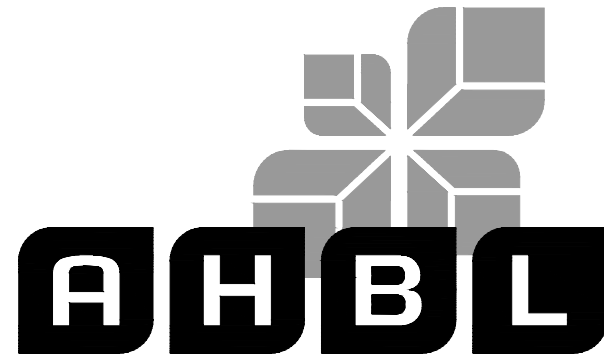

TACOMA · SEATTLE · SPOKANE · TRI-CITIES

2215 North 30th Street, Suite 300, Tacoma, WA 98403  
253.383.2422 TEL 253.383.2572 FAX www.ahbl.com WEB

Project Title:

**EAST TOWN  
CROSSING PHASE 2**

Project No.

2230752

9/20/2024

**AMENDED SOILS NOTES:**

- SOIL AMENDMENTS ARE REQUIRED FOR ALL DISTURBED AREAS IN ACCORDANCE WITH BMP L613: POST-CONSTRUCTION SOIL QUALITY AND DEPTH OF THE 2021 SURFACE WATER MANAGEMENT MANUAL.
- AMENDED SOILS SHALL BE A MINIMUM OF 8" (NON-COMPACTED) WITH SUBSOILS SCARIFIED AT LEAST 4" WITH INCORPORATION OF THE UPPER MATERIAL TO AVOID STRATIFIED LAYERS, WHERE FEASIBLE.
- QUALITY OF COMPOST AND OTHER MATERIALS USED TO MEET THE ORGANIC CONTENT REQUIREMENTS ARE AS FOLLOWS:
  - a. THE ORGANIC CONTENT FOR "PRE-APPROVED" AMENDMENT RATES CAN BE MET ONLY USING COMPOST THAT MEETS THE DEFINITION OF "COMPOSTED MATERIALS" IN WAC 173-350-220. THE WAC IS AVAILABLE ONLINE AT: [HTTP://WWW.ECY.WA.GOV/PROGRAMS/SWFA/FACILITIES/350.HTML](http://www.ecy.wa.gov/PROGRAMS/SWFA/FACILITIES/350.HTML). THE COMPOST MUST ALSO HAVE AN ORGANIC MATTER CONTENT OF 35% TO 65%, AND A CARBON TO NITROGEN RATIO BELOW 25:1. THE CARBON TO NITROGEN RATIO MAY BE AS HIGH AS 35: 1 FOR PLANTINGS COMPOSED ENTIRELY OF PLANTS NATIVE TO THE PUGET SOUND LOWLANDS REGION.
  - b. CALCULATED AMENDMENT RATES MAY BE MET THROUGH USE OF COMPOSTED MATERIALS AS DEFINED ABOVE; OR OTHER ORGANIC MATERIALS AMENDED TO MEET THE CARBON TO NITROGEN RATIO REQUIREMENTS, AND MEETING THE CONTAMINANT STANDARDS OF GRADE A COMPOST.
- USE ONE OF THE FOLLOWING OPTIONS TO MEET THE POST CONSTRUCTION SOIL QUALITY AND DEPTH REQUIREMENTS. USE THE MOST RECENT VERSION OF "GUIDELINES FOR RESOURCES FOR IMPLEMENTING SOIL QUALITY AND DEPTH BMP T5.13" TO MEET THE REQUIREMENTS OF THIS BMP. THIS GUIDANCE CAN BE FOUND ONLINE AT:WWW.SOILSFORSALMON.ORG
  - a. LEAVE NATIVE VEGETATION AND SOIL UNDISTURBED, AND PROTECT FROM COMPACTION DURING CONSTRUCTION
  - b. AMEND EXISTING SITE TOPSOIL OR SUBSOIL EITHER AT DEFAULT "PRE-APPROVED" RATES, OR AT CUSTOM CALCULATED RATES BASED ON SPECIFIC TESTS OF THE SOIL AND AMENDMENT
  - c. STOCKPILE EXISTING TOPSOIL DURING GRADING, AND REPLACE IT PRIOR TO PLANTING. STOCKPILED TOPSOIL MUST ALSO BE AMENDED IF NEEDED TO MEET THE ORGANIC MATTER OR DEPTH REQUIREMENTS, EITHER AT A DEFAULT "PRE-APPROVED" RATE OR AT A CUSTOM CALCULATED RATE.
  - d. IMPORT TOPSOIL MIX OF SUFFICIENT ORGANIC CONTENT AND DEPTH TO MEET THE REQUIREMENTS. MORE THAN ONE METHOD MAY BE USED ON DIFFERENT PORTIONS OF THE SAME SITE. SOIL THAT ALREADY MEETS THE DEPTH AND ORGANIC MATTER QUALITY STANDARDS, AND IS NOT COMPACTED, DOES NOT NEED TO BE AMENDED.
- AMENDED SOILS SHALL BE MAINTAINED AS FOLLOWS:
  - a. SOIL QUALITY AND DEPTH SHOULD BE ESTABLISHED TOWARD THE END OF CONSTRUCTION AND ONCE ESTABLISHED, SHOULD BE PROTECTED FROM COMPACTION, SUCH AS FROM LARGE MACHINERY USE, AND FROM EROSION.
  - b. SOIL SHOULD BE PLANTED AND MULCHED AFTER INSTALLATION.
  - c. PLANT DEBRIS OR ITS EQUIVALENT SHOULD BE LEFT ON THE SOIL SURFACE TO REPLENISH ORGANIC MATTER.
  - d. IT SHOULD BE POSSIBLE TO REDUCE USE OF IRRIGATION, FERTILIZERS, HERBICIDES AND PESTICIDES. THESE ACTIVITIES SHOULD BE ADJUSTED WHERE POSSIBLE, RATHER THAN CONTINUING TO IMPLEMENT FORMERLY ESTABLISHED PRACTICES.
- SEE PROJECT CONSTRUCTION SWPPP FOR ADDITIONAL INFORMATION OR SECTION 2.2.1.4 OF CHAPTER 2 OF VOLUME 6 OF THE 2021 SURFACE WATER MANAGEMENT MANUAL.

**MULCHING NOTES:**

1. MULCH MATERIALS USED SHALL BE STRAW OR HAY, AND SHALL BE APPLIED AT THE RATE OF 75-100 POUNDS PER 1000 SQ. FT. (APPX 2" THICK).
2. MULCH SHALL BE APPLIED IN ALL AREAS WITH EXPOSED SLOPES GREATER THAN 2: 1.
3. MULCHING SHALL BE USED IMMEDIATELY AFTER SEEDING OR IN AREAS WHICH CANNOT BE SEEDED BECAUSE OF THE SEASON.
4. ALL AREAS NEEDING MULCH SHALL BE COVERED BY NOVEMBER 1.

**CONTRACTOR NOTES:**


1. INLET PROTECTION SHALL BE INSTALLED IN ALL NEWLY CONSTRUCTED CATCH BASINS AND ALONG ALL IMPACTED FRONTAGE AND OFFSITE AREAS PER THE REQUIREMENTS OF THE COUNTY INSPECTOR PER DETAIL 5 ON THIS SHEET 5.
2. CONSTRUCTION FENCE CAN BE UTILIZED IN PLACE OF FILTER FABRIC FENCE ONLY IN AREAS WHERE THE GRADES DO NOT ALLOW THE POTENTIAL FOR ANY STORMWATER TO LEAVE THE SITE.
3. ALL DEMOLISHED MATERIALS SHALL BE REMOVED FROM THE SITE AND DISPOSED OF AT A CITY APPROVED LOCATION AND IN A MANNER CONSISTENT WITH CURRENT REGULATIONS AND REQUIREMENTS.
4. ALL AREAS THAT WILL BE UNWORKED FOR MORE THAN SEVEN (7) DAYS DURING THE DRY SEASON OR TWO (2) DAYS DURING THE WET SEASON, SHALL BE COVERED WITH STRAW, WOOD FIBER MULCH, COMPOST, PLASTIC SHEETING, OR OTHER EQUIVALENT PER CURRENT CITY OR COUNTY STANDARDS. SEE SEEDING NOTES AND MULCHING NOTES ON THIS SHEET.
5. CONTRACTOR SHALL DESIGNATE A WASHINGTON DEPT OF ECOLOGY CERTIFIED EROSION CONTROL LEAD PERSON, AND SHALL COMPLY WITH THE CONSTRUCTION STORMWATER POLLUTION PREVENTION PLAN (SWPPP) PREPARED FOR THE PROJECT.
6. AT ANY TIME DURING CONSTRUCTION IT IS DETERMINED BY THE CITY OR COUNTY THAT MUD AND DEBRIS ARE BEING TRACKED ONTO PUBLIC STREETS WITH INSUFFICIENT CLEANUP, ALL WORK SHALL CEASE ON THE PROJECT UNTIL THIS CONDITION IS CORRECTED. THE CONTRACTOR AND/OR THE OWNER SHALL IMMEDIATELY TAKE ALL STEPS NECESSARY TO PREVENT FUTURE TRACKING OF MUD AND DEBRIS INTO THE PUBLIC ROW, WHICH MAY INCLUDE THE INSTALLATION OF A WHEEL WASH FACILITY ON-SITE.
7. SEDIMENT LADEN RUNOFF SHALL NOT BE ALLOWED TO DISCHARGE BEYOND THE LIMITS OF THE IMPROVEMENTS. ADDITIONAL MEASURES SHALL BE INSTALLED AS NEEDED.
8. SAND BAGS SHALL BE SECURELY PLACED AROUND INSTALLED CATCH BASINS WITH INLET PROTECTION AS FIELD AND WEATHER CONDITIONS WARRANT SO TO PROTECT ALL DISPERSION AND INFILTRATION TRENCHES SEDIMENT LADEN RUNOFF.
9. TREES WITHIN WORKING LIMITS TO BE SAVED, SHALL BE MARKED AS SUCH ON SITE AND PROTECTION FENCE PLACED AROUND EACH TREE.

**SEEDING NOTES:**


1. THE FOLLOWING SEED MIXTURE SHALL BE AS BELOW AND SHALL BE APPLIED AT THE RATE RECOMMENDED BY THE SUPPLIER.

TABLE D.3.2.B TEMPORARY EROSION CONTROL SEED MIX			
	% WEIGHT	% PURITY	% GERMINATION
CHEWINGS OR RED FESCUE FESTUCA RUBRA VAR. COMMUTATA OR FESTUCA RUBRA	40	98	90
ANNUAL OR PERENNIAL RYE LOLIUM MULTIFLORUM OR LOLIUM PERENNE	40	98	90
REDFEATHER OR COLONIAL BENTGRASS AGROSTIS ALBA OR AGROSTIS TENUIS	10	92	85
WHITE DUTCH CLOVER TRIFOLIUM REPENS	10	98	90

2. SEED BEDS PLANTED BETWEEN MAY 1 AND OCTOBER 31 WILL REQUIRE IRRIGATION AND OTHER MAINTENANCE AS NECESSARY TO FOSTER AND PROTECT THE ROOT STRUCTURE.
3. FOR SEED BEDS PLANTED BETWEEN OCTOBER 31 AND APRIL 30, ARMORING OF THE SEED BED WILL BE NECESSARY. (E.G., GEOTEXTILES, JUTE MAT, CLEAR PLASTIC COVERING).
4. BEFORE SEEDING, INSTALL NEEDED SURFACE RUNOFF CONTROL MEASURES SUCH AS GRADIENT TERRACES, INTERCEPTOR DIKES, SWALES, LEVEL SPREADERS AND SEDIMENT BASINS.
5. THE SEEDBED SHALL BE FIRM WITH A FAIRLY FINE SURFACE, FOLLOWING SURFACE ROUGHENING. PERFORM ALL OPERATIONS ACROSS OR AT RIGHT ANGLES TO THE SLOPE.
6. FERTILIZERS ARE TO BE USED ACCORDING TO SUPPLIER'S RECOMMENDATIONS. AMOUNTS USED SHOULD BE MINIMIZED, ESPECIALLY ADJACENT TO WATER BODIES AND WETLANDS.

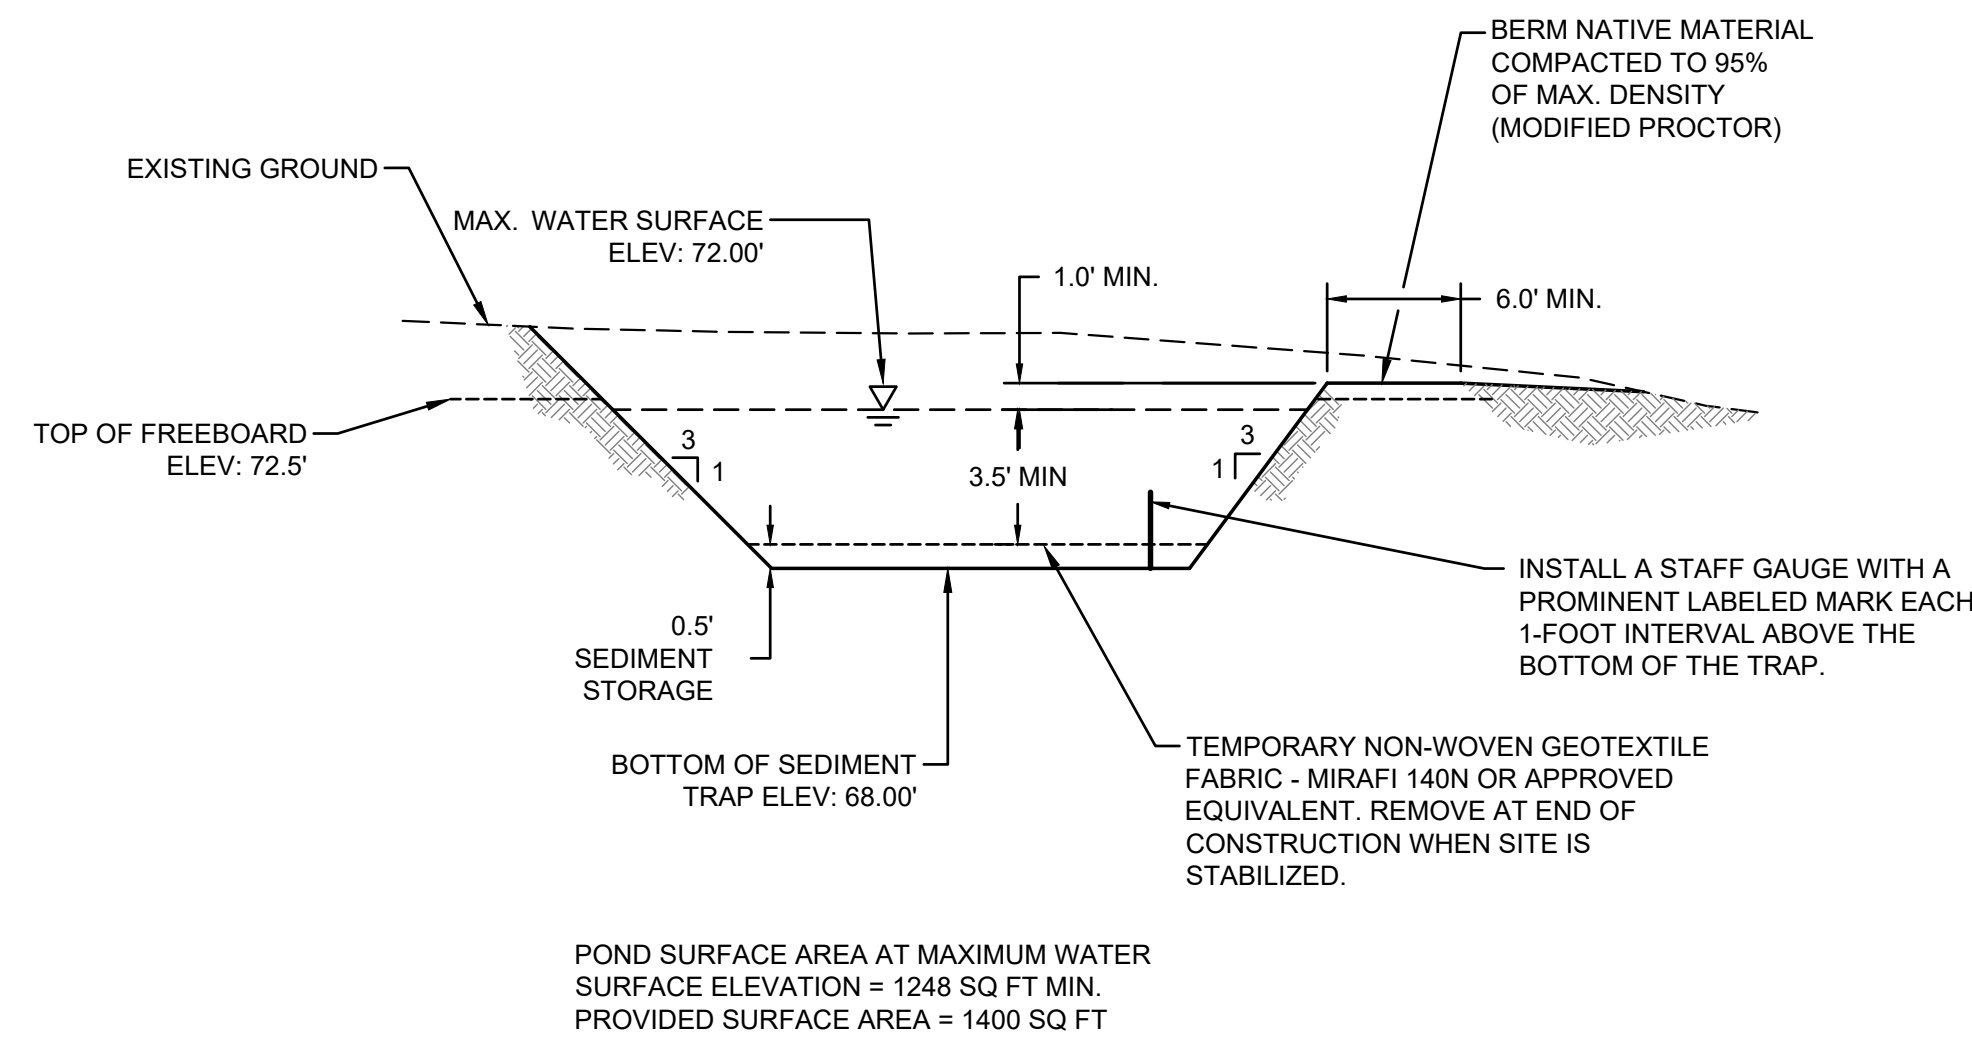

**1 TEMPORARY SEDIMENT TRAP**  
NOT TO SCALE

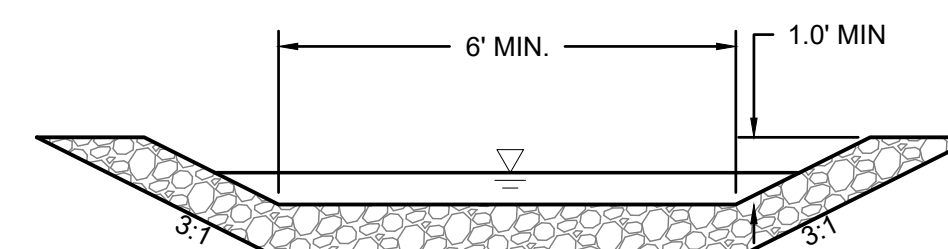


**2 OVERFLOW SPILLWAY**  
NOT TO SCALE



Know what's below.  
Call before you dig.

Sheet Title:

**TESC NOTES  
AND DETAILS**

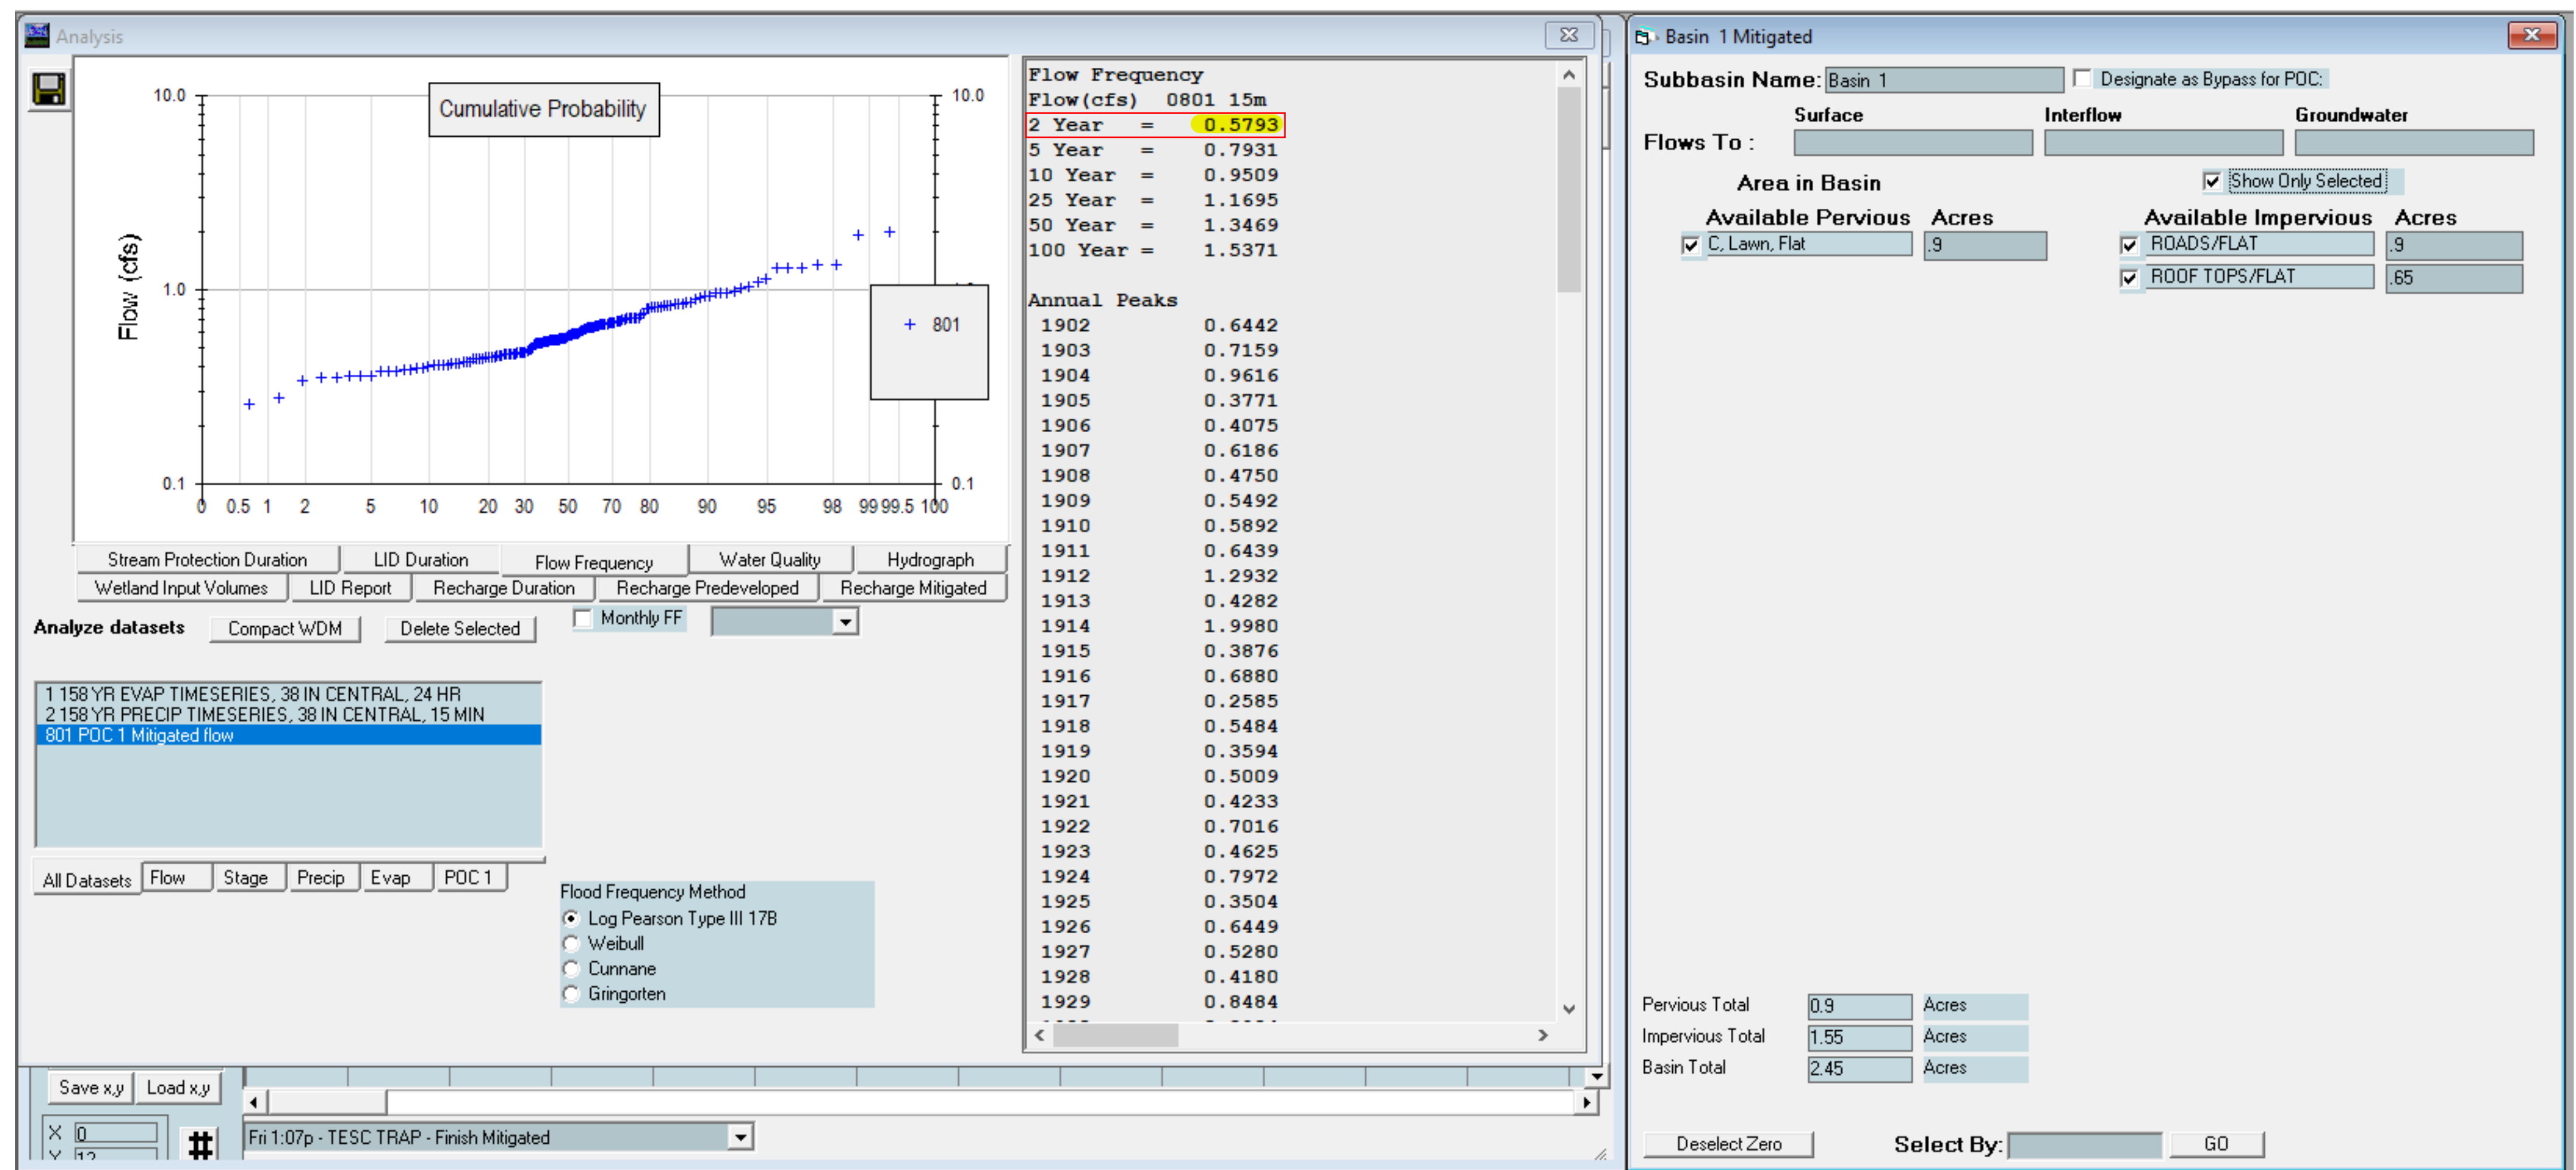

$Q_2 = 0.6 \text{ CFS}$

$SA = 2 \times Q_2 / 0.00096$   
 or  
 2080 square feet per cfs of inflow

$SA = 2080 \times 0.6 = 1248 \text{ SF REQUIRED SURFACE AREA}$

Sediment trap depth shall be 3.5 feet minimum from the bottom of the trap to the top of the overflow weir.

PROPOSED TRAP SIZE 14' BY 19' AT TRAP BOTTOM. 3:1 SIDE SLOPES, 3.5' MINIMUM FROM BOTTOM TO TOP OF OVERFLOW WEIR. PROPOSED TRAP SIZE AT TOP OF WEIR = 35' BY 40'  
 PROVIDED SURFACE AREA = 1400 SF  
 1400 SF > 1248 SF  
 PROVIDED SURFACE AREA > REQUIRED SURFACE AREA

Note: Sediment trap will be used for onsite construction runoff only and not the upstream runoff



# ***Appendix G***

---

## **Inspection Logs**

**East Town Crossing**  
**Stormwater Pollution Prevention Plan**  
**Inspection and Maintenance Report Form**

To be completed every 7 days and within 24 hours of a rainfall event of 0.5 inches or more

Inspector: \_\_\_\_\_ Date: \_\_\_\_\_  
 Inspector's Qualifications: \_\_\_\_\_

Days since last rainfall: \_\_\_\_\_ Amount of last rainfall: \_\_\_\_\_ inches

**Stabilization Measures**

Drainage Area	Date Since Last Disturbance	Date of Next Disturbance	Stabilized (yes/No)	Stabilized With	Condition

Stabilization required: \_\_\_\_\_

To be performed by: \_\_\_\_\_ On or before: \_\_\_\_\_  
 \_\_\_\_\_

**East Town Crossing**  
**Stormwater Pollution Prevention Plan**  
**Inspection and Maintenance Report Form**

Site Entrance:

Date:

**Temporary Construction Entrance**

Drainage Area Perimeter	Does Rock Pad Adequately Remove Mud from Vehicle Wheels?	Is Rock Pad Clogged with Mud?	Have Quarry Spalls Been Moved to the Roadway?

Maintenance required for temporary construction entrances:

To be performed by: \_\_\_\_\_ On or before: \_\_\_\_\_

---

**East Town Crossing**  
**Stormwater Pollution Prevention Plan**  
**Inspection and Maintenance Report Form**

Perimeter Structural Controls:

Date:

**Silt Fence**

Drainage Area Perimeter	Has Silt Reached 1/3 of Fence Height?	Is Fence Properly Secured?	Is There Evidence of Washout or Overtopping?

Maintenance required for silt fence and straw bales:

To be performed by: \_\_\_\_\_ On or before: \_\_\_\_\_  
\_\_\_\_\_

**East Town Crossing**  
**Stormwater Pollution Prevention Plan**  
**Inspection and Maintenance Report Form**

Inlet Protection:

Date:

**Storm Drain Barriers**

Inlet	Has Silt Reached 1/3 of Barrier Height?	Is Barrier Properly Secured?	Is There Evidence of Washout or Overtopping?

Maintenance required for storm drain barriers:

To be performed by: \_\_\_\_\_ On or before: \_\_\_\_\_  
\_\_\_\_\_



**East Town Crossing**  
**Stormwater Pollution Prevention Plan**  
**Inspection and Maintenance Report Form**

Changes required to the pollution prevention plan:

Reasons for changes:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

# Appendix H

---

## Best Management Practices (BMPs)

BMP C102.....	Buffer Zones
BMP C103.....	High Visibility Fence
BMP C105.....	Stabilized Construction Entrance
BMP C107.....	Construction Road / Parking Area Stabilization
BMP C120.....	Temporary and Permanent Seeding
BMP C121.....	Mulching
BMP C122.....	Nets and Blankets
BMP C123.....	Plastic Covering
BMP C140.....	Dust Control
BMP C150.....	Materials on Hand
BMP C151.....	Concrete Handling
BMP C152.....	Sawcutting and Surface Pollution Prevention
BMP C153.....	Material Delivery, Storage, and Containment
BMP C160.....	Certified Erosion and Sediment Control Lead
BMP C209.....	Outlet Protection
BMP C220.....	Storm Drain Inlet Protection
BMP C233.....	Silt Fence
BMP C240.....	Sediment Trap (Temporary)

## **BMP C102: Buffer Zones**

### ***Purpose***

Creation of an undisturbed area or strip of natural vegetation or an established suitable planting that will provide a living filter to reduce soil erosion and stormwater runoff velocities.

### ***Conditions of Use***

Buffer zones are used along streams, wetlands and other bodies of water that need protection from erosion and sedimentation. Contractors can use vegetative buffer zone BMPs to protect natural swales and they can incorporate them into the natural landscaping of an area.

Do not use critical-areas buffer zones as sediment treatment areas. These areas shall remain completely undisturbed. The local permitting authority may expand the buffer widths temporarily to allow the use of the expanded area for removal of sediment.

The types of buffer zones can change the level of protection required as shown below:

Designated Critical Area Buffers - buffers that protect Critical Areas, as defined by the Washington State Growth Management Act, and are established and managed by the local permitting authority. These should not be disturbed and must be protected with sediment control BMPs to prevent impacts. The local permitting authority may expand the buffer widths temporarily to allow the use of the expanded area for removal of sediment.

Vegetative Buffer Zones - areas that may be identified in undisturbed vegetation areas or managed vegetation areas that are outside any Designated Critical Area Buffer. They may be utilized to provide an additional sediment control area and/or reduce runoff velocities. If being used for preservation of natural vegetation, they should be arranged in clumps or strips. They can be used to protect natural swales and incorporated into the natural landscaping area.

### ***Design and Installation Specifications***

- Preserving natural vegetation or plantings in clumps, blocks, or strips is generally the easiest and most successful method.
- Leave all unstable steep slopes in natural vegetation.
- Mark clearing limits and keep all equipment and construction debris out of the natural areas and buffer zones. Steel construction fencing is the most effective method to protect sensitive areas and buffers. Alternatively, wire-backed silt fence on steel posts is marginally effective. Flagging alone is typically not effective.
- Keep all excavations outside the dripline of trees and shrubs.
- Do not push debris or extra soil into the buffer zone area because it will cause damage by

burying and smothering vegetation.

- Vegetative buffer zones for streams, lakes or other waterways shall be established by the local permitting authority or other state or federal permits or approvals.

## ***Maintenance Standards***

Inspect the area frequently to make sure flagging remains in place and the area remains undisturbed. Replace all damaged flagging immediately. Remove all materials located in the buffer area that may impede the ability of the vegetation to act as a filter.

## **BMP C103: High-Visibility Fence**

### ***Purpose***

High-visibility fencing is intended to:

- Restrict clearing to approved limits.
- Prevent disturbance of sensitive areas, their buffers, and other areas required to be left undisturbed.
- Limit construction traffic to designated construction entrances, exits, or internal roads.
- Protect areas where marking with survey tape may not provide adequate protection.

### ***Conditions of Use***

To establish clearing limits plastic, fabric, or metal fence may be used:

- At the boundary of sensitive areas, their buffers, and other areas required to be left uncleared.
- As necessary to control vehicle access to and on the site.

### ***Design and Installation Specifications***

High-visibility plastic fence shall be composed of a high-density polyethylene material and shall be at least four feet in height. Posts for the fencing shall be steel or wood and placed every 6 feet on center (maximum) or as needed to ensure rigidity. The fencing shall be fastened to the post every six inches with a polyethylene tie. On long continuous lengths of fencing, a tension wire or rope shall be used as a top stringer to prevent sagging between posts. The fence color shall be high-visibility orange. The fence tensile strength shall be 360 lbs/ft using the ASTM D4595 testing method.

If appropriate install fabric silt fence in accordance with [BMP C233: Silt Fence](#) to act as high-visibility fence. Silt fence shall be at least 3 feet high and must be highly visible to meet the requirements of this BMP.

Metal fences shall be designed and installed according to the manufacturer's specifications.

Metal fences shall be at least 3 feet high and must be highly visible.

Fences shall not be wired or stapled to trees.

## Maintenance Standards

If the fence has been damaged or visibility reduced, it shall be repaired or replaced immediately and visibility restored.

## BMP C105: Stabilized Construction Access

### Purpose

Stabilized construction accesses are established to reduce the amount of sediment transported onto paved roads outside the project site by vehicles or equipment. This is done by constructing a stabilized pad of quarry spalls at entrances and exits for project sites.

### Conditions of Use

Construction accesses shall be stabilized wherever traffic will be entering or leaving a construction site if paved roads or other paved areas are within 1,000 feet of the site.

For residential subdivision construction sites, provide a stabilized construction access for each residence, rather than only at the main subdivision entrance. Stabilized surfaces shall be of sufficient length/width to provide vehicle access/parking, based on lot size and configuration.

On large commercial, highway, and road projects, the designer should include enough extra materials in the contract to allow for additional stabilized accesses not shown in the initial Construction SWPPP. It is difficult to determine exactly where access to these projects will take place; additional materials will enable the contractor to install them where needed.

### Design and Installation Specifications

See [Figure II-3.1: Stabilized Construction Access](#) for details. Note: the 100' minimum length of the access shall be reduced to the maximum practicable size when the size or configuration of the site does not allow the full length (100').

Construct stabilized construction accesses with a 12-inch thick pad of 4-inch to 8-inch quarry spalls, a 4-inch course of asphalt treated base (ATB), or use existing pavement. Do not use crushed concrete, cement, or calcium chloride for construction access stabilization because these products raise pH levels in stormwater and concrete discharge to waters of the State is prohibited.

A separation geotextile shall be placed under the spalls to prevent fine sediment from pumping up into the rock pad. The geotextile shall meet the standards listed in [Table II-3.2: Stabilized Construction Access Geotextile Standards](#).

**Table II-3.2: Stabilized Construction Access Geotextile Standards**

Geotextile Property	Required Value
Grab Tensile Strength (ASTM D4751)	200 psi min.

**Table II-3.2: Stabilized Construction Access  
Geotextile Standards (continued)**

Geotextile Property	Required Value
Grab Tensile Elongation (ASTM D4632)	30% max.
Mullen Burst Strength (ASTM D3786-80a)	400 psi min.
AOS (ASTM D4751)	20-45 (U.S. standard sieve size)

- Consider early installation of the first lift of asphalt in areas that will be paved; this can be used as a stabilized access. Also consider the installation of excess concrete as a stabilized access. During large concrete pours, excess concrete is often available for this purpose.
- Fencing (see [BMP C 103: High-Visibility Fence](#)) shall be installed as necessary to restrict traffic to the construction access.
- Whenever possible, the access shall be constructed on a firm, compacted subgrade. This can substantially increase the effectiveness of the pad and reduce the need for maintenance.
- Construction accesses should avoid crossing existing sidewalks and back of walk drains if at all possible. If a construction access must cross a sidewalk or back of walk drain, the full length of the sidewalk and back of walk drain must be covered and protected from sediment leaving the site.

**Alternative Material Specification**

WSDOT has raised safety concerns about the Quarry Spall rock specified above. WSDOT observes that the 4-inch to 8-inch rock sizes can become trapped between Dually truck tires, and then released off-site at highway speeds. WSDOT has chosen to use a modified specification for the rock while continuously verifying that the Stabilized Construction Access remains effective. To remain effective, the BMP must prevent sediment from migrating off site. To date, there has been no performance testing to verify operation of this new specification. Jurisdictions may use the alternative specification, but must perform increased off-site inspection if they use, or allow others to use, it.

Stabilized Construction Accesses may use material that meets the requirements of WSDOT's *Standard Specifications for Road, Bridge, and Municipal Construction* Section 9-03.9(1) ([WSDOT, 2016](#)) for ballast except for the following special requirements.

The grading and quality requirements are listed in [Table II-3.3: Stabilized Construction Access Alternative Material Requirements](#).

**Table II-3.3: Stabilized  
Construction Access  
Alternative Material  
Requirements**

Sieve Size	Percent Passing
2½"	99-100

**Table II-3.3: Stabilized  
Construction Access  
Alternative Material  
Requirements  
(continued)**

Sieve Size	Percent Passing
2"	65-100
¾"	40-80
No. 4	5 max.
No. 100	0-2
% Fracture	75 min.

- All percentages are by weight.
- The sand equivalent value and dust ratio requirements do not apply.
- The fracture requirement shall be at least one fractured face and will apply the combined aggregate retained on the No. 4 sieve in accordance with FOP for AASHTO T 335.

### ***Maintenance Standards***


Quarry spalls shall be added if the pad is no longer in accordance with the specifications.

- If the access is not preventing sediment from being tracked onto pavement, then alternative measures to keep the streets free of sediment shall be used. This may include replacement/cleaning of the existing quarry spalls, street sweeping, an increase in the dimensions of the access, or the installation of [BMP C106: Wheel Wash](#).
- Any sediment that is tracked onto pavement shall be removed by shoveling or street sweeping. The sediment collected by sweeping shall be removed or stabilized on site. The pavement shall not be cleaned by washing down the street, except when high efficiency sweeping is ineffective and there is a threat to public safety. If it is necessary to wash the streets, the construction of a small sump to contain the wash water shall be considered. The sediment would then be washed into the sump where it can be controlled.
- Perform street sweeping by hand or with a high efficiency sweeper. Do not use a non-high efficiency mechanical sweeper because this creates dust and throws soils into storm systems or conveyance ditches.
- Any quarry spalls that are loosened from the pad, which end up on the roadway shall be removed immediately.
- If vehicles are entering or exiting the site at points other than the construction access(es), [BMP C103: High-Visibility Fence](#) shall be installed to control traffic.

- Upon project completion and site stabilization, all construction accesses intended as permanent access for maintenance shall be permanently stabilized.



**Figure II-3.1: Stabilized Construction Access**

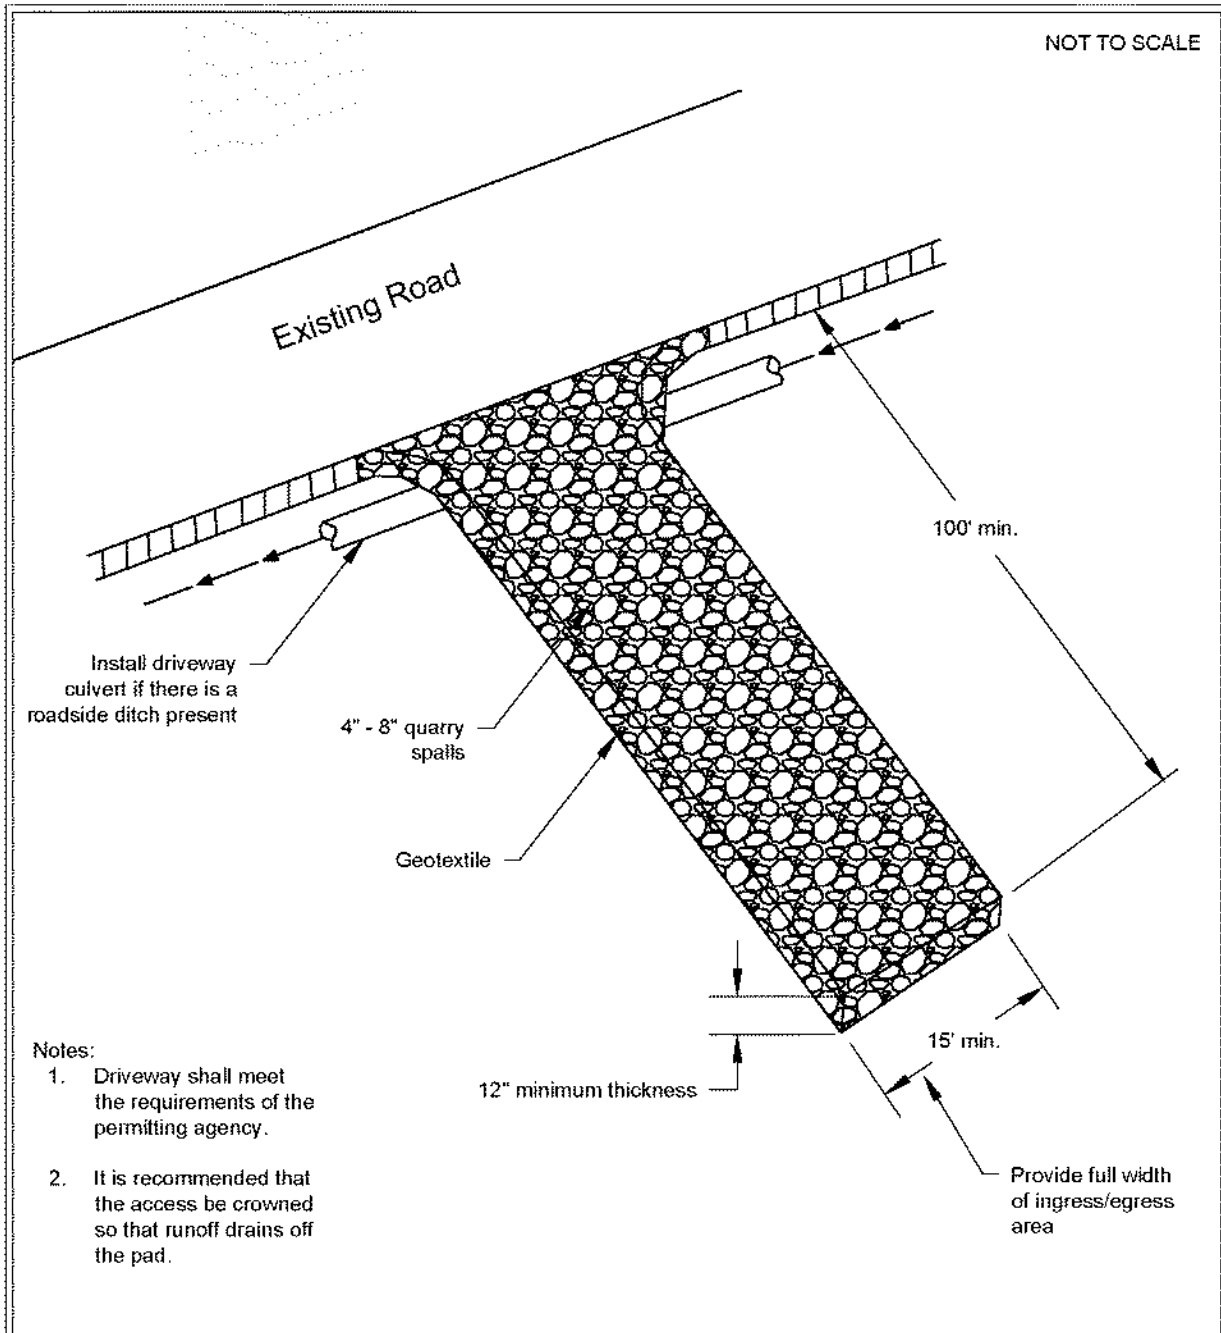

## Stabilized Construction Access

Revised June 2018

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

## ***Approved as Functionally Equivalent***

Ecology has approved products as able to meet the requirements of this BMP. The products did not pass through the Technology Assessment Protocol – Ecology (TAPE) process. Local jurisdictions may choose not to accept these products, or may require additional testing prior to consideration for local use. Products that Ecology has approved as functionally equivalent are available for review on Ecology's website at:

<https://ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Stormwater-permittee-guidance-resources/Emerging-stormwater-treatment-technologies>

## **BMP C107: Construction Road / Parking Area Stabilization**

### ***Purpose***

Stabilizing roads, parking areas, and other on-site vehicle transportation routes immediately after grading reduces erosion caused by construction traffic or stormwater runoff.

### ***Conditions of Use***

Roads and parking areas shall be stabilized wherever they are constructed, whether permanent or temporary, for use by construction traffic.

[BMP C103: High-Visibility Fence](#) shall be installed, if necessary, to limit the access of vehicles to only those roads and parking areas that are stabilized.

### ***Design and Installation Specifications***

- On areas that will receive asphalt as part of the project, install the first lift as soon as possible.
- A 6-inch depth of 2- to 4-inch crushed rock, gravel base, or crushed surfacing base course shall be applied immediately after grading or utility installation. A 4-inch course of asphalt treated base (ATB) may also be used, or the road/parking area may be paved. It may also be possible to use cement or calcium chloride for soil stabilization. If cement or cement kiln dust is used for roadbase stabilization, pH monitoring and [BMP C252: Treating and Disposing of High pH Water](#) is necessary to evaluate and minimize the effects on stormwater. If the area will not be used for permanent roads, parking areas, or structures, a 6-inch depth of hog fuel may also be used, but this is likely to require more maintenance. Whenever possible, construction roads and parking areas shall be placed on a firm, compacted subgrade.
- Temporary road gradients shall not exceed 15 percent. Roadways shall be carefully graded to drain. Drainage ditches shall be provided on each side of the roadway in the case of a crowned section, or on one side in the case of a super-elevated section. Drainage ditches shall be directed to a sediment control BMP.
- Rather than relying on ditches, it may also be possible to grade the road so that runoff sheetflows into a heavily vegetated area with a well-developed topsoil. Landscaped areas are not adequate. If this area has at least 50 feet of vegetation that water can flow through, then it is generally preferable to use the vegetation to treat runoff, rather than a sediment pond or trap. The 50 feet shall not include wetlands or their buffers. If runoff is allowed to sheetflow through adjacent vegetated areas, it is vital to design the roadways and parking areas so that no concentrated runoff is created.
- Storm drain inlets shall be protected to prevent sediment-laden water entering the drainage system (see [BMP C220: Inlet Protection](#)).

### ***Maintenance Standards***

Inspect stabilized areas regularly, especially after large storm events.

Crushed rock, gravel base, etc., shall be added as required to maintain a stable driving surface and to stabilize any areas that have eroded.

Following construction, these areas shall be restored to pre-construction condition or better to prevent future erosion.

Perform street cleaning at the end of each day or more often if necessary.

## **BMP C120: Temporary and Permanent Seeding**

### ***Purpose***

Seeding reduces erosion by stabilizing exposed soils. A well-established vegetative cover is one of the most effective methods of reducing erosion.

### ***Conditions of Use***

Use seeding throughout the project on disturbed areas that have reached final grade or that will remain unworked for more than 30 days.

The optimum seeding windows for western Washington are April 1 through June 30 and September 1 through October 1.

Between July 1 and August 30 seeding requires irrigation until 75 percent grass cover is established.

Between October 1 and March 30 seeding requires a cover of mulch or an erosion control blanket until 75 percent grass cover is established.

Review all disturbed areas in late August to early September and complete all seeding by the end of September. Otherwise, vegetation will not establish itself enough to provide more than average protection.

Mulch is required at all times for seeding because it protects seeds from heat, moisture loss, and transport due to runoff. Mulch can be applied on top of the seed or simultaneously by hydroseeding. See [BMP C121: Mulching](#) for specifications.

Seed and mulch all disturbed areas not otherwise vegetated at final site stabilization. Final stabilization means the completion of all soil disturbing activities at the site and the establishment of a permanent vegetative cover, or equivalent permanent stabilization measures (such as pavement, riprap, gabions, or geotextiles) which will prevent erosion. See [BMP T5.13: Post-Construction Soil Quality and Depth](#).

### ***Design and Installation Specifications***

#### **General**

- Install channels intended for vegetation before starting major earthwork and hydroseed with a Bonded Fiber Matrix. For vegetated channels that will have high flows, install erosion control blankets over the top of hydroseed. Before allowing water to flow in vegetated channels, establish 75 percent vegetation cover. If vegetated channels cannot be established by seed

before water flow; install sod in the channel bottom — over top of hydromulch and erosion control blankets.

- Confirm the installation of all required surface water control measures to prevent seed from washing away.
- Hydroseed applications shall include a minimum of 1,500 pounds per acre of mulch with 3 percent tackifier. See [BMP C121: Mulching](#) for specifications.
- Areas that will have seeding only and not landscaping may need compost or meal-based mulch included in the hydroseed in order to establish vegetation. Re-install native topsoil on the disturbed soil surface before application. See [BMP T5.13: Post-Construction Soil Quality and Depth](#).
- When installing seed via hydroseeding operations, only about 1/3 of the seed actually ends up in contact with the soil surface. This reduces the ability to establish a good stand of grass quickly. To overcome this, consider increasing seed quantities by up to 50 percent.
- Enhance vegetation establishment by dividing the hydromulch operation into two phases:
  - Phase 1- Install all seed and fertilizer with 25-30 percent mulch and tackifier onto soil in the first lift.
  - Phase 2- Install the rest of the mulch and tackifier over the first lift.

Or, enhance vegetation by:

- Installing the mulch, seed, fertilizer, and tackifier in one lift.
- Spread or blow straw over the top of the hydromulch at a rate of 800-1000 pounds per acre.
- Hold straw in place with a standard tackifier.

Both of these approaches will increase cost moderately but will greatly improve and enhance vegetative establishment. The increased cost may be offset by the reduced need for:

- Irrigation.
- Reapplication of mulch.
- Repair of failed slope surfaces.

This technique works with standard hydromulch (1,500 pounds per acre minimum) and Bonded Fiber Matrix/ Mechanically Bonded Fiber Matrix (BFM/MBFMs) (3,000 pounds per acre minimum).

- Seed may be installed by hand if:
  - Temporary and covered by straw, mulch, or topsoil.
  - Permanent in small areas (usually less than 1 acre) and covered with mulch, topsoil, or erosion blankets.
- The seed mixes listed in [Table II-3.4: Temporary and Permanent Seed Mixes](#) include

recommended mixes for both temporary and permanent seeding.

- Apply these mixes, with the exception of the wet area seed mix, at a rate of 120 pounds per acre. This rate can be reduced if soil amendments or slow-release fertilizers are used. Apply the wet area seed mix at a rate of 60 pounds per acre.
- Consult the local suppliers or the local conservation district for their recommendations. The appropriate mix depends on a variety of factors, including location, exposure, soil type, slope, and expected foot traffic. Alternative seed mixes approved by the local authority may be used, depending on the soil type and hydrology of the area.

**Table II-3.4: Temporary and Permanent Seed Mixes**

Common Name	Latin Name	% Weight	% Purity	% Germination
<b>Temporary Erosion Control Seed Mix</b>				
A standard mix for areas requiring a temporary vegetative cover.				
Chewings or annual blue grass	<i>Festuca rubra var. commutata</i> or <i>Poa annua</i>	40	98	90
Perennial rye	<i>Lolium perenne</i>	50	98	90
Redtop or colonial bentgrass	<i>Agrostis alba</i> or <i>Agrostis tenuis</i>	5	92	85
White dutch clover	<i>Trifolium repens</i>	5	98	90
<b>Landscaping Seed Mix</b>				
A recommended mix for landscaping seed.				
Perennial rye blend	<i>Lolium perenne</i>	70	98	90
Chewings and red fescue blend	<i>Festuca rubra var. commutata</i> or <i>Festuca rubra</i>	30	98	90
<b>Low-Growing Turf Seed Mix</b>				
A turf seed mix for dry situations where there is no need for watering. This mix requires very little maintenance.				
Dwarf tall fescue (several varieties)	<i>Festuca arundinacea var.</i>	45	98	90
Dwarf perennial rye (Barclay)	<i>Lolium perenne var. barclay</i>	30	98	90
Red fescue	<i>Festuca rubra</i>	20	98	90
Colonial bentgrass	<i>Agrostis tenuis</i>	5	98	90
<b>Bioswale Seed Mix</b>				
A seed mix for bioswales and other intermittently wet areas.				
Tall or meadow fes-	<i>Festuca arundin-</i>	75-80	98	90

**Table II-3.4: Temporary and Permanent Seed Mixes (continued)**

Common Name	Latin Name	% Weight	% Purity	% Germination
cue	<i>acea</i> or <i>Festuca elatior</i>			
Seaside/Creeping bentgrass	<i>Agrostis palustris</i>	10-15	92	85
Redtop bentgrass	<i>Agrostis alba</i> or <i>Agrostis gigantea</i>	5-10	90	80
<b>Wet Area Seed Mix</b>				
A low-growing, relatively non-invasive seed mix appropriate for very wet areas that are not regulated wetlands. Consult Hydraulic Permit Authority (HPA) for seed mixes if applicable.				
Tall or meadow fescue	<i>Festuca arundinacea</i> or <i>Festuca elatior</i>	60-70	98	90
Seaside/Creeping bentgrass	<i>Agrostis palustris</i>	10-15	98	85
Meadow foxtail	<i>Alepocurus pratensis</i>	10-15	90	80
Alsike clover	<i>Trifolium hybridum</i>	1-6	98	90
Redtop bentgrass	<i>Agrostis alba</i>	1-6	92	85
<b>Meadow Seed Mix</b>				
A recommended meadow seed mix for infrequently maintained areas or non-maintained areas where colonization by native plants is desirable. Likely applications include rural road and utility right-of-way. Seeding should take place in September or very early October in order to obtain adequate establishment prior to the winter months. Consider the appropriateness of clover, a fairly invasive species, in the mix. Amending the soil can reduce the need for clover.				
Redtop or Oregon bentgrass	<i>Agrostis alba</i> or <i>Agrostis oregonensis</i>	20	92	85
Red fescue	<i>Festuca rubra</i>	70	98	90
White dutch clover	<i>Trifolium repens</i>	10	98	90

**Roughening and Rototilling**

- The seedbed should be firm and rough. Roughen all soil no matter what the slope. Track walk slopes before seeding if engineering purposes require compaction. Backblading or smoothing of slopes greater than 4H:1V is not allowed if they are to be seeded.
- Restoration-based landscape practices require deeper incorporation than that provided by a simple single-pass rototilling treatment. Wherever practical, initially rip the subgrade to improve long-term permeability, infiltration, and water inflow qualities. At a minimum,

permanent areas shall use soil amendments to achieve organic matter and permeability performance defined in engineered soil/landscape systems. For systems that are deeper than 8 inches complete the rototilling process in multiple lifts, or prepare the engineered soil system per specifications and place to achieve the specified depth.

### **Fertilizers**

- Conducting soil tests to determine the exact type and quantity of fertilizer is recommended. This will prevent the over-application of fertilizer.
- Organic matter is the most appropriate form of fertilizer because it provides nutrients (including nitrogen, phosphorus, and potassium) in the least water-soluble form.
- In general, use 10-4-6 N-P-K (nitrogen-phosphorus-potassium) fertilizer at a rate of 90 pounds per acre. Always use slow-release fertilizers because they are more efficient and have fewer environmental impacts. Do not add fertilizer to the hydromulch machine, or agitate, more than 20 minutes before use. Too much agitation destroys the slow-release coating.
- There are numerous products available that take the place of chemical fertilizers. These include several with seaweed extracts that are beneficial to soil microbes and organisms. If 100 percent cottonseed meal is used as the mulch in hydroseed, chemical fertilizer may not be necessary. Cottonseed meal provides a good source of long-term, slow-release, available nitrogen.

### **Bonded Fiber Matrix and Mechanically Bonded Fiber Matrix**

- On steep slopes use Bonded Fiber Matrix (BFM) or Mechanically Bonded Fiber Matrix (MBFM) products. Apply BFM/MBFM products at a minimum rate of 3,000 pounds per acre with approximately 10 percent tackifier. Achieve a minimum of 95 percent soil coverage during application. Numerous products are available commercially. Most products require 24-36 hours to cure before rainfall and cannot be installed on wet or saturated soils. Generally, products come in 40-50 pound bags and include all necessary ingredients except for seed and fertilizer.
- Install products per manufacturer's instructions.
- BFMs and MBFMs provide good alternatives to blankets in most areas requiring vegetation establishment. Advantages over blankets include:
  - BFMs and MBFMs do not require surface preparation.
  - Helicopters can assist in installing BFM and MBFMs in remote areas.
  - On slopes steeper than 2.5H:1V, blanket installers may require ropes and harnesses for safety.
  - Installing BFM and MBFMs can save at least \$1,000 per acre compared to blankets.



## ***Maintenance Standards***

Reseed any seeded areas that fail to establish at least 75 percent cover (100 percent cover for areas that receive sheet or concentrated flows). If reseeding is ineffective, use an alternate method such as sodding, mulching, nets, or blankets.

- Reseed and protect by mulch any areas that experience erosion after achieving adequate cover. Reseed and protect by mulch any eroded area.
- Supply seeded areas with adequate moisture, but do not water to the extent that it causes run-off.

## ***Approved as Functionally Equivalent***

Ecology has approved products as able to meet the requirements of this BMP. The products did not pass through the Technology Assessment Protocol – Ecology (TAPE) process. Local jurisdictions may choose not to accept these products, or may require additional testing prior to consideration for local use. Products that Ecology has approved as functionally equivalent are available for review on Ecology’s website at:

<https://ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Stormwater-permittee-guidance-resources/Emerging-stormwater-treatment-technologies>

## **BMP C121: Mulching**

### ***Purpose***

Mulching soils provides immediate temporary protection from erosion. Mulch also enhances plant establishment by conserving moisture, holding fertilizer, seed, and topsoil in place, and moderating soil temperatures. There are a variety of mulches that can be used. This section discusses only the most common types of mulch.

### ***Conditions of Use***

As a temporary cover measure, mulch should be used:

- For less than 30 days on disturbed areas that require cover.
- At all times for seeded areas, especially during the wet season and during the hot summer months.
- During the wet season on slopes steeper than 3H:1V with more than 10 feet of vertical relief.

Mulch may be applied at any time of the year and must be refreshed periodically.

For seeded areas, mulch may be made up of 100 percent:

- cottonseed meal;
- fibers made of wood, recycled cellulose, hemp, or kenaf;

- compost;
- or blends of these.

Tackifier shall be plant-based, such as guar or alpha plantago, or chemical-based such as polyacrylamide or polymers.

Generally, mulches come in 40-50 pound bags. Seed and fertilizer are added at time of application.

Recycled cellulose may contain polychlorinated biphenyl (PCBs). Ecology recommends that products should be evaluated for PCBs prior to use.

Refer to [BMP C 126: Polyacrylamide \(PAM\) for Soil Erosion Protection](#) for conditions of use. PAM shall not be directly applied to water or allowed to enter a water body.

Any mulch or tackifier product used shall be installed per the manufacturer's instructions.

## ***Design and Installation Specifications***

For mulch materials, application rates, and specifications, see [Table II-3.6: Mulch Standards and Guidelines](#). Consult with the local supplier or the local conservation district for their recommendations. Increase the application rate until the ground is 95% covered (i.e. not visible under the mulch layer). Note: Thickness may be increased for disturbed areas in or near sensitive areas or other areas highly susceptible to erosion.

Where the option of "Compost" is selected, it should be a coarse compost that meets the size gradations listed in [Table II-3.5: Size Gradations of Compost as Mulch Material](#) when tested in accordance with Test Method 02.02-B found in *Test Methods for the Examination of Composting and Compost* ([Thompson, 2001](#)).

**Table II-3.5: Size Gradations of Compost as Mulch Material**

Sieve Size	Percent Passing
3"	100%
1"	90% - 100%
3/4"	70% - 100%
1/4"	40% - 100%

Mulch used within the ordinary high-water mark of surface waters should be selected to minimize potential flotation of organic matter. Composted organic materials have higher specific gravities (densities) than straw, wood, or chipped material. Consult the Hydraulic Permit Authority (HPA) for mulch mixes if applicable.

## ***Maintenance Standards***

The thickness of the mulch cover must be maintained.

Any areas that experience erosion shall be remulched and/or protected with a net or blanket. If the erosion problem is drainage related, then the problem shall be fixed and the eroded area remulched.

**Table II-3.6: Mulch Standards and Guidelines**

Mulch Material	Guideline	Description
Straw	Quality Standards	Air-dried; free from undesirable seed and coarse material.
	Application Rates	2"-3" thick; 5 bales per 1,000 sf or 2-3 tons per acre
	Remarks	Cost-effective protection when applied with adequate thickness. Hand-application generally requires greater thickness than blown straw. The thickness of straw may be reduced by half when used in conjunction with seeding. In windy areas straw must be held in place by crimping, using a tackifier, or covering with netting. Blown straw always has to be held in place with a tackifier as even light winds will blow it away. Straw, however, has several deficiencies that should be considered when selecting mulch materials. It often introduces and/or encourages the propagation of weed species and it has no significant long-term benefits. It should also not be used within the ordinary high-water elevation of surface waters (due to flotation).
Hydromulch	Quality Standards	No growth inhibiting factors.
	Application Rates	Approx. 35-45 lbs per 1,000 sf or 1,500 - 2,000 lbs per acre
	Remarks	Shall be applied with hydromulcher. Shall not be used without seed and tackifier unless the application rate is at least doubled. Fibers longer than about 3/4 - 1 inch clog hydromulch equipment. Fibers should be kept to less than 3/4 inch.
Compost	Quality Standards	No visible water or dust during handling. Must be produced per <a href="#">WAC 173-350</a> , Solid Waste Handling Standards, but may have up to 35% biosolids.
	Application Rates	2" thick min.; approx. 100 tons per acre (approx. 750 lbs per cubic yard)
	Remarks	More effective control can be obtained by increasing thickness to 3". Excellent mulch for protecting final grades until landscaping because it can be directly seeded or tilled into soil as an amendment. Compost used for mulch has a coarser size gradation than compost used for <a href="#">BMP C 125: Topsoiling / Composting</a> or <a href="#">BMP T5.13: Post-Construction Soil Quality and Depth</a> . It is more stable and practical to use in wet areas and during rainy weather conditions. Do not use near wetlands or near phosphorous impaired water bodies.
Chipped Site Vegetation	Quality Standards	Gradations from fines to 6 inches in length for texture, variation, and interlocking properties. Include a mix of various sizes so that the average size is between 2- and 4- inches.
	Application Rates	2" thick min.;

**Table II-3.6: Mulch Standards and Guidelines (continued)**

Mulch Material	Guideline	Description
	Remarks	<p>This is a cost-effective way to dispose of debris from clearing and grubbing, and it eliminates the problems associated with burning. Generally, it should not be used on slopes above approx. 10% because of its tendency to be transported by runoff. It is not recommended within 200 feet of surface waters. If permanent seeding or planting is expected shortly after mulch, the decomposition of the chipped vegetation may tie up nutrients important to grass establishment.</p> <p>Note: thick application of this material over existing grass, herbaceous species, and some groundcovers could smother and kill vegetation.</p>
Wood-Based Mulch	Quality Standards	No visible water or dust during handling. Must be purchased from a supplier with a Solid Waste Handling Permit or one exempt from solid waste regulations.
	Application Rates	2" thick min.; approx. 100 tons per acre (approx. 750 lbs. per cubic yard)
	Remarks	This material is often called "wood straw" or "hog fuel". The use of mulch ultimately improves the organic matter in the soil. Special caution is advised regarding the source and composition of wood-based mulches. Its preparation typically does not provide any weed seed control, so evidence of residual vegetation in its composition or known inclusion of weed plants or seeds should be monitored and prevented (or minimized).
Wood Strand Mulch	Quality Standards	A blend of loose, long, thin wood pieces derived from native conifer or deciduous trees with high length-to-width ratio.
	Application Rates	2" thick min.
	Remarks	Cost-effective protection when applied with adequate thickness. A minimum of 95-percent of the wood strand shall have lengths between 2 and 10-inches, with a width and thickness between 1/16 and 1/2-inches. The mulch shall not contain resin, tannin, or other compounds in quantities that would be detrimental to plant life. Sawdust or wood shavings shall not be used as mulch. [Specification 9-14.4(4) from the <i>Standard Specifications for Road, Bridge, and Municipal Construction</i> ( <a href="#">WSDOT, 2016</a> )

## BMP C122: Nets and Blankets

### Purpose

Erosion control nets and blankets are intended to prevent erosion and hold seed and mulch in place on steep slopes and in channels so that vegetation can become well established. In addition, some nets and blankets can be used to permanently reinforce turf to protect drainage ways during high flows.

Nets (commonly called matting) are strands of material woven into an open, but high-tensile strength net (for example, coconut fiber matting). Blankets are strands of material that are not tightly woven, but instead form a layer of interlocking fibers, typically held together by a biodegradable or photodegradable netting (for example, excelsior or straw blankets). They generally have lower tensile strength than nets, but cover the ground more completely. Coir (coconut fiber) fabric comes as both nets and blankets.

## **Conditions of Use**

Erosion control netting and blankets shall be made of natural plant fibers unaltered by synthetic materials.

Erosion control nets and blankets should be used:

- To aid permanent vegetated stabilization of slopes 2H:1V or greater and with more than 10 feet of vertical relief.
- For drainage ditches and swales (highly recommended). The application of appropriate netting or blanket to drainage ditches and swales can protect bare soil from channelized runoff while vegetation is established. Nets and blankets also can capture a great deal of sediment due to their open, porous structure. Nets and blankets can be used to permanently stabilize channels and may provide a cost-effective, environmentally preferable alternative to riprap.

Disadvantages of nets and blankets include:

- Surface preparation is required.
- On slopes steeper than 2.5H:1V, net and blanket installers may need to be roped and harnessed for safety.
- They cost at least \$4,000-6,000 per acre installed.

Advantages of nets and blankets include:

- Installation without mobilizing special equipment.
- Installation by anyone with minimal training
- Installation in stages or phases as the project progresses.
- Installers can hand place seed and fertilizer as they progress down the slope.
- Installation in any weather.
- There are numerous types of nets and blankets that can be designed with various parameters in mind. Those parameters include: fiber blend, mesh strength, longevity, biodegradability, cost, and availability.

An alternative to nets and blankets in some limited conditions is [BMP C202: Riprap Channel Lining](#). Ensure that [BMP C202: Riprap Channel Lining](#) is appropriate before using it as a substitute for nets and blankets.

## Design and Installation Specifications

- See [Figure II-3.3: Channel Installation \(Clackamas County et al., 2008\)](#) and [Figure II-3.4: Slope Installation](#) for typical orientation and installation of nets and blankets used in channels and as slope protection. Note: these are typical only; all nets and blankets must be installed per manufacturer's installation instructions.
- Installation is critical to the effectiveness of these products. If good ground contact is not achieved, runoff can concentrate under the product, resulting in significant erosion.
- Installation of nets and blankets on slopes:
  1. Complete final grade and track walk up and down the slope.
  2. Install hydromulch with seed and fertilizer.
  3. Dig a small trench, approximately 12 inches wide by 6 inches deep along the top of the slope.
  4. Install the leading edge of the net/blanket into the small trench and staple approximately every 18 inches. NOTE: Staples are metal, "U"-shaped, and a minimum of 6 inches long. Longer staples are used in sandy soils. Biodegradable stakes are also available.
  5. Roll the net/blanket slowly down the slope as the installer walks backward. NOTE: The net/blanket rests against the installer's legs. Staples are installed as the net/blanket is unrolled. It is critical that the proper staple pattern is used for the net/blanket being installed. The net/blanket is not to be allowed to roll down the slope on its own as this stretches the net/blanket, making it impossible to maintain soil contact. In addition, no one is allowed to walk on the net/blanket after it is in place.
  6. If the net/blanket is not long enough to cover the entire slope length, the trailing edge of the upper net/blanket should overlap the leading edge of the lower net/blanket and be stapled. On steeper slopes, this overlap should be installed in a small trench, stapled, and covered with soil.
- With the variety of products available, it is impossible to cover all the details of appropriate use and installation. Therefore, it is critical that the designer consult the manufacturer's information and that a site visit takes place in order to ensure that the product specified is appropriate. Information is also available in WSDOT's *Standard Specifications for Road, Bridge, and Municipal Construction* Division 8-01 and Division 9-14 ([WSDOT, 2016](#)).
- Use jute matting in conjunction with mulch ([BMP C 121: Mulching](#)). Excelsior, woven straw blankets and coir (coconut fiber) blankets may be installed without mulch. There are many other types of erosion control nets and blankets on the market that may be appropriate in certain circumstances.
- In general, most nets (e.g., jute matting) require mulch in order to prevent erosion because they have a fairly open structure. Blankets typically do not require mulch because they usually provide complete protection of the surface.
- Extremely steep, unstable, wet, or rocky slopes are often appropriate candidates for use of synthetic blankets, as are riverbanks, beaches and other high-energy environments. If


synthetic blankets are used, the soil should be hydromulched first.

- 100-percent biodegradable blankets are available for use in sensitive areas. These organic blankets are usually held together with a paper or fiber mesh and stitching which may last up to a year.
- Most netting used with blankets is photodegradable, meaning it breaks down under sunlight (not UV stabilized). However, this process can take months or years even under bright sun. Once vegetation is established, sunlight does not reach the mesh. It is not uncommon to find non-degraded netting still in place several years after installation. This can be a problem if maintenance requires the use of mowers or ditch cleaning equipment. In addition, birds and small animals can become trapped in the netting.

### ***Maintenance Standards***

- Maintain good contact with the ground. Erosion must not occur beneath the net or blanket.
- Repair and staple any areas of the net or blanket that are damaged or not in close contact with the ground.
- Fix and protect eroded areas if erosion occurs due to poorly controlled drainage.

**Figure II-3.3: Channel Installation**

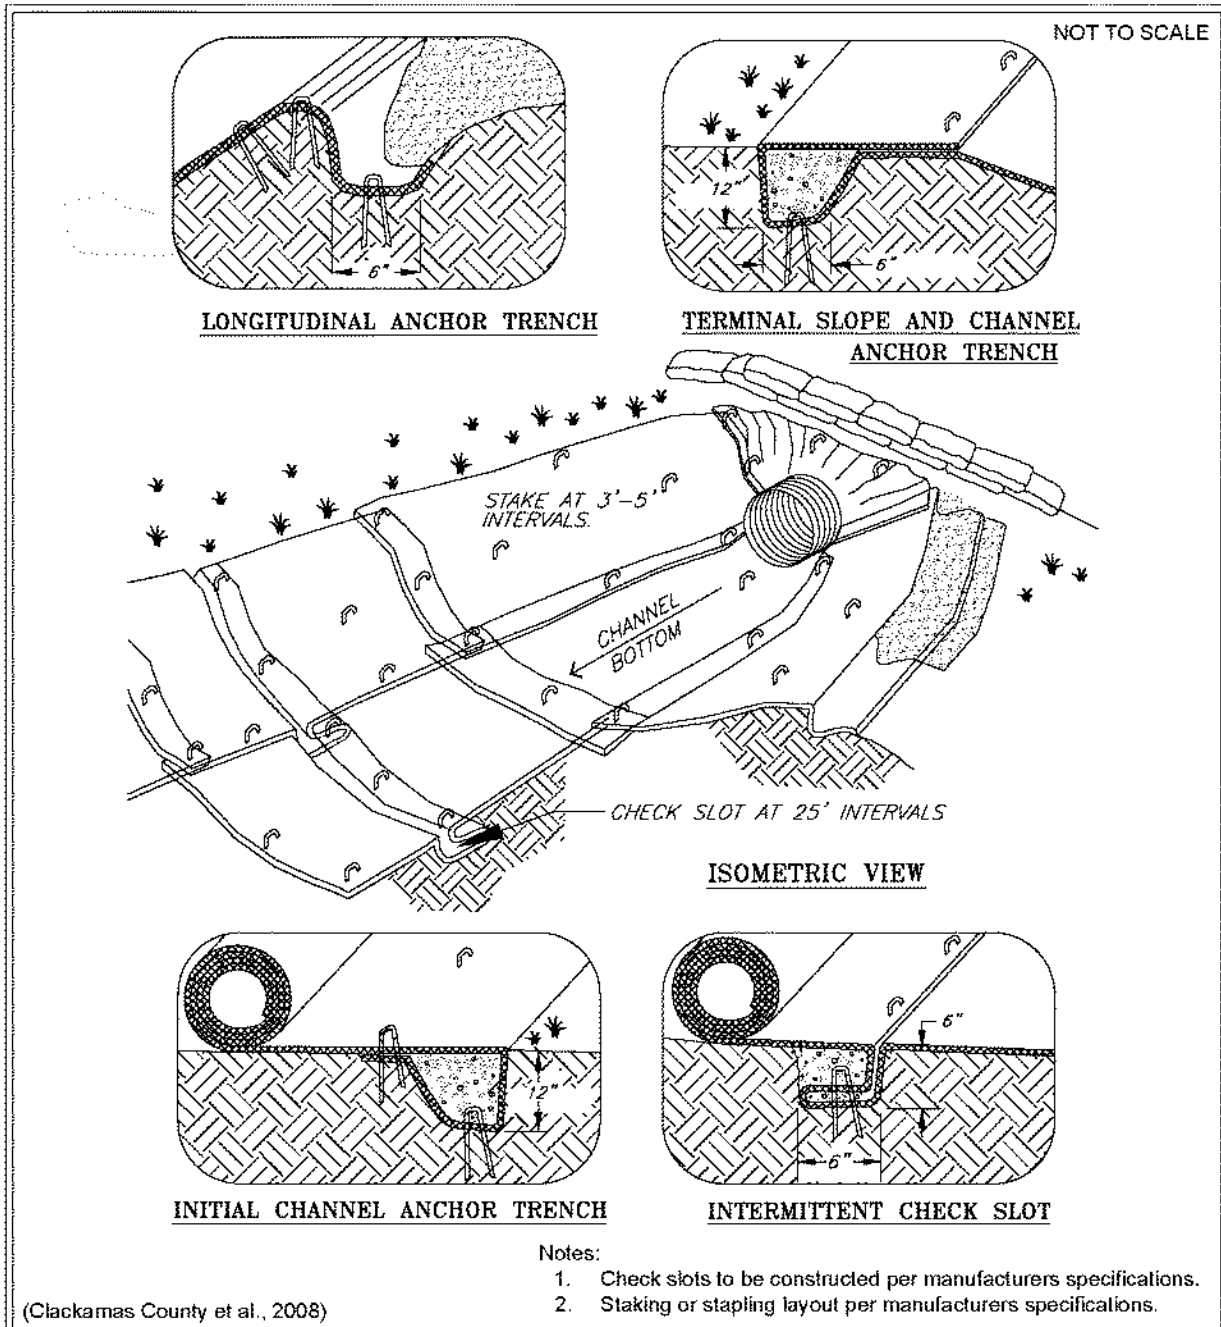


## Channel Installation

Revised July 2016

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.



**Figure II-3.4: Slope Installation**

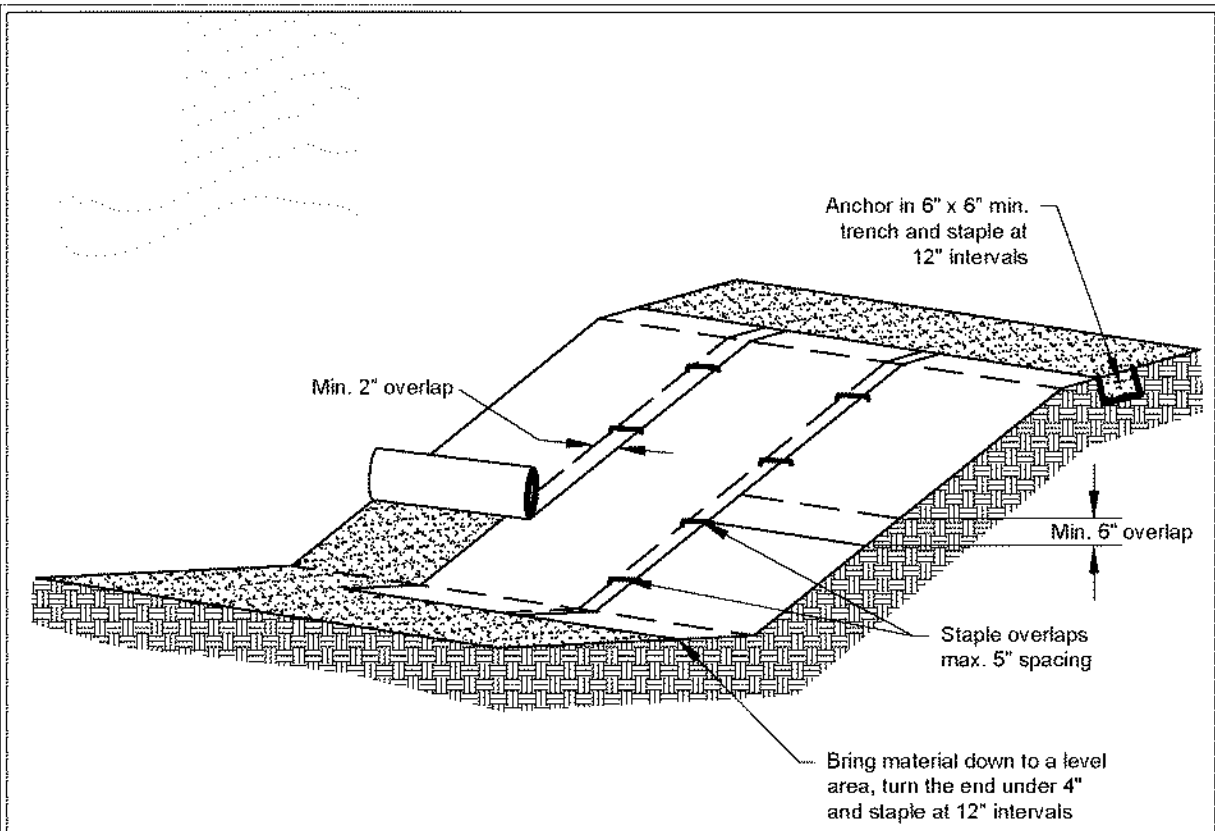

**Notes:**

1. Slope surface shall be smooth before placement for proper soil contact.
2. Stapling pattern as per manufacturer's recommendations.
3. Do not stretch blankets/matlings tight - allow the rolls to mold to any irregularities.
4. For slopes less than 3H:1V, rolls may be placed in horizontal strips.
5. If there is a berm at the top of the slope, anchor upslope of the berm.
6. Lime, fertilize, and seed before installation. Planting of shrubs, trees, etc. should occur after installation.

NOT TO SCALE



## Slope Installation

Revised June 2016

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

## **BMP C123: Plastic Covering**

### ***Purpose***

Plastic covering provides immediate, short-term erosion protection to slopes and disturbed areas.

### ***Conditions of Use***

Plastic covering may be used on disturbed areas that require cover measures for less than 30 days, except as stated below.

- Plastic is particularly useful for protecting cut and fill slopes and stockpiles. However, the relatively rapid breakdown of most polyethylene sheeting makes it unsuitable for applications greater than six months.
- Due to rapid runoff caused by plastic covering, do not use this method upslope of areas that might be adversely impacted by concentrated runoff. Such areas include steep and/or unstable slopes.
- Plastic sheeting may result in increased runoff volumes and velocities, requiring additional on-site measures to counteract the increases. Creating a trough with wattles or other material can convey clean water away from these areas.
- To prevent undercutting, trench and backfill rolled plastic covering products.
- Although the plastic material is inexpensive to purchase, the cost of installation, maintenance, removal, and disposal add to the total costs of this BMP.
- Whenever plastic is used to protect slopes, install water collection measures at the base of the slope. These measures include plastic-covered berms, channels, and pipes used to convey clean rainwater away from bare soil and disturbed areas. Do not mix clean runoff from a plastic covered slope with dirty runoff from a project.
- Other uses for plastic include:
  - Temporary ditch liner.
  - Pond liner in temporary sediment pond.
  - Liner for bermed temporary fuel storage area if plastic is not reactive to the type of fuel being stored.
  - Emergency slope protection during heavy rains.
  - Temporary drainpipe (“elephant trunk”) used to direct water.

### ***Design and Installation Specifications***

- Plastic slope cover must be installed as follows:
  1. Run plastic up and down the slope, not across the slope.
  2. Plastic may be installed perpendicular to a slope if the slope length is less than 10 feet.

3. Provide a minimum of 8-inch overlap at the seams.
  4. On long or wide slopes, or slopes subject to wind, tape all seams.
  5. Place plastic into a small (12-inch wide by 6-inch deep) slot trench at the top of the slope and backfill with soil to keep water from flowing underneath.
  6. Place sand filled burlap or geotextile bags every 3 to 6 feet along seams and tie them together with twine to hold them in place.
  7. Inspect plastic for rips, tears, and open seams regularly and repair immediately. This prevents high velocity runoff from contacting bare soil, which causes extreme erosion.
  8. Sandbags may be lowered into place tied to ropes. However, all sandbags must be staked in place.
- Plastic sheeting shall have a minimum thickness of 0.06 millimeters.
  - If erosion at the toe of a slope is likely, a gravel berm, riprap, or other suitable protection shall be installed at the toe of the slope in order to reduce the velocity of runoff.

### ***Maintenance Standards***

- Torn sheets must be replaced and open seams repaired.
- Completely remove and replace the plastic if it begins to deteriorate due to ultraviolet radiation.
- Completely remove plastic when no longer needed.
- Dispose of old tires used to weight down plastic sheeting appropriately.

### ***Approved as Functionally Equivalent***

Ecology has approved products as able to meet the requirements of this BMP. The products did not pass through the Technology Assessment Protocol – Ecology (TAPE) process. Local jurisdictions may choose not to accept these products, or may require additional testing prior to consideration for local use. Products that Ecology has approved as functionally equivalent are available for review on Ecology's website at:

<https://ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Stormwater-permittee-guidance-resources/Emerging-stormwater-treatment-technologies>

## **BMP C140: Dust Control**

### ***Purpose***

Dust control prevents wind transport of dust from disturbed soil surfaces onto roadways, drainage ways, and surface waters.

### ***Conditions of Use***

Use dust control in areas (including roadways) subject to surface and air movement of dust where on-site or off-site impacts to roadways, drainage ways, or surface waters are likely.

### ***Design and Installation Specifications***

- Vegetate or mulch areas that will not receive vehicle traffic. In areas where planting, mulching, or paving is impractical, apply gravel or landscaping rock.
- Limit dust generation by clearing only those areas where immediate activity will take place, leaving the remaining area(s) in the original condition. Maintain the original ground cover as long as practical.
- Construct natural or artificial windbreaks or windscreens. These may be designed as enclosures for small dust sources.
- Sprinkle the site with water until the surface is wet. Repeat as needed. To prevent carryout of mud onto the street, refer to [BMP C 105: Stabilized Construction Access](#) and [BMP C 106: Wheel Wash](#).
- Irrigation water can be used for dust control. Irrigation systems should be installed as a first step on sites where dust control is a concern.
- Spray exposed soil areas with a dust palliative, following the manufacturer's instructions and cautions regarding handling and application. Used oil is prohibited from use as a dust suppressant. Local governments may approve other dust palliatives such as calcium chloride or PAM.
- PAM ([BMP C 126: Polyacrylamide \(PAM\) for Soil Erosion Protection](#)) added to water at a rate of 0.5 pounds per 1,000 gallons of water per acre and applied from a water truck is more effective than water alone. This is due to increased infiltration of water into the soil and reduced evaporation. In addition, small soil particles are bonded together and are not as easily transported by wind. Adding PAM may reduce the quantity of water needed for dust control. Note that the application rate specified here applies to this BMP, and is not the same application rate that is specified in [BMP C 126: Polyacrylamide \(PAM\) for Soil Erosion Protection](#), but the downstream protections still apply.

Refer to [BMP C 126: Polyacrylamide \(PAM\) for Soil Erosion Protection](#) for conditions of use. PAM shall not be directly applied to water or allowed to enter a water body.

- Contact your local Air Pollution Control Authority for guidance and training on other dust control measures. Compliance with the local Air Pollution Control Authority constitutes

compliance with this BMP.

- Use vacuum street sweepers.
- Remove mud and other dirt promptly so it does not dry and then turn into dust.
- Techniques that can be used for unpaved roads and lots include:
  - Lower speed limits. High vehicle speed increases the amount of dust stirred up from unpaved roads and lots.
  - Upgrade the road surface strength by improving particle size, shape, and mineral types that make up the surface and base materials.
  - Add surface gravel to reduce the source of dust emission. Limit the amount of fine particles (those smaller than .075 mm) to 10 to 20 percent.
  - Use geotextile fabrics to increase the strength of new roads or roads undergoing reconstruction.
  - Encourage the use of alternate, paved routes, if available.
  - Apply chemical dust suppressants using the admix method, blending the product with the top few inches of surface material. Suppressants may also be applied as surface treatments.
  - Limit dust-causing work on windy days.
  - Pave unpaved permanent roads and other trafficked areas.

## ***Maintenance Standards***

Respray area as necessary to keep dust to a minimum.

## **BMP C150: Materials on Hand**

### ***Purpose***

Keep quantities of erosion prevention and sediment control materials on the project site at all times to be used for regular maintenance and emergency situations such as unexpected heavy rains. Having these materials on-site reduces the time needed to replace existing or implement new BMPs when inspections indicate that existing BMPs are not meeting the Construction SWPPP requirements. In addition, contractors can save money by buying some materials in bulk and storing them at their office or yard.

### ***Conditions of Use***

- Construction projects of any size or type can benefit from having materials on hand. A small commercial development project could have a roll of plastic and some gravel available for immediate protection of bare soil and temporary berm construction. A large earthwork project, such as highway construction, might have several tons of straw, several rolls of plastic, flexible

pipe, sandbags, geotextile fabric and steel “T” posts.

- Materials should be stockpiled and readily available before any site clearing, grubbing, or earthwork begins. A large contractor or project proponent could keep a stockpile of materials that are available for use on several projects.
- If storage space at the project site is at a premium, the contractor could maintain the materials at their office or yard. The office or yard must be less than an hour from the project site.

## ***Design and Installation Specifications***

Depending on project type, size, complexity, and length, materials and quantities will vary. A good minimum list of items that will cover numerous situations includes:

- Clear Plastic, 6 mil
- Drainpipe, 6 or 8 inch diameter
- Sandbags, filled
- Straw Bales for mulching
- Quarry Spalls
- Washed Gravel
- Geotextile Fabric
- Catch Basin Inserts
- Steel "T" Posts
- Silt fence material
- Straw Wattles

## ***Maintenance Standards***

- All materials with the exception of the quarry spalls, steel “T” posts, and gravel should be kept covered and out of both sun and rain.
- Re-stock materials as needed.

## **BMP C151: Concrete Handling**

### ***Purpose***

Concrete work can generate process water and slurry that contain fine particles and high pH, both of which can violate water quality standards in the receiving water. Concrete spillage or concrete discharge to waters of the State is prohibited. Use this BMP to minimize and eliminate concrete, concrete process water, and concrete slurry from entering waters of the State.

## Conditions of Use

Any time concrete is used, utilize these management practices. Concrete construction project components include, but are not limited to:

- Curbs
- Sidewalks
- Roads
- Bridges
- Foundations
- Floors
- Runways

Disposal options for concrete, in order of preference are:

1. Off-site disposal
2. Concrete wash-out areas (see [BMP C154: Concrete Washout Area](#))
3. De minimus washout to formed areas awaiting concrete

## Design and Installation Specifications

- Wash concrete truck drums at an approved off-site location or in designated concrete washout areas only. Do not wash out concrete trucks onto the ground (including formed areas awaiting concrete), or into storm drains, open ditches, streets, or streams. Refer to [BMP C154: Concrete Washout Area](#) for information on concrete washout areas.
  - Return unused concrete remaining in the truck and pump to the originating batch plant for recycling. Do not dump excess concrete on site, except in designated concrete washout areas as allowed in [BMP C154: Concrete Washout Area](#).
- Wash small concrete handling equipment (e.g. hand tools, screeds, shovels, rakes, floats, trowels, and wheelbarrows) into designated concrete washout areas or into formed areas awaiting concrete pour.
- At no time shall concrete be washed off into the footprint of an area where an infiltration feature will be installed.
- Wash equipment difficult to move, such as concrete paving machines, in areas that do not directly drain to natural or constructed stormwater conveyance or potential infiltration areas.
- Do not allow washwater from areas, such as concrete aggregate driveways, to drain directly (without detention or treatment) to natural or constructed stormwater conveyances.
- Contain washwater and leftover product in a lined container when no designated concrete washout areas (or formed areas, allowed as described above) are available. Dispose of contained concrete and concrete washwater (process water) properly.

- Always use forms or solid barriers for concrete pours, such as pilings, within 15-feet of surface waters.
- Refer to [BMP C252: Treating and Disposing of High pH Water](#) for pH adjustment requirements.
- Refer to the Construction Stormwater General Permit (CSWGP) for pH monitoring requirements if the project involves one of the following activities:
  - Significant concrete work (as defined in the CSWGP).
  - The use of soils amended with (but not limited to) Portland cement-treated base, cement kiln dust or fly ash.
  - Discharging stormwater to segments of water bodies on the 303(d) list (Category 5) for high pH.

### ***Maintenance Standards***

Check containers for holes in the liner daily during concrete pours and repair the same day.

## **BMP C152: Sawcutting and Surfacing Pollution Prevention**

### ***Purpose***

Sawcutting and surfacing operations generate slurry and process water that contains fine particles and high pH (concrete cutting), both of which can violate the water quality standards in the receiving water. Concrete spillage or concrete discharge to waters of the State is prohibited. Use this BMP to minimize and eliminate process water and slurry created through sawcutting or surfacing from entering waters of the State.

### ***Conditions of Use***

Utilize these management practices anytime sawcutting or surfacing operations take place. Sawcutting and surfacing operations include, but are not limited to:

- Sawing
- Coring
- Grinding
- Roughening
- Hydro-demolition
- Bridge and road surfacing



## ***Design and Installation Specifications***

- Vacuum slurry and cuttings during cutting and surfacing operations.
- Slurry and cuttings shall not remain on permanent concrete or asphalt pavement overnight.
- Slurry and cuttings shall not drain to any natural or constructed drainage conveyance including stormwater systems. This may require temporarily blocking catch basins.
- Dispose of collected slurry and cuttings in a manner that does not violate ground water or surface water quality standards.
- Do not allow process water generated during hydro-demolition, surface roughening or similar operations to drain to any natural or constructed drainage conveyance including stormwater systems. Dispose of process water in a manner that does not violate ground water or surface water quality standards.
- Handle and dispose of cleaning waste material and demolition debris in a manner that does not cause contamination of water. Dispose of sweeping material from a pick-up sweeper at an appropriate disposal site.

## ***Maintenance Standards***

Continually monitor operations to determine whether slurry, cuttings, or process water could enter waters of the state. If inspections show that a violation of water quality standards could occur, stop operations and immediately implement preventive measures such as berms, barriers, secondary containment, and/or vacuum trucks.

## **BMP C153: Material Delivery, Storage, and Containment**

### ***Purpose***

Prevent, reduce, or eliminate the discharge of pollutants to the stormwater system or watercourses from material delivery and storage. Minimize the storage of hazardous materials on-site, store materials in a designated area, and install secondary containment.

### ***Conditions of Use***

Use at construction sites with delivery and storage of the following materials:

- Petroleum products such as fuel, oil and grease
- Soil stabilizers and binders (e.g., Polyacrylamide)
- Fertilizers, pesticides and herbicides
- Detergents
- Asphalt and concrete compounds

- Hazardous chemicals such as acids, lime, adhesives, paints, solvents, and curing compounds
- Any other material that may be detrimental if released to the environment

## ***Design and Installation Specifications***

- The temporary storage area should be located away from vehicular traffic, near the construction entrance(s), and away from waterways or storm drains.
- Safety Data Sheets (SDS) should be supplied for all materials stored. Chemicals should be kept in their original labeled containers.
- Hazardous material storage on-site should be minimized.
- Hazardous materials should be handled as infrequently as possible.
- During the wet weather season (Oct 1 – April 30), consider storing materials in a covered area.
- Materials should be stored in secondary containments, such as an earthen dike, horse trough, or even a children’s wading pool for non-reactive materials such as detergents, oil, grease, and paints. Small amounts of material may be secondarily contained in “bus boy” trays or concrete mixing trays.
- Do not store chemicals, drums, or bagged materials directly on the ground. Place these items on a pallet and, when possible, within secondary containment.
- If drums must be kept uncovered, store them at a slight angle to reduce ponding of rainwater on the lids to reduce corrosion. Domed plastic covers are inexpensive and snap to the top of drums, preventing water from collecting.
- Liquids, petroleum products, and substances listed in 40 CFR Parts 110, 117, or 302 shall be stored in approved containers and drums and shall not be overfilled. Containers and drums shall be stored in temporary secondary containment facilities.
- Temporary secondary containment facilities shall provide for a spill containment volume able to contain 10% of the total enclosed container volume of all containers, or 110% of the capacity of the largest container within its boundary, whichever is greater.
- Secondary containment facilities shall be impervious to the materials stored therein for a minimum contact time of 72 hours.
- Sufficient separation should be provided between stored containers to allow for spill cleanup and emergency response access.
- During the wet weather season (Oct 1 – April 30), each secondary containment facility shall be covered during non-working days, prior to and during rain events.
- Keep material storage areas clean, organized and equipped with an ample supply of appropriate spill clean-up material (spill kit).
- The spill kit should include, at a minimum:

- 1-Water Resistant Nylon Bag
- 3-Oil Absorbent Socks 3"x 4'
- 2-Oil Absorbent Socks 3"x 10'
- 12-Oil Absorbent Pads 17"x19"
- 1-Pair Splash Resistant Goggles
- 3-Pair Nitrile Gloves
- 10-Disposable Bags with Ties
- Instructions

### ***Maintenance Standards***

- Secondary containment facilities shall be maintained free of accumulated rainwater and spills. In the event of spills or leaks, accumulated rainwater and spills shall be collected and placed into drums. These liquids shall be handled as hazardous waste unless testing determines them to be non-hazardous.
- Re-stock spill kit materials as needed.

# **BMP C160: Certified Erosion and Sediment Control Lead**

## ***Purpose***

The project proponent designates at least one person as the responsible representative in charge of erosion and sediment control (ESC), and water quality protection. The designated person shall be responsible for ensuring compliance with all local, state, and federal erosion and sediment control and water quality requirements. Construction sites one acre or larger that discharge to waters of the State must designate a Certified Erosion and Sediment Control Lead (CESCL) as the responsible representative.

## ***Conditions of Use***

A CESCL shall be made available on projects one acre or larger that discharge stormwater to surface waters of the state. Sites less than one acre may have a person without CESCL certification conduct inspections.

The CESCL shall:

- Have a current certificate proving attendance in an erosion and sediment control training course that meets the minimum ESC training and certification requirements established by Ecology.

Ecology has provided the minimum requirements for CESCL course training, as well as a list of ESC training and certification providers at:

<https://ecology.wa.gov/Regulations-Permits/Permits-certifications/Certified-erosion-sediment-control>

**OR**

- Be a Certified Professional in Erosion and Sediment Control (CPESC). For additional information go to:

<http://www.envirocertintl.org/cpesc/>

## ***Specifications***

- CESCL certification shall remain valid for three years.
- The CESCL shall have authority to act on behalf of the contractor or project proponent and shall be available, or on-call, 24 hours per day throughout the period of construction.
- The Construction SWPPP shall include the name, telephone number, fax number, and address of the designated CESCL. See [II-2 Construction Stormwater Pollution Prevention Plans \(Construction SWPPPs\)](#).
- A CESCL may provide inspection and compliance services for multiple construction projects in the same geographic region, but must be on site whenever earthwork activities are

occurring that could generate release of turbid water.

- Duties and responsibilities of the CESCL shall include, but are not limited to the following:
  - Maintaining a permit file on site at all times which includes the Construction SWPPP and any associated permits and plans.
  - Directing BMP installation, inspection, maintenance, modification, and removal.
  - Updating all project drawings and the Construction SWPPP with changes made.
  - Completing any sampling requirements including reporting results using electronic Discharge Monitoring Reports (WebDMR).
  - Facilitate, participate in, and take corrective actions resulting from inspections performed by outside agencies or the owner.
  - Keeping daily logs, and inspection reports. Inspection reports should include:
    - Inspection date/time.
    - Weather information; general conditions during inspection and approximate amount of precipitation since the last inspection.
    - Visual monitoring results, including a description of discharged stormwater. The presence of suspended sediment, turbid water, discoloration, and oil sheen shall be noted, as applicable.
    - Any water quality monitoring performed during inspection.
    - General comments and notes, including a brief description of any BMP repairs, maintenance or installations made as a result of the inspection.
    - A summary or list of all BMPs implemented, including observations of all erosion/sediment control structures or practices. The following shall be noted:
      1. Locations of BMPs inspected.
      2. Locations of BMPs that need maintenance.
      3. Locations of BMPs that failed to operate as designed or intended.
      4. Locations of where additional or different BMPs are required.

## **BMP C209: Outlet Protection**

### ***Purpose***

Outlet protection prevents scour at conveyance outlets and minimizes the potential for downstream erosion by reducing the velocity of concentrated stormwater flows.

### ***Conditions of Use***

Use outlet protection at the outlets of all ponds, pipes, ditches, or other conveyances that discharge to a natural or manmade drainage feature such as a stream, wetland, lake, or ditch.

### ***Design and Installation Specifications***

- The receiving channel at the outlet of a pipe shall be protected from erosion by lining a minimum of 6 feet downstream and extending up the channel sides a minimum of 1-foot above the maximum tailwater elevation, or 1-foot above the crown, whichever is higher. For pipes larger than 18 inches in diameter, the outlet protection lining of the channel shall be four times the diameter of the outlet pipe.
- Standard wingwalls, tapered outlets, and paved channels should also be considered when appropriate for permanent culvert outlet protection ([WSDOT, 2015](#)).
- [BMP C122: Nets and Blankets](#) or [BMP C202: Riprap Channel Lining](#) provide suitable options for lining materials.
- With low flows, [BMP C201: Grass-Lined Channels](#) can be an effective alternative for lining material.
- The following guidelines shall be used for outlet protection with riprap:
  - If the discharge velocity at the outlet is less than 5 fps, use 2-inch to 8-inch riprap. Minimum thickness is 1-foot.
  - For 5 to 10 fps discharge velocity at the outlet, use 24-inch to 48-inch riprap. Minimum

thickness is 2 feet.

- For outlets at the base of steep slope pipes (pipe slope greater than 10 percent), use an engineered energy dissipator.
- Filter fabric or erosion control blankets should always be used under riprap to prevent scour and channel erosion. See [BMP C122: Nets and Blankets](#).
- Bank stabilization, bioengineering, and habitat features may be required for disturbed areas. This work may require a Hydraulic Project Approval (HPA) from the Washington State Department of Fish and Wildlife. See [I-2.11 Hydraulic Project Approvals](#).

## **Maintenance Standards**

- Inspect and repair as needed.
- Add rock as needed to maintain the intended function.
- Clean energy dissipator if sediment builds up.

## **BMP C220: Inlet Protection**

### ***Purpose***

Inlet protection prevents coarse sediment from entering drainage systems prior to permanent stabilization of the disturbed area.

### ***Conditions of Use***

Use inlet protection at inlets that are operational before permanent stabilization of the disturbed areas that contribute runoff to the inlet. Provide protection for all storm drain inlets downslope and within 500 feet of a disturbed or construction area, unless those inlets are preceded by a sediment trapping BMP.

Also consider inlet protection for lawn and yard drains on new home construction. These small and numerous drains coupled with lack of gutters can add significant amounts of sediment into the roof drain system. If possible, delay installing lawn and yard drains until just before landscaping, or cap these drains to prevent sediment from entering the system until completion of landscaping. Provide 18-inches of sod around each finished lawn and yard drain.

[Table II-3.10: Storm Drain Inlet Protection](#) lists several options for inlet protection. All of the methods for inlet protection tend to plug and require a high frequency of maintenance. Limit contributing drainage areas for an individual inlet to one acre or less. If possible, provide emergency overflows with additional end-of-pipe treatment where stormwater ponding would cause a hazard.

**Table II-3.10: Storm Drain Inlet Protection**

Type of Inlet Protection	Emergency Overflow	Applicable for Paved/ Earthen Surfaces	Conditions of Use
<b>Drop Inlet Protection</b>			
Excavated drop inlet protection	Yes, temporary flooding may occur	Earthen	Applicable for heavy flows. Easy to maintain. Large area requirement: 30'x30'/acre
Block and gravel drop inlet protection	Yes	Paved or Earthen	Applicable for heavy concentrated flows. Will not pond.
Gravel and wire drop inlet protection	No	Paved or Earthen	Applicable for heavy concentrated flows. Will pond. Can withstand traffic.
Catch basin filters	Yes	Paved or Earthen	Frequent maintenance required.
<b>Curb Inlet Protection</b>			
Curb inlet protection with wooden weir	Small capacity overflow	Paved	Used for sturdy, more compact installation.
Block and gravel curb inlet protection	Yes	Paved	Sturdy, but limited filtration.
<b>Culvert Inlet Protection</b>			
Culvert inlet sediment trap	N/A	N/A	18 month expected life.

## ***Design and Installation Specifications***

### **Excavated Drop Inlet Protection**

Excavated drop inlet protection consists of an excavated impoundment around the storm drain inlet. Sediment settles out of the stormwater prior to entering the storm drain. Design and installation specifications for excavated drop inlet protection include:

- Provide a depth of 1-2 ft as measured from the crest of the inlet structure.
- Slope sides of excavation should be no steeper than 2H:1V.
- Minimum volume of excavation is 35 cubic yards.
- Shape the excavation to fit the site, with the longest dimension oriented toward the longest inflow area.
- Install provisions for draining to prevent standing water.
- Clear the area of all debris.




- Grade the approach to the inlet uniformly.
- Drill weep holes into the side of the inlet.
- Protect weep holes with screen wire and washed aggregate.
- Seal weep holes when removing structure and stabilizing area.
- Build a temporary dike, if necessary, to the down slope side of the structure to prevent bypass flow.

### **Block and Gravel Filter**

A block and gravel filter is a barrier formed around the inlet with standard concrete blocks and gravel. See [Figure II-3.17: Block and Gravel Filter](#). Design and installation specifications for block gravel filters include:

- Provide a height of 1 to 2 feet above the inlet.
- Recess the first row of blocks 2-inches into the ground for stability.
- Support subsequent courses by placing a pressure treated wood 2x4 through the block opening.
- Do not use mortar.
- Lay some blocks in the bottom row on their side to allow for dewatering the pool.
- Place hardware cloth or comparable wire mesh with ½-inch openings over all block openings.
- Place gravel to just below the top of blocks on slopes of 2H:1V or flatter.
- An alternative design is a gravel berm surrounding the inlet, as follows:
  - Provide a slope of 3H:1V on the upstream side of the berm.
  - Provide a slope of 2H:1V on the downstream side of the berm.
  - Provide a 1-foot wide level stone area between the gravel berm and the inlet.
  - Use stones 3 inches in diameter or larger on the upstream slope of the berm.
  - Use gravel ½- to ¾-inch at a minimum thickness of 1-foot on the downstream slope of the berm.

**Figure II-3.17: Block and Gravel Filter**

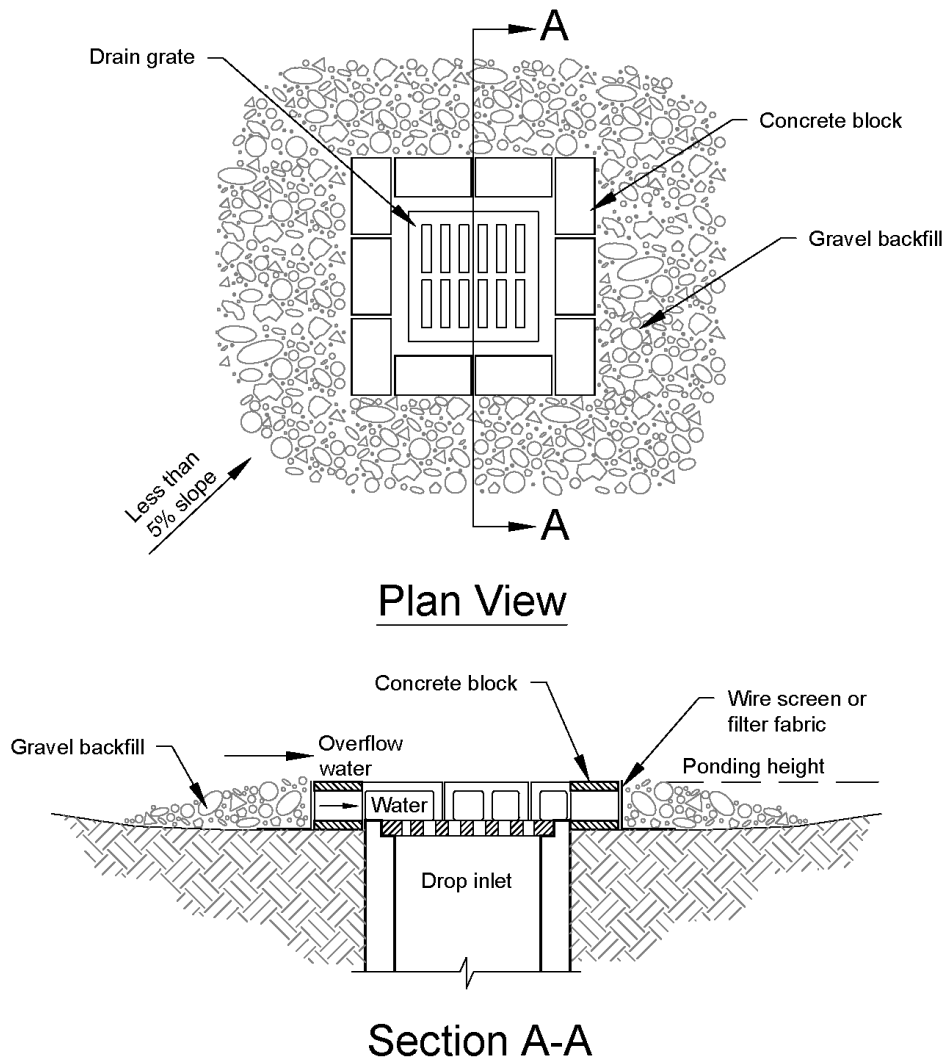

**Notes:**

1. Drop inlet sediment barriers are to be used for small, nearly level drainage areas. (less than 5%)
2. Excavate a basin of sufficient size adjacent to the drop inlet.
3. The top of the structure (ponding height) must be well below the ground elevation downslope to prevent runoff from bypassing the inlet. A temporary dike may be necessary on the downslope side of the structure.

NOT TO SCALE



**Block and Gravel Filter**

Revised June 2016

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

### **Gravel and Wire Mesh Filter**

Gravel and wire mesh filters are gravel barriers placed over the top of the inlet. This method does not provide an overflow. Design and installation specifications for gravel and wire mesh filters include:

- Use a hardware cloth or comparable wire mesh with ½-inch openings.
  - Place wire mesh over the drop inlet so that the wire extends a minimum of 1-foot beyond each side of the inlet structure.
  - Overlap the strips if more than one strip of mesh is necessary.
- Place coarse aggregate over the wire mesh.
  - Provide at least a 12-inch depth of aggregate over the entire inlet opening and extend at least 18-inches on all sides.

### **Catch Basin Filters**

Catch basin filters are designed by manufacturers for construction sites. The limited sediment storage capacity increases the amount of inspection and maintenance required, which may be daily for heavy sediment loads. To reduce maintenance requirements, combine a catch basin filter with another type of inlet protection. This type of inlet protection provides flow bypass without overflow and therefore may be a better method for inlets located along active rights-of-way. Design and installation specifications for catch basin filters include:

- Provides 5 cubic feet of storage.
- Requires dewatering provisions.
- Provides a high-flow bypass that will not clog under normal use at a construction site.
- Insert the catch basin filter in the catch basin just below the grating.

### **Curb Inlet Protection with Wooden Weir**

Curb inlet protection with wooden weir is an option that consists of a barrier formed around a curb inlet with a wooden frame and gravel. Design and installation specifications for curb inlet protection with wooden weirs include:


- Use wire mesh with ½-inch openings.
- Use extra strength filter cloth.
- Construct a frame.
- Attach the wire and filter fabric to the frame.
- Pile coarse washed aggregate against the wire and fabric.
- Place weight on the frame anchors.

### **Block and Gravel Curb Inlet Protection**

Block and gravel curb inlet protection is a barrier formed around a curb inlet with concrete blocks and gravel. See [Figure II-3.18: Block and Gravel Curb Inlet Protection](#). Design and installation specifications for block and gravel curb inlet protection include:

- Use wire mesh with ½-inch openings.
- Place two concrete blocks on their sides abutting the curb at either side of the inlet opening. These are spacer blocks.
- Place a 2x4 stud through the outer holes of each spacer block to align the front blocks.
- Place blocks on their sides across the front of the inlet and abutting the spacer blocks.
- Place wire mesh over the outside vertical face.
- Pile coarse aggregate against the wire to the top of the barrier.

**Figure II-3.18: Block and Gravel Curb Inlet Protection**

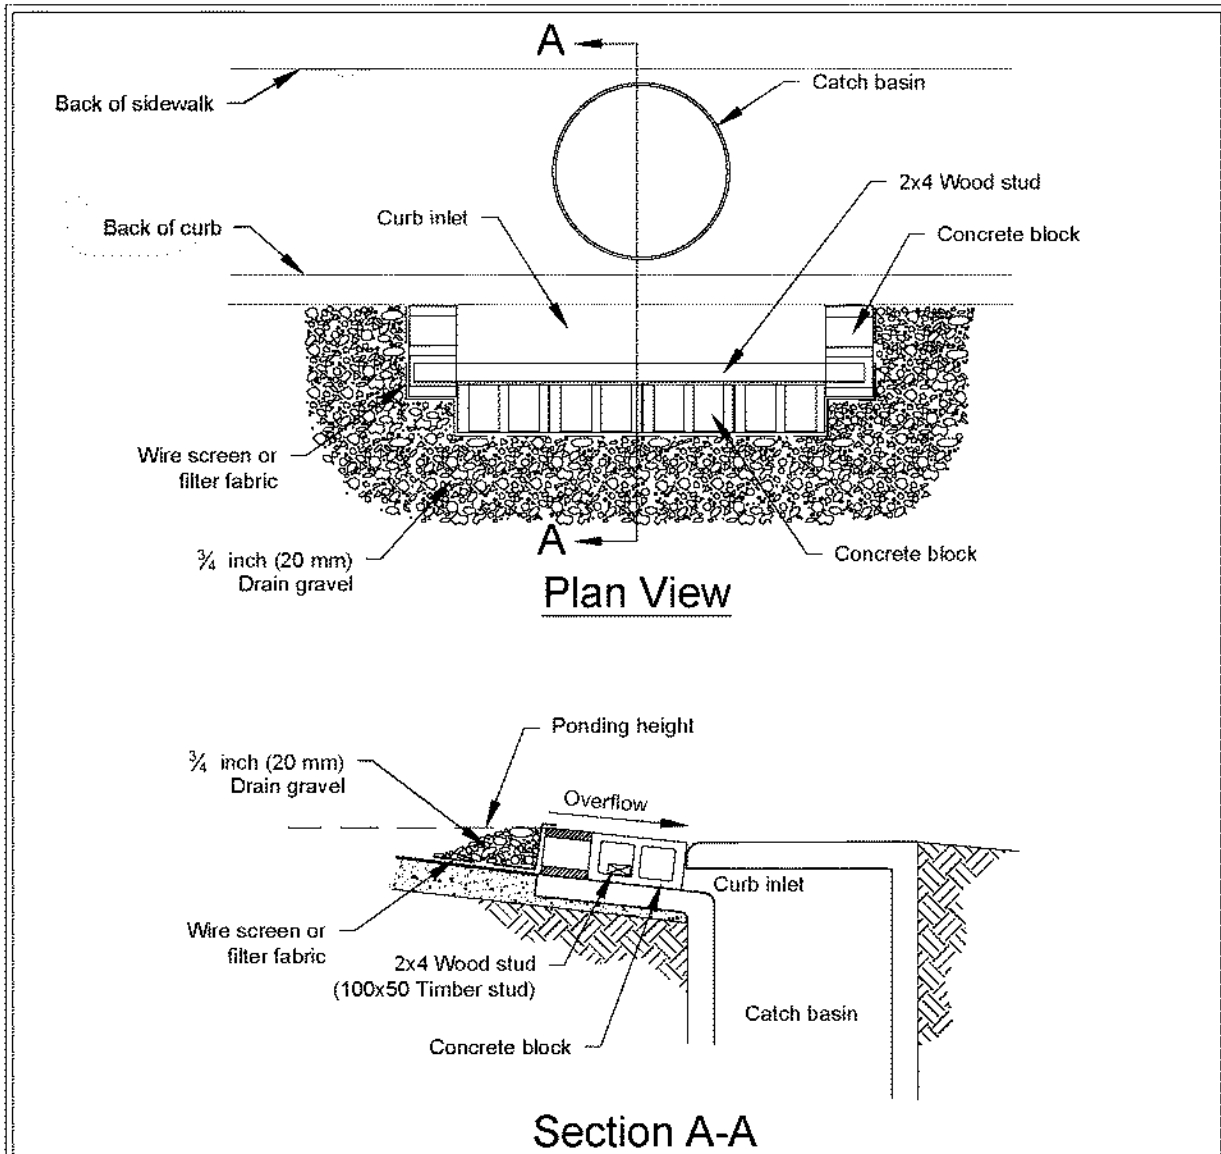

**Notes:**

1. Use block and gravel type sediment barrier when curb inlet is located in gently sloping street segment, where water can pond and allow sediment to separate from runoff.
2. Barrier shall allow for overflow from severe storm event.
3. Inspect barriers and remove sediment after each storm event. Sediment and gravel must be removed from the traveled way immediately.

NOT TO SCALE



**Block and Gravel Curb Inlet Protection**

Revised June 2016


Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

### **Curb and Gutter Sediment Barrier**

Curb and gutter sediment barrier is a sandbag or rock berm (riprap and aggregate) 3 feet high and 3 feet wide in a horseshoe shape. See [Figure II-3.19: Curb and Gutter Barrier](#). Design and installation specifications for curb and gutter sediment barrier include:

- Construct a horseshoe shaped berm, faced with coarse aggregate if using riprap, 3 feet high and 3 feet wide, at least 2 feet from the inlet.
- Construct a horseshoe shaped sedimentation trap on the upstream side of the berm. Size the trap to sediment trap standards for protecting a culvert inlet.

**Figure II-3.19: Curb and Gutter Barrier**

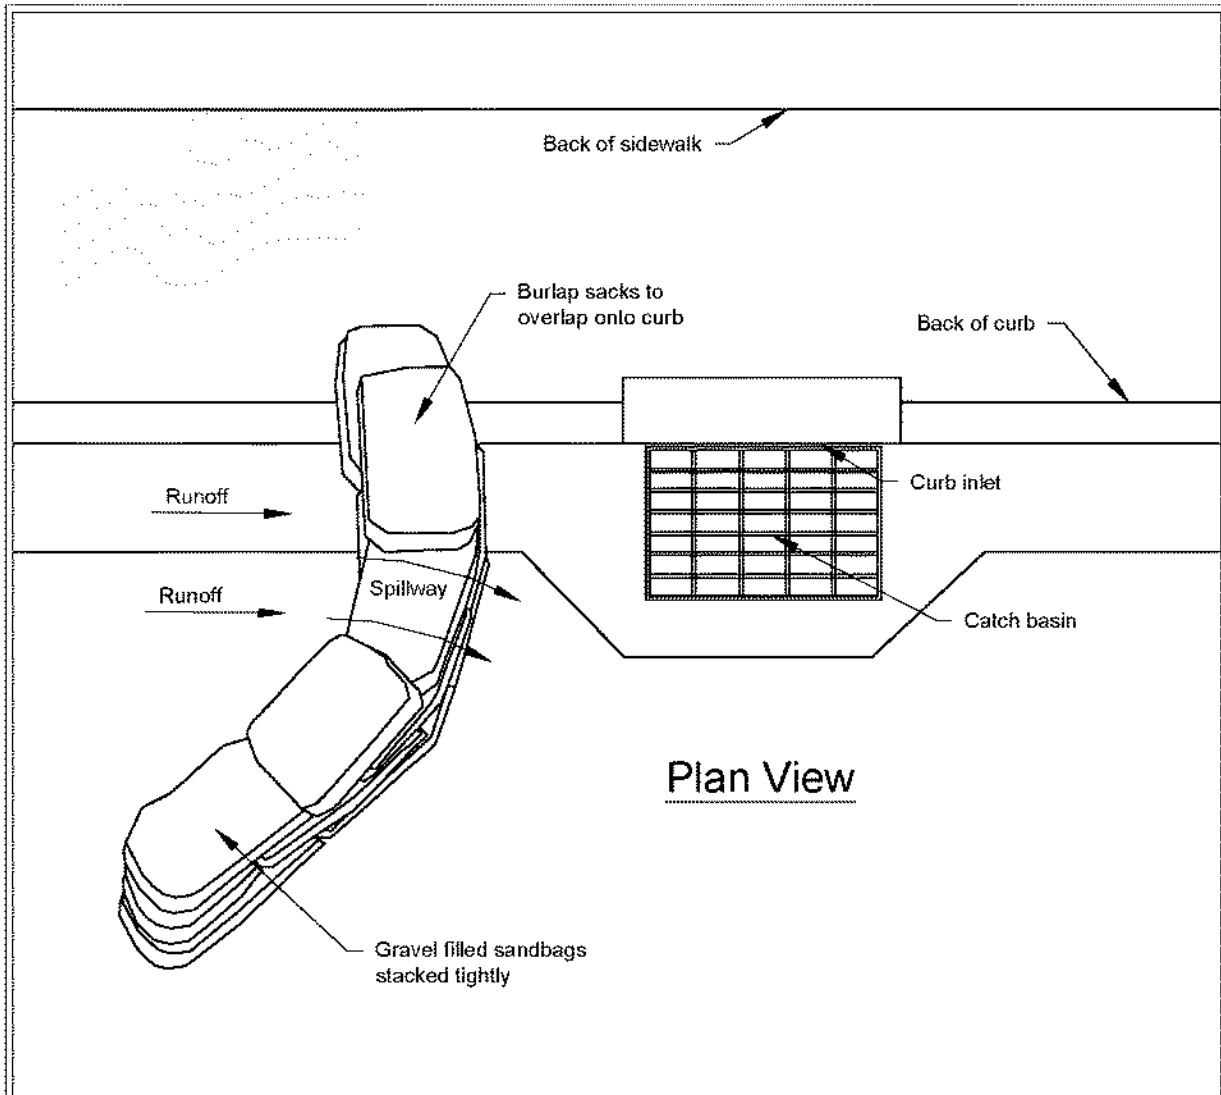

**Notes:**

1. Place curb type sediment barriers on gently sloping street segments, where water can pond and allow sediment to separate from runoff.
2. Sandbags of either burlap or woven 'geotextile' fabric, are filled with gravel, layered and packed tightly.
3. Leave a one sandbag gap in the top row to provide a spillway for overflow.
4. Inspect barriers and remove sediment after each storm event. Sediment and gravel must be removed from the traveled way immediately.

NOT TO SCALE



**Curb and Gutter Barrier**

Revised June 2016

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

## ***Maintenance Standards***

- Inspect all forms of inlet protection frequently, especially after storm events. Clean and replace clogged catch basin filters. For rock and gravel filters, pull away the rocks from the inlet and clean or replace. An alternative approach would be to use the clogged rock as fill and put fresh rock around the inlet.
- Do not wash sediment into storm drains while cleaning. Spread all excavated material evenly over the surrounding land area or stockpile and stabilize as appropriate.

## ***Approved as Functionally Equivalent***

Ecology has approved products as able to meet the requirements of this BMP. The products did not pass through the Technology Assessment Protocol – Ecology (TAPE) process. Local jurisdictions may choose not to accept these products, or may require additional testing prior to consideration for local use. Products that Ecology has approved as functionally equivalent are available for review on Ecology's website at:

<https://ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Stormwater-permittee-guidance-resources/Emerging-stormwater-treatment-technologies>



## **BMP C233: Silt Fence**

### ***Purpose***


Silt fence reduces the transport of coarse sediment from a construction site by providing a temporary physical barrier to sediment and reducing the runoff velocities of overland flow.

### ***Conditions of Use***

Silt fence may be used downslope of all disturbed areas.

- Silt fence shall prevent sediment carried by runoff from going beneath, through, or over the top of the silt fence, but shall allow the water to pass through the fence.
- Silt fence is not intended to treat concentrated flows, nor is it intended to treat substantial amounts of overland flow. Convey any concentrated flows through the drainage system to a sediment trapping BMP.
- Do not construct silt fences in streams or use in V-shaped ditches. Silt fences do not provide an adequate method of silt control for anything deeper than sheet or overland flow.

**Figure II-3.22: Silt Fence**

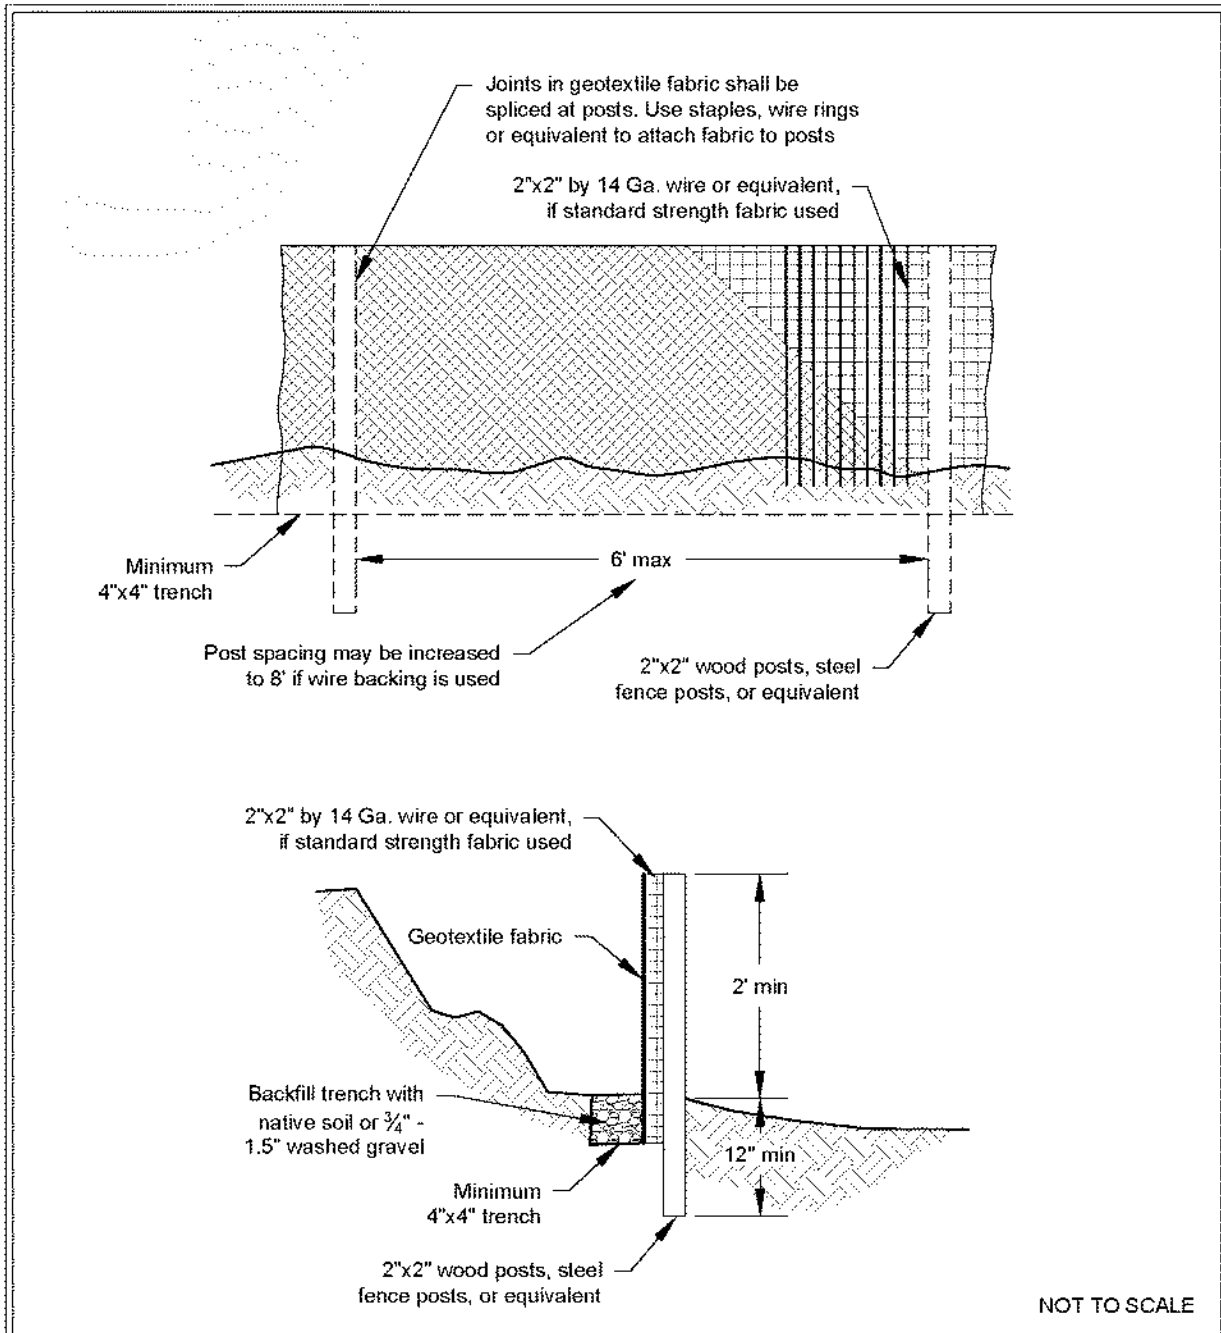

**Silt Fence**

Revised July 2017

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

## Design and Installation Specifications

- Use in combination with other construction stormwater BMPs.
- Maximum slope steepness (perpendicular to the silt fence line) 1H:1V.
- Maximum sheet or overland flow path length to the silt fence of 100 feet.
- Do not allow flows greater than 0.5 cfs.
- Use geotextile fabric that meets the following standards. All geotextile properties listed below are minimum average roll values (i.e., the test result for any sampled roll in a lot shall meet or exceed the values shown in [Table II-3.11: Geotextile Fabric Standards for Silt Fence](#)):

**Table II-3.11: Geotextile Fabric Standards for Silt Fence**

Geotextile Property	Minimum Average Roll Value
Polymeric Mesh AOS (ASTM D4751)	0.60 mm maximum for slit film woven (#30 sieve). 0.30 mm maximum for all other geotextile types (#50 sieve). 0.15 mm minimum for all fabric types (#100 sieve).
Water Permittivity (ASTM D4491)	0.02 sec <sup>-1</sup> minimum
Grab Tensile Strength (ASTM D4632)	180 lbs. Minimum for extra strength fabric. 100 lbs minimum for standard strength fabric.
Grab Tensile Strength (ASTM D4632)	30% maximum
Ultraviolet Resistance (ASTM D4355)	70% minimum


- Support standard strength geotextiles with wire mesh, chicken wire, 2-inch x 2-inch wire, safety fence, or jute mesh to increase the strength of the geotextile. Silt fence materials are available that have synthetic mesh backing attached.
- Silt fence material shall contain ultraviolet ray inhibitors and stabilizers to provide a minimum of six months of expected usable construction life at a temperature range of 0°F to 120°F.
- One-hundred percent biodegradable silt fence is available that is strong, long lasting, and can be left in place after the project is completed, if permitted by the local jurisdiction.
- Refer to [Figure II-3.22: Silt Fence](#) for standard silt fence details. Include the following Standard Notes for silt fence on construction plans and specifications:
  1. The Contractor shall install and maintain temporary silt fences at the locations shown in the Plans.
  2. Construct silt fences in areas of clearing, grading, or drainage prior to starting those activities.

3. The silt fence shall have a 2-foot min. and a 2½-foot max. height above the original ground surface.
4. The geotextile fabric shall be sewn together at the point of manufacture to form fabric lengths as required. Locate all sewn seams at support posts. Alternatively, two sections of silt fence can be overlapped, provided that the overlap is long enough and that the adjacent silt fence sections are close enough together to prevent silt laden water from escaping through the fence at the overlap.
5. Attach the geotextile fabric on the up-slope side of the posts and secure with staples, wire, or in accordance with the manufacturer's recommendations. Attach the geotextile fabric to the posts in a manner that reduces the potential for tearing.
6. Support the geotextile fabric with wire or plastic mesh, dependent on the properties of the geotextile selected for use. If wire or plastic mesh is used, fasten the mesh securely to the up-slope side of the posts with the geotextile fabric up-slope of the mesh.
7. Mesh support, if used, shall consist of steel wire with a maximum mesh spacing of 2-inches, or a prefabricated polymeric mesh. The strength of the wire or polymeric mesh shall be equivalent to or greater than 180 lbs. grab tensile strength. The polymeric mesh must be as resistant to the same level of ultraviolet radiation as the geotextile fabric it supports.
8. Bury the bottom of the geotextile fabric 4-inches min. below the ground surface. Backfill and tamp soil in place over the buried portion of the geotextile fabric, so that no flow can pass beneath the silt fence and scouring cannot occur. When wire or polymeric back-up support mesh is used, the wire or polymeric mesh shall extend into the ground 3-inches min.
9. Drive or place the silt fence posts into the ground 18-inches min. A 12-inch min. depth is allowed if topsoil or other soft subgrade soil is not present and 18-inches cannot be reached. Increase fence post min. depths by 6 inches if the fence is located on slopes of 3H:1V or steeper and the slope is perpendicular to the fence. If required post depths cannot be obtained, the posts shall be adequately secured by bracing or guying to prevent overturning of the fence due to sediment loading.
10. Use wood, steel or equivalent posts. The spacing of the support posts shall be a maximum of 6-feet. Posts shall consist of either:
  - Wood with minimum dimensions of 2 inches by 2 inches by 3 feet. Wood shall be free of defects such as knots, splits, or gouges.
  - No. 6 steel rebar or larger.
  - ASTM A 120 steel pipe with a minimum diameter of 1-inch.
  - U, T, L, or C shape steel posts with a minimum weight of 1.35 lbs./ft.
  - Other steel posts having equivalent strength and bending resistance to the post sizes listed above.
11. Locate silt fences on contour as much as possible, except at the ends of the fence,

where the fence shall be turned uphill such that the silt fence captures the runoff water and prevents water from flowing around the end of the fence.

12. If the fence must cross contours, with the exception of the ends of the fence, place check dams perpendicular to the back of the fence to minimize concentrated flow and erosion. The slope of the fence line where contours must be crossed shall not be steeper than 3H:1V.
  - Check dams shall be approximately 1-foot deep at the back of the fence. Check dams shall be continued perpendicular to the fence at the same elevation until the top of the check dam intercepts the ground surface behind the fence.
  - Check dams shall consist of crushed surfacing base course, gravel backfill for walls, or shoulder ballast. Check dams shall be located every 10 feet along the fence where the fence must cross contours.
- Refer to [Figure II-3.23: Silt Fence Installation by Slicing Method](#) for slicing method details. The following are specifications for silt fence installation using the slicing method:
  1. The base of both end posts must be at least 2- to 4-inches above the top of the geotextile fabric on the middle posts for ditch checks to drain properly. Use a hand level or string level, if necessary, to mark base points before installation.
  2. Install posts 3- to 4-feet apart in critical retention areas and 6- to 7-feet apart in standard applications.
  3. Install posts 24-inches deep on the downstream side of the silt fence, and as close as possible to the geotextile fabric, enabling posts to support the geotextile fabric from upstream water pressure.
  4. Install posts with the nipples facing away from the geotextile fabric.
  5. Attach the geotextile fabric to each post with three ties, all spaced within the top 8-inches of the fabric. Attach each tie diagonally 45 degrees through the fabric, with each puncture at least 1-inch vertically apart. Each tie should be positioned to hang on a post nipple when tightening to prevent sagging.
  6. Wrap approximately 6-inches of the geotextile fabric around the end posts and secure with 3 ties.
  7. No more than 24-inches of a 36-inch geotextile fabric is allowed above ground level.
  8. Compact the soil immediately next to the geotextile fabric with the front wheel of the tractor, skid steer, or roller exerting at least 60 pounds per square inch. Compact the upstream side first and then each side twice for a total of four trips. Check and correct the silt fence installation for any deviation before compaction. Use a flat-bladed shovel to tuck the fabric deeper into the ground if necessary.

**Figure II-3.23: Silt Fence Installation by Slicing Method**

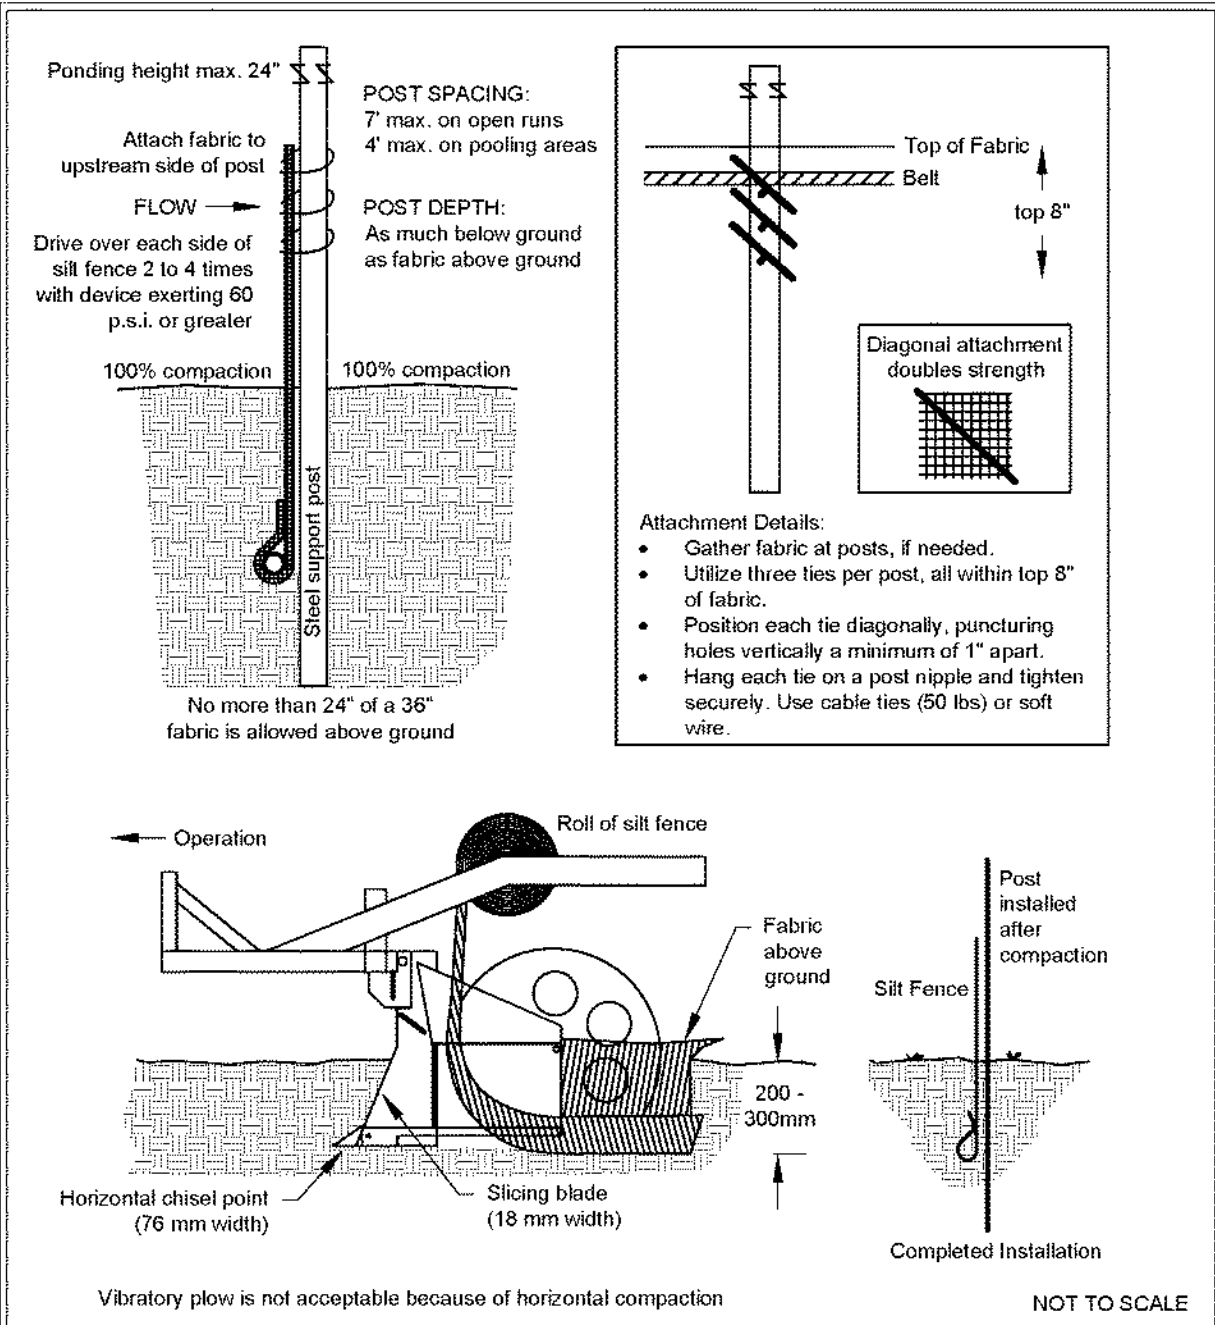

## Silt Fence Installation by Slicing Method

Revised June 2016

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

## ***Maintenance Standards***

- Repair any damage immediately.
- Intercept and convey all evident concentrated flows uphill of the silt fence to a sediment trapping BMP.
- Check the uphill side of the silt fence for signs of the fence clogging and acting as a barrier to flow and then causing channelization of flows parallel to the fence. If this occurs, replace the fence and remove the trapped sediment.
- Remove sediment deposits when the deposit reaches approximately one-third the height of the silt fence, or install a second silt fence.
- Replace geotextile fabric that has deteriorated due to ultraviolet breakdown.

## **Maintenance Standards**

- Monitor the spray field on a daily basis to ensure that over saturation of any portion of the field doesn't occur at any time. The presence of standing puddles of water or creation of concentrated flows visually signify that over saturation of the field has occurred.
- Monitor the vegetated spray field all the way down to the nearest surface water, or farthest spray area, to ensure that the water has not caused overland or concentrated flows, and has not created erosion around the spray nozzle(s).
- Do not exceed water quality standards for turbidity.
- Ecology recommends that a separate inspection log be developed, maintained and kept with the existing site logbook to aid the operator conducting inspections. This separate "Field Filtration Logbook" can also aid in demonstrating compliance with permit conditions.
- Inspect the spray nozzles daily, at a minimum, for leaks and plugging from sediment particles.
- If erosion, concentrated flows, or over saturation of the field occurs, rotate the use of branches or spray heads or move the branches to a new field location.
- Check all branches and the manifold for unintended leaks.

## **BMP C240: Sediment Trap**

### **Purpose**

A sediment trap is a small temporary ponding area with a gravel outlet used to collect and store sediment from sites during construction. Sediment traps, along with other perimeter controls, shall be installed before any land disturbance takes place in the drainage area.

### **Conditions of Use**

- Sediment traps are intended for use on sites where the tributary drainage area is less than 3 acres, with no unusual drainage features, and a projected build-out time of six months or less. The sediment trap is a temporary measure (with a design life of approximately 6 months) and shall be maintained until the tributary area is permanently protected against erosion by vegetation and/or structures.
- Sediment traps are only effective in removing sediment down to about the medium silt size fraction. Runoff with sediment of finer grades (fine silt and clay) will pass through untreated, emphasizing the need to control erosion to the maximum extent first.
- Projects that are constructing permanent Flow Control BMPs, or Runoff Treatment BMPs that use ponding for treatment, may use the rough-graded or final-graded permanent BMP footprint for the temporary sediment trap. When permanent BMP footprints are used as temporary sediment traps, the surface area requirement of the sediment trap must be met. If the surface area requirement of the sediment trap is larger than the surface area of the permanent BMP, then the sediment trap shall be enlarged beyond the permanent BMP footprint to comply with the surface area requirement.



- A floating pond skimmer may be used for the sediment trap outlet if approved by the Local Permitting Authority.
- Sediment traps may not be feasible on utility projects due to the limited work space or the short-term nature of the work. Portable tanks may be used in place of sediment traps for utility projects.

## ***Design and Installation Specifications***

- See [Figure II-3.26: Cross Section of Sediment Trap](#) and [Figure II-3.27: Sediment Trap Outlet](#) for details.
- To determine the sediment trap geometry, first calculate the design surface area (SA) of the trap, measured at the invert of the weir. Use the following equation:

$$SA = FS(Q_2/V_s)$$

where

$Q_2 =$

- Option 1 - Single Event Hydrograph Method:

$Q_2$  = Peak volumetric flow rate calculated using a 10-minute time step from a Type 1A, 2-year, 24-hour frequency storm for the developed condition. The 10-year peak volumetric flow rate shall be used if the project size, expected timing and duration of construction, or downstream conditions warrant a higher level of protection.

- Option 2 - For construction sites that are less than 1 acre, the Rational Method may be used to determine  $Q_2$ .

$V_s$  = The settling velocity of the soil particle of interest. The 0.02 mm (medium silt) particle with an assumed density of 2.65 g/cm<sup>3</sup> has been selected as the particle of interest and has a settling velocity ( $V_s$ ) of 0.00096 ft/sec.

FS = A safety factor of 2 to account for non-ideal settling.

Therefore, the equation for computing sediment trap surface area becomes:

$$SA = 2 \times Q_2 / 0.00096$$

or

2080 square feet per cfs of inflow


- Sediment trap depth shall be 3.5 feet minimum from the bottom of the trap to the top of the overflow weir.
- To aid in determining sediment depth, all sediment traps shall have a staff gauge with a prominent mark 1-foot above the bottom of the trap.

- Design the discharge from the sediment trap by using the guidance for discharge from temporary sediment ponds in [BMP C241: Sediment Pond \(Temporary\)](#).

### ***Maintenance Standards***

- Sediment shall be removed from the trap when it reaches 1-foot in depth.
- Any damage to the trap embankments or slopes shall be repaired.

**Figure II-3.26: Cross Section of Sediment Trap**

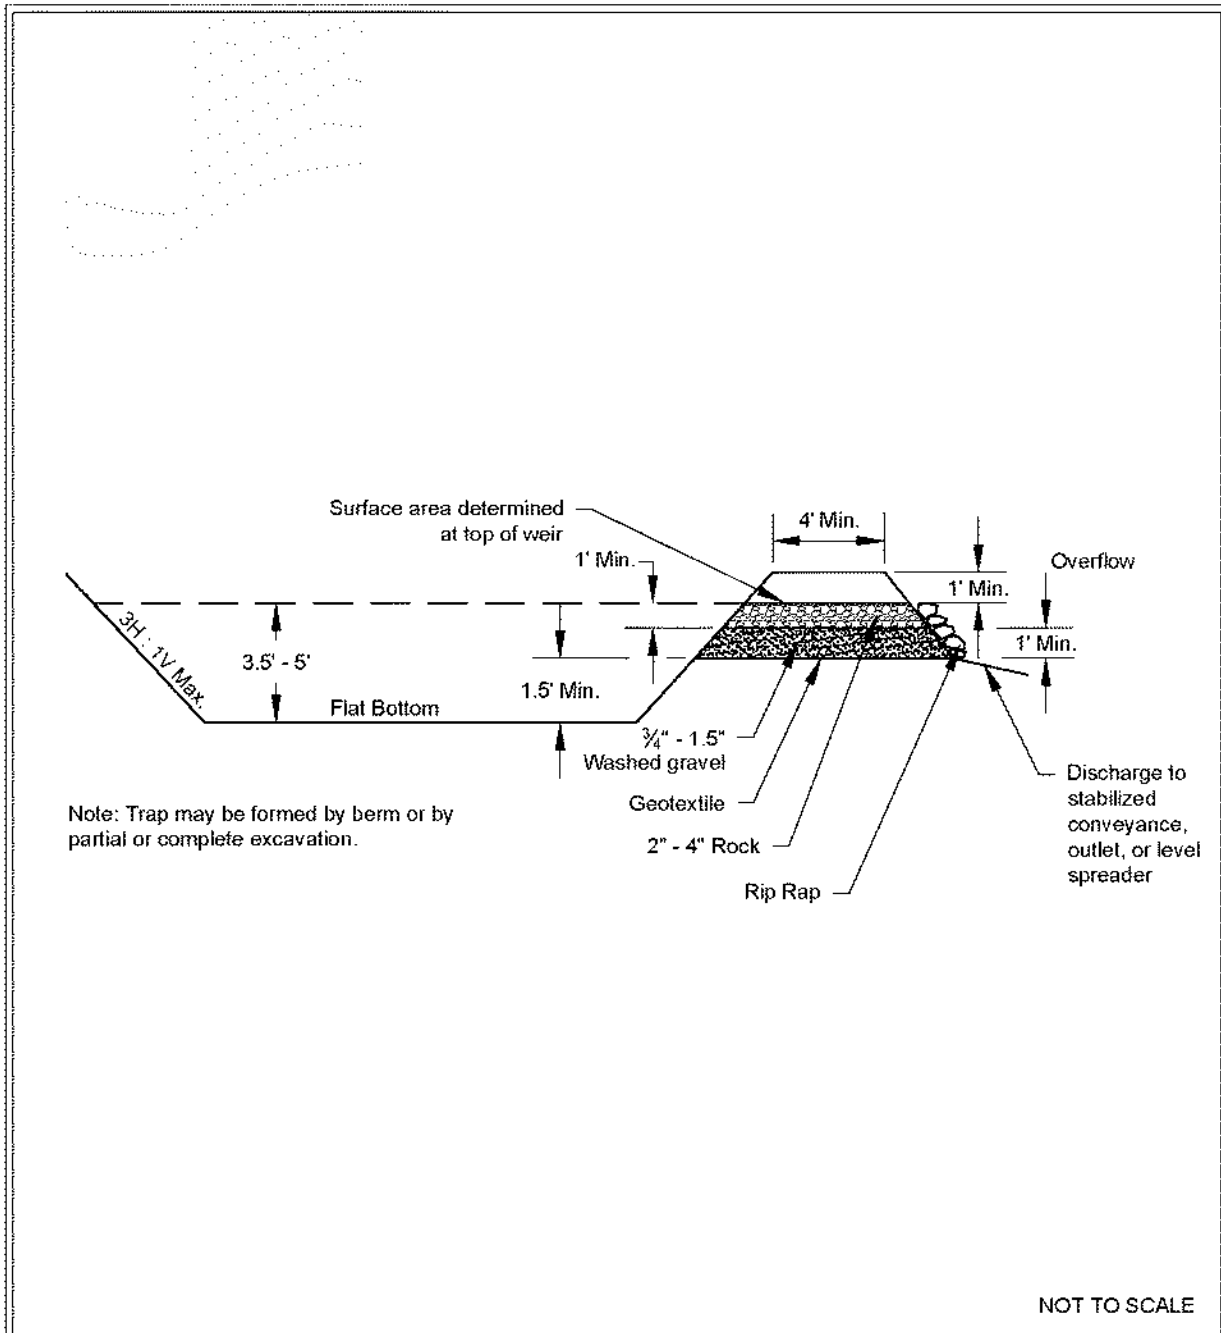


**Cross Section of Sediment Trap**

Revised June 2016

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.

**Figure II-3.27: Sediment Trap Outlet**

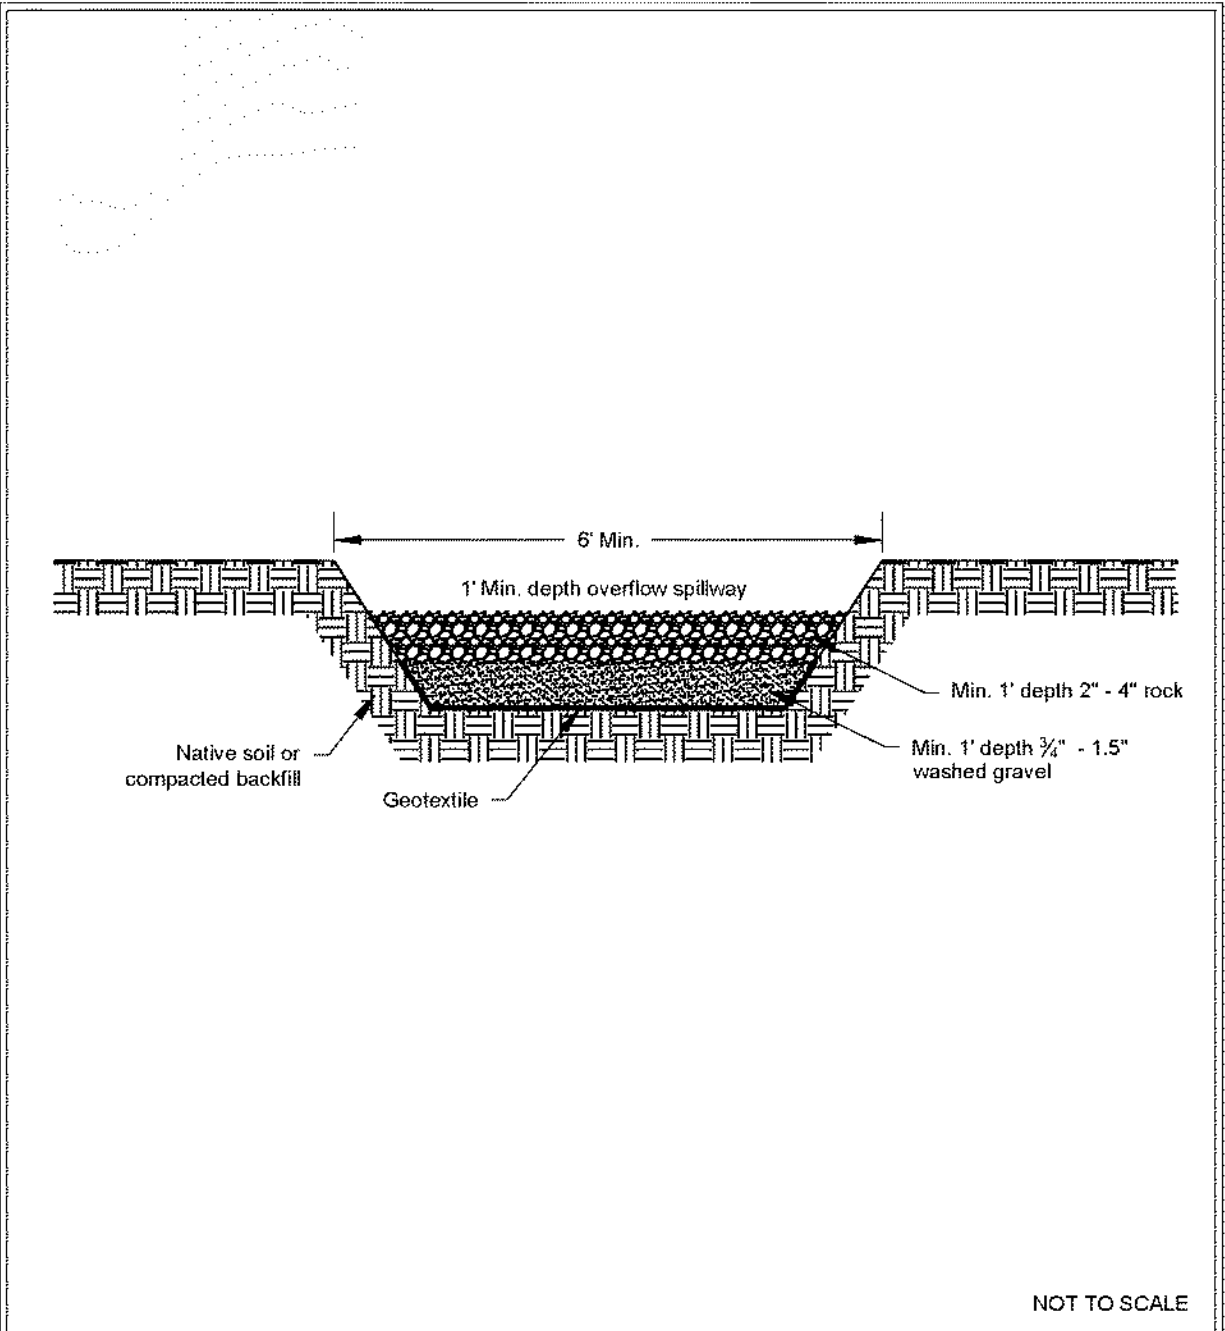

## Sediment Trap Outlet

Revised June 2016

Please see <http://www.ecy.wa.gov/copyright.html> for copyright notice including permissions, limitation of liability, and disclaimer.