



SOLUTIONS 4 STRUCTURES Inc.

Page: 1 of 154
Date: 2023 06 16
Design by: MRO

Structural Calculations for Vertical and Lateral Design of Building B

Project & Location:

Structural Calculations Bradley Heights Apartments

(Lat 47.1652, Long -122.2921)
202 27th Avenue SE, Puyallup, WA

Client:

Timberlane Partners
Attn: Dave Enslow
dave@timberlanepartners.com

Professional Engineer:

Solutions 4 Structures, Inc
11605 135th St Ct E
Puyallup, WA 98374
Attn: Tom Chase, PE
tom@solutions4structures.com
(253) 314 - 9822



Project Number:

23.007

Code / Location:

2018 IBC

02-20-24

Loads:

1. Vertical Loads	Dead	Live
Roof	22 PSF	25 PSF (Snow)
Floor	26 PSF	40 PSF (Apartments)
Floor	25 PSF	60 PSF (Decks)
Exits	47 PSF	100 PSF (Stairs & Landings)

2. Lateral Loads

Wind Criteria

Basic Wind Speed = 97 MPH

Exposure B

Iw = 1.0, Kzt = 1.0

Seismic Criteria

Seismic Design Category "D"

Site Class C

I_E = 1.0, S_s = 1.263, S₁ = 0.435

SDS = 1.010, SD1 = 0.435

Building Response R = 5, Cs = 0.111 (ASD)

3. Soils Data (per GeoResources Inc. dated 02/10/2022)

Bearing Capacity = 2,000 PSF

FULL SIZED LEDGIBLE COLOR REPORTS IS
REQUIRED TO BE PROVIDED BY THE
PERMITTEE ON SITE FOR ALL INSPECTIONS

Vertical

Building B

ROOF LOADS:

Roof Dead Loads:		
Solar Panels	5.00	PSF
Comp Shingles	3.00	PSF
#30 Felt	0.20	PSF
APA Rated Plywood/OSB	1.70	PSF
PE Trusses @ 24" o.c.	3.50	PSF
Insulation	1.50	PSF
(2) Layer of 5/8" Gypsum Board	5.60	PSF
Mechanical & Electrical	1.00	PSF
Miscellaneous	0.50	PSF
Total Roof Dead Load:	22.00	PSF
Total Live / Snow Load:	25.00	PSF
Total Roof Load:	47.00	PSF

FLOOR LOADS:

Floor Dead Loads:		
Finish Material	1.00	PSF
1.25" Gypcrete (105pcf)	10.90	PSF
APA Rated 3/4" T&G Plywood/OSB	2.50	PSF
11-7/8" TJI Joists @16" o.c.	2.80	PSF
Insulation	1.00	PSF
(2) Layer of 5/8" Gypsum Board	5.60	PSF
Mechanical & Electrical	1.00	PSF
Miscellaneous	1.20	PSF
Total Floor Dead Load:	26.00	PSF
Total Live / Snow Load:	40.00	PSF
Total Floor Load:	66.00	PSF

STAIR LOADS:

Deck Dead Loads:		
3" Concrete Topping (145 pcf)	36.30	PSF
Waterproof membrane (per Arch)	0.50	PSF
PT 3/4" T&G Plywood	3.00	PSF
2 x 8 Joists @16" o.c.	2.00	PSF
(1) Layer of 5/8" Gypsum Board	2.80	PSF
Mechanical & Electrical	1.00	PSF
Miscellaneous	1.40	PSF
Total Floor Dead Load:	47.00	PSF
Total Live / Live Load:	100.00	PSF
Total Floor Load:	147.00	PSF


DECK LOADS:


Deck Dead Loads:		
Decking/Ply & Topping TBD	20.00	PSF
Waterproof membrane (per Arch)	0.50	PSF
2 x 8 Joists @16" o.c.	2.00	PSF
Deck soffit	1.50	PSF
Miscellaneous	1.00	PSF
Total Dead Load:	25.00	PSF
Total Load:	60.00	PSF
Total Deck Load:	85.00	PSF

PRMU20240285


WALL LOADS:		
Wall Dead Loads: INT. Wall Assembly		
5/8" Gypsum Board	2.80	PSF
Fiberglass insulation	0.70	PSF
2x6 or 2x4 Studs @ 16" o.c.	1.70	PSF
Top & Bottom Wall Plates	0.30	PSF
5/8" Gypsum Board	2.80	PSF
Miscellaneous	0.70	PSF
Total Wall Dead Load:	9.00	PSF
Total Wall Load:	9.00	PSF

WALL LOADS:		
Wall Dead Loads: EXT. Wall Assembly		
Exterior siding	3.00	PSF
Moisture barrier	0.20	PSF
1/2" Plywood/OSB	1.70	PSF
2 x 6 or 2 x 4 Studs @ 16" o.c.	1.70	PSF
Top & Bottom Wall Plates	0.30	PSF
Insulation	1.00	PSF
(1) Layer of 5/8" Gypsum Board	2.80	PSF
Miscellaneous	1.30	PSF
Total Wall Dead Load:	12.00	PSF
Total Wall Load:	12.00	PSF




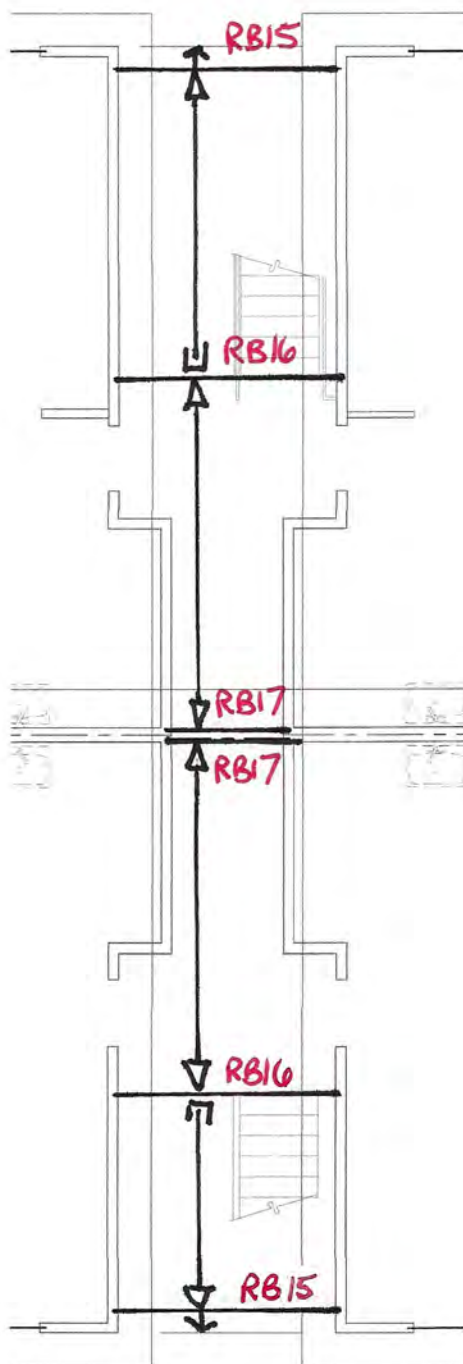

TYPICAL CORRIDOR ROOF

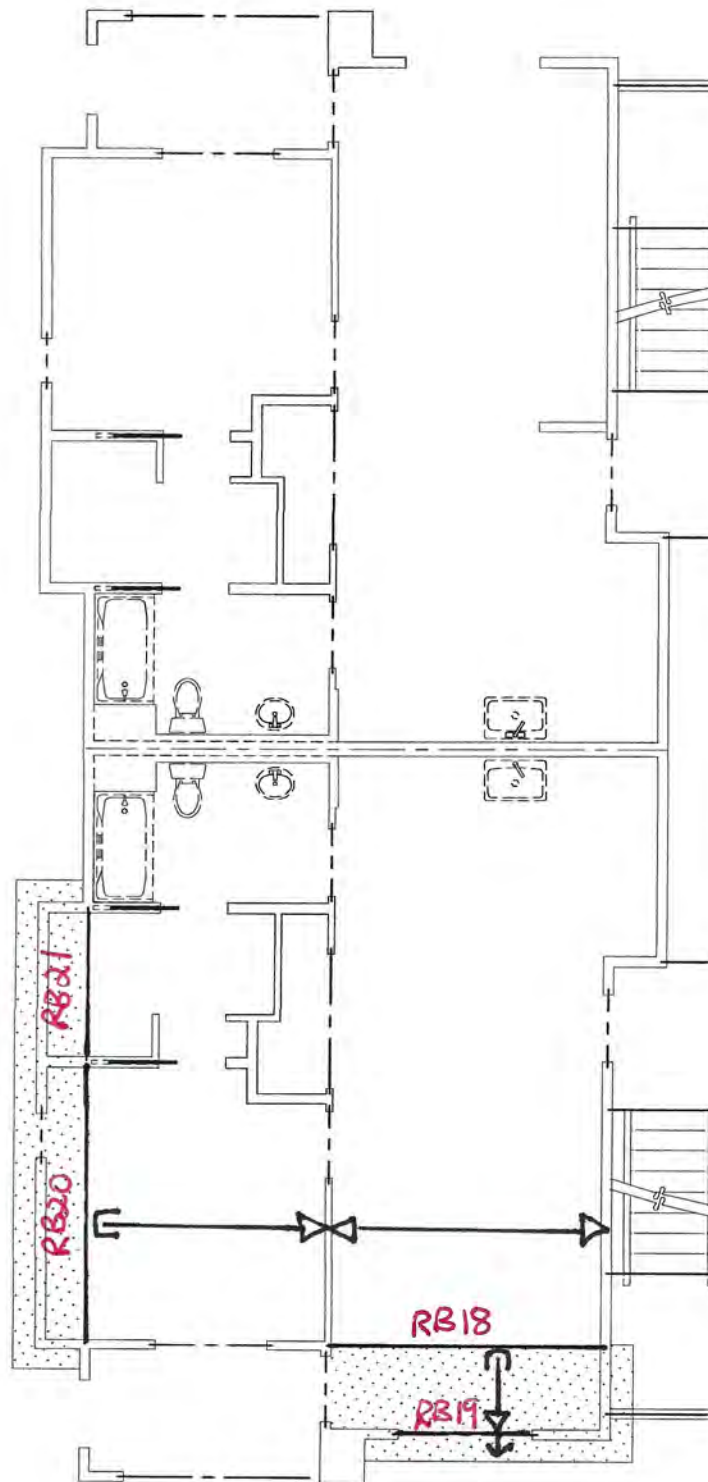

3RD FLOOR LOW ROOFS

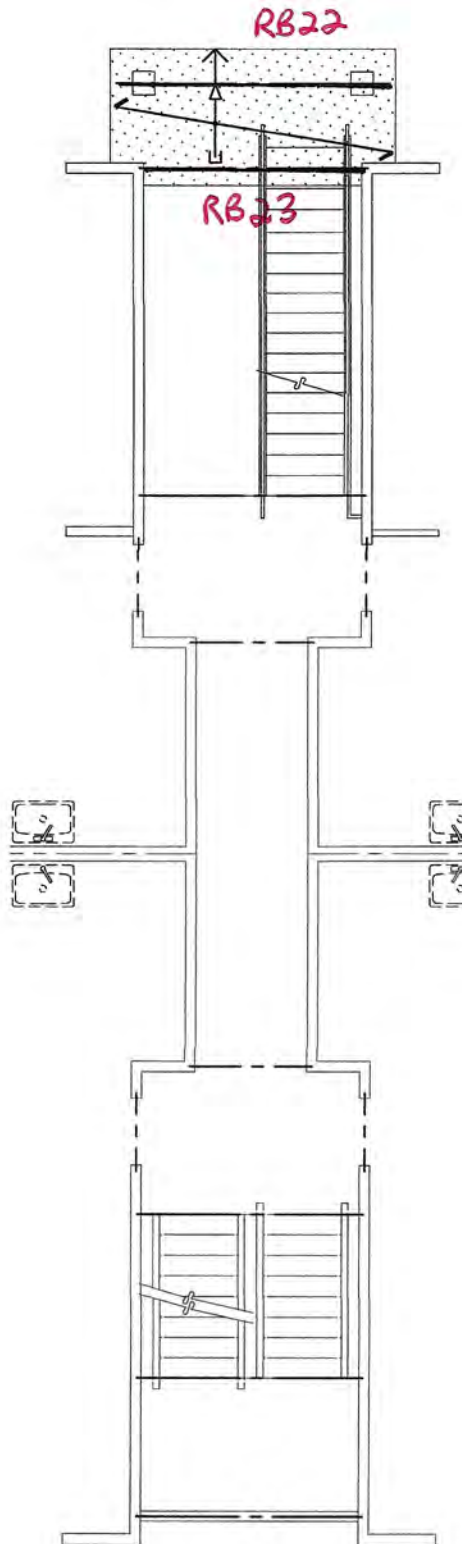

2ND FLOOR ENTRANCE ROOFS

PRMU20240285



Job #: 23.007
 Designed: TLC
 Date: 6/1/23

ROOF FRAMING

2018 NDS/2018 IBC

C_r =	1.15	repetitive
C_D =	1.15	SNOW
C_F =	(varies)	size

2 x 6		Pressure Treated Incising	Hem Fir	#2			
2 x 6	▼	A =	8.25	in ²	Snow	25.00	psf
Hem Fir	▼	S =	7.56	in ³	Dead	17.00	psf
#2	▼	I =	20.80	in ⁴	Other	-	psf
Incising? Yes	▼	C_F =	1.30		Total	42.00	psf
		F_b =	850.00	psi			
		F_v =	150.00	psi	Allowable Span @ 12" o.c. =	11.08	ft (TL Defl.)
		E =	1,300,000.00	psi	Allowable Span @ 16" o.c. =	10.06	ft (TL Defl.)
		C_i =	0.80	Incising (Fb)	Allowable Span @ 24" o.c. =	8.54	ft (bending)
		C_i =	0.95	Incising (E)			
		spacing (in)	12.00	16.00	24.00	Control	% over allowed
		$L_{v\text{allow}} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$	Lv (ft) =	46.55	35.14	23.73	1.00%
		$L_{b\text{allow}} = (S \cdot F_b \cdot C_D \cdot C_r \cdot C_i \cdot 8 / w)^{1/2}$	Lb (ft) =	12.08	10.46	8.54	4.00%
		$L_{d\text{allow}} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$	Ld (ft) =	11.50	10.45	9.13	360
		$L_{d\text{allow}} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$	Ld (ft) =	11.08	10.06	8.79	240
			TL Defl.	TL Defl.	bending		

2 x 8		Hem Fir	#2				
2 x 8	▼	A =	10.88	in ²	Snow	25.00	psf
Hem Fir	▼	S =	13.14	in ³	Dead	17.00	psf
#2	▼	I =	47.63	in ⁴	Other	-	psf
Incising? No	▼	C_F =	1.20		Total	42.00	psf
		F_b =	850.00	psi			
		F_v =	150.00	psi	Allowable Span @ 12" o.c. =	14.85	ft (TL Defl.)
		E =	1,300,000.00	psi	Allowable Span @ 16" o.c. =	13.49	ft (TL Defl.)
		C_i =	1.00	Incising (Fb)	Allowable Span @ 24" o.c. =	11.79	ft (TL Defl.)
		C_i =	1.00	Incising (E)			
		spacing (in)	12.00	16.00	24.00	Control	% over allowed
		$L_{v\text{allow}} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$	Lv (ft) =	61.36	46.32	31.28	1.00%
		$L_{b\text{allow}} = (S \cdot F_b \cdot C_D \cdot C_r \cdot C_i \cdot 8 / w)^{1/2}$	Lb (ft) =	17.11	14.81	12.10	4.00%
		$L_{d\text{allow}} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$	Ld (ft) =	15.42	14.01	12.24	360
		$L_{d\text{allow}} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$	Ld (ft) =	14.85	13.49	11.79	240
			TL Defl.	TL Defl.	TL Defl.		

2 x 10		Hem Fir	#2				
2 x 10	▼	A =	13.88	in ²	Snow	25.00	psf
Hem Fir	▼	S =	21.39	in ³	Dead	17.00	psf
#2	▼	I =	98.93	in ⁴	Other	-	psf
Incising? No	▼	C_F =	1.10		Total	42.00	psf
		F_b =	850.00	psi			
		F_v =	150.00	psi	Allowable Span @ 12" o.c. =	18.95	ft (TL Defl.)
		E =	1,300,000.00	psi	Allowable Span @ 16" o.c. =	17.22	ft (TL Defl.)
		C_i =	1.00	Incising (Fb)	Allowable Span @ 24" o.c. =	14.78	ft (bending)
		C_i =	1.00	Incising (E)			
		spacing (in)	12.00	16.00	24.00	Control	% over allowed
		$L_{v\text{allow}} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$	Lv (ft) =	78.28	59.10	39.91	1.00%
		$L_{b\text{allow}} = (S \cdot F_b \cdot C_D \cdot C_r \cdot C_i \cdot 8 / w)^{1/2}$	Lb (ft) =	20.90	18.10	14.78	4.00%
		$L_{d\text{allow}} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$	Ld (ft) =	19.68	17.88	15.62	360
		$L_{d\text{allow}} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$	Ld (ft) =	18.95	17.22	15.04	240
			TL Defl.	TL Defl.	bending		

SOLUTIONS 4 STRUCTURES INC.

LOADS ONLY

RB1 4x8

$$W_1 = \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 22 & 8.0 \\ \text{SL} & 25 & 8.0 \end{array} \right) + \text{DL} \left(\begin{array}{c} 40 \\ \text{Wall} \end{array} \right) + \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ \text{SL} & 0 & 0.0 \end{array} \right) = \text{DL} \left(\begin{array}{cc} \text{PLF} \\ 216 \\ \text{SL} & 200 \\ \Sigma & 416 \end{array} \right)$$

$$R_1 = \text{DL} \left(\begin{array}{c} 0.32 \\ \text{SL} & 0.30 \end{array} \right) \quad R_2 = \left(\begin{array}{c} 0.32 \\ 0.30 \end{array} \right)$$

$$\Sigma \quad 0.62 \text{ k} \quad \Sigma \quad 0.62 \text{ k}$$

RB2 4x8

$$W_1 = \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 22 & 14.5 \\ \text{SL} & 25 & 14.5 \end{array} \right) + \text{DL} \left(\begin{array}{c} 0 \\ \text{Wall} \end{array} \right) + \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ \text{SL} & 0 & 0.0 \end{array} \right) = \text{DL} \left(\begin{array}{cc} \text{PLF} \\ 319 \\ \text{SL} & 363 \\ \Sigma & 682 \end{array} \right)$$

$$R_1 = \text{DL} \left(\begin{array}{c} 0.80 \\ \text{SL} & 0.91 \end{array} \right) \quad R_2 = \left(\begin{array}{c} 0.80 \\ 0.91 \end{array} \right)$$

$$\Sigma \quad 1.70 \text{ k} \quad \Sigma \quad 1.70 \text{ k}$$

RB3 4x8

$$W_1 = \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 22 & 8.0 \\ \text{SL} & 25 & 8.0 \end{array} \right) + \text{DL} \left(\begin{array}{c} 40 \\ \text{Wall} \end{array} \right) + \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ \text{SL} & 0 & 0.0 \end{array} \right) = \text{DL} \left(\begin{array}{cc} \text{PLF} \\ 216 \\ \text{SL} & 200 \\ \Sigma & 416 \end{array} \right)$$

$$R_1 = \text{DL} \left(\begin{array}{c} 0.76 \\ \text{SL} & 0.70 \end{array} \right) \quad R_2 = \left(\begin{array}{c} 0.76 \\ 0.70 \end{array} \right)$$

$$\Sigma \quad 1.46 \text{ k} \quad \Sigma \quad 1.46 \text{ k}$$

RB4 4x10

$$W_1 = \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 22 & 17.0 \\ \text{SL} & 25 & 17.0 \end{array} \right) + \text{DL} \left(\begin{array}{c} 0 \\ \text{Wall} \end{array} \right) + \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ \text{SL} & 0 & 0.0 \end{array} \right) = \text{DL} \left(\begin{array}{cc} \text{PLF} \\ 375 \\ \text{SL} & 426 \\ \Sigma & 801 \end{array} \right)$$

$$R_1 = \text{DL} \left(\begin{array}{c} 1.12 \\ \text{SL} & 1.28 \end{array} \right) \quad R_2 = \left(\begin{array}{c} 1.12 \\ 1.28 \end{array} \right)$$

$$\Sigma \quad 2.40 \text{ k} \quad \Sigma \quad 2.40 \text{ k}$$

RB5 4x8

$$W_1 = \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 22 & 15.0 \\ \text{SL} & 25 & 15.0 \end{array} \right) + \text{DL} \left(\begin{array}{c} 0 \\ \text{Wall} \end{array} \right) + \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ \text{SL} & 0 & 0.0 \end{array} \right) = \text{DL} \left(\begin{array}{cc} \text{PLF} \\ 331 \\ \text{SL} & 376 \\ \Sigma & 707 \end{array} \right)$$

$$R_1 = \text{DL} \left(\begin{array}{c} 0.83 \\ \text{SL} & 0.94 \end{array} \right) \quad R_2 = \left(\begin{array}{c} 0.83 \\ 0.94 \end{array} \right)$$

$$\Sigma \quad 1.77 \text{ k} \quad \Sigma \quad 1.77 \text{ k}$$

RB6 4x10

$$W_1 = \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 22 & 15.0 \\ \text{SL} & 25 & 15.0 \end{array} \right) + \text{DL} \left(\begin{array}{c} 0 \\ \text{Wall} \end{array} \right) + \text{DL} \left(\begin{array}{cc} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ \text{SL} & 0 & 0.0 \end{array} \right) = \text{DL} \left(\begin{array}{cc} \text{PLF} \\ 331 \\ \text{SL} & 376 \\ \Sigma & 707 \end{array} \right)$$

$$R_1 = \text{DL} \left(\begin{array}{c} 0.99 \\ \text{SL} & 1.13 \end{array} \right) \quad R_2 = \left(\begin{array}{c} 0.99 \\ 1.13 \end{array} \right)$$

$$\Sigma \quad 2.12 \text{ k} \quad \Sigma \quad 2.12 \text{ k}$$

SOLUTIONS 4 STRUCTURES

LOADS ONLY

RB7 4x8

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 22 & 8.9 \\ 25 & 8.9 \end{pmatrix} + \text{DL} \begin{pmatrix} 60 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ 0 & 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} \text{PLF} \\ 256 \\ 223 \\ \Sigma & 479 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 0.77 \\ \text{SL} \\ 0.67 \end{pmatrix} \quad R_2 = \begin{pmatrix} 0.77 \\ 0.67 \end{pmatrix}$$

$$\Sigma \quad 1.44 \text{ k} \quad \Sigma \quad 1.44 \text{ k}$$

RB8 4x10

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 22 & 8.9 \\ 25 & 8.9 \end{pmatrix} + \text{DL} \begin{pmatrix} 40 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ 0 & 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} \text{PLF} \\ 236 \\ 223 \\ \Sigma & 459 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 0.83 \\ \text{SL} \\ 0.78 \end{pmatrix} \quad R_2 = \begin{pmatrix} 0.83 \\ 0.78 \end{pmatrix}$$

$$\Sigma \quad 1.61 \text{ k} \quad \Sigma \quad 1.61 \text{ k}$$

RB9 4x8

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 22 & 17.0 \\ 25 & 17.0 \end{pmatrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ 0 & 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} \text{PLF} \\ 375 \\ 426 \\ \Sigma & 801 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 0.94 \\ \text{SL} \\ 1.07 \end{pmatrix} \quad R_2 = \begin{pmatrix} 0.94 \\ 1.07 \end{pmatrix}$$

$$\Sigma \quad 2.00 \text{ k} \quad \Sigma \quad 2.00 \text{ k}$$

RB10 PT 6x10 HF 1

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 22 & -5.9 \\ 25 & -5.9 \end{pmatrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ 0 & 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} \text{PLF} \\ -130 \\ -148 \\ \Sigma & -277 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} -0.71 \\ \text{SL} \\ -0.81 \end{pmatrix} \quad R_2 = \begin{pmatrix} -0.71 \\ -0.81 \end{pmatrix}$$

$$\Sigma \quad -1.53 \text{ k} \quad \Sigma \quad -1.53 \text{ k}$$

RB11 4x10

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 22 & 21.1 \\ 25 & 21.1 \end{pmatrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ 0 & 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} \text{PLF} \\ 465 \\ 528 \\ \Sigma & 993 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 1.16 \\ \text{SL} \\ 1.32 \end{pmatrix} \quad R_2 = \begin{pmatrix} 1.16 \\ 1.32 \end{pmatrix}$$

$$\Sigma \quad 2.48 \text{ k} \quad \Sigma \quad 2.48 \text{ k}$$

RB12 4x8

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 22 & 14.0 \\ 25 & 14.0 \end{pmatrix} + \text{DL} \begin{pmatrix} 40 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} & \text{Tributary} \\ 0 & 0.0 \\ 0 & 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} \text{PLF} \\ 348 \\ 350 \\ \Sigma & 698 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 0.52 \\ \text{SL} \\ 0.53 \end{pmatrix} \quad R_2 = \begin{pmatrix} 0.52 \\ 0.53 \end{pmatrix}$$

$$\Sigma \quad 1.05 \text{ k} \quad \Sigma \quad 1.05 \text{ k}$$

SOLUTIONS 4 STRUCTURES INC.

LOADS ONLY

RB13 4x8

$L = 5.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} 0.77 \\ 0.88 \end{pmatrix} \quad \quad \quad R_2 = \begin{pmatrix} 0.77 \\ 0.88 \end{pmatrix}$$

$$\Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma$$

$$\quad \quad \quad 1.65 \text{ k} \quad \quad \quad 1.65 \text{ k}$$

$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 14.0 \\ 14.0 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 309 \\ 351 \\ 660 \end{pmatrix}$

RB14 PT 4x10

$L = 9.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} -0.58 \\ -0.66 \end{pmatrix} \quad \quad \quad R_2 = \begin{pmatrix} -0.58 \\ -0.66 \end{pmatrix}$$

$$\Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma$$

$$\quad \quad \quad -1.25 \text{ k} \quad \quad \quad -1.25 \text{ k}$$

$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} -5.9 \\ -5.9 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} -130 \\ -148 \\ -277 \end{pmatrix}$

RB15 PT 3-1/8x10.5 GLB

$L = 10.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} 0.92 \\ 1.04 \end{pmatrix} \quad \quad \quad R_2 = \begin{pmatrix} 0.92 \\ 1.04 \end{pmatrix}$$

$$\Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma$$

$$\quad \quad \quad 1.96 \text{ k} \quad \quad \quad 1.96 \text{ k}$$

$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 8.3 \\ 8.3 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 183 \\ 208 \\ 392 \end{pmatrix}$

RB16 3-1/8x10.5 GLB

$L = 10.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} 1.61 \\ 1.83 \end{pmatrix} \quad \quad \quad R_2 = \begin{pmatrix} 1.61 \\ 1.83 \end{pmatrix}$$

$$\Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma$$

$$\quad \quad \quad 3.45 \text{ k} \quad \quad \quad 3.45 \text{ k}$$

$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 14.7 \\ 14.7 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 323 \\ 367 \\ 689 \end{pmatrix}$

RB17 4x8

$L = 5.50 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} 0.48 \\ 0.55 \end{pmatrix} \quad \quad \quad R_2 = \begin{pmatrix} 0.48 \\ 0.55 \end{pmatrix}$$

$$\Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma \quad \quad \quad \Sigma$$

$$\quad \quad \quad 1.03 \text{ k} \quad \quad \quad 1.03 \text{ k}$$


$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 8.0 \\ 8.0 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 176 \\ 200 \\ 376 \end{pmatrix}$

SOLUTIONS 4 STRUCTURES

LOADS ONLY

RB18

5-1/4 x 11-7/8 PSL

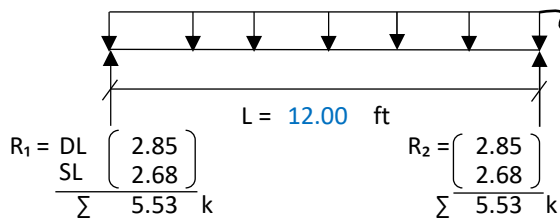


Roof

$$W_1 = \begin{matrix} \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 15.0 \\ 15.0 \end{pmatrix} + \text{DL} \begin{pmatrix} 100 \\ \text{Wall} \end{pmatrix} + \begin{matrix} \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 35 \end{pmatrix} \begin{pmatrix} 2.0 \\ 2.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 475 \\ 446 \\ 921 \end{pmatrix}$$

Roof

RB19

4x8

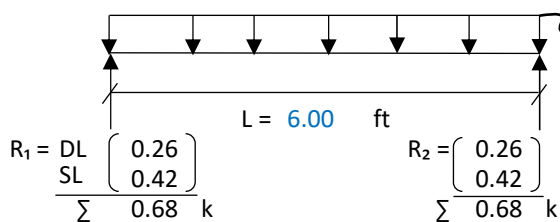


Roof

$$W_1 = \begin{matrix} \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 35 \end{pmatrix} \begin{pmatrix} 4.0 \\ 4.0 \end{pmatrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \begin{matrix} \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 88 \\ 140 \\ 228 \end{pmatrix}$$

Roof

RB20

5-1/4 x 11-7/8 PSL

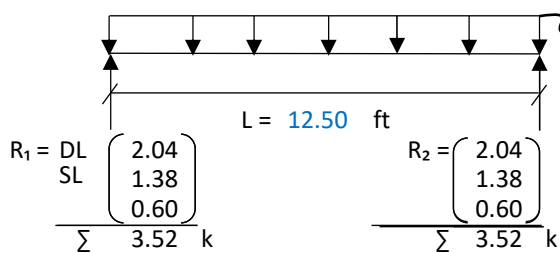


Roof

$$W_1 = \begin{matrix} \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 3.8 \\ 3.8 \end{pmatrix} + \text{DL} \begin{pmatrix} 100 \\ \text{Wall} \end{pmatrix} + \begin{matrix} \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 5.5 \\ 5.5 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{LL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 327 \\ 220 \\ 95 \\ 563 \end{pmatrix}$$

Floor

RB21

4x10

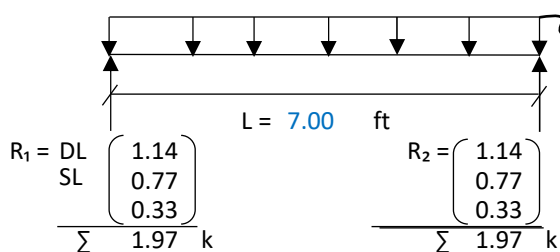


Roof

$$W_1 = \begin{matrix} \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 3.8 \\ 3.8 \end{pmatrix} + \text{DL} \begin{pmatrix} 100 \\ \text{Wall} \end{pmatrix} + \begin{matrix} \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 5.5 \\ 5.5 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{LL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 327 \\ 220 \\ 95 \\ 563 \end{pmatrix}$$

Floor

RB22

4x10

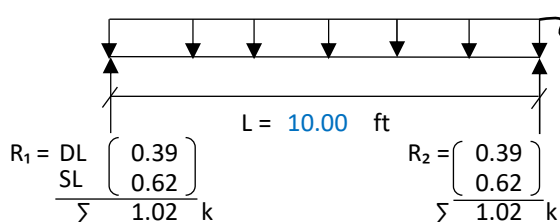

Roof

$$W_1 = \begin{matrix} \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 35 \end{pmatrix} \begin{pmatrix} 3.6 \\ 3.6 \end{pmatrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \begin{matrix} \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 79 \\ 125 \\ 203 \end{pmatrix}$$

Roof

SOLUTIONS 4 STRUCTURES

LOADS ONLY

RB23 4x8

$L = 10.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} 0.27 \\ 0.43 \end{pmatrix} \quad \Sigma \quad 0.69 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.27 \\ 0.43 \end{pmatrix} \quad \Sigma \quad 0.69 \text{ k}$$

$$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 35 \end{pmatrix} \begin{pmatrix} 2.4 \\ 2.4 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 53 \\ 85 \\ 139 \end{pmatrix}$$

GT-1

$L = 11.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} 1.48 \\ 1.68 \end{pmatrix} \quad \Sigma \quad 3.17 \text{ k}$$

$$R_2 = \begin{pmatrix} 1.48 \\ 1.68 \end{pmatrix} \quad \Sigma \quad 3.17 \text{ k}$$

$$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 12.3 \\ 12.3 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 270 \\ 306 \\ 576 \end{pmatrix}$$

GT-2

$L = 13.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} 2.36 \\ 2.68 \end{pmatrix} \quad \Sigma \quad 5.04 \text{ k}$$

$$R_2 = \begin{pmatrix} 2.36 \\ 2.68 \end{pmatrix} \quad \Sigma \quad 5.04 \text{ k}$$

$$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 16.5 \\ 16.5 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 363 \\ 413 \\ 776 \end{pmatrix}$$

GT-3

$L = 12.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{SL} \end{matrix} \begin{pmatrix} 1.78 \\ 2.03 \end{pmatrix} \quad \Sigma \quad 3.81 \text{ k}$$

$$R_2 = \begin{pmatrix} 1.78 \\ 2.03 \end{pmatrix} \quad \Sigma \quad 3.81 \text{ k}$$

$$W_1 = \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 22 \\ 25 \end{pmatrix} \begin{pmatrix} 13.5 \\ 13.5 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Roof} \\ \text{PSF Tributary} \\ \text{SL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 297 \\ 338 \\ 635 \end{pmatrix}$$

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:27PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Description : Roof Beams RB1-RB12**Wood Beam Design : RB1****Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16****BEAM Size :** 4x8, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2160, S = 0.20 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.146** : 1
 fb : Actual : 185.24 psi at 1.500 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.216** : 1
 fv : Actual : 37.31 psi at 0.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.33			0.30			
Right Support	0.33			0.30			

**Max Deflections**

Transient Downward	0.003 in	Total Downward	0.005 in
Ratio	9999	Ratio	6747
LC: S Only		LC: +D+S+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

Wood Beam Design : RB2**Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16****BEAM Size :** 4x8, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.3190, S = 0.3630 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.661** : 1
 fb : Actual : 839.89 psi at 2.500 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.588** : 1
 fv : Actual : 101.49 psi at 5.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.81			0.91			
Right Support	0.81			0.91			

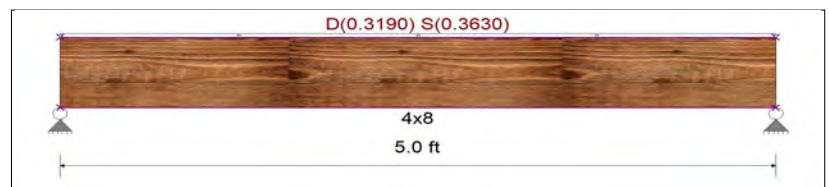**Max Deflections**

Transient Downward	0.036 in	Total Downward	0.067 in
Ratio	1689	Ratio	892
LC: S Only		LC: +D+S+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:27PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB3

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2160, S = 0.20 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.794** : 1
 fb : Actual : 1,008.55 psi at 3.500 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.505** : 1
 fv : Actual : 87.05 psi at 0.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.77			0.70			
Right Support	0.77			0.70			

Max Deflections

Transient Downward	0.075 in	Total Downward	0.158 in
Ratio	1117	Ratio	531
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : RB4

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3750, S = 0.4260 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.744** : 1
 fb : Actual : 873.14 psi at 3.000 ft in Span # 1
 Fb : Allowable : 1,173.00 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.650** : 1
 fv : Actual : 112.17 psi at 6.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.14			1.28			
Right Support	1.14			1.28			

Max Deflections

Transient Downward	0.042 in	Total Downward	0.079 in
Ratio	1730	Ratio	913
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:27PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB5

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3310, S = 0.3760 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.685** : 1
 fb : Actual : 870.47 psi at 2.500 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.610** : 1
 fv : Actual : 105.18 psi at 5.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.84			0.94			
Right Support	0.84			0.94			

Max Deflections

Transient Downward	0.037 in	Total Downward	0.070 in
Ratio	1630	Ratio	861
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : RB6

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3310, S = 0.3760 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.658** : 1
 fb : Actual : 771.44 psi at 3.000 ft in Span # 1
 Fb : Allowable : 1,173.00 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.575** : 1
 fv : Actual : 99.11 psi at 6.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.01			1.13			
Right Support	1.01			1.13			

Max Deflections

Transient Downward	0.037 in	Total Downward	0.070 in
Ratio	1960	Ratio	1033
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:27PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB7

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2560, S = 0.2230 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.670** : 1
 fb : Actual : 851.93 psi at 3.000 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.497** : 1
 fv : Actual : 85.78 psi at 0.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.78			0.67			
Right Support	0.78			0.67			

Max Deflections

Transient Downward	0.045 in	Total Downward	0.098 in
Ratio	1591	Ratio	733
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : RB8

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2360, S = 0.2230 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.584** : 1
 fb : Actual : 684.81 psi at 3.500 ft in Span # 1
 Fb : Allowable : 1,173.00 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.437** : 1
 fv : Actual : 75.41 psi at 0.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.85			0.78			
Right Support	0.85			0.78			

Max Deflections

Transient Downward	0.040 in	Total Downward	0.084 in
Ratio	2081	Ratio	998
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:27PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB9

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3750, S = 0.4260 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.775** : 1
 fb : Actual : 985.43 psi at 2.500 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.690** : 1
 fv : Actual : 119.07 psi at 0.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.95			1.07			
Right Support	0.95			1.07			

Max Deflections

Transient Downward	0.042 in	Total Downward	0.079 in
Ratio	1439	Ratio	761
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : RB10

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **6x10, Sawn, Fully Unbraced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.1

Fb - Tension	1,050.0 psi	Fc - Prll	750.0 psi	Fv	140.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	1,050.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = -0.130, S = -0.1480 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.614** : 1
 fb : Actual : 588.54 psi at 5.500 ft in Span # 1
 Fb : Allowable : 958.83 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.329** : 1
 fv : Actual : 42.36 psi at 0.000 ft in Span # 1
 Fv : Allowable : 128.80 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	-0.66			-0.81			
Right Support	-0.66			-0.81			

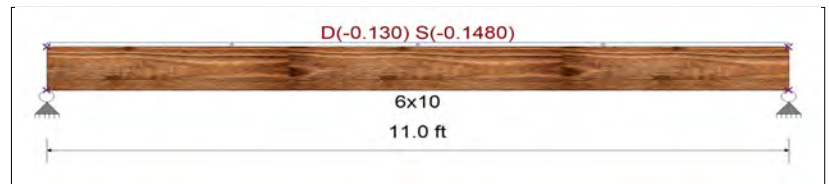Max Deflections

Transient Downward	0.000 in	Total Downward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:
Transient Upward	-0.096 in	Total Upward	-0.174 in
Ratio	1375	Ratio	759
	LC: S Only		LC: +D+S+H

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:27PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB11

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	575.0 psi	Fc - Prll	575.0 psi	Fv	140.0 psi	Ebend- xx	1,100.0 ksi	Density	26.840 pcf
Fb - Compr	575.0 psi	Fc - Perp	405.0 psi	Ft	375.0 psi	Eminbend - xx	400.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.4650, S = 0.5280 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.946** : 1
 fb : Actual : 750.60 psi at 2.500 ft in Span # 1
 Fb : Allowable : 793.50 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.719** : 1
 fv : Actual : 115.72 psi at 0.000 ft in Span # 1
 Fv : Allowable : 161.00 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.18			1.32			
Right Support	1.18			1.32			

Max Deflections

Transient Downward	0.029 in	Total Downward	0.056 in
Ratio	2041	Ratio	1078
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : RB12

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	575.0 psi	Fc - Prll	575.0 psi	Fv	140.0 psi	Ebend- xx	1,100.0 ksi	Density	26.840 pcf
Fb - Compr	575.0 psi	Fc - Perp	405.0 psi	Ft	375.0 psi	Eminbend - xx	400.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3480, S = 0.350 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.360** : 1
 fb : Actual : 309.41 psi at 1.500 ft in Span # 1
 Fb : Allowable : 859.63 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.387** : 1
 fv : Actual : 62.31 psi at 3.000 ft in Span # 1
 Fv : Allowable : 161.00 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.53			0.53			
Right Support	0.53			0.53			

Max Deflections

Transient Downward	0.005 in	Total Downward	0.011 in
Ratio	6863	Ratio	3418
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:28PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Description : Roof Beams RB13-RB23**Wood Beam Design : RB13**

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x8, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3090, S = 0.3510 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.640** : 1
 fb : Actual : 812.99 psi at 2.500 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.569** : 1
 fv : Actual : 98.24 psi at 5.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.78			0.88			
Right Support	0.78			0.88			

Max Deflections

Transient Downward	0.034 in	Total Downward	0.065 in
Ratio	1747	Ratio	922
LC: S Only		LC: +D+S+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

Wood Beam Design : RB14

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x10, Sawn, Fully Unbraced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = -0.130, S = -0.1480 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.717** : 1
 fb : Actual : 662.05 psi at 4.500 ft in Span # 1
 Fb : Allowable : 922.87 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.411** : 1
 fv : Actual : 56.70 psi at 0.000 ft in Span # 1
 Fv : Allowable : 138.00 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	-0.56			-0.67			
Right Support	-0.56			-0.67			

Max Deflections

Transient Downward	0.000 in	Total Downward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	
Transient Upward	-0.073 in	Total Upward	-0.135 in
Ratio	1475	Ratio	802
LC: S Only		LC: +D+S+H	

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:28PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB15

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **3.125x10.5, GLB, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : DF/DF

Wood Grade : 24F-V4

Fb - Tension	2400 psi	Fc - Prll	1650 psi	Fv	265 psi	Ebend- xx	1800 ksi	Density	31.21 pcf
Fb - Compr	1850 psi	Fc - Perp	650 psi	Ft	1100 psi	Eminbend - xx	950 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.1830, S = 0.2080 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.377** : 1
 fb : Actual : 1,039.97 psi at 5.000 ft in Span # 1
 Fb : Allowable : 2,760.00 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.299** : 1
 fv : Actual : 91.00 psi at 0.000 ft in Span # 1
 Fv : Allowable : 304.75 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.95			1.04			
Right Support	0.95			1.04			

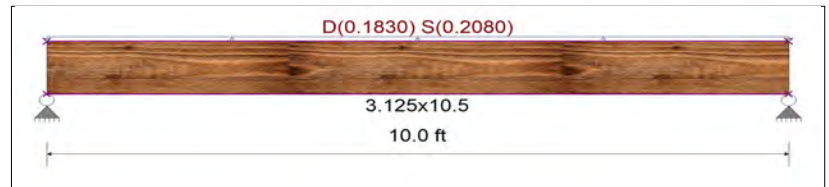Max Deflections

Transient Downward	0.087 in	Total Downward	0.166 in
Ratio	1383	Ratio	723
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : RB16

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **3.125x10.5, GLB, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : DF/DF

Wood Grade : 24F-V4

Fb - Tension	2400 psi	Fc - Prll	1650 psi	Fv	265 psi	Ebend- xx	1800 ksi	Density	31.21 pcf
Fb - Compr	1850 psi	Fc - Perp	650 psi	Ft	1100 psi	Eminbend - xx	950 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3230, S = 0.3670 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.660** : 1
 fb : Actual : 1,821.03 psi at 5.000 ft in Span # 1
 Fb : Allowable : 2,760.00 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.523** : 1
 fv : Actual : 159.34 psi at 10.000 ft in Span # 1
 Fv : Allowable : 304.75 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.65			1.84			
Right Support	1.65			1.84			

Max Deflections

Transient Downward	0.153 in	Total Downward	0.291 in
Ratio	784	Ratio	412
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:28PM

Multiple Simple Beam

File: Beam Designs.ec6

Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB17

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x8, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.1760, S = 0.20 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = 0.443 : 1
 fb : Actual : 563.43 psi at 2.750 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = 0.359 : 1
 fv : Actual : 61.89 psi at 0.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.50			0.55			
Right Support	0.50			0.55			



Max Deflections

Transient Downward	0.029 in	Total Downward	0.055 in
Ratio	2303	Ratio	1210
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : RB18

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 5.25x11.875, Parallam PSL, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : iLevel Truss Joist

Wood Grade : Parallam PSL 2.0E

Fb - Tension	2900 psi	Fc - Prll	2900 psi	Fv	290 psi	Ebend- xx	2000 ksi	Density	45.07 pcf
Fb - Compr	2900 psi	Fc - Perp	750 psi	Ft	2025 psi	Eminbend - xx	1016.535 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.4480, L = 0.0270, S = 0.3960 k/ft, 0.0 ft to 3.0 ft, Trib= 1.0 ft

Unif Load: D = 0.0670, L = 0.0270 k/ft, 3.0 to 9.0 ft, Trib= 1.0 ft

Unif Load: D = 0.4480, L = 0.0270, S = 0.3960 k/ft, 9.0 to 12.0 ft, Trib= 1.0 ft

Point: D = 0.990, S = 1.130 k @ 3.0 ft


Point: D = 0.990, S = 1.130 k @ 9.0 ft

Design Summary

Max fb/Fb Ratio = 0.333 : 1
 fb : Actual : 1,110.03 psi at 6.000 ft in Span # 1
 Fb : Allowable : 3,335.00 psi
 Load Comb : +D+S+H

Max fv/FvRatio = 0.359 : 1
 fv : Actual : 119.58 psi at 12.000 ft in Span # 1
 Fv : Allowable : 333.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	2.65	0.16		2.32			
Right Support	2.65	0.16		2.32			

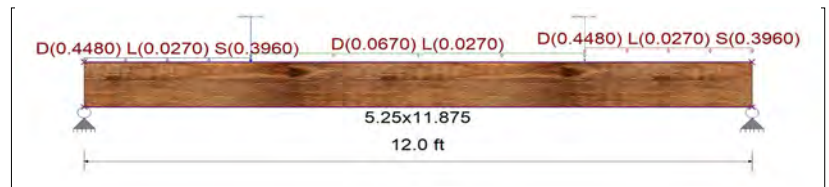

Max Deflections

Transient Downward	0.103 in	Total Downward	0.224 in
Ratio	1400	Ratio	643
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:28PM

File: Beam Designs.ec6

Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Solutions 4 Structures, Inc

Multiple Simple Beam

Lic. #: KW-06013765

Wood Beam Design : RB19

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.0880, S = 0.140 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.323** : 1
 fb : Actual : 409.88 psi at 3.000 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.239** : 1
 fv : Actual : 41.27 psi at 0.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.28			0.42			
Right Support	0.28			0.42			

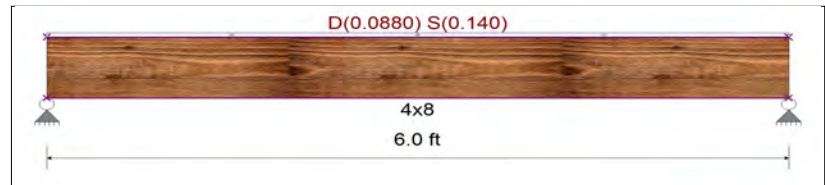Max Deflections

Transient Downward	0.028 in	Total Downward	0.047 in
Ratio	2534	Ratio	1524
LC: S Only		LC: +D+S+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

Wood Beam Design : RB20

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **5.125x10.5, GLB, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : DF/DF

Wood Grade : 24F-V4

Fb - Tension	2,400.0 psi	Fc - Prll	1,650.0 psi	Fv	265.0 psi	Ebend- xx	1,800.0 ksi	Density	31.210 pcf
Fb - Compr	1,850.0 psi	Fc - Perp	650.0 psi	Ft	1,100.0 psi	Eminbend - xx	950.0 ksi		

Applied Loads


Unif Load: D = 0.3270, L = 0.220, S = 0.0950 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.567** : 1
 fb : Actual : 1,361.37 psi at 6.250 ft in Span # 1
 Fb : Allowable : 2,400.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.360** : 1
 fv : Actual : 95.30 psi at 0.000 ft in Span # 1
 Fv : Allowable : 265.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	2.04	1.38		0.59			
Right Support	2.04	1.38		0.59			

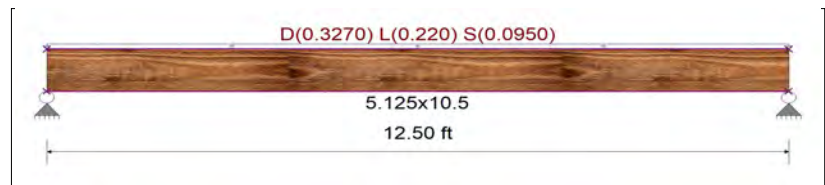Max Deflections

Transient Downward	0.137 in	Total Downward	0.350 in
Ratio	1098	Ratio	429
LC: L Only		LC: +D+0.750L+0.750S+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:28PM

Multiple Simple Beam

File: Beam Designs.ec6

Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB21

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.3270, L = 0.220, S = 0.0950 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.798** : 1
 fb : Actual : 814.40 psi at 3.500 ft in Span # 1
 Fb : Allowable : 1,020.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.598** : 1
 fv : Actual : 89.68 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.17	0.77		0.33			
Right Support	1.17	0.77		0.33			

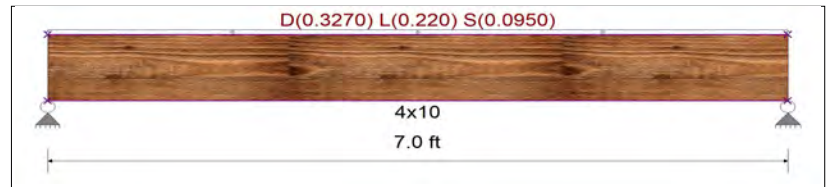Max Deflections

Transient Downward	0.040 in	Total Downward	0.103 in
Ratio	2109	Ratio	815
	LC: L Only		.C: +D+0.750L+0.750S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : RB22

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.0790, S = 0.1250 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.538** : 1
 fb : Actual : 631.22 psi at 5.000 ft in Span # 1
 Fb : Allowable : 1,173.00 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.282** : 1
 fv : Actual : 48.66 psi at 10.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.43			0.63			
Right Support	0.43			0.63			

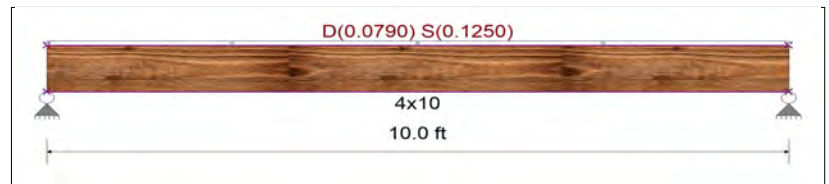Max Deflections

Transient Downward	0.094 in	Total Downward	0.158 in
Ratio	1273	Ratio	757
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:28PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : RB23

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.0530, S = 0.0850 k/ft, Trib= 1.0 ft

Design Summary


Max fb/Fb Ratio = **0.549** : 1
 fb : Actual : 698.25 psi at 5.000 ft in Span # 1
 Fb : Allowable : 1,270.75 psi
 Load Comb : +D+S+H

Max fv/FvRatio = **0.245** : 1
 fv : Actual : 42.19 psi at 0.000 ft in Span # 1
 Fv : Allowable : 172.50 psi
 Load Comb : +D+S+H


Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.29			0.43			
Right Support	0.29			0.43			

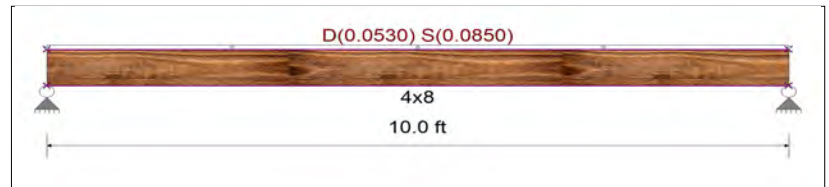Max Deflections

Transient Downward	0.133 in	Total Downward	0.223 in
Ratio	901	Ratio	537
	LC: S Only		LC: +D+S+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

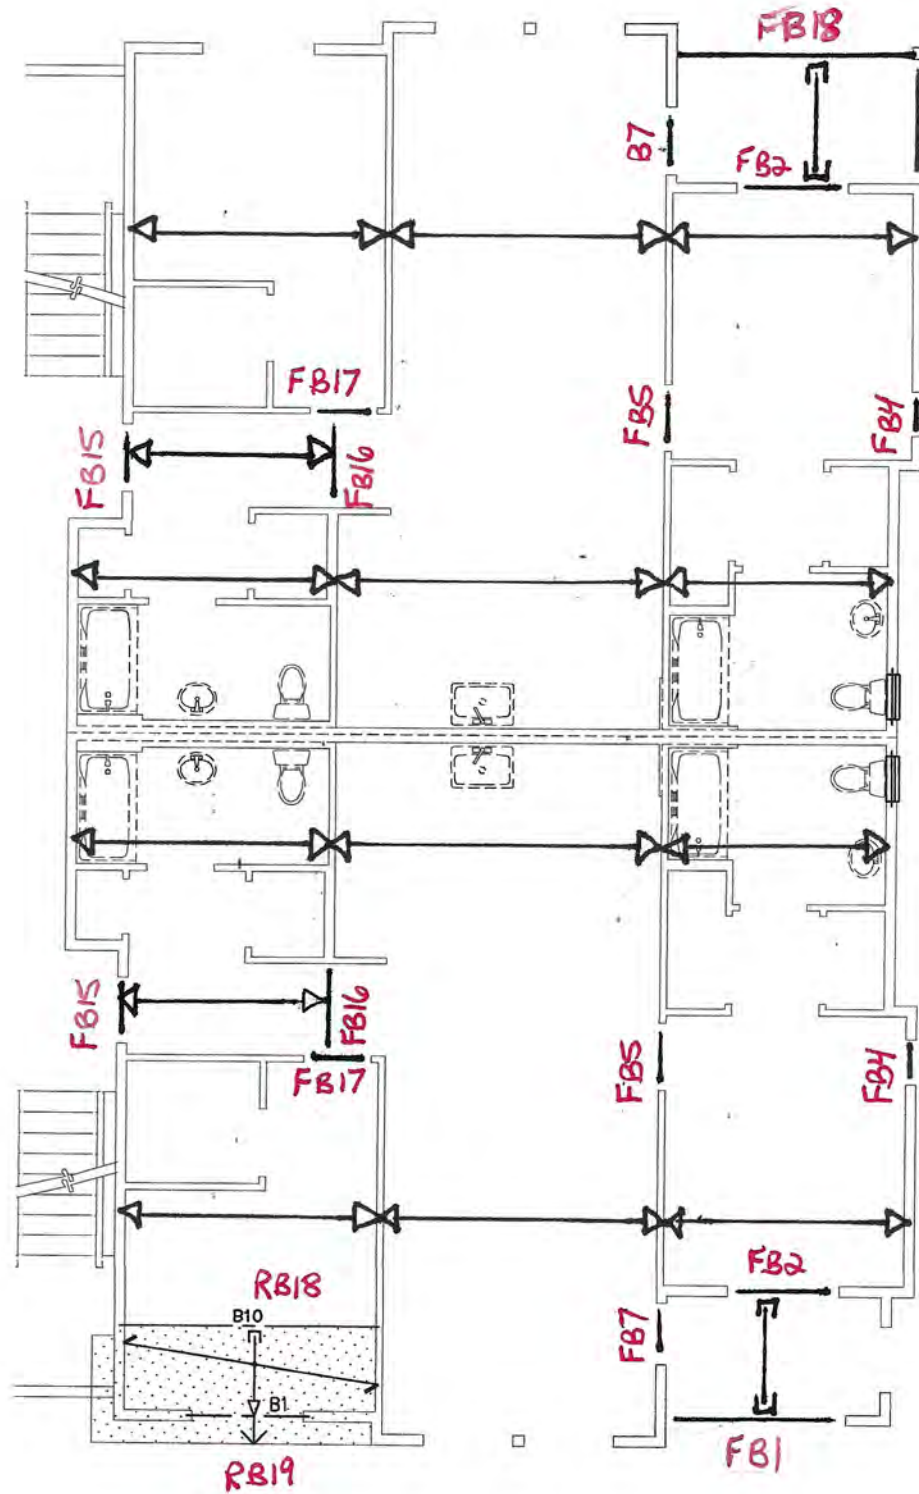


FLOOR TYPE 3

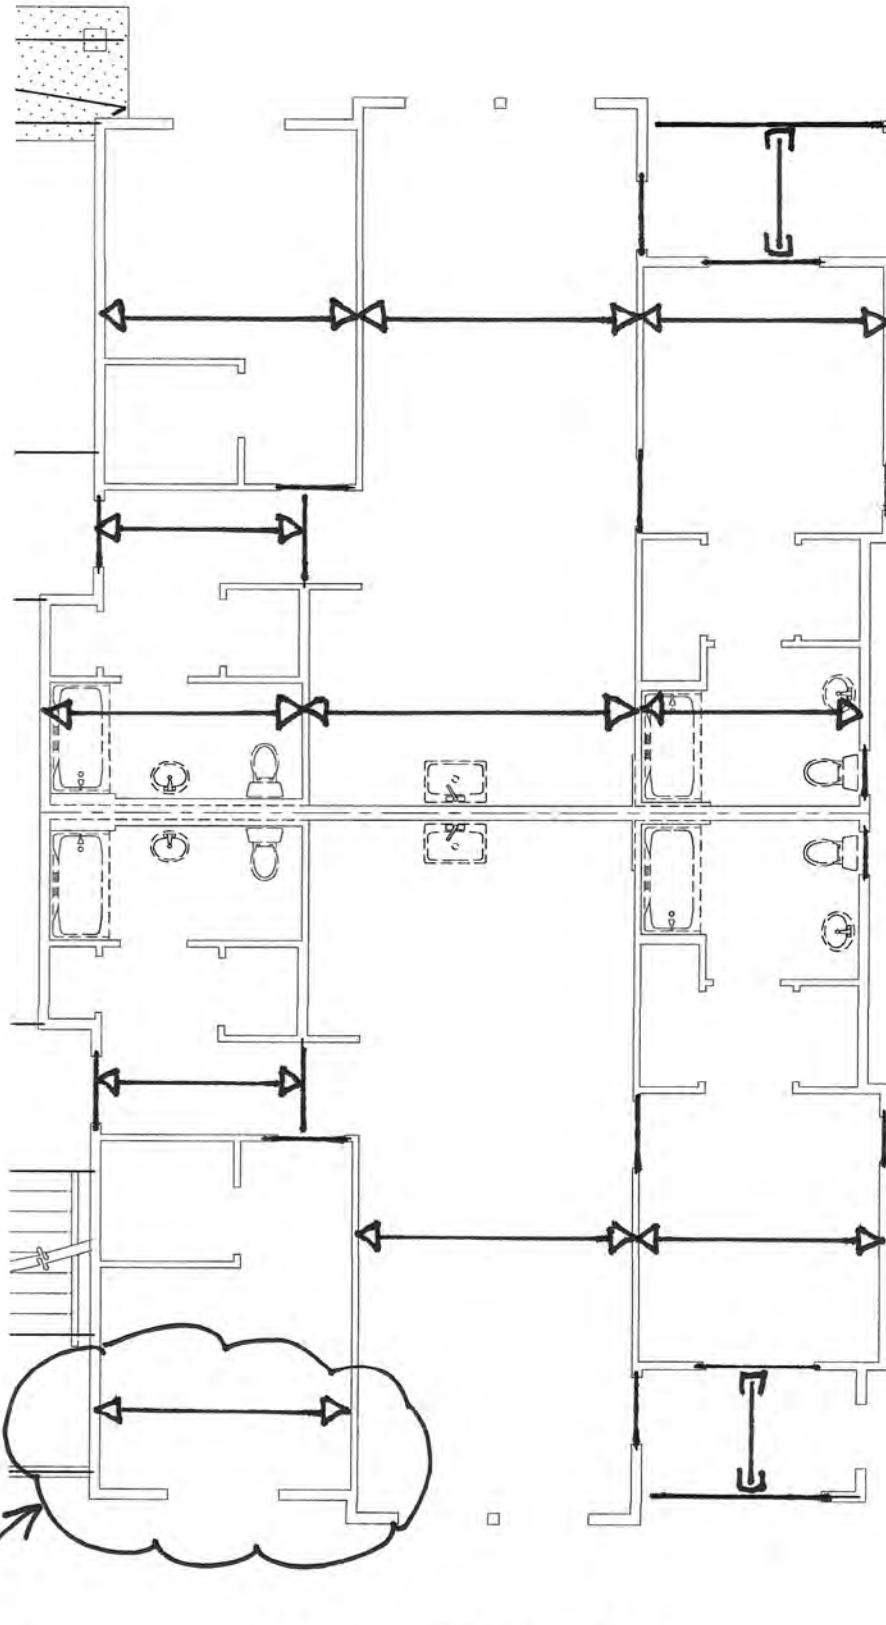


DIFFERENCE
FROM TYPE 3


FLOOR TYPE 3B

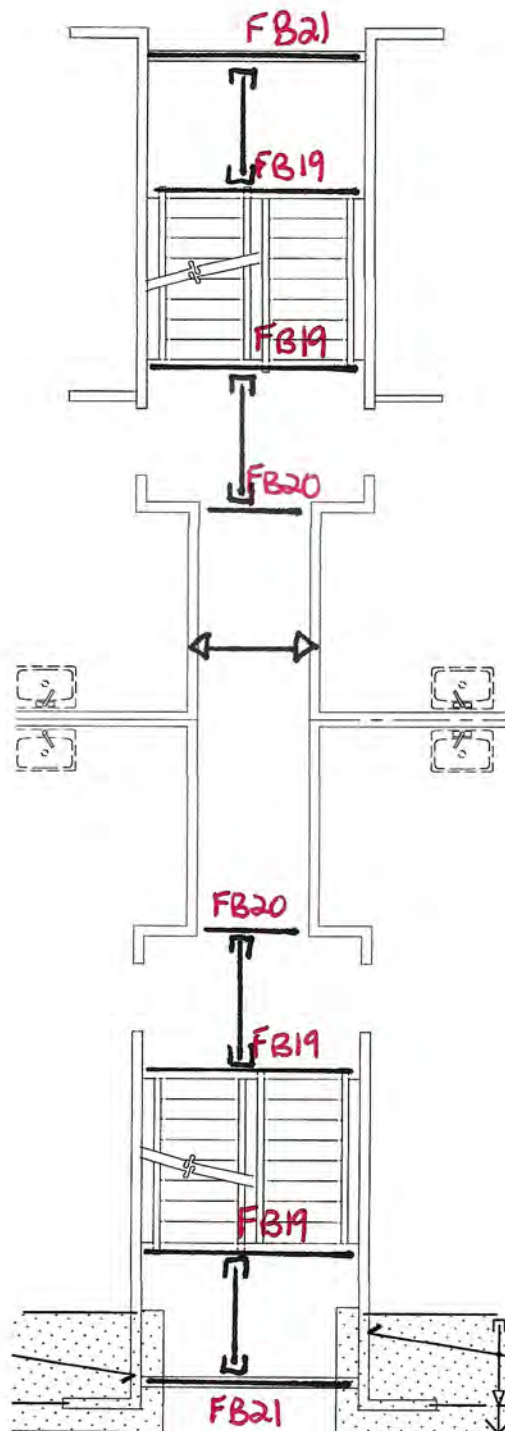

TYPICAL STAIR/CORRIDOR

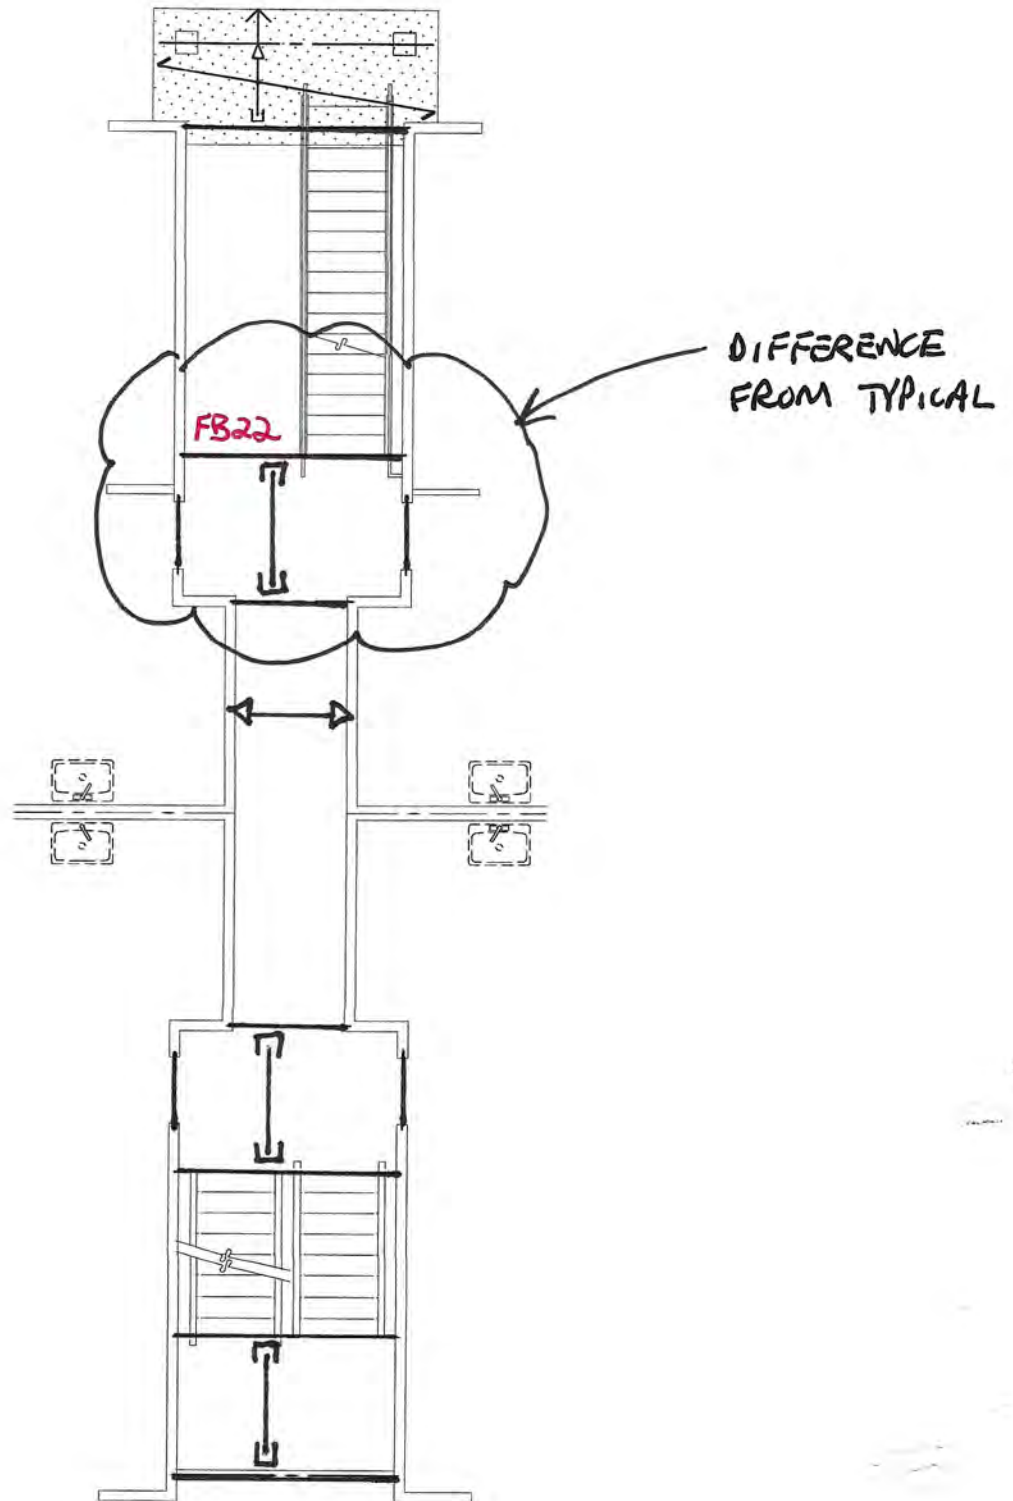


STAIR CORRIDOR (2ND FLOOR)

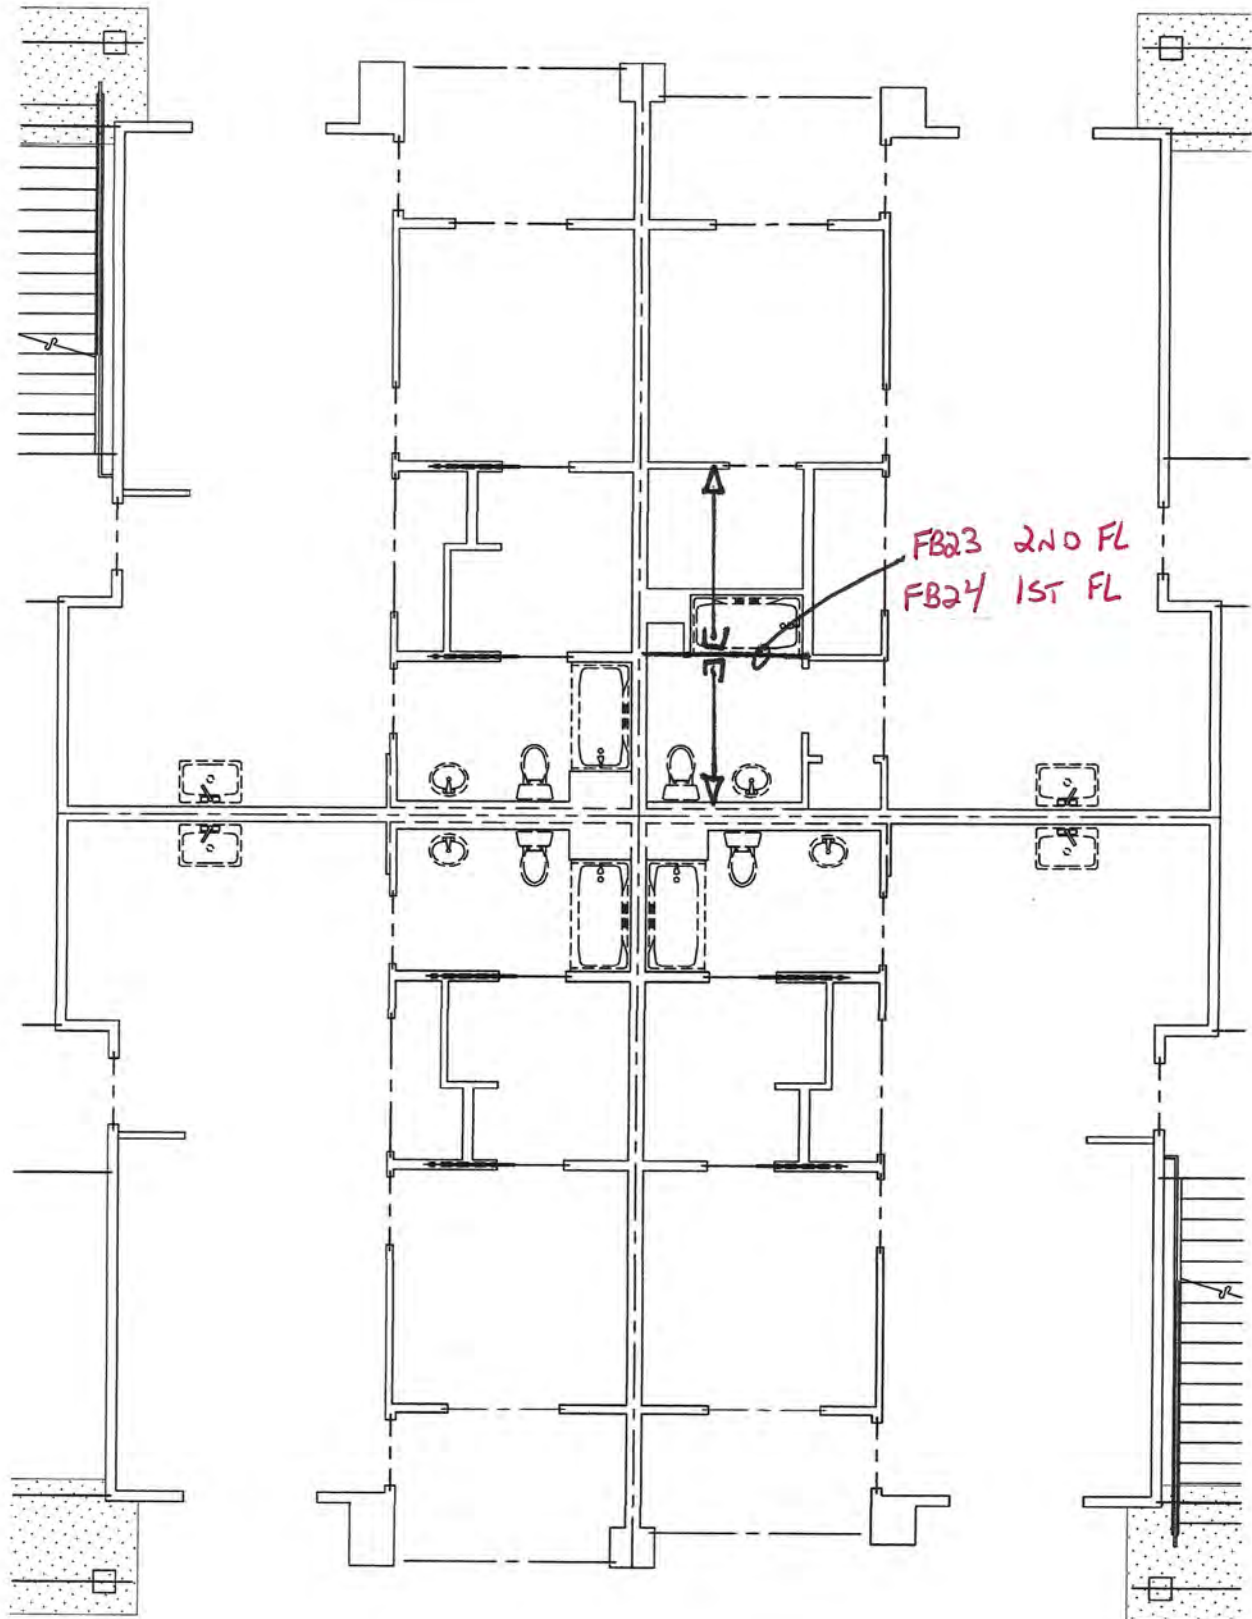

Level, J1
1 piece(s) 11 7/8" TJI® 110 @ 16" OC

PRMU20240285

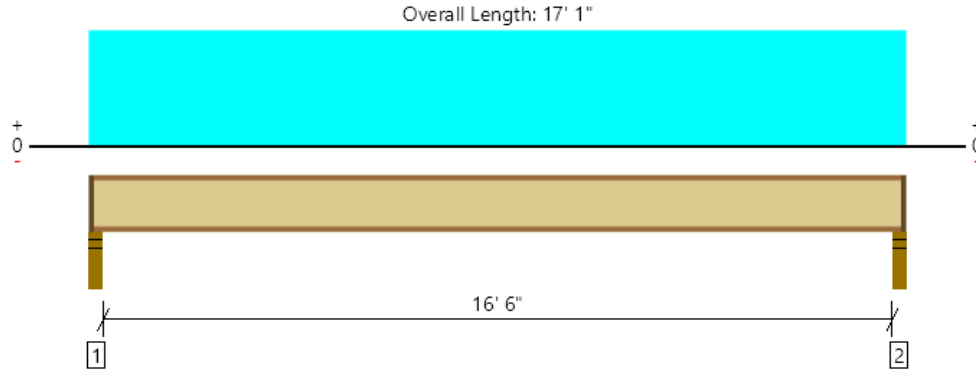

All locations are measured from the outside face of left support (or left cantilever end). All dimensions are horizontal.

Design Results	Actual @ Location	Allowed	Result	LDF	Load: Combination (Pattern)
Member Reaction (lbs)	743 @ 2 1/2"	1041 (2.25")	Passed (71%)	1.00	1.0 D + 1.0 L (All Spans)
Shear (lbs)	726 @ 3 1/2"	1560	Passed (47%)	1.00	1.0 D + 1.0 L (All Spans)
Moment (Ft-lbs)	3056 @ 8' 6 1/2"	3160	Passed (97%)	1.00	1.0 D + 1.0 L (All Spans)
Live Load Defl. (in)	0.309 @ 8' 6 1/2"	0.417	Passed (L/647)	--	1.0 D + 1.0 L (All Spans)
Total Load Defl. (in)	0.510 @ 8' 6 1/2"	0.833	Passed (L/392)	--	1.0 D + 1.0 L (All Spans)
TJ-Pro™ Rating	46	40	Passed	--	--

System : Floor
Member Type : Joist
Building Use : Residential
Building Code : IBC 2018
Design Methodology : ASD

- Deflection criteria: LL (L/480) and TL (L/240).
- Allowed moment does not reflect the adjustment for the beam stability factor.
- A structural analysis of the deck has not been performed.
- Deflection analysis is based on composite action with a single layer of 23/32" Weyerhaeuser Edge™ Panel (24" Span Rating) that is glued and nailed down.
- Additional considerations for the TJ-Pro™ Rating include: 1/2" Gypsum ceiling.

Supports	Bearing Length			Loads to Supports (lbs)			Accessories
	Total	Available	Required	Dead	Floor Live	Factored	
1 - Stud wall - SPF	3.50"	2.25"	1.75"	296	456	752	1 1/4" Rim Board
2 - Stud wall - SPF	3.50"	2.25"	1.75"	296	456	752	1 1/4" Rim Board

• Rim Board is assumed to carry all loads applied directly above it, bypassing the member being designed.

Lateral Bracing	Bracing Intervals	Comments
Top Edge (Lu)	3' 1" o/c	
Bottom Edge (Lu)	16' 11" o/c	

- TJI joists are only analyzed using Maximum Allowable bracing solutions.
- Maximum allowable bracing intervals based on applied load.

Vertical Load	Location	Spacing	Dead (0.90)	Floor Live (1.00)	Comments
1 - Uniform (PSF)	0 to 17' 1"	16"	26.0	40.0	Default Load

Weyerhaeuser Notes

Weyerhaeuser warrants that the sizing of its products will be in accordance with Weyerhaeuser product design criteria and published design values. Weyerhaeuser expressly disclaims any other warranties related to the software. Use of this software is not intended to circumvent the need for a design professional as determined by the authority having jurisdiction. The designer of record, builder or framer is responsible to assure that this calculation is compatible with the overall project. Accessories (Rim Board, Blocking Panels and Squash Blocks) are not designed by this software. Products manufactured at Weyerhaeuser facilities are third-party certified to sustainable forestry standards. Weyerhaeuser Engineered Lumber Products have been evaluated by ICC-ES under evaluation reports ESR-1153 and ESR-1387 and/or tested in accordance with applicable ASTM standards. For current code evaluation reports, Weyerhaeuser product literature and installation details refer to www.weyerhaeuser.com/woodproducts/document-library.

The product application, input design loads, dimensions and support information have been provided by ForteWEB Software Operator

ForteWEB Software Operator	Job Notes
Oleg Kondratyuk Solutions 4 Structures, Inc (253) 970-3664 oleg@solutions4structures.com	



PRMU20240285



Job #: 21.011
 Designed: OGK
 Date: 6/1/23

FLOOR FRAMING

2018 NDS/2018 IBC

$C_r =$	1.15	repetitive
$C_D =$	1.0	LIVE
$C_F =$	(varies)	size

2 x 6	Pressure Treated Incising	Hem Fir	#2
2 x 6	A = 8.25	in ²	Live 60.00 psf
Hem Fir	S = 7.56	in ³	Dead 14.00 psf
#2	I = 20.80	in ⁴	Partition - psf
Incising? Yes	$C_F =$ 1.30		Total 74.00 psf
Wet Use? No	$F_b =$ 850.00	psi	
	$F_v =$ 150.00	psi	Allowable Span @ 8" o.c. = 9.83 ft (LL Defl.)
	E = 1,300,000.00	psi	Allowable Span @ 12" o.c. = 8.49 ft (bending)
	$C_i =$ 0.80	Incising (Fb)	Allowable Span @ 16" o.c. = 7.35 ft (bending)
	$C_i =$ 0.95	Incising (E)	
Calculations:	spacing (in)	8.00	12.00 16.00 Control % over allowed
$Lv_{allow} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$	Lv (ft) =	34.70	23.44 17.81 Shear 1.00%
$Lb_{allow} = (S \cdot F_b \cdot C_D \cdot Cr \cdot C_i \cdot 8/w)^{1/2}$	Lb (ft) =	10.39	8.49 7.35 Bending 4.00%
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$	Ld (ft) =	9.83	8.59 7.81 LL Deflection 360
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$	Ld (ft) =	10.50	9.17 8.33 TL Deflection 240
	LL Defl.	bending	bending

2 x 8	Pressure Treated Incising	Hem Fir	#2
2 x 8	A = 10.88	in ²	Live 60.00 psf
Hem Fir	S = 13.14	in ³	Dead 14.00 psf
#2	I = 47.63	in ⁴	Partition - psf
Incising? Yes	$C_F =$ 1.20		Total 74.00 psf
Wet Use? No	$F_b =$ 850.00	psi	
	$F_v =$ 150.00	psi	Allowable Span @ 8" o.c. = 12.96 ft (LL Defl.)
	E = 1,300,000.00	psi	Allowable Span @ 12" o.c. = 10.75 ft (bending)
	$C_i =$ 0.80	Incising (Fb)	Allowable Span @ 16" o.c. = 9.31 ft (bending)
	$C_i =$ 0.95	Incising (E)	
Calculations:	spacing (in)	8.00	12.00 16.00 Control % over allowed
$Lv_{allow} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$	Lv (ft) =	45.74	30.89 23.47 Shear 1.00%
$Lb_{allow} = (S \cdot F_b \cdot C_D \cdot Cr \cdot C_i \cdot 8/w)^{1/2}$	Lb (ft) =	13.16	10.75 9.31 Bending 4.00%
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$	Ld (ft) =	12.96	11.33 10.29 LL Deflection 360
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$	Ld (ft) =	13.84	12.09 10.98 TL Deflection 240
	LL Defl.	bending	bending

2 x 10	Pressure Treated Incising	Hem Fir	#2
2 x 10	A = 13.88	in ²	Live 60.00 psf
Hem Fir	S = 21.39	in ³	Dead 14.00 psf
#2	I = 98.93	in ⁴	Partition - psf
Incising? Yes	$C_F =$ 1.10		Total 74.00 psf
Wet Use? No	$F_b =$ 850.00	psi	
	$F_v =$ 150.00	psi	Allowable Span @ 8" o.c. = 16.08 ft (bending)
	E = 1,300,000.00	psi	Allowable Span @ 12" o.c. = 13.13 ft (bending)
	$C_i =$ 0.80	Incising (Fb)	Allowable Span @ 16" o.c. = 11.37 ft (bending)
	$C_i =$ 0.95	Incising (E)	
Calculations:	spacing (in)	8.00	12.00 16.00 Control % over allowed
$Lv_{allow} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$	Lv (ft) =	58.35	39.42 29.95 Shear 1.00%
$Lb_{allow} = (S \cdot F_b \cdot C_D \cdot Cr \cdot C_i \cdot 8/w)^{1/2}$	Lb (ft) =	16.08	13.13 11.37 Bending 4.00%
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$	Ld (ft) =	16.54	14.45 13.13 LL Deflection 360
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$	Ld (ft) =	17.66	15.42 14.01 TL Deflection 240
	bending	bending	bending

PRMU20240285



Job #: 21.011
 Designed: OGK
 Date: 6/1/23

FLOOR FRAMING

2018 NDS/2018 IBC

$C_r =$	1.15	repetitive
$C_D =$	1.0	LIVE
$C_F =$	(varies)	size

2 x 6	Pressure Treated Incising	Hem Fir	#2				
2 x 6		A = 8.25	in ²	Live	100.00	psf	
Hem Fir		S = 7.56	in ³	Dead	47.00	psf	
#2		I = 20.80	in ⁴	Partition	-	psf	
Incising? Yes		$C_F =$ 1.30		Total	147.00	psf	
Wet Use? No		$F_b =$ 850.00	psi				
		$F_v =$ 150.00	psi	Allowable Span @ 8" o.c. =	7.38	ft (bending)	
		E = 1,300,000.00	psi	Allowable Span @ 12" o.c. =	6.02	ft (bending)	
		$C_i =$ 0.80	Incising (Fb)	Allowable Span @ 16" o.c. =	5.21	ft (bending)	
		$C_i =$ 0.95	Incising (E)				
Calculations:				spacing (in)	8.00	12.00	16.00
$Lv_{allow} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$				Lv (ft) =	17.92	12.25	9.42
$Lb_{allow} = (S \cdot F_b \cdot C_D \cdot C_r \cdot C_i \cdot 8/w)^{1/2}$				Lb (ft) =	7.38	6.02	5.21
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$				Ld (ft) =	8.30	7.25	6.58
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$				Ld (ft) =	8.35	7.30	6.63
				bending	bending	bending	
							Control % over allowed
							Shear 1.00%
							Bending 4.00%
							LL Deflection 360
							TL Deflection 240

2 x 8	Pressure Treated Incising	Hem Fir	#2				
2 x 8		A = 10.88	in ²	Live	100.00	psf	
Hem Fir		S = 13.14	in ³	Dead	47.00	psf	
#2		I = 47.63	in ⁴	Partition	-	psf	
Incising? Yes		$C_F =$ 1.20		Total	147.00	psf	
Wet Use? No		$F_b =$ 850.00	psi				
		$F_v =$ 150.00	psi	Allowable Span @ 8" o.c. =	9.34	ft (bending)	
		E = 1,300,000.00	psi	Allowable Span @ 12" o.c. =	7.63	ft (bending)	
		$C_i =$ 0.80	Incising (Fb)	Allowable Span @ 16" o.c. =	6.60	ft (bending)	
		$C_i =$ 0.95	Incising (E)				
Calculations:				spacing (in)	8.00	12.00	16.00
$Lv_{allow} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$				Lv (ft) =	23.62	16.15	12.42
$Lb_{allow} = (S \cdot F_b \cdot C_D \cdot C_r \cdot C_i \cdot 8/w)^{1/2}$				Lb (ft) =	9.34	7.63	6.60
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$				Ld (ft) =	10.93	9.55	8.68
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$				Ld (ft) =	11.01	9.62	8.74
				bending	bending	bending	
							Control % over allowed
							Shear 1.00%
							Bending 4.00%
							LL Deflection 360
							TL Deflection 240

2 x 10	Pressure Treated Incising	Hem Fir	#2				
2 x 10		A = 13.88	in ²	Live	100.00	psf	
Hem Fir		S = 21.39	in ³	Dead	47.00	psf	
#2		I = 98.93	in ⁴	Partition	-	psf	
Incising? Yes		$C_F =$ 1.10		Total	147.00	psf	
Wet Use? No		$F_b =$ 850.00	psi				
		$F_v =$ 150.00	psi	Allowable Span @ 8" o.c. =	11.41	ft (bending)	
		E = 1,300,000.00	psi	Allowable Span @ 12" o.c. =	9.32	ft (bending)	
		$C_i =$ 0.80	Incising (Fb)	Allowable Span @ 16" o.c. =	8.07	ft (bending)	
		$C_i =$ 0.95	Incising (E)				
Calculations:				spacing (in)	8.00	12.00	16.00
$Lv_{allow} = \{[A \cdot F_v \cdot C_D / (1.5 \cdot w)] + d\} \cdot 2$				Lv (ft) =	30.14	20.61	15.84
$Lb_{allow} = (S \cdot F_b \cdot C_D \cdot C_r \cdot C_i \cdot 8/w)^{1/2}$				Lb (ft) =	11.41	9.32	8.07
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot LL \cdot 360)]^{1/3}$				Ld (ft) =	13.95	12.19	11.07
$Ld_{allow} = [384 \cdot E \cdot C_i \cdot I / (5 \cdot TL \cdot 240)]^{1/3}$				Ld (ft) =	14.04	12.27	11.15
				bending	bending	bending	
							Control % over allowed
							Shear 1.00%
							Bending 4.00%
							LL Deflection 360
							TL Deflection 240

SOLUTIONS 4 STRUCTURES

LOADS ONLY

FB1 PT 4 x 10

$L = 8.00$ ft

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.32 \\ 0.76 \end{pmatrix} \quad \Sigma \quad 1.08 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.32 \\ 0.76 \end{pmatrix} \quad \Sigma \quad 1.08 \text{ k}$$

$$W_1 = \begin{matrix} \text{Deck} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 25 \\ 3.2 \\ 60 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 0.0 \\ 40 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{LL} \\ \Sigma \end{matrix} \begin{pmatrix} 79 \\ 190 \\ 269 \end{pmatrix}$$

FB2 4 x 8

$L = 5.00$ ft

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.34 \\ 0.54 \end{pmatrix} \quad \Sigma \quad 0.88 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.34 \\ 0.54 \end{pmatrix} \quad \Sigma \quad 0.88 \text{ k}$$

$$W_1 = \begin{matrix} \text{Deck} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 25 \\ 3.2 \\ 60 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 40 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 0.7 \\ 40 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 136 \\ 217 \\ 353 \end{pmatrix}$$

FB3 4 x 8

$L = 3.00$ ft

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.33 \\ 0.43 \end{pmatrix} \quad \Sigma \quad 0.76 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.33 \\ 0.43 \end{pmatrix} \quad \Sigma \quad 0.76 \text{ k}$$

$$W_1 = \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 6.3 \\ 40 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 40 \end{pmatrix} + \begin{matrix} \text{Deck} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 25 \\ 0.7 \\ 60 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{LL} \\ \Sigma \end{matrix} \begin{pmatrix} 219 \\ 290 \\ 509 \end{pmatrix}$$

FB4 4 x 8

$L = 2.00$ ft

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.21 \\ 0.26 \end{pmatrix} \quad \Sigma \quad 0.47 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.21 \\ 0.26 \end{pmatrix} \quad \Sigma \quad 0.47 \text{ k}$$

$$W_1 = \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 6.5 \\ 40 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 40 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 0.0 \\ 40 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 209 \\ 260 \\ 469 \end{pmatrix}$$

FB5 4 x 8

$L = 3.00$ ft

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.51 \\ 0.78 \end{pmatrix} \quad \Sigma \quad 1.29 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.51 \\ 0.78 \end{pmatrix} \quad \Sigma \quad 1.29 \text{ k}$$

$$W_1 = \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 13.0 \\ 40 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 0.0 \\ 40 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{LL} \\ \Sigma \end{matrix} \begin{pmatrix} 338 \\ 520 \\ 858 \end{pmatrix}$$

FB6 4 x 10

$L = 6.00$ ft

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 1.01 \\ 1.56 \end{pmatrix} \quad \Sigma \quad 2.57 \text{ k}$$

$$R_2 = \begin{pmatrix} 1.01 \\ 1.56 \end{pmatrix} \quad \Sigma \quad 2.57 \text{ k}$$

$$W_1 = \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 13.0 \\ 40 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 0.0 \\ 40 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 338 \\ 520 \\ 858 \end{pmatrix}$$

SOLUTIONS 4 STRUCTURES

LOADS ONLY

FB7 4 x 8

$L = 3.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.37 \\ 0.50 \end{pmatrix} \quad \Sigma \quad 0.88 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.37 \\ 0.50 \end{pmatrix} \quad \Sigma \quad 0.88 \text{ k}$$

$$W_1 = \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 6.8 \\ 6.8 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 40 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 0.7 \\ 0.7 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 247 \\ 337 \\ 583 \end{pmatrix} \text{ PLF}$$

FB8 PT 6 x 10 HF1

$L = 10.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.44 \\ 1.05 \end{pmatrix} \quad \Sigma \quad 1.49 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.44 \\ 1.05 \end{pmatrix} \quad \Sigma \quad 1.49 \text{ k}$$

$$W_1 = \begin{matrix} \text{Deck} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 25 \\ 60 \end{pmatrix} \begin{pmatrix} 3.5 \\ 3.5 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 0 \\ 0 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{LL} \\ \Sigma \end{matrix} \begin{pmatrix} 88 \\ 210 \\ 298 \end{pmatrix} \text{ PLF}$$

FB9 4 x 8

$L = 3.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.34 \\ 0.53 \end{pmatrix} \quad \Sigma \quad 0.87 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.34 \\ 0.53 \end{pmatrix} \quad \Sigma \quad 0.87 \text{ k}$$

$$W_1 = \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 8.2 \\ 8.2 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 0.7 \\ 0.7 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 230 \\ 353 \\ 583 \end{pmatrix} \text{ PLF}$$

FB10 4 x 8

$L = 6.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.59 \\ 0.91 \end{pmatrix} \quad \Sigma \quad 1.50 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.59 \\ 0.91 \end{pmatrix} \quad \Sigma \quad 1.50 \text{ k}$$

$$W_1 = \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 6.9 \\ 6.9 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 0.7 \\ 0.7 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 197 \\ 303 \\ 501 \end{pmatrix} \text{ PLF}$$

FB11 4 x 8

$L = 5.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.58 \\ 1.08 \end{pmatrix} \quad \Sigma \quad 1.65 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.58 \\ 1.08 \end{pmatrix} \quad \Sigma \quad 1.65 \text{ k}$$

$$W_1 = \begin{matrix} \text{Deck} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 25 \\ 60 \end{pmatrix} \begin{pmatrix} 3.5 \\ 3.5 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 5.5 \\ 5.5 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{LL} \\ \Sigma \end{matrix} \begin{pmatrix} 231 \\ 430 \\ 661 \end{pmatrix} \text{ PLF}$$

FB12 4 x 10

$L = 6.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.76 \\ 1.17 \end{pmatrix} \quad \Sigma \quad 1.93 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.76 \\ 1.17 \end{pmatrix} \quad \Sigma \quad 1.93 \text{ k}$$

$$W_1 = \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 9.8 \\ 9.8 \end{pmatrix} + \begin{matrix} \text{DL} \\ \text{Wall} \end{matrix} \begin{pmatrix} 0 \end{pmatrix} + \begin{matrix} \text{Floor} \\ \text{PSF Tributary} \\ \text{LL} \end{matrix} \begin{pmatrix} 26 \\ 40 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 254 \\ 390 \\ 644 \end{pmatrix} \text{ PLF}$$

SOLUTIONS 4 STRUCTURES

LOADS ONLY

FB13 4 x 10

$L = 6.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.60 \\ 0.93 \end{pmatrix} \quad \Sigma \quad 1.53 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.60 \\ 0.93 \end{pmatrix} \quad \Sigma \quad 1.53 \text{ k}$$

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 202 \\ 310 \\ 512 \end{pmatrix}$$

FB14 4 x 8

$L = 5.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.36 \\ 0.55 \end{pmatrix} \quad \Sigma \quad 0.91 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.36 \\ 0.55 \end{pmatrix} \quad \Sigma \quad 0.91 \text{ k}$$

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 143 \\ 220 \\ 363 \end{pmatrix}$$

FB15 4 x 8

$L = 3.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.22 \\ 0.37 \end{pmatrix} \quad \Sigma \quad 0.59 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.22 \\ 0.37 \end{pmatrix} \quad \Sigma \quad 0.59 \text{ k}$$

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 148 \\ 247 \\ 395 \end{pmatrix}$$

FB16 4 x 8

$L = 4.50 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.70 \\ 1.08 \end{pmatrix} \quad \Sigma \quad 1.78 \text{ k}$$

$$R_2 = \begin{pmatrix} 0.70 \\ 1.08 \end{pmatrix} \quad \Sigma \quad 1.78 \text{ k}$$

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 312 \\ 480 \\ 792 \end{pmatrix}$$

FB17 See Hand Drawn Diagram

FB18 PT 6 x 10 HF 1

$L = 11.00 \text{ ft}$

$$R_1 = \begin{matrix} \text{DL} \\ \text{LL} \end{matrix} \begin{pmatrix} 0.44 \\ 1.04 \end{pmatrix} \quad \Sigma \quad 1.48 \text{ k}$$


$$R_2 = \begin{pmatrix} 0.44 \\ 1.04 \end{pmatrix} \quad \Sigma \quad 1.48 \text{ k}$$

$$W_1 = \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} \text{PSF} \\ \text{LL} \end{pmatrix} \begin{matrix} \text{Tributary} \\ \end{matrix} = \begin{matrix} \text{DL} \\ \text{SL} \\ \Sigma \end{matrix} \begin{pmatrix} 79 \\ 190 \\ 269 \end{pmatrix}$$

SOLUTIONS 4 STRUCTURES INC.

LOADS ONLY

FB19 PT 5-1/8 x 10.5 GLB




$$W_1 = \text{DL} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 6.8 \\ 6.8 \end{pmatrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} 317 \\ 675 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 1.59 \\ 3.38 \end{pmatrix} \quad R_2 = \begin{pmatrix} 1.59 \\ 3.38 \end{pmatrix}$$

$$\Sigma \quad 4.96 \text{ k} \quad \Sigma \quad 4.96 \text{ k}$$

FB20 PT 4 x 8




$$W_1 = \text{DL} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 3.9 \\ 3.9 \end{pmatrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} 184 \\ 392 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 0.46 \\ 0.98 \end{pmatrix} \quad R_2 = \begin{pmatrix} 0.46 \\ 0.98 \end{pmatrix}$$

$$\Sigma \quad 1.44 \text{ k} \quad \Sigma \quad 1.44 \text{ k}$$

FB21 PT 3-1/8 x 10.5 GLB




$$W_1 = \text{DL} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 3.3 \\ 3.3 \end{pmatrix} + \text{DL} \begin{pmatrix} 100 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} 253 \\ 325 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 1.26 \\ 1.63 \end{pmatrix} \quad R_2 = \begin{pmatrix} 1.26 \\ 1.63 \end{pmatrix}$$

$$\Sigma \quad 2.89 \text{ k} \quad \Sigma \quad 2.89 \text{ k}$$

FB22 PT 5-1/8 x 10.5 GLB



$$W_1 = \text{DL} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 6.3 \\ 6.3 \end{pmatrix} + \text{DL} \begin{pmatrix} 0 \\ \text{Wall} \end{pmatrix} + \text{DL} \begin{pmatrix} 47 \\ 100 \end{pmatrix} \begin{pmatrix} 0.0 \\ 0.0 \end{pmatrix} = \text{DL} \begin{pmatrix} 294 \\ 625 \end{pmatrix}$$

$$R_1 = \text{DL} \begin{pmatrix} 1.47 \\ 3.13 \end{pmatrix} \quad R_2 = \begin{pmatrix} 1.47 \\ 3.13 \end{pmatrix}$$

$$\Sigma \quad 4.59 \text{ k} \quad \Sigma \quad 4.59 \text{ k}$$




FB23 See Hand Drawn Diagram

FB24 See Hand Drawn Diagram

SOLUTIONS 4 STRUCTURES Inc.

JOB # 23.067

PRMU20240285

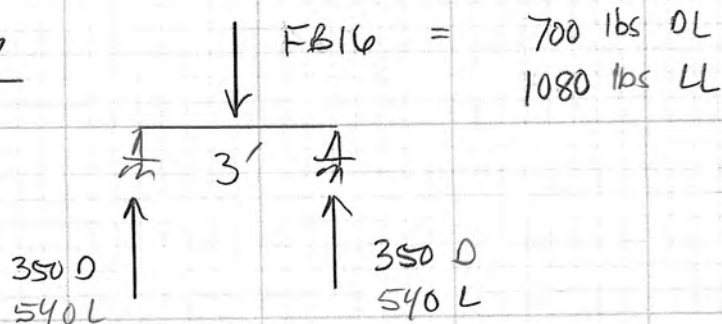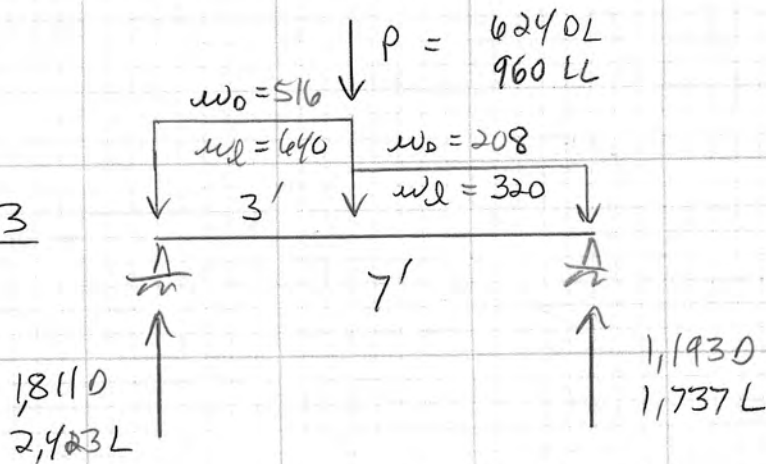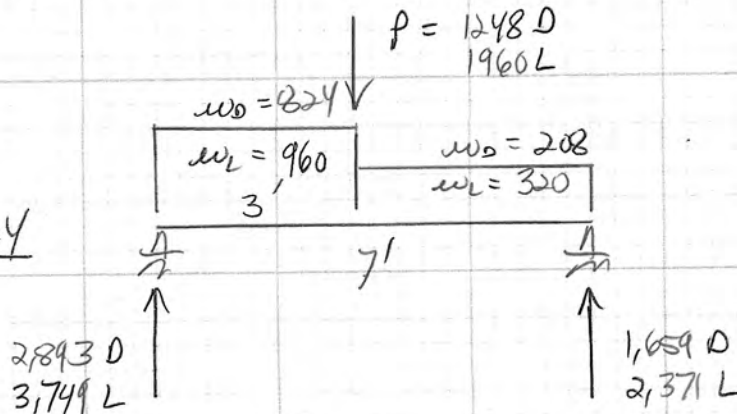DESIGNED MRODATE 5-29-23PROJECT: BRADLEY HEIGHTS APTSFB17FB23FB24

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:47PM

File: Beam Designs.ec6

Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Solutions 4 Structures, Inc

Multiple Simple Beam

Lic. # : KW-06013765

Description : Floor Beams FB1-FB12**Wood Beam Design : FB1**

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x10, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.0790, L = 0.190 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.648** : 1
 fb : Actual : 529.00 psi at 4.000 ft in Span # 1
 Fb : Allowable : 816.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.425** : 1
 fv : Actual : 50.97 psi at 0.000 ft in Span # 1
 Fv : Allowable : 120.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.34	0.76					
Right Support	0.34	0.76					

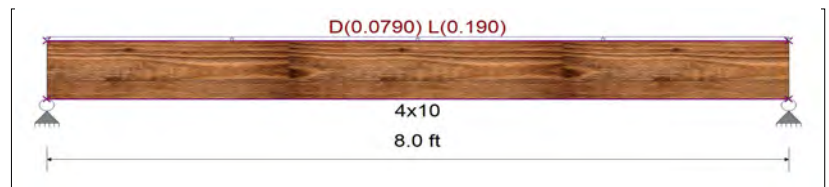**Max Deflections**

Transient Downward	0.059 in	Total Downward	0.085 in
Ratio	1636	Ratio	1130
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB2

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x8, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.1360, L = 0.2170 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.396** : 1
 fb : Actual : 437.52 psi at 2.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.352** : 1
 fv : Actual : 52.87 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.35	0.54					
Right Support	0.35	0.54					

**Max Deflections**

Transient Downward	0.021 in	Total Downward	0.035 in
Ratio	2825	Ratio	1714
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:47PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : FB3

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x8, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2190, L = 0.290 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = 0.205 : 1
 fb : Actual : 226.19 psi at 1.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = 0.304 : 1
 fv : Actual : 45.55 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.34	0.44					
Right Support	0.34	0.44					



Max Deflections

Transient Downward	0.004 in	Total Downward	0.007 in
Ratio	9789	Ratio	5526
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB4

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x8, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.2090, L = 0.260 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = 0.084 : 1
 fb : Actual : 92.70 psi at 1.000 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = 0.187 : 1
 fv : Actual : 28.00 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.21	0.26					
Right Support	0.21	0.26					

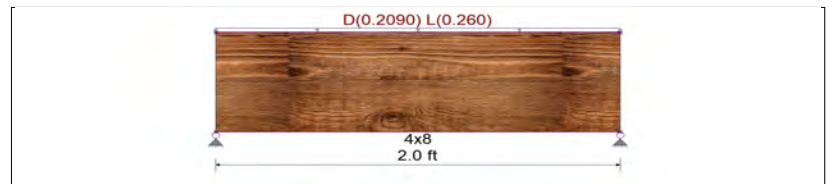

Max Deflections

Transient Downward	0.001 in	Total Downward	0.001 in
Ratio	9999	Ratio	9999
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:47PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : FB5

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3380, L = 0.520 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.344** : 1
 fb : Actual : 379.85 psi at 1.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.510** : 1
 fv : Actual : 76.50 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.51	0.78					
Right Support	0.51	0.78					



Max Deflections

Transient Downward	0.007 in	Total Downward	0.011 in
Ratio	5459	Ratio	3290
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB6

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3550, L = 0.5470 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.963** : 1
 fb : Actual : 982.42 psi at 3.000 ft in Span # 1
 Fb : Allowable : 1,020.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.841** : 1
 fv : Actual : 126.21 psi at 6.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.08	1.64					
Right Support	1.08	1.64					



Max Deflections

Transient Downward	0.053 in	Total Downward	0.089 in
Ratio	1347	Ratio	811
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:47PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : FB7

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2470, L = 0.3370 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.235** : 1
 fb : Actual : 259.21 psi at 1.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.348** : 1
 fv : Actual : 52.20 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.38	0.51					
Right Support	0.38	0.51					



Max Deflections

Transient Downward	0.004 in	Total Downward	0.007 in
Ratio	8424	Ratio	4822
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB8

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **6x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.1

Fb - Tension	1050 psi	Fc - Prll	750 psi	Fv	140 psi	Ebend- xx	1300 ksi	Density	26.84 pcf
Fb - Compr	1050 psi	Fc - Perp	405 psi	Ft	525 psi	Eminbend - xx	470 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.0880, L = 0.210 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.664** : 1
 fb : Actual : 557.98 psi at 5.000 ft in Span # 1
 Fb : Allowable : 840.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.394** : 1
 fv : Actual : 44.17 psi at 10.000 ft in Span # 1
 Fv : Allowable : 112.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.49	1.05					
Right Support	0.49	1.05					

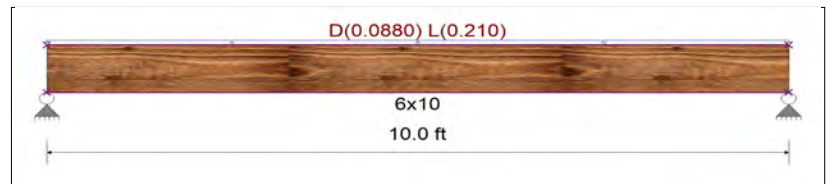

Max Deflections

Transient Downward	0.093 in	Total Downward	0.136 in
Ratio	1290	Ratio	880
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:47PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : FB9

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.230, L = 0.3530 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.234** : 1
 fb : Actual : 258.77 psi at 1.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.347** : 1
 fv : Actual : 52.11 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.35	0.53					
Right Support	0.35	0.53					

Max Deflections

Transient Downward	0.004 in	Total Downward	0.007 in
Ratio	8042	Ratio	4830
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB10

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.1970, L = 0.3030 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.804** : 1
 fb : Actual : 888.91 psi at 3.000 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.597** : 1
 fv : Actual : 89.51 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.61	0.91					
Right Support	0.61	0.91					

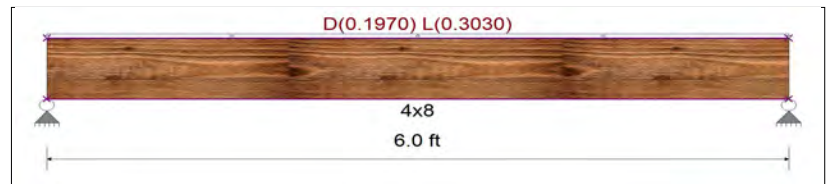Max Deflections

Transient Downward	0.061 in	Total Downward	0.102 in
Ratio	1171	Ratio	703
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:47PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : FB11

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2310, L = 0.430 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.737** : 1
 fb : Actual : 814.21 psi at 2.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.656** : 1
 fv : Actual : 98.38 psi at 5.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.59	1.08					
Right Support	0.59	1.08					

Max Deflections

Transient Downward	0.042 in	Total Downward	0.065 in
Ratio	1426	Ratio	921
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB12

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2540, L = 0.390 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.689** : 1
 fb : Actual : 703.28 psi at 3.000 ft in Span # 1
 Fb : Allowable : 1,020.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.602** : 1
 fv : Actual : 90.35 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.78	1.17					
Right Support	0.78	1.17					

Max Deflections

Transient Downward	0.038 in	Total Downward	0.064 in
Ratio	1889	Ratio	1133
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:48PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Description : Floor Beams FB13-FB24**Wood Beam Design : FB13**

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x10, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.2020, L = 0.310 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.549** : 1
 fb : Actual : 560.47 psi at 3.000 ft in Span # 1
 Fb : Allowable : 1,020.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.480** : 1
 fv : Actual : 72.00 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.62	0.93					
Right Support	0.62	0.93					

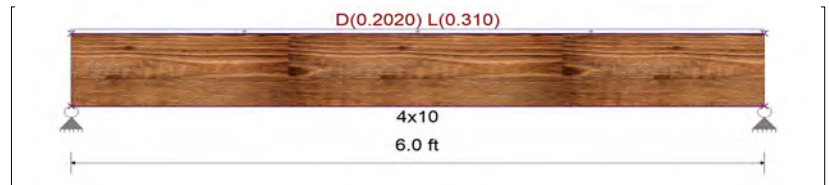**Max Deflections**

Transient Downward	0.030 in	Total Downward	0.051 in
Ratio	2377	Ratio	1422
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB14

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : 4x8, Sawn, Fully Braced

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.1430, L = 0.220 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.407** : 1
 fb : Actual : 449.75 psi at 2.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.362** : 1
 fv : Actual : 54.34 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.37	0.55					
Right Support	0.37	0.55					

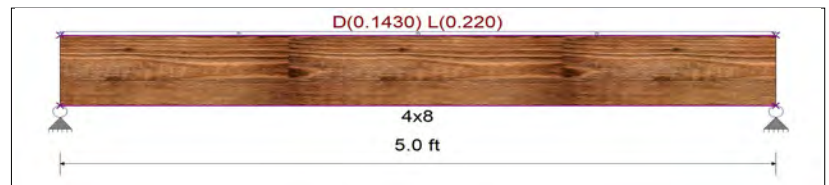**Max Deflections**

Transient Downward	0.022 in	Total Downward	0.036 in
Ratio	2787	Ratio	1667
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: **PRMU20240285**
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:48PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : FB15

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.1480, L = 0.2470 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.159** : 1
 fb : Actual : 176.00 psi at 1.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.236** : 1
 fv : Actual : 35.44 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.23	0.37					
Right Support	0.23	0.37					

Max Deflections

Transient Downward	0.003 in	Total Downward	0.005 in
Ratio	9999	Ratio	7102
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB16

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.3120, L = 0.480 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.714** : 1
 fb : Actual : 789.29 psi at 2.250 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.706** : 1
 fv : Actual : 105.97 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.71	1.08					
Right Support	0.71	1.08					

Max Deflections

Transient Downward	0.031 in	Total Downward	0.051 in
Ratio	1752	Ratio	1055
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:48PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : FB17

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Point: D = 0.70, L = 1.080 k @ 1.50 ft

Design Summary

Max fb/Fb Ratio = **0.475** : 1
 fb : Actual : 524.56 psi at 1.500 ft in Span # 1
 Fb : Allowable : 1,105.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.354** : 1
 fv : Actual : 53.03 psi at 0.000 ft in Span # 1
 Fv : Allowable : 150.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.36	0.54					
Right Support	0.36	0.54					

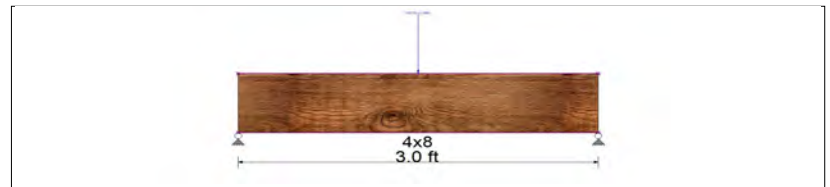Max Deflections

Transient Downward	0.007 in	Total Downward	0.012 in
Ratio	4930	Ratio	2976
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB18

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **6x10, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.1

Fb - Tension	1050 psi	Fc - Prll	750 psi	Fv	140 psi	Ebend- xx	1300 ksi	Density	26.84 pcf
Fb - Compr	1050 psi	Fc - Perp	405 psi	Ft	525 psi	Eminbend - xx	470 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.0790, L = 0.190 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.728** : 1
 fb : Actual : 611.53 psi at 5.500 ft in Span # 1
 Fb : Allowable : 840.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.393** : 1
 fv : Actual : 44.01 psi at 0.000 ft in Span # 1
 Fv : Allowable : 112.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.49	1.05					
Right Support	0.49	1.05					

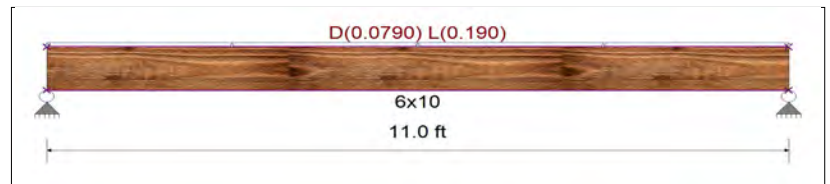Max Deflections

Transient Downward	0.123 in	Total Downward	0.181 in
Ratio	1071	Ratio	730
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:48PM

Multiple Simple Beam

File: Beam Designs.ec6
 Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Lic. #: KW-06013765

Solutions 4 Structures, Inc

Wood Beam Design : FB19

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **5.125x10.5, GLB, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : DF/DF

Wood Grade : 24F-V4

Fb - Tension	2,400.0 psi	Fc - Prll	1,650.0 psi	Fv	265.0 psi	Ebend- xx	1,800.0 ksi	Density	31.210 pcf
Fb - Compr	1,850.0 psi	Fc - Perp	650.0 psi	Ft	1,100.0 psi	Eminbend - xx	950.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.3170, L = 0.6750 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.666** : 1
 fb : Actual : 1,598.67 psi at 5.000 ft in Span # 1
 Fb : Allowable : 2,400.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.528** : 1
 fv : Actual : 139.88 psi at 0.000 ft in Span # 1
 Fv : Allowable : 265.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.64	3.38					
Right Support	1.64	3.38					

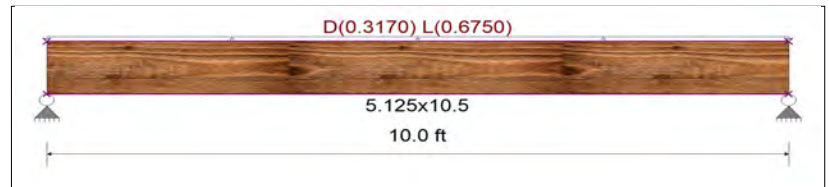Max Deflections

Transient Downward	0.172 in	Total Downward	0.255 in
Ratio	699	Ratio	470
LC: L Only		LC: +D+L+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

Wood Beam Design : FB20

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **4x8, Sawn, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : Hem-Fir

Wood Grade : No.2

Fb - Tension	850.0 psi	Fc - Prll	1,300.0 psi	Fv	150.0 psi	Ebend- xx	1,300.0 ksi	Density	26.840 pcf
Fb - Compr	850.0 psi	Fc - Perp	405.0 psi	Ft	525.0 psi	Eminbend - xx	470.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.1840, L = 0.3920 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.803** : 1
 fb : Actual : 710.25 psi at 2.500 ft in Span # 1
 Fb : Allowable : 884.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.715** : 1
 fv : Actual : 85.82 psi at 5.000 ft in Span # 1
 Fv : Allowable : 120.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	0.47	0.98					
Right Support	0.47	0.98					

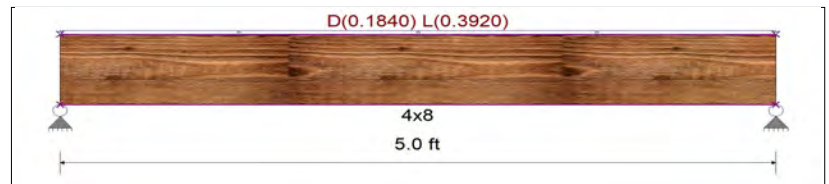Max Deflections

Transient Downward	0.038 in	Total Downward	0.057 in
Ratio	1564	Ratio	1055
LC: L Only		LC: +D+L+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:48PM

File: Beam Designs.ec6

Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Solutions 4 Structures, Inc

Multiple Simple Beam

Lic. #: KW-06013765

Wood Beam Design : FB21

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **3.125x10.5, GLB, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : DF/DF

Wood Grade : 24F-V4

Fb - Tension	2,400.0 psi	Fc - Prll	1,650.0 psi	Fv	265.0 psi	Ebend- xx	1,800.0 ksi	Density	31.210 pcf
Fb - Compr	1,850.0 psi	Fc - Perp	650.0 psi	Ft	1,100.0 psi	Eminbend - xx	950.0 ksi		

Applied Loads

Beam self weight calculated and added to loads


Unif Load: D = 0.2530, L = 0.3250 k/ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.637** : 1
 fb : Actual : 1,528.45 psi at 5.000 ft in Span # 1
 Fb : Allowable : 2,400.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.505** : 1
 fv : Actual : 133.74 psi at 10.000 ft in Span # 1
 Fv : Allowable : 265.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.30	1.63					
Right Support	1.30	1.63					

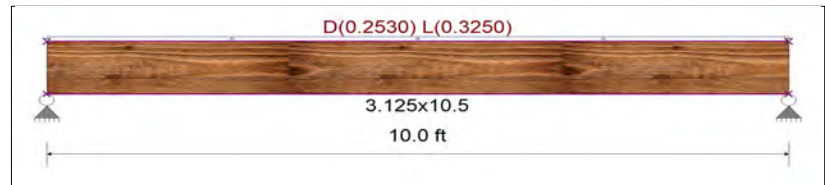Max Deflections

Transient Downward	0.135 in	Total Downward	0.244 in
Ratio	885	Ratio	491
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Wood Beam Design : FB22

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **5.125x10.5, GLB, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : DF/DF

Wood Grade : 24F-V4

Fb - Tension	2,400.0 psi	Fc - Prll	1,650.0 psi	Fv	265.0 psi	Ebend- xx	1,800.0 ksi	Density	31.210 pcf
Fb - Compr	1,850.0 psi	Fc - Perp	650.0 psi	Ft	1,100.0 psi	Eminbend - xx	950.0 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.2940, L = 0.6250 k/ft, 0.0 ft to 6.0 ft, Trib= 1.0 ft


Unif Load: D = 0.670, L = 1.425 k/ft, 6.0 to 10.0 ft, Trib= 1.0 ft

Design Summary

Max fb/Fb Ratio = **0.893** : 1
 fb : Actual : 2,142.39 psi at 6.000 ft in Span # 1
 Fb : Allowable : 2,400.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.885** : 1
 fv : Actual : 234.61 psi at 10.000 ft in Span # 1
 Fv : Allowable : 265.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.83	3.77					
Right Support	2.73	5.69					

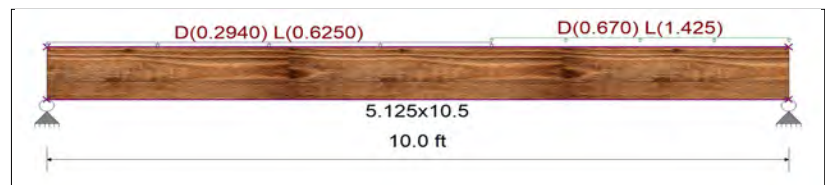Max Deflections

Transient Downward	0.229 in	Total Downward	0.339 in
Ratio	524	Ratio	353 <360
	LC: L Only		LC: +D+L+H
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
	LC:		LC:

Project Title: Bradley Heights Apartments
 Engineer: M. Oman
 Project ID: PRMU20240285
 Project Descr: 3-4 Story Apartment Bldgs

Printed: 29 MAY 2023, 3:48PM

File: Beam Designs.ec6

Software copyright ENERCALC, INC. 1983-2020, Build:12.20.8.24

Solutions 4 Structures, Inc

Multiple Simple Beam

Lic. #: KW-06013765

Wood Beam Design : FB23

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **3.5x11.875, TimberStrand LSL, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : iLevel Truss Joist

Wood Grade : TimberStrand LSL 1.55E

Fb - Tension	2,325.0 psi	Fc - Prll	2,050.0 psi	Fv	310.0 psi	Ebend- xx	1,550.0 ksi	Density	45.010 pcf
Fb - Compr	2,325.0 psi	Fc - Perp	800.0 psi	Ft	1,070.0 psi	Eminbend - xx	787.82 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.5160, L = 0.640 k/ft, 0.0 ft to 3.0 ft, Trib= 1.0 ft

Unif Load: D = 0.2080, L = 0.320 k/ft, 3.0 to 7.0 ft, Trib= 1.0 ft

Point: D = 0.6240, L = 0.960 k @ 3.0 ft

Design Summary

Max fb/Fb Ratio = **0.475** : 1
 fb : Actual : 1,104.04 psi at 3.010 ft in Span # 1
 Fb : Allowable : 2,325.00 psi
 Load Comb : +D+L+H

Max fv/FvRatio = **0.498** : 1
 fv : Actual : 154.43 psi at 0.000 ft in Span # 1
 Fv : Allowable : 310.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	1.86	2.42					
Right Support	1.24	1.74					

Max Deflections

Transient Downward	0.047 in	Total Downward	0.082 in
Ratio	1779	Ratio	1029
LC: L Only		LC: +D+L+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

Wood Beam Design : FB24

Calculations per NDS 2018, IBC 2018, CBC 2019, ASCE 7-16

BEAM Size : **3.5x11.875, TimberStrand LSL, Fully Braced**

Using Allowable Stress Design with IBC 2018 Load Combinations, Major Axis Bending

Wood Species : iLevel Truss Joist

Wood Grade : TimberStrand LSL 1.55E

Fb - Tension	2,325.0 psi	Fc - Prll	2,050.0 psi	Fv	310.0 psi	Ebend- xx	1,550.0 ksi	Density	45.010 pcf
Fb - Compr	2,325.0 psi	Fc - Perp	800.0 psi	Ft	1,070.0 psi	Eminbend - xx	787.82 ksi		

Applied Loads

Beam self weight calculated and added to loads

Unif Load: D = 0.8240, L = 0.960 k/ft, 0.0 ft to 3.0 ft, Trib= 1.0 ft

Unif Load: D = 0.2080, L = 0.320 k/ft, 3.0 to 7.0 ft, Trib= 1.0 ft

Point: D = 1.248, L = 1.960 k @ 3.0 ft

Design Summary

Max fb/Fb Ratio = **0.750** : 1
 fb : Actual : 1,744.39 psi at 2.987 ft in Span # 1
 Fb : Allowable : 2,325.00 psi
 Load Comb : +D+L+H


Max fv/FvRatio = **0.779** : 1
 fv : Actual : 241.34 psi at 0.000 ft in Span # 1
 Fv : Allowable : 310.00 psi
 Load Comb : +D+L+H

Max Reactions (k)	D	L	Lr	S	W	E	H
Left Support	2.94	3.75					
Right Support	1.70	2.37					

Max Deflections

Transient Downward	0.072 in	Total Downward	0.125 in
Ratio	1164	Ratio	671
LC: L Only		LC: +D+L+H	
Transient Upward	0.000 in	Total Upward	0.000 in
Ratio	9999	Ratio	9999
LC:		LC:	

PRMU20240285

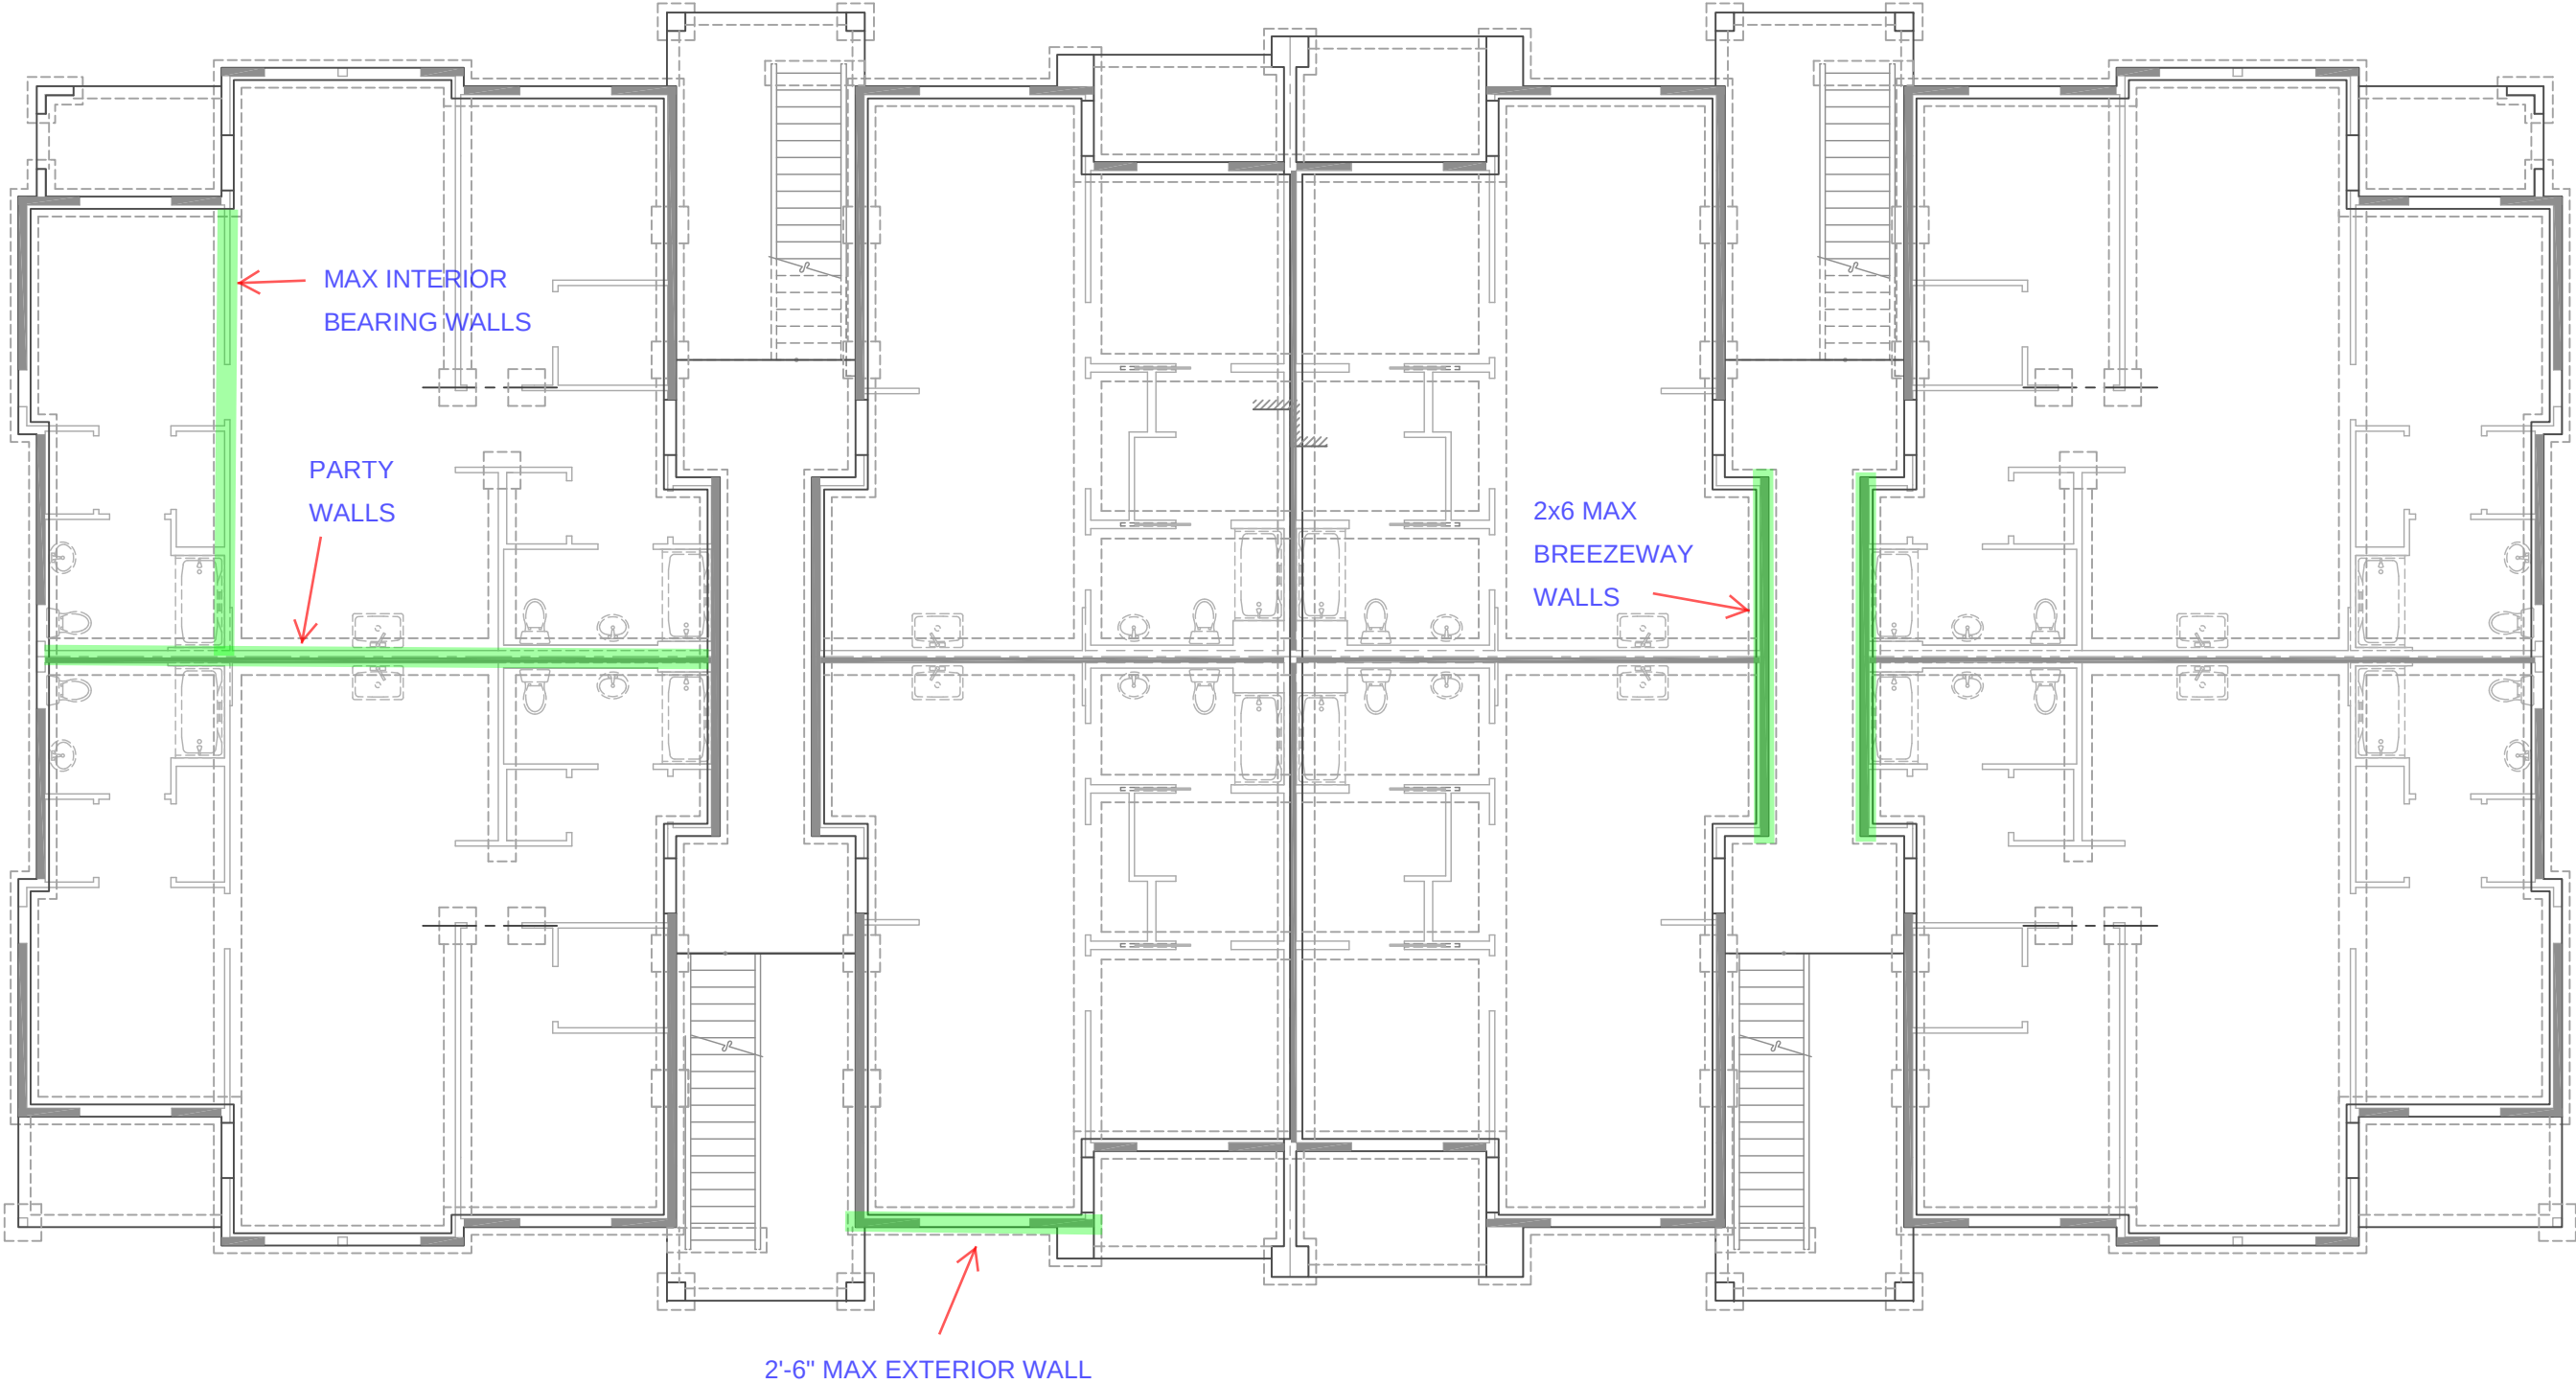

CONTROLLING BEARING WALLS - KEY PLAN

Bradley Heights Apt - S4S Job# 23.007

PRMU20240285

Bearing Wall Loading

Max Loaded Exterior Wall							
DL/LL Level	Tributary Widths				Wall Loading		
	22/25 Roof	26/40 Floor	25/60 Deck	47/100 Corridor	+12 psf self Wt		
					DL	LL	S
Roof	15.0				450	0	375
3rd		5.5	2.5		773	365	375
2nd		5.5	2.5		1,096	730	375
1st		5.5	2.5		1,419	1,095	375

Breezway Walls							
DL/LL Level	Tributary Widths				Wall Loading		
	22/25 Roof	26/40 Floor	25/60 Deck	47/100 Corridor	+12 psf self Wt		
					DL	LL	S
Roof	2.0				164	0	50
3rd		7.5		2.5	597	550	50
2nd		7.5		2.5	1,029	1,100	50
1st		7.5		2.5	1,462	1,650	50

2x4 and 2x6 Interior							
DL/LL Level	Tributary Widths				Wall Loading		
	22/25 Roof	26/40 Floor	25/60 Deck	47/100 Corridor	+9 psf self Wt		
					DL	LL	S
Roof	2.0				134	0	50
3rd		13.0			562	520	50
2nd		13.0			990	1,040	50
1st		13.0			1,418	1,560	50

2x6 Party							
DL/LL Level	Tributary Widths				Wall Loading		
	22/25 Roof	26/40 Floor	25/60 Deck	47/100 Corridor	+9 psf self Wt		
					DL	LL	S
Roof	13.5				387	0	338
3rd		4.5			594	180	338
2nd		4.5			801	360	338
1st		4.5			1,008	540	338

2x4 Party							
DL/LL Level	Tributary Widths				Wall Loading		
	22/25 Roof	26/40 Floor	25/60 Deck	47/100 Corridor	+9 psf self Wt		
					DL	LL	S
Roof	13.5				387	0	338
3rd		0.67			494	27	338
2nd		0.67			602	54	338
1st		1.67			735	120	338

PRMU20240285



JOB #: 23.007

DESIGNED: MRO


DATE: 05/31/23

PROJECT: Bradley Hts Apartments

Typical Exterior - 1st

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

P_{DL} (#/ft) = 1,419
 P_{SL} (#/ft) = 375
 P_{LL} (#/ft) = 1,095
 P_{TOT} (#/ft) = 2,889
 e (IN) = 0.5
 $TRIB.$ (IN) = 16

LATERAL LOADS W

W (PSF) = 15.00
 E (PSF) = 0.00
 $TRIB.$ (IN) = 16

DESIGN VALUES

F_b (psi) = 675
 F_v (psi) = 150
 F_c (psi) = 800
 F_{cL} (psi) = 405
 E (psi) = 1.20E+06
 E_{min} (psi) = 4.40E+05
 C_r = 1.15
 L_u (in) = 104.5
 c = 0.8
 K_e = 1
 C_b = 1.00

Hem Fir
 Stud Grade
 Bending X-X axis
 405
 Incised, No
 Wet Use, No
 Repetitive, Yes
 Full Bracing, Yes
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

8.25

405 = F_{cL} (psi)

Use: (1) 2" X 6" @ 16" O.C. OK

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY 1			A = 8.25 in ²		
b = 1.5 in			S = 7.56 in ³		
d = 5.5 in			I = 20.80 in ⁴		
(Eq. 16-9)		(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
L _u (ft) =	8.708	8.708	8.708	8.708	8.708
V _{applied} (#) =	16	11	16	93	79
M _{applied} (ft-#) =	68	48	68	237	226
P _{applied} (#) =	3247	2317	3257	1833	3257
C _D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		F _{bE} (psi)= 17476		C _{bF} = 1	
F _b [*] (psi)=	776	893	893	1242	1242
C _L =	1.000	1.000	1.000	1.000	1.000
F _b ' (psi)=	776	893	893	1242	1242
AXIAL STRESS CALCS		F _{cE} = 1002		C _{cF} = 1	
L _e /d =	19.00	19.00	19.00	19.00	19.00
F _c [*] (psi)=	800	920	920	1280	1280
C _p =	0.7626	0.7196	0.7196	0.6013	0.6013
F _c ' (psi)=	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
V _{allow} (#) =	825	949	949	1321	1321
M _{allow} (ft - #) =	489	563	563	783	783
P _{allow} (#) =	5,035	5,465	5,465	6,353	6,353
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE}))) =	0.64	0.30	0.55	0.47	0.74
(f _t /F _{cE}) + (f _t /F _{bE}) ² =	0.39	0.28	0.39	0.22	0.39
P _{c,allow} on PL (#) =	3,343	3,343	3,343	3,343	3,343
P _{c,allow} on Beam (#) =	3,341	3,341	3,341	3,341	3,341
Deflection L/	NA	NA	NA	L/1040	L/1387
240	0.00	0.00	0.00	0.10	0.08
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
SHEAR V	OK	OK	OK	OK	OK
V _{applied} /V _{allow}	1.9%	1.2%	1.6%	7.1%	6.0%
MOMENT M	OK	OK	OK	OK	OK
M _{applied} /M _{allow}	13.8%	8.6%	12.1%	30.3%	28.9%
AXIAL P	OK	OK	OK	OK	OK
P _{applied} /P _{allow}	64.5%	42.4%	59.6%	28.9%	51.3%
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE})))	OK	OK	OK	OK	OK
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE})))	64.4%	29.9%	55.4%	47.3%	73.9%
(f _t /F _{cE}) + (f _t /F _{bE}) ²	OK	OK	OK	OK	OK
(f _t /F _{cE}) + (f _t /F _{bE}) ²	39.3%	28.0%	39.4%	22.2%	39.4%
AXIAL P _⊥ on PL	OK	OK	OK	OK	OK
P _c [*] applied/P _{c,allow}	97.1%	69.3%	97.4%	54.8%	97.4%
AXIAL P _⊥ on Beam	OK	OK	OK	OK	OK
P _c [*] applied/P _{c,allow}	97.2%	69.4%	97.5%	54.9%	97.5%
DEFLECTION	OK	OK	OK	OK	OK
D _{actual} /D _{allowed}	0.0%	0.0%	0.0%	23.1%	17.3%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{allow} = A * F_v * C_D / 1.5$ $M_{allow} = S * F_b * C_D * C_F * C_L * C_r$ $P_{allow} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c,allow} = A * F_c * C_b$ $P_{c,allow} = A * F_c$ $L/(I * E / 15 * L * M_{applied})$

(1.0) x W Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007

DESIGNED: MRO


DATE: 05/31/23

PROJECT: Bradley Hts Apartments

Breezeway - 2nd

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

P_{DL} (#/ft) = 1,029
 P_{SL} (#/ft) = 50
 P_{LL} (#/ft) = 1,100
 P_{TOT} (#/ft) = 2,179
 e (IN) = 0.5
 $TRIB.$ (IN) = 16

LATERAL LOADS W

W (PSF) = 15.00
 E (PSF) = 0.00
 $TRIB.$ (IN) = 16

DESIGN VALUES

F_b (psi) = 675
 F_v (psi) = 150
 F_c (psi) = 800
 F_{cL} (psi) = 405
 E (psi) = 1.20E+06
 E_{min} (psi) = 4.40E+05
 C_r = 1.15
 L_u (in) = 104.5
 c = 0.8
 K_e = 1
 C_b = 1.00

Hem Fir
 Stud Grade
 Bending X-X axis
 405
 Incised, No
 Wet Use, No
 Repetitive, Yes
 Full Bracing, Yes
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

8.25

405 = F_{cL} (psi)

Use: (1) 2" X 6" @ 16" O.C. OK

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	1		A =	8.25 in ²	
b =	1.5 in		S =	7.56 in ³	
d =	5.5 in		I =	20.80 in ⁴	
(Eq. 16-9)		(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
L _u (ft) =	8.708	8.708	8.708	8.708	8.708
V _{applied} (#) =	14	7	12	94	77
M _{applied} (ft-#) =	59	30	53	230	211
P _{applied} (#) =	2839	1439	2522	1372	2522
C _D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		F _{bE} (psi) = 17476		C _{bF} = 1	
F _b [*] (psi) =	776	893	893	1242	1242
C _L =	1.000	1.000	1.000	1.000	1.000
F _b ' (psi) =	776	893	893	1242	1242
AXIAL STRESS CALCS		F _{cE} = 1002		C _{cF} = 1	
L _e /d =	19.00	19.00	19.00	19.00	19.00
F _c [*] (psi) =	800	920	920	1280	1280
C _p =	0.7626	0.7196	0.7196	0.6013	0.6013
F' _c (psi) =	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
V _{allow} (#) =	825	949	949	1320	1320
M _{allow} (ft - #) =	489	563	563	783	783
P _{allow} (#) =	5,033	5,462	5,462	6,350	6,350
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE}))) =	0.50	0.13	0.35	0.40	0.55
(f _t /F _{cE}) + (f _t /F _{bE}) ² =	0.34	0.17	0.31	0.17	0.31
P _{c,allow} on PL (#) =	3,341	3,341	3,341	3,341	3,341
P _{c,allow} on Beam (#) =	3,341	3,341	3,341	3,341	3,341
Deflection L/ 240	NA 0.00	NA 0.00	NA 0.00	L/1008 0.10	L/1344 0.08
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
SHEAR V	OK	OK	OK	OK	OK
V _{applied} /V _{allow}	1.6%	0.7%	1.3%	7.1%	5.9%
MOMENT M	OK	OK	OK	OK	OK
M _{applied} /M _{allow}	12.1%	5.3%	9.3%	29.4%	27.0%
AXIAL P	OK	OK	OK	OK	OK
P _{applied} /P _{allow}	56.4%	26.3%	46.2%	21.6%	39.7%
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE})))	OK	OK	OK	OK	OK
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE})))	50.2%	13.4%	34.8%	39.9%	54.6%
(f _t /F _{cE}) + (f _t /F _{bE}) ²	OK	OK	OK	OK	OK
(f _t /F _{cE}) + (f _t /F _{bE}) ²	34.3%	17.4%	30.5%	16.6%	30.5%
AXIAL P _⊥ on PL	OK	OK	OK	OK	OK
P _{c*applied} /P _{c,allow}	85.0%	43.1%	75.5%	41.1%	75.5%
AXIAL P _⊥ on Beam	OK	OK	OK	OK	OK
P _{c*applied} /P _{c,allow}	85.0%	43.1%	75.5%	41.1%	75.5%
DEFLECTION	OK	OK	OK	OK	OK
D _{actual} /D _{allowed}	0.0%	0.0%	0.0%	23.8%	17.9%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{allow} = A * F_v * C_D / 1.5$ $M_{allow} = S * F_b * C_D * C_F * C_L * C_r$ $P_{allow} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c,allow} = A * F_c * C_b$ $P_{c,allow} = A * F_c$ $L/(I * E / 15 * L * M_{applied})$

(1.0) x W Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments Breezway - 1st

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

P_{DL} (#/ft) = 1,462
 P_{SL} (#/ft) = 50
 P_{LL} (#/ft) = 1,650
 P_{TOT} (#/ft) = 3,162
 e (IN) = 0.5
 $TRIB.$ (IN) = 12

LATERAL LOADS W

W (PSF) = 15.00
 E (PSF) = 0.00
 $TRIB.$ (IN) = 12

DESIGN VALUES

F_b (psi) = 675
 F_v (psi) = 150
 F_c (psi) = 800
 F_{cL} (psi) = 405
 E (psi) = 1.20E+06
 E_{min} (psi) = 4.40E+05
 C_r = 1.15
 L_u (in) = 104.5
 c = 0.8
 K_e = 1
 C_b = 1.00

Hem Fir
 Stud Grade
 Bending X-X axis
 405
 Incised, No
 Wet Use, No
 Repetitive, Yes
 Full Bracing, Yes
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

8.25

405 = F_{cL} (psi)

Use: (1) 2" X 6" @ 12" O.C. OK

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	1		A =	8.25 in ²	
b =	1.5 in		S =	7.56 in ³	
d =	5.5 in		I =	20.80 in ⁴	
(Eq. 16-9)		(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
L _u (ft) =	8.708	8.708	8.708	8.708	8.708
V _{applied} (#) =	15	7	13	72	62
M _{applied} (ft-#) =	65	32	57	182	177
P _{applied} (#) =	3112	1512	2737	1462	2737
C _D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		F _{bE} (psi) = 17476		C _{bF} = 1	
F _b * (psi) =	776	893	893	1242	1242
C _L =	1.000	1.000	1.000	1.000	1.000
F' _b (psi) =	776	893	893	1242	1242
AXIAL STRESS CALCS		F _{cE} = 1002		C _{cF} = 1	
L _e /d =	19.00	19.00	19.00	19.00	19.00
F _c * (psi) =	800	920	920	1280	1280
C _P =	0.7626	0.7196	0.7196	0.6013	0.6013
F' _c (psi) =	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
V _{allow} (#) =	825	949	949	1320	1320
M _{allow} (ft - #) =	489	563	563	783	783
P _{allow} (#) =	5,033	5,462	5,462	6,350	6,350
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE})) =	0.59	0.15	0.40	0.34	0.52
(f _t /F _{cE}) + (f _t /F _{bE}) ² =	0.38	0.18	0.33	0.18	0.33
P _{c,allow} on PL (#) =	3,341	3,341	3,341	3,341	3,341
P _{c,allow} on Beam (#) =	3,341	3,341	3,341	3,341	3,341
Deflection L/ 240	NA 0.00	NA 0.00	NA 0.00	L/1344 0.08	L/1792 0.06
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
SHEAR V	OK	OK	OK	OK	OK
V _{applied} /V _{allow}	1.8%	0.8%	1.4%	5.5%	4.7%
MOMENT M	OK	OK	OK	OK	OK
M _{applied} /M _{allow}	13.3%	5.6%	10.1%	23.3%	22.6%
AXIAL P	OK	OK	OK	OK	OK
P _{applied} /P _{allow}	61.8%	27.7%	50.1%	23.0%	43.1%
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE}))	OK	OK	OK	OK	OK
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE}))	59.5%	14.5%	40.3%	33.6%	52.4%
(f _t /F _{cE}) + (f _t /F _{bE}) ²	OK	OK	OK	OK	OK
(f _t /F _{cE}) + (f _t /F _{bE}) ²	37.7%	18.3%	33.1%	17.7%	33.1%
AXIAL P _⊥ on PL	OK	OK	OK	OK	OK
P _c *applied/P _{c,allow}	93.1%	45.3%	81.9%	43.8%	81.9%
AXIAL P _⊥ on Beam	OK	OK	OK	OK	OK
P _c *applied/P _{c,allow}	93.1%	45.3%	81.9%	43.8%	81.9%
DEFLECTION	OK	OK	OK	OK	OK
D _{actual} /D _{allowed}	0.0%	0.0%	0.0%	17.9%	13.4%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{allow} = A * F_v * C_D / 1.5$ $M_{allow} = S * F_b * C_D * C_F * C_r$ $P_{allow} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c,allow} = A * F_c * C_b$ $P_{c,allow} = A * F_c$ $L/(I * E / 15 * L * M_{applied})$

(1.0) x W Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x6 Bearing- 2nd

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

P_{DL} (#/ft) = 990
 P_{SL} (#/ft) = 50
 P_{LL} (#/ft) = 1,040
 P_{TOT} (#/ft) = 2,080
 e (IN) = 0.5
 $TRIB.$ (IN) = 16

LATERAL LOADS W

W (PSF) = 0.00
 E (PSF) = 5.00
 $TRIB.$ (IN) = 16

DESIGN VALUES

F_b (psi) = 675
 F_v (psi) = 150
 F_c (psi) = 800
 F_{cL} (psi) = 405
 E (psi) = 1.20E+06
 E_{min} (psi) = 4.40E+05
 C_r = 1.15
 L_u (in) = 104.5
 c = 0.8
 K_e = 1
 C_b = 1.00

Hem Fir
 Stud Grade
 Bending X-X axis
 405
 Incised, No
 Wet Use, No
 Repetitive, Yes
 Full Bracing, Yes
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

8.25

405 = F_{cL} (psi)

Use: (1) 2" X 6" @ 16" O.C. OK

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	1		A =	8.25 in ²	
b =	1.5 in		S =	7.56 in ³	
d =	5.5 in		I =	20.80 in ⁴	
(Eq. 16-9)		(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
L _u (ft) =	8.708	8.708	8.708	8.708	8.708
V _{applied} (#) =	13	7	12	35	33
M _{applied} (ft-#) =	56	29	50	94	103
P _{applied} (#) =	2707	1387	2410	1320	2410
C _D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		F _{bE} (psi)= 17476		C _{bF} = 1	
F _b [*] (psi)=	776	893	893	1242	1242
C _L =	1.000	1.000	1.000	1.000	1.000
F' _b (psi)=	776	893	893	1242	1242
AXIAL STRESS CALCS		F _{cE} = 1002		C _{cF} = 1	
L _e /d =	19.00	19.00	19.00	19.00	19.00
F _c [*] (psi)=	800	920	920	1280	1280
C _P =	0.7626	0.7196	0.7196	0.6013	0.6013
F' _c (psi)=	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
V _{allow} (#) =	825	949	949	1320	1320
M _{allow} (ft - #) =	489	563	563	783	783
P _{allow} (#) =	5,033	5,462	5,462	6,350	6,350
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE}))) =	0.46	0.13	0.32	0.19	0.33
(f _t /F _{cE}) + (f _t /F _{bE}) ² =	0.33	0.17	0.29	0.16	0.29
P _{c,allow} on PL (#) =	3,341	3,341	3,341	3,341	3,341
P _{c,allow} on Beam (#) =	3,341	3,341	3,341	3,341	3,341
Deflection L/ 240	NA 0.00	NA 0.00	NA 0.00	L/3023 0.03	L/4031 0.03
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
SHEAR V	OK	OK	OK	OK	OK
V _{applied} /V _{allow}	1.6%	0.7%	1.2%	2.7%	2.5%
MOMENT M	OK	OK	OK	OK	OK
M _{applied} /M _{allow}	11.5%	5.1%	8.9%	12.1%	13.1%
AXIAL P	OK	OK	OK	OK	OK
P _{applied} /P _{allow}	53.8%	25.4%	44.1%	20.8%	38.0%
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE})))	OK	OK	OK	OK	OK
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE})))	46.1%	12.6%	32.1%	18.7%	32.9%
(f _t /F _{bE}) + (f _t /F _{bE}) ²	OK	OK	OK	OK	OK
(f _t /F _{cE}) + (f _t /F _{bE}) ²	32.7%	16.8%	29.2%	16.0%	29.2%
AXIAL P _⊥ on PL	OK	OK	OK	OK	OK
P _c [*] applied/P _{c,allow}	81.0%	41.5%	72.1%	39.5%	72.1%
AXIAL P _⊥ on Beam	OK	OK	OK	OK	OK
P _c [*] applied/P _{c,allow}	81.0%	41.5%	72.1%	39.5%	72.1%
DEFLECTION	OK	OK	OK	OK	OK
D _{actual} /D _{allowed}	0.0%	0.0%	0.0%	7.9%	6.0%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{allow} = A * F_v * C_D / 1.5$ $M_{allow} = S * F_b * C_D * C_F * C_L * C_r$ $P_{allow} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c,allow} = A * F_c * C_b$ $P_{c,allow} = A * F_c$ $L/(I * E / 15 * L * M_{applied})$

(1.0) x E Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x6 Bearing- 1st

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

P_{DL} (#/ft) = 1,418
 P_{SL} (#/ft) = 50
 P_{LL} (#/ft) = 1,560
 P_{TOT} (#/ft) = 3,028
 e (IN) = 0.5
 $TRIB.$ (IN) = 12

LATERAL LOADS W

W (PSF) = 0.00
 E (PSF) = 5.00
 $TRIB.$ (IN) = 12

DESIGN VALUES

F_b (psi) = 675
 F_v (psi) = 150
 F_c (psi) = 800
 F_{cL} (psi) = 405
 E (psi) = 1.20E+06
 E_{min} (psi) = 4.40E+05
 C_r = 1.15
 L_u (in) = 104.5
 c = 0.8
 K_e = 1
 C_b = 1.00

Hem Fir
 Stud Grade
 Bending X-X axis
 Incised, No
 Wet Use, No
 Repetitive, Yes
 Full Bracing, Yes
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

8.25

405 = F_{cL} (psi)

Use: (1) 2" X 6" @ 12" O.C. OK

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	1		A =	8.25 in ²	
b =	1.5 in		S =	7.56 in ³	
d =	5.5 in		I =	20.80 in ⁴	
(Eq. 16-9)		(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
L _u (ft) =	8.708	8.708	8.708	8.708	8.708
V _{applied} (#) =	14	7	13	29	29
M _{applied} (ft-#) =	62	31	55	80	94
P _{applied} (#) =	2978	1468	2626	1418	2626
C _D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		F _{bE} (psi) = 17476		C _{bF} = 1	
F _b [*] (psi) =	776	893	893	1242	1242
C _L =	1.000	1.000	1.000	1.000	1.000
F _b ' (psi) =	776	893	893	1242	1242
AXIAL STRESS CALCS		F _{cE} = 1002		C _{cF} = 1	
L _e /d =	19.00	19.00	19.00	19.00	19.00
F _c [*] (psi) =	800	920	920	1280	1280
C _P =	0.7626	0.7196	0.7196	0.6013	0.6013
F' _c (psi) =	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
V _{allow} (#) =	825	949	949	1320	1320
M _{allow} (ft - #) =	489	563	563	783	783
P _{allow} (#) =	5,033	5,462	5,462	6,350	6,350
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE}))) =	0.55	0.14	0.37	0.17	0.35
(f _t /F _{cE}) + (f _t /F _{bE}) ² =	0.36	0.18	0.32	0.17	0.32
P _{c,allow} on PL (#) =	3,341	3,341	3,341	3,341	3,341
P _{c,allow} on Beam (#) =	3,341	3,341	3,341	3,341	3,341
Deflection L/	NA	NA	NA	L/4031	L/5375
240	0.00	0.00	0.00	0.03	0.02
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
SHEAR V	OK	OK	OK	OK	OK
V _{applied} /V _{allow}	1.7%	0.7%	1.3%	2.2%	2.2%
MOMENT M	OK	OK	OK	OK	OK
M _{applied} /M _{allow}	12.7%	5.4%	9.7%	10.2%	12.1%
AXIAL P	OK	OK	OK	OK	OK
P _{applied} /P _{allow}	59.2%	26.9%	48.1%	22.3%	41.3%
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE})))	OK	OK	OK	OK	OK
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE})))	54.8%	13.8%	37.4%	17.3%	34.8%
(f _t /F _{cE}) + (f _t /F _{bE}) ²	OK	OK	OK	OK	OK
(f _t /F _{cE}) + (f _t /F _{bE}) ²	36.0%	17.8%	31.8%	17.2%	31.8%
AXIAL P _⊥ on PL	OK	OK	OK	OK	OK
P _c [*] applied/P _{c,allow}	89.1%	43.9%	78.6%	42.4%	78.6%
AXIAL P _⊥ on Beam	OK	OK	OK	OK	OK
P _c [*] applied/P _{c,allow}	89.1%	43.9%	78.6%	42.4%	78.6%
DEFLECTION	OK	OK	OK	OK	OK
D _{actual} /D _{allowed}	0.0%	0.0%	0.0%	6.0%	4.5%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{allow} = A * F_v * C_D / 1.5$ $M_{allow} = S * F_b * C_D * C_F * C_L * C_r$ $P_{allow} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c,allow} = A * F_c * C_b$ $P_{c,allow} = A * F_c$ $L/(I * E / 15 * L * M_{applied})$

(1.0) x E Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x4 Bearing- 3rd

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

$P_{DL} \text{ (#/ft)} = 562$
 $P_{SL} \text{ (#/ft)} = 50$
 $P_{LL} \text{ (#/ft)} = 520$
 $P_{TOT} \text{ (#/ft)} = 1,132$
 $e \text{ (IN)} = 0.5$
 $TRIB. \text{ (IN)} = 16$

LATERAL LOADS W

$W \text{ (PSF)} = 0.00$
 $E \text{ (PSF)} = 5.00$
 $TRIB. \text{ (IN)} = 16$

DESIGN VALUES

$F_b \text{ (psi)} = 850$
 $F_v \text{ (psi)} = 150$
 $F_c \text{ (psi)} = 1300$
 $F_{cL} \text{ (psi)} = 405$
 $E \text{ (psi)} = 1.30E+06$
 $E_{min} \text{ (psi)} = 4.70E+05$
 $C_r = 1.15$
 $L_u \text{ (in)} = 104.5$
 $c = 0.8$
 $K_e = 1$
 $C_b = 1.00$

Hem Fir
 #2
 Bending X-X axis
 405
 Incised, No
 Wet Use, No
 Repetitive, Yes
 Full Bracing, Yes
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

5.25

405 = F_{cL} (psi)

Use: (1) 2" X 4" @ 16" O.C. OK

MEMBER SIZE		SECTION PROPERTIES			
QUANTITY	1	A =	5.25 in ²		
b =	1.5 in	S =	3.06 in ³		
d =	3.5 in	I =	5.36 in ⁴		
	(Eq. 16-9)	(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
$L_u \text{ (ft)}$	8.708	8.708	8.708	8.708	8.708
$V_{\text{applied}} \text{ (#)}$	7	4	6	33	28
$M_{\text{applied}} \text{ (ft-#)}$	30	17	27	87	85
$P_{\text{applied}} \text{ (#)}$	1443	816	1319	749	1319
C_D	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS	$F_{bE} \text{ (psi)} = 29334$			$C_{bF} = 1.5$	
$F_b^* \text{ (psi)}$	1466	1686	1686	2346	2346
C_L	1.000	1.000	1.000	1.000	1.000
$F_b' \text{ (psi)}$	1466	1686	1686	2346	2346
AXIAL STRESS CALCS	$F_{cE} = 433$			$C_{cF} = 1.15$	
L_e/d	29.86	29.86	29.86	29.86	29.86
$F_c^* \text{ (psi)}$	1495	1719	1719	2392	2392
C_P	0.2699	0.2373	0.2373	0.1739	0.1739
$F_c' \text{ (psi)}$	404	408	408	416	416
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
$V_{\text{allow}} \text{ (#)}$	525	604	604	840	840
$M_{\text{allow}} \text{ (ft-#)}$	374	430	430	599	599
$P_{\text{allow}} \text{ (#)}$	2,119	2,142	2,142	2,183	2,183
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	0.68	0.21	0.53	0.33	0.70
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	0.63	0.36	0.58	0.33	0.58
$P_{c, \text{allow}} \text{ on PL} \text{ (#)}$	2,126	2,126	2,126	2,126	2,126
$P_{c, \text{allow}} \text{ on Beam} \text{ (#)}$	2,126	2,126	2,126	2,126	2,126
Deflection L/	NA	NA	NA	L/844	L/1125
240	0.00	0.00	0.00	0.12	0.09
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
SHEAR V	OK	OK	OK	OK	OK
$V_{\text{applied}}/V_{\text{allow}}$	1.3%	0.6%	1.0%	3.9%	3.3%
MOMENT M	OK	OK	OK	OK	OK
$M_{\text{applied}}/M_{\text{allow}}$	8.0%	4.0%	6.4%	14.5%	14.2%
AXIAL P	OK	OK	OK	OK	OK
$P_{\text{applied}}/P_{\text{allow}}$	68.1%	38.1%	61.6%	34.3%	60.4%
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	68.3%	20.7%	53.1%	33.3%	70.3%
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	63.4%	35.9%	58.0%	32.9%	58.0%
AXIAL P _c on PL	OK	OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}}$	67.9%	38.4%	62.0%	35.2%	62.0%
AXIAL P _c on Beam	OK	OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}}$	67.9%	38.4%	62.0%	35.2%	62.0%
DEFLECTION	OK	OK	OK	OK	OK
$D_{\text{actual}}/D_{\text{allowed}}$	0.0%	0.0%	0.0%	28.4%	21.3%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{\text{allow}} = A * F_v * C_D / 1.5$ $M_{\text{allow}} = S * F_b * C_D * C_F * C_L * C_r$ $P_{\text{allow}} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c, \text{allow}} = A * F_c * C_b$ $P_{c, \text{allow}} = A * F_c$ $L/(I * E / 15 * L * M_{\text{applied}})$

(1.0) x E Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x4 Bearing- 2nd

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

$P_{DL} \text{ (#/ft)} = 990$
 $P_{SL} \text{ (#/ft)} = 50$
 $P_{LL} \text{ (#/ft)} = 1,040$
 $P_{TOT} \text{ (#/ft)} = 2,080$
 $e \text{ (IN)} = 0.5$
 $TRIB. \text{ (IN)} = 16$

LATERAL LOADS W

$W \text{ (PSF)} = 0.00$
 $E \text{ (PSF)} = 5.00$
 $TRIB. \text{ (IN)} = 16$

DESIGN VALUES

$F_b \text{ (psi)} = 850$
 $F_v \text{ (psi)} = 150$
 $F_c \text{ (psi)} = 1300$
 $F_{cL} \text{ (psi)} = 405$
 $E \text{ (psi)} = 1.30E+06$
 $E_{min} \text{ (psi)} = 4.70E+05$
 $C_r = 1.15$
 $L_u \text{ (in)} = 104.5$
 $c = 0.8$
 $K_e = 1$
 $C_b = 1.00$

Hem Fir	
#2	
Bending X-X axis	
405	405
Incised, No	
Wet Use, No	
Repetitive, Yes	
Full Bracing, Yes	
(Sawn Lumber)	
(Appendix G)	
(Bearing Area Factor)	

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

10.5

405 = F_{cL} (psi)

Use: (2) 2" X 4" @ 16" O.C. OK

MEMBER SIZE		SECTION PROPERTIES			
QUANTITY	2	A =	10.50 in ²		
b =	1.5 in	S =	6.13 in ³		
d =	3.5 in	I =	10.72 in ⁴		
	(Eq. 16-9)	(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
$L_u \text{ (ft)} =$	8.708	8.708	8.708	8.708	8.708
$V_{\text{applied}} \text{ (#)} =$	13	7	12	35	33
$M_{\text{applied}} \text{ (ft-#)} =$	56	29	50	98	107
$P_{\text{applied}} \text{ (#)} =$	2707	1387	2410	1320	2410
$C_D =$	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS	$F_{bE} \text{ (psi)} = 29334$		$C_{bF} = 1.5$		
$F_b^* \text{ (psi)} =$	1466	1686	1686	2346	2346
$C_L =$	1.000	1.000	1.000	1.000	1.000
$F_b' \text{ (psi)} =$	1466	1686	1686	2346	2346
AXIAL STRESS CALCS	$F_{cE} = 433$		$C_{cF} = 1.15$		
$L_e/d =$	29.86	29.86	29.86	29.86	29.86
$F_c^* \text{ (psi)} =$	1495	1719	1719	2392	2392
$C_P =$	0.2699	0.2373	0.2373	0.1739	0.1739
$F_c' \text{ (psi)} =$	404	408	408	416	416
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
$V_{\text{allow}} \text{ (#)} =$	1050	1208	1208	1680	1680
$M_{\text{allow}} \text{ (ft-#)} =$	748	861	861	1197	1197
$P_{\text{allow}} \text{ (#)} =$	4,237	4,284	4,284	4,367	4,367
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE})) =$	0.59	0.15	0.44	0.21	0.49
$(f_t/F_{cE}) + (f_t/F_{bE})^2 =$	0.59	0.30	0.53	0.29	0.53
$P_{c, \text{allow}} \text{ on PL (ft-#)} =$	4,253	4,253	4,253	4,253	4,253
$P_{c, \text{allow}} \text{ on Beam (ft-#)} =$	4,253	4,253	4,253	4,253	4,253
Deflection L/	NA	NA	NA	L/1688	L/2251
240	0.00	0.00	0.00	0.06	0.05
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
SHEAR V	OK	OK	OK	OK	OK
$V_{\text{applied}}/V_{\text{allow}} =$	1.2%	0.5%	1.0%	2.1%	2.0%
MOMENT M	OK	OK	OK	OK	OK
$M_{\text{applied}}/M_{\text{allow}} =$	7.5%	3.4%	5.8%	8.1%	8.9%
AXIAL P	OK	OK	OK	OK	OK
$P_{\text{applied}}/P_{\text{allow}} =$	63.9%	32.4%	56.3%	30.2%	55.2%
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE})) =$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2 =$	59.4%	15.3%	44.0%	20.6%	49.4%
$(f_t/F_{cE}) + (f_t/F_{bE})^2 =$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2 =$	59.5%	30.5%	53.0%	29.0%	53.0%
AXIAL $P_{\perp}$ on PL	OK	OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}} =$	63.6%	32.6%	56.7%	31.0%	56.7%
AXIAL $P_{\perp}$ on Beam	OK	OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}} =$	63.6%	32.6%	56.7%	31.0%	56.7%
DEFLECTION	OK	OK	OK	OK	OK
$D_{\text{actual}}/D_{\text{allowed}} =$	0.0%	0.0%	0.0%	14.2%	10.7%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{\text{allow}} = A * F_v * C_D / 1.5$ $M_{\text{allow}} = S * F_b * C_D * C_F * C_L * C_r$ $P_{\text{allow}} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c, \text{allow}} = A * F_c * C_b$ $P_{c, \text{allow}} = A * F_c$ $L/(I * E / 15 * L * M_{\text{applied}})$

(1.0) x E Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x4 Bearing- 1st

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

$P_{DL} \text{ (#/ft)} = 1,418$
 $P_{SL} \text{ (#/ft)} = 50$
 $P_{LL} \text{ (#/ft)} = 1,560$
 $P_{TOT} \text{ (#/ft)} = 3,028$
 $e \text{ (IN)} = 0.5$
 $TRIB. \text{ (IN)} = 12$

LATERAL LOADS W

$W \text{ (PSF)} = 0.00$
 $E \text{ (PSF)} = 5.00$
 $TRIB. \text{ (IN)} = 12$

DESIGN VALUES

$F_b \text{ (psi)} = 850$
 $F_v \text{ (psi)} = 150$
 $F_c \text{ (psi)} = 1300$
 $F_{cL} \text{ (psi)} = 405$
 $E \text{ (psi)} = 1.30E+06$
 $E_{min} \text{ (psi)} = 4.70E+05$
 $C_r = 1.15$
 $L_u \text{ (in)} = 104.5$
 $c = 0.8$
 $K_e = 1$
 $C_b = 1.00$

Bearing wall Fire rated ? No
 Fire Retardant FirePRO? No
 Header Bearing Area (in²) = 10.5

Use: (2) 2" X 4" @ 12" O.C. OK

405 = F_{cL} (psi)

MEMBER SIZE		SECTION PROPERTIES			
QUANTITY	2	A =	10.50 in ²		
b =	1.5 in	S =	6.13 in ³		
d =	3.5 in	I =	10.72 in ⁴		
		(Eq. 16-9)	(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)
LOAD CASES		DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E
$L_u \text{ (ft)}$		8.708	8.708	8.708	8.708
$V_{\text{applied}} \text{ (#)}$		14	7	13	29
$M_{\text{applied}} \text{ (ft-#)}$		62	31	55	82
$P_{\text{applied}} \text{ (#)}$		2978	1468	2626	1418
C_D		1	1.15	1.15	1.6
BENDING STRESS CALCS		$F_{bE} \text{ (psi)} = 29334$			$C_{bF} = 1.5$
$F_b^* \text{ (psi)}$		1466	1686	1686	2346
C_L		1.000	1.000	1.000	1.000
$F_b' \text{ (psi)}$		1466	1686	1686	2346
AXIAL STRESS CALCS		$F_{cE} = 433$			$C_{cF} = 1.15$
L_e/d		29.86	29.86	29.86	29.86
$F_c^* \text{ (psi)}$		1495	1719	1719	2392
C_P		0.2699	0.2373	0.2373	0.1739
$F_c' \text{ (psi)}$		404	408	408	416
ALLOWABLES		DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E
$V_{\text{allow}} \text{ (#)}$		1050	1208	1208	1680
$M_{\text{allow}} \text{ (ft-#)}$		748	861	861	1197
$P_{\text{allow}} \text{ (#)}$		4,237	4,284	4,284	4,367
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$		0.73	0.17	0.53	0.21
$(f_t/F_{cE}) + (f_t/F_{bE})^2$		0.65	0.32	0.58	0.31
$P_{c, \text{allow}} \text{ on PL} \text{ (#)}$		4,253	4,253	4,253	4,253
$P_{c, \text{allow}} \text{ on Beam} \text{ (#)}$		4,253	4,253	4,253	4,253
Deflection L/		NA	NA	NA	L/2251
240		0.00	0.00	0.00	0.05
CHECKS		DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E
SHEAR V		OK	OK	OK	OK
$V_{\text{applied}}/V_{\text{allow}}$		1.4%	0.6%	1.0%	1.7%
MOMENT M		OK	OK	OK	OK
$M_{\text{applied}}/M_{\text{allow}}$		8.3%	3.6%	6.4%	6.9%
AXIAL P		OK	OK	OK	OK
$P_{\text{applied}}/P_{\text{allow}}$		70.3%	34.3%	61.3%	32.5%
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$		OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$		73.4%	17.0%	52.6%	20.5%
$(f_t/F_{cE}) + (f_t/F_{bE})^2$		OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$		65.4%	32.3%	57.7%	31.2%
AXIAL P _c on PL		OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}}$		70.0%	34.5%	61.7%	33.3%
AXIAL P _c on Beam		OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}}$		70.0%	34.5%	61.7%	33.3%
DEFLECTION		OK	OK	OK	OK
$D_{\text{actual}}/D_{\text{allowed}}$		0.0%	0.0%	0.0%	10.7%
Overall Check		OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x6 Party - 1st

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

$P_{DL} \text{ (#/ft)} = 1,008$
 $P_{SL} \text{ (#/ft)} = 338$
 $P_{LL} \text{ (#/ft)} = 540$
 $P_{TOT} \text{ (#/ft)} = 1,886$
 $e \text{ (IN)} = 0.5$
 $TRIB. \text{ (IN)} = 16$

LATERAL LOADS W

$W \text{ (PSF)} = 0.00$
 $E \text{ (PSF)} = 5.00$
 $TRIB. \text{ (IN)} = 16$

DESIGN VALUES

$F_b \text{ (psi)} = 675$
 $F_v \text{ (psi)} = 150$
 $F_c \text{ (psi)} = 800$
 $F_{cL} \text{ (psi)} = 405$
 $E \text{ (psi)} = 1.20E+06$
 $E_{min} \text{ (psi)} = 4.40E+05$
 $C_r = 1.15$
 $L_u \text{ (in)} = 104.5$
 $c = 0.8$
 $K_e = 1$
 $C_b = 1.00$

Hem Fir
 Stud Grade
 Bending X-X axis
 405
 Incised, No
 Wet Use, No
 Repetitive, Yes
 Full Bracing, Yes
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

8.25

405 = F_{cL} (psi)

Use: (1) 2" X 6" @ 16" O.C. OK

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	1		A =	8.25 in ²	
b =	1.5 in		S =	7.56 in ³	
d =	5.5 in		I =	20.80 in ⁴	
(Eq. 16-9)		(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
L _u (ft) =	8.708	8.708	8.708	8.708	8.708
V _{applied} (#) =	10	9	11	35	32
M _{applied} (ft-#) =	43	37	46	95	98
P _{applied} (#) =	2064	1795	2222	1344	2222
C _D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		F _{bE} (psi) = 17476		C _{bF} = 1	
F _b [*] (psi) =	776	893	893	1242	1242
C _L =	1.000	1.000	1.000	1.000	1.000
F _b ' (psi) =	776	893	893	1242	1242
AXIAL STRESS CALCS		F _{cE} = 1002		C _{cF} = 1	
L _e /d =	19.00	19.00	19.00	19.00	19.00
F _c [*] (psi) =	800	920	920	1280	1280
C _P =	0.7626	0.7196	0.7196	0.6013	0.6013
F' _c (psi) =	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
V _{allow} (#) =	825	949	949	1320	1320
M _{allow} (ft - #) =	489	563	563	783	783
P _{allow} (#) =	5,033	5,462	5,462	6,350	6,350
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE})) =	0.29	0.19	0.28	0.19	0.29
(f _t /F _{cE}) + (f _t /F _{bE}) ² =	0.25	0.22	0.27	0.16	0.27
P _{c,allow} on PL (#) =	3,341	3,341	3,341	3,341	3,341
P _{c,allow} on Beam (#) =	3,341	3,341	3,341	3,341	3,341
Deflection L/	NA	NA	NA	L/3023	L/4031
240	0.00	0.00	0.00	0.03	0.03
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
SHEAR V	OK	OK	OK	OK	OK
V _{applied} /V _{allow}	1.2%	0.9%	1.1%	2.7%	2.5%
MOMENT M	OK	OK	OK	OK	OK
M _{applied} /M _{allow}	8.8%	6.6%	8.2%	12.1%	12.6%
AXIAL P	OK	OK	OK	OK	OK
P _{applied} /P _{allow}	41.0%	32.9%	40.7%	21.2%	35.0%
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE}))	OK	OK	OK	OK	OK
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE}))	28.5%	19.3%	27.8%	19.0%	29.5%
(f _t /F _{cE}) + (f _t /F _{bE}) ²	OK	OK	OK	OK	OK
(f _t /F _{cE}) + (f _t /F _{bE}) ²	25.0%	21.7%	26.9%	16.3%	26.9%
AXIAL P _⊥ on PL	OK	OK	OK	OK	OK
P _c [*] applied/P _{c,allow}	61.8%	53.7%	66.5%	40.2%	66.5%
AXIAL P _⊥ on Beam	OK	OK	OK	OK	OK
P _c [*] applied/P _{c,allow}	61.8%	53.7%	66.5%	40.2%	66.5%
DEFLECTION	OK	OK	OK	OK	OK
D _{actual} /D _{allowed}	0.0%	0.0%	0.0%	7.9%	6.0%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{\text{allow}} = A * F_v * C_D / 1.5$ $M_{\text{allow}} = S * F_b * C_P * C_F * C_L * C_r$ $P_{\text{allow}} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c, \text{allow}} = A * F_c * C_b$ $P_{c, \text{allow}} = A * F_c$ $L/(I * E / 15 * L * M_{\text{applied}})$

(1.0) x E Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x4 Party - 1st

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

$P_{DL} \text{ (\#/ft)} = 735$
 $P_{SL} \text{ (\#/ft)} = 338$
 $P_{LL} \text{ (\#/ft)} = 120$
 $P_{TOT} \text{ (\#/ft)} = 1193$
 $e \text{ (IN)} = 0.5$
 $TRIB. \text{ (IN)} = 16$

LATERAL LOADS W

$W \text{ (PSF)} = 0.00$
 $E \text{ (PSF)} = 5.00$
 $TRIB. \text{ (IN)} = 16$

DESIGN VALUES

$F_b \text{ (psi)} = 850$
 $F_v \text{ (psi)} = 150$
 $F_c \text{ (psi)} = 1300$
 $F_{cL} \text{ (psi)} = 405$
 $E \text{ (psi)} = 1.30E+06$
 $E_{min} \text{ (psi)} = 4.70E+05$
 $C_r = 1.15$
 $L_u \text{ (in)} = 104.5$
 $c = 0.8$
 $K_e = 1$
 $C_b = 1.00$

Hem Fir
 #2
 Bending X-X axis
 405
 Incised, No
 Wet Use, No
 Repetitive, Yes
 Full Bracing, Yes
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

5.25

405 = F_{cL} (psi)

Use: (1) 2" X 4" @ 16" O.C. OK

MEMBER SIZE		SECTION PROPERTIES			
QUANTITY	1	A =	5.25 in ²		
b =	1.5 in	S =	3.06 in ³		
d =	3.5 in	I =	5.36 in ⁴		
	(Eq. 16-9)	(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
$L_u \text{ (ft)}$	8.708	8.708	8.708	8.708	8.708
$V_{\text{applied}} \text{ (\#)}$	5	7	7	34	29
$M_{\text{applied}} \text{ (ft-\#)}$	24	30	30	94	88
$P_{\text{applied}} \text{ (\#)}$	1140	1431	1438	980	1438
C_D	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS	$F_{bE} \text{ (psi)} = 29334$		$C_{bF} = 1.5$		
$F_b^* \text{ (psi)}$	1466	1686	1686	2346	2346
C_L	1.000	1.000	1.000	1.000	1.000
$F'_b \text{ (psi)}$	1466	1686	1686	2346	2346
AXIAL STRESS CALCS	$F_{cE} = 433$		$C_{cF} = 1.15$		
L_e/d	29.86	29.86	29.86	29.86	29.86
$F_c^* \text{ (psi)}$	1495	1719	1719	2392	2392
C_P	0.2699	0.2373	0.2373	0.1739	0.1739
$F'_c \text{ (psi)}$	404	408	408	416	416
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
$V_{\text{allow}} \text{ (\#)}$	525	604	604	840	840
$M_{\text{allow}} \text{ (ft - \#)}$	374	430	430	599	599
$P_{\text{allow}} \text{ (\#)}$	2,119	2,142	2,142	2,183	2,183
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	0.42	0.63	0.64	0.48	0.84
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	0.50	0.63	0.63	0.43	0.63
$P_{c, \text{allow}} \text{ on PL (\#)}$	2,126	2,126	2,126	2,126	2,126
$P_{c, \text{allow}} \text{ on Beam (\#)}$	2,126	2,126	2,126	2,126	2,126
Deflection L/	NA	NA	NA	L/844	L/1125
240	0.00	0.00	0.00	0.12	0.09
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + E	DL+0.75(LL+SL+E)
SHEAR V	OK	OK	OK	OK	OK
$V_{\text{applied}}/V_{\text{allow}}$	1.0%	1.1%	1.1%	4.0%	3.4%
MOMENT M	OK	OK	OK	OK	OK
$M_{\text{applied}}/M_{\text{allow}}$	6.3%	6.9%	7.0%	15.7%	14.8%
AXIAL P	OK	OK	OK	OK	OK
$P_{\text{applied}}/P_{\text{allow}}$	53.8%	66.8%	67.1%	44.9%	65.9%
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + f_t/(F_b(1-f_t/F_{cE}))$	41.7%	63.3%	64.0%	47.6%	83.5%
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	50.1%	62.9%	63.2%	43.1%	63.2%
AXIAL P _c on PL	OK	OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}}$	53.6%	67.3%	67.6%	46.1%	67.6%
AXIAL P _c on Beam	OK	OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}}$	53.6%	67.3%	67.6%	46.1%	67.6%
DEFLECTION	OK	OK	OK	OK	OK
$D_{\text{actual}}/D_{\text{allowed}}$	0.0%	0.0%	0.0%	28.4%	21.3%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4)

<50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{\text{allow}} = A * F_v * C_D / 1.5$ $M_{\text{allow}} = S * F_b * C_D * C_F * C_L * C_r$ $P_{\text{allow}} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c, \text{allow}} = A * F_c * C_b$ $P_{c, \text{allow}} = A * F_c$ $L/(I * E / 15 * L * M_{\text{applied}})$

(1.0) x E Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x Brg at 4x Header

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

$P_{DL} \text{ (#/ft)} = 921$
 $P_{SL} \text{ (#/ft)} = 244$
 $P_{LL} \text{ (#/ft)} = 714$
 $P_{TOT} \text{ (#/ft)} = 1,880$
 $e \text{ (IN)} = 0.5$
 $TRIB. \text{ (IN)} = 16$

LATERAL LOADS W

$W \text{ (PSF)} = 15.00$
 $E \text{ (PSF)} = 0.00$
 $TRIB. \text{ (IN)} = 16$

DESIGN VALUES

$F_b \text{ (psi)} = 675$
 $F_v \text{ (psi)} = 150$
 $F_c \text{ (psi)} = 800$
 $F_{cL} \text{ (psi)} = 405$
 $E \text{ (psi)} = 1.20E+06$
 $E_{min} \text{ (psi)} = 4.40E+05$
 $C_r = 1.15$
 $L_u \text{ (in)} = 104.5$
 $c = 0.8$
 $K_e = 1$
 $C_b = 1.00$

Hem Fir	▼
Stud Grade	▼
Bending X-X axis	▼
405	▼
Incised, No	▼
Wet Use, No	▼
Repetitive, Yes	▼
Full Bracing, Yes	▼

0.49
0.13
0.38

Use: (1) 2" X 6" @ 16" O.C. OK

Bearing wall Fire rated ? No
 Fire Retardant FirePRO? No
 Header Bearing Area (in²) = 5.25

5.25

405 = F_{cL} (psi)

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	1		A =	8.25 in ²	
b =	1.5 in		S =	7.56 in ³	
d =	5.5 in		I =	20.80 in ⁴	
(Eq. 16-9)		(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
L _u (ft) =	8.708	8.708	8.708	8.708	8.708
V _{applied} (#) =	10	7	10	90	73
M _{applied} (ft-#) =	44	31	44	218	195
P _{applied} (#) =	2113	1506	2119	1190	2119
C _D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		F _{bE} (psi) = 17476		C _{bF} = 1	
F _b [*] (psi) =	776	893	893	1242	1242
C _L =	1.000	1.000	1.000	1.000	1.000
F _b ' (psi) =	776	893	893	1242	1242
AXIAL STRESS CALCS		F _{cE} = 1002		C _{cF} = 1	
L _e /d =	19.00	19.00	19.00	19.00	19.00
F _c [*] (psi) =	800	920	920	1280	1280
C _P =	0.7626	0.7196	0.7196	0.6013	0.6013
F' _c (psi) =	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
V _{allow} (#) =	825	949	949	1321	1321
M _{allow} (ft - #) =	489	563	563	783	783
P _{allow} (#) =	5,035	5,465	5,465	6,353	6,353
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE}))) =	0.30	0.14	0.26	0.36	0.45
(f _t /F _{cE}) + (f _t /F _{bE}) ² =	0.26	0.18	0.26	0.14	0.26
P _{c,allow} on PL (#) =	3,343	3,343	3,343	3,343	3,343
P _{c,allow} on Beam (#) =	2,126	2,126	2,126	2,126	2,126
Deflection L/ 240	NA 0.00	NA 0.00	NA 0.00	L/1040 0.10	L/1387 0.08
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
SHEAR V	OK	OK	OK	OK	OK
V _{applied} /V _{allow}	1.2%	0.8%	1.1%	6.8%	5.6%
MOMENT M	OK	OK	OK	OK	OK
M _{applied} /M _{allow}	9.0%	5.6%	7.8%	27.9%	24.9%
AXIAL P	OK	OK	OK	OK	OK
P _{applied} /P _{allow}	42.0%	27.6%	38.8%	18.7%	33.3%
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE})))	OK	OK	OK	OK	OK
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{cE})))	29.7%	14.4%	25.6%	36.1%	44.6%
(f _t /F _{cE}) + (f _t /F _{bE}) ²	OK	OK	OK	OK	OK
(f _t /F _{cE}) + (f _t /F _{bE}) ²	25.5%	18.2%	25.6%	14.4%	25.6%
AXIAL P _⊥ on PL	OK	OK	OK	OK	OK
P _{c*applied} /P _{c,allow}	63.2%	45.0%	63.4%	35.6%	63.4%
AXIAL P _⊥ on Beam	OK	OK	OK	OK	OK
P _{c*applied} /P _{c,allow}	99.4%	70.8%	99.6%	56.0%	99.6%
DEFLECTION	OK	OK	OK	OK	OK
D _{actual} /D _{allowed}	0.0%	0.0%	0.0%	23.1%	17.3%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{\text{allow}} = A * F_v * C_D / 1.5$ $M_{\text{allow}} = S * F_b * C_D * C_F * C_L * C_r$ $P_{\text{allow}} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c, \text{allow}} = A * F_c * C_b$ $P_{c, \text{allow}} = A * F_c$ $L/(I * E / 15 * L * M_{\text{applied}})$

(1.0) x W Table 1604.3(f)

Actual △

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x Brg at 3-1/8 GLB Header

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

P_{DL} (#/ft) = 1,269
 P_{SL} (#/ft) = 337
 P_{LL} (#/ft) = 984
 P_{TOT} (#/ft) = 2,590
 e (IN) = 0.5
 $TRIB.$ (IN) = 16

LATERAL LOADS W

W (PSF) = 15.00
 E (PSF) = 0.00
 $TRIB.$ (IN) = 16

DESIGN VALUES

F_b (psi) = 675
 F_v (psi) = 150
 F_c (psi) = 800
 F_{cL} (psi) = 405
 E (psi) = 1.20E+06
 E_{min} (psi) = 4.40E+05
 C_r = 1.15
 L_u (in) = 104.5
 c = 0.8
 K_e = 1
 C_b = 1.00

Hem Fir	▼
Stud Grade	▼
Bending X-X axis	▼
405	▼
Incised, No	▼
Wet Use, No	▼
Repetitive, Yes	▼
Full Bracing, Yes	▼

0.49
0.13
0.38

Use: (1) 2" X 6" @ 16" O.C. OK

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

4.69

625 = F_{cL} (psi)

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	1		A =	8.25 in ²	
b =	1.5 in		S =	7.56 in ³	
d =	5.5 in		I =	20.80 in ⁴	
	(Eq. 16-9)	(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
L_u (ft) =	8.708	8.708	8.708	8.708	8.708
$V_{applied}$ (#) =	14	10	14	92	77
$M_{applied}$ (ft-#) =	61	43	61	232	217
$P_{applied}$ (#) =	2911	2074	2919	1639	2919
C_D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS	F_{bE} (psi) = 17476			$C_{bF} = 1$	
F_b^* (psi) =	776	893	893	1242	1242
C_L =	1.000	1.000	1.000	1.000	1.000
F_b' (psi) =	776	893	893	1242	1242
AXIAL STRESS CALCS	$F_{cE} = 1002$			$C_{cF} = 1$	
L_e/d =	19.00	19.00	19.00	19.00	19.00
F_c^* (psi) =	800	920	920	1280	1280
C_P =	0.7626	0.7196	0.7196	0.6013	0.6013
F_c' (psi) =	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
V_{allow} (#) =	825	949	949	1321	1321
M_{allow} (ft - #) =	489	563	563	783	783
P_{allow} (#) =	5,035	5,465	5,465	6,353	6,353
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$ =	0.53	0.25	0.45	0.44	0.64
$(f_t/F_{cE}) + (f_t/F_{bE})^2$ =	0.35	0.25	0.35	0.20	0.35
$P_{c,allow}$ on PL (#) =	3,343	3,343	3,343	3,343	3,343
$P_{c,allow}$ on Beam (#) =	2,930	2,930	2,930	2,930	2,930
Deflection L/	NA	NA	NA	L/1040	L/1387
240	0.00	0.00	0.00	0.10	0.08
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
SHEAR V	OK	OK	OK	OK	OK
$V_{applied}/V_{allow}$	1.7%	1.0%	1.5%	7.0%	5.8%
MOMENT M	OK	OK	OK	OK	OK
$M_{applied}/M_{allow}$	12.4%	7.7%	10.8%	29.6%	27.7%
AXIAL P	OK	OK	OK	OK	OK
$P_{applied}/P_{allow}$	57.8%	38.0%	53.4%	25.8%	45.9%
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	52.5%	24.7%	45.2%	43.6%	63.9%
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	35.2%	25.1%	35.3%	19.8%	35.3%
AXIAL P_c on PL	OK	OK	OK	OK	OK
$P_{c,applied}/P_{c,allow}$	87.1%	62.0%	87.3%	49.0%	87.3%
AXIAL P_c on Beam	OK	OK	OK	OK	OK
$P_{c,applied}/P_{c,allow}$	99.3%	70.8%	99.6%	56.0%	99.6%
DEFLECTION	OK	OK	OK	OK	OK
$D_{actual}/D_{allowed}$	0.0%	0.0%	0.0%	23.1%	17.3%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{allow} = A * F_v * C_D / 1.5$ $M_{allow} = S * F_b * C_D * C_F * C_L * C_r$ $P_{allow} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c,allow} = A * F_c * C_b$ $P_{c,allow} = A * F_c$ $L/(I * E / 15 * L * M_{applied})$

(1.0) x W

Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments 2x Brg at 5-1/8 GLB Header

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

$P_{DL} \text{ (#/ft)} = 1,450$
 $P_{SL} \text{ (#/ft)} = 385$
 $P_{LL} \text{ (#/ft)} = 1,125$
 $P_{TOT} \text{ (#/ft)} = 2,960$
 $e \text{ (IN)} = 0.5$
 $TRIB. \text{ (IN)} = 16$

LATERAL LOADS W

$W \text{ (PSF)} = 15.00$
 $E \text{ (PSF)} = 0.00$
 $TRIB. \text{ (IN)} = 16$

DESIGN VALUES

$F_b \text{ (psi)} = 675$
 $F_v \text{ (psi)} = 150$
 $F_c \text{ (psi)} = 800$
 $F_{cL} \text{ (psi)} = 405$
 $E \text{ (psi)} = 1.20E+06$
 $E_{min} \text{ (psi)} = 4.40E+05$
 $C_r = 1.15$
 $L_u \text{ (in)} = 104.5$
 $c = 0.8$
 $K_e = 1$
 $C_b = 1.00$

Hem Fir	▼
Stud Grade	▼
Bending X-X axis	▼
Inched, No	▼
Wet Use, No	▼
Repetitive, Yes	▼
Full Bracing, Yes	▼

0.49
0.13
0.38

Bearing wall Fire rated? No
 Fire Retardant FirePRO? No
 Header Bearing Area (in²) = 7.69

Use: (1) 2" X 6" @ 16" O.C. OK

625 = F_{cL} (psi)

MEMBER SIZE		SECTION PROPERTIES			
QUANTITY	1	A =	8.25 in ²		
b =	1.5 in	S =	7.56 in ³		
d =	5.5 in	I =	20.80 in ⁴		
	(Eq. 16-9)	(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
$L_u \text{ (ft)}$	8.708	8.708	8.708	8.708	8.708
$V_{\text{applied}} \text{ (#)}$	16	11	16	93	79
$M_{\text{applied}} \text{ (ft-#)}$	69	49	69	238	228
$P_{\text{applied}} \text{ (#)}$	3326	2370	3336	1873	3336
C_D	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		$F_{bE} \text{ (psi)} = 17476$		$C_{bF} = 1$	
$F_b^* \text{ (psi)}$	776	893	893	1242	1242
C_L	1.000	1.000	1.000	1.000	1.000
$F_b' \text{ (psi)}$	776	893	893	1242	1242
AXIAL STRESS CALCS		$F_{cE} = 1002$		$C_{cF} = 1$	
L_e/d	19.00	19.00	19.00	19.00	19.00
$F_c^* \text{ (psi)}$	800	920	920	1280	1280
C_P	0.7626	0.7196	0.7196	0.6013	0.6013
$F_c' \text{ (psi)}$	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
$V_{\text{allow}} \text{ (#)}$	825	949	949	1321	1321
$M_{\text{allow}} \text{ (ft - #)}$	489	563	563	783	783
$P_{\text{allow}} \text{ (#)}$	5,035	5,465	5,465	6,353	6,353
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	0.67	0.31	0.58	0.48	0.76
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	0.40	0.29	0.40	0.23	0.40
$P_{c, \text{allow}} \text{ on PL} \text{ (#)}$	3,343	3,343	3,343	3,343	3,343
$P_{c, \text{allow}} \text{ on Beam} \text{ (#)}$	4,805	4,805	4,805	4,805	4,805
Deflection L/	NA	NA	NA	L/1040	L/1387
240	0.00	0.00	0.00	0.10	0.08
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
SHEAR V	OK	OK	OK	OK	OK
$V_{\text{applied}}/V_{\text{allow}}$	1.9%	1.2%	1.7%	7.1%	6.0%
MOMENT M	OK	OK	OK	OK	OK
$M_{\text{applied}}/M_{\text{allow}}$	14.2%	8.8%	12.4%	30.5%	29.2%
AXIAL P	OK	OK	OK	OK	OK
$P_{\text{applied}}/P_{\text{allow}}$	66.1%	43.4%	61.0%	29.5%	52.5%
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	OK	OK	OK	OK	OK
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	67.3%	31.1%	58.0%	48.1%	76.4%
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	40.2%	28.7%	40.3%	22.7%	40.3%
AXIAL $P_{\perp}$ on PL	OK	OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}}$	99.5%	70.9%	99.8%	56.0%	99.8%
AXIAL $P_{\perp}$ on Beam	OK	OK	OK	OK	OK
$P_{c, \text{applied}}/P_{c, \text{allow}}$	69.2%	49.3%	69.4%	39.0%	69.4%
DEFLECTION	OK	OK	OK	OK	OK
$D_{\text{actual}}/D_{\text{allowed}}$	0.0%	0.0%	0.0%	23.1%	17.3%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{\text{allow}} = A * F_v * C_D / 1.5$ $M_{\text{allow}} = S * F_b * C_P * C_F * C_r$ $P_{\text{allow}} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c, \text{allow}} = A * F_c * C_b$ $P_{c, \text{allow}} = A * F_c$ $L/(I * E / 15 * L * M_{\text{applied}})$

(1.0) x W Table 1604.3(f)

Actual △

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments Max Trib for (1) 2x6 Jamb Stud

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

P_{DL} (#/ft) = 1,419

P_{SL} (#/ft) = 375

P_{LL} (#/ft) = 1,095

P_{TOT} (#/ft) = 2,522

e (IN) = 0.5

TRIB. (IN) = 8

LATERAL LOADS W

W (PSF) = 15.00

E (PSF) = 0.00

TRIB. (IN) = 53

DESIGN VALUES

F_b (psi) = 675

F_v (psi) = 150

F_c (psi) = 800

F_{cL} (psi) = 405

E (psi) = 1.20E+06

E_{min} (psi) = 4.40E+05

C_r = 1.15

L_u (in) = 104.5

c = 0.8

K_e = 1

C_b = 1.00

Hem Fir

Stud Grade

Bending X-X axis

405

Incised, No

Wet Use, No

Repetitive, Yes

Full Bracing, Yes

(Sawn Lumber)

(Appendix G)

(Bearing Area Factor)

Bearing wall Fire rated ?

No

Fire Retardant FirePRO?

No

Header Bearing Area (in²) =

5.25

405 = F_{cL} (psi)

Use: (1) 2" X 6" @ 53" O.C. OK

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	1		A =	8.25 in ²	
b =	1.5 in		S =	7.56 in ³	
d =	5.5 in		I =	20.80 in ⁴	
(Eq. 16-9)		(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
L _u (ft) =	8.708	8.708	8.708	8.708	8.708
V _{applied} (#) =	8	6	8	293	224
M _{applied} (ft-#) =	35	25	35	675	542
P _{applied} (#) =	1676	1196	1681	946	1681
C _D =	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		F _{bE} (psi) = 17476		C _{bF} = 1	
F _b * (psi) =	776	893	893	1242	1242
C _L =	1.000	1.000	1.000	1.000	1.000
F' _b (psi) =	776	893	893	1242	1242
AXIAL STRESS CALCS		F _{cE} = 1002		C _{cF} = 1	
L _e /d =	19.00	19.00	19.00	19.00	19.00
F _c * (psi) =	800	920	920	1280	1280
C _p =	0.7626	0.7196	0.7196	0.6013	0.6013
F' _c (psi) =	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
V _{allow} (#) =	825	949	949	1321	1321
M _{allow} (ft - #) =	489	563	563	783	783
P _{allow} (#) =	5,035	5,465	5,465	6,353	6,353
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE}))) =	0.20	0.10	0.17	1.00	0.94
(f _t /F _{cE}) + (f _t /F _{bE}) ² =	0.20	0.14	0.20	0.11	0.20
P _{c,allow} on PL (#) =	3,343	3,343	3,343	3,343	3,343
P _{c,allow} on Beam (#) =	2,126	2,126	2,126	2,126	2,126
Deflection L/ 240	NA 0.00	NA 0.00	NA 0.00	L/304 0.34	L/406 0.26
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
SHEAR V	OK	OK	OK	OK	OK
V _{applied} /V _{allow}	1.0%	0.6%	0.8%	22.2%	17.0%
MOMENT M	OK	OK	OK	OK	OK
M _{applied} /M _{allow}	7.1%	4.4%	6.2%	86.2%	69.3%
AXIAL P	OK	OK	OK	OK	OK
P _{applied} /P _{allow}	33.3%	21.9%	30.8%	14.9%	26.5%
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE})))	OK	OK	OK	OK	OK
(f _t /F _c) ² + f _t /(F _b (1-(f _t /F _{bE})))	20.0%	10.0%	17.3%	99.6%	93.9%
(f _t /F _{cE}) + (f _t /F _{bE}) ²	OK	OK	OK	OK	OK
(f _t /F _{cE}) + (f _t /F _{bE}) ²	20.3%	14.5%	20.3%	11.4%	20.3%
AXIAL P _⊥ on PL	OK	OK	OK	OK	OK
P _{c*applied} /P _{c,allow}	50.1%	35.8%	50.3%	28.3%	50.3%
AXIAL P _⊥ on Beam	OK	OK	OK	OK	OK
P _{c*applied} /P _{c,allow}	78.8%	56.2%	79.1%	44.5%	79.1%
DEFLECTION	OK	OK	OK	OK	OK
D _{actual} /D _{allowed}	0.0%	0.0%	0.0%	78.9%	59.2%
Overall Check	OK	OK	OK	OK	OK

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

 $L_e = (K_e)L$

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

 $V_{allow} = A * F_v * C_D / 1.5$ $M_{allow} = S * F_b * C_D * C_F * C_L * C_r$ $P_{allow} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c,allow} = A * F_c * C_b$ $P_{c,allow} = A * F_c$ $L/(I * E / 15 * L * M_{applied})$

(1.0) x W Table 1604.3(f)

Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285



JOB #: 23.007


DESIGNED: MRO

DATE: 05/31/23

PROJECT: Bradley Hts Apartments Max Trib for (2) 2x6 Jamb Stud

STUD WALL DESIGN

2018 NDS/2018 IBC



AXIAL LOADS P

$P_{DL} \text{ (#/ft)} = 1,419$
 $P_{SL} \text{ (#/ft)} = 375$
 $P_{LL} \text{ (#/ft)} = 1,095$
 $P_{TOT} \text{ (#/ft)} = 2,522$
 $e \text{ (IN)} = 0.5$
 $TRIB. \text{ (IN)} = 8$

LATERAL LOADS W

$W \text{ (PSF)} = 15.00$
 $E \text{ (PSF)} = 0.00$
 $TRIB. \text{ (IN)} = 110$

DESIGN VALUES

$F_b \text{ (psi)} = 675$
 $F_v \text{ (psi)} = 150$
 $F_c \text{ (psi)} = 800$
 $F_{cL} \text{ (psi)} = 405$
 $E \text{ (psi)} = 1.20E+06$
 $E_{min} \text{ (psi)} = 4.40E+05$
 $C_r = 1.15$
 $L_u \text{ (in)} = 104.5$
 $c = 0.8$
 $K_e = 1$
 $C_b = 1.00$

Hem Fir $\downarrow$ 0.56276
 Stud Grade $\downarrow$ 0.148721
 Bending X-X axis $\downarrow$ 0.434265
 Incised, No $\downarrow$
 Wet Use, No $\downarrow$
 Repetitive, Yes $\downarrow$
 Full Bracing, Yes $\downarrow$
 (Sawn Lumber)
 (Appendix G)
 (Bearing Area Factor)

Use: (2) 2" X 6" @ 110" O.C. OK

Bearing wall Fire rated? No $\downarrow$
 Fire Retardant FirePRO? No $\downarrow$
 Header Bearing Area (in²) = 5.25

405 = F_{cL} (psi)

MEMBER SIZE			SECTION PROPERTIES		
QUANTITY	2		A =	8.25 in ²	
b =	1.5 in		S =	15.13 in ³	
d =	5.5 in		I =	41.59 in ⁴	
	(Eq. 16-9)	(Eq. 16-10)	(Eq. 16-11)	(Eq. 16-12)	(Eq. 16-13)
LOAD CASES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
$L_u \text{ (ft)}$	8.708	8.708	8.708	8.708	8.708
$V_{applied} \text{ (#)}$	8	6	8	603	457
$M_{applied} \text{ (ft-#)}$	35	25	35	1351	1050
$P_{applied} \text{ (#)}$	1676	1196	1681	946	1681
C_D	1	1.15	1.15	1.6	1.6
BENDING STRESS CALCS		$F_{bE} \text{ (psi)} = 17476$		$C_{bF} = 1$	
$F_b^* \text{ (psi)}$	776	893	893	1242	1242
C_L	1.000	1.000	1.000	1.000	1.000
$F_b' \text{ (psi)}$	776	893	893	1242	1242
AXIAL STRESS CALCS		$F_{cE} = 1002$		$C_{cF} = 1$	
L_e/d	19.00	19.00	19.00	19.00	19.00
$F_c^* \text{ (psi)}$	800	920	920	1280	1280
C_P	0.7626	0.7196	0.7196	0.6013	0.6013
$F_c' \text{ (psi)}$	610	662	662	770	770
ALLOWABLES	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
$V_{allow} \text{ (#)}$	825	949	949	1321	1321
$M_{allow} \text{ (ft-#)}$	978	1125	1125	1565	1565
$P_{allow} \text{ (#)}$	5,035	5,465	5,465	6,353	6,353
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	0.16	0.07	0.13	1.00	0.91
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	0.20	0.14	0.20	0.11	0.20
$P_{c,allow} \text{ on PL} \text{ (#)}$	3,343	3,343	3,343	3,343	3,343
$P_{c,allow} \text{ on Beam} \text{ (#)}$	2,126	2,126	2,126	2,126	2,126
Deflection L/	NA	NA	NA	L/293	L/391
240	0.00	0.00	0.00	0.36	0.27
CHECKS	DL + LL	DL + SL	DL+0.75(LL+SL)	DL + W	DL+0.75(LL+SL+W)
SHEAR V	OK	OK	OK	OK	OK
$V_{applied}/V_{allow}$	1.0%	0.6%	0.8%	45.7%	34.6%
MOMENT M	OK	OK	OK	OK	OK
$M_{applied}/M_{allow}$	3.6%	2.2%	3.1%	86.3%	67.1%
AXIAL P	OK	OK	OK	OK	OK
$P_{applied}/P_{allow}$	33.3%	21.9%	30.8%	14.9%	26.5%
$(f_t/F_c)^2 + f_t/(F_b(1-f_t/F_{cE}))$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	15.6%	7.4%	13.4%	99.7%	91.2%
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	OK	OK	OK	OK	OK
$(f_t/F_{cE}) + (f_t/F_{bE})^2$	20.3%	14.5%	20.3%	11.4%	20.3%
AXIAL P_c on PL	OK	OK	OK	OK	OK
$P_{c,applied}/P_{c,allow}$	50.1%	35.8%	50.3%	28.3%	50.3%
AXIAL P_c on Beam	OK	OK	OK	OK	OK
$P_{c,applied}/P_{c,allow}$	78.8%	56.2%	79.1%	44.5%	79.1%
DEFLECTION	OK	OK	OK	OK	OK
$D_{actual}/D_{allowed}$	0.0%	0.0%	0.0%	81.9%	61.4%
Overall Check	OK	OK	OK	OK	OK

Bearing wall Fire rated? No

Fire Retardant FirePRO? No

Header Bearing Area (in²) = 5.25405 = F_{cL} (psi)

(Table 4a Bending)

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

(Table 4a Compression)

(3.7.1.4) <50

(Eq 3.7-1)

(Eq 3.7-1)

(Table 4.3.1)

Le = (Ke)L

 $V_{allow} = A * F_v * C_D / 1.5$ $M_{allow} = S * F_b * C_D * C_F * C_L * C_r$ $P_{allow} = A * F_c * C_D * C_F * C_P$

(Eq 3.9-3)

(Eq 3.9-4)

 $P_{c,allow} = A * F_c * C_b$ $P_{c,allow} = A * F_c$ $L/(I * E / 15 * L * M_{applied})$

(1.0) x W

Table 1604.3(f)


Actual Δ

Axial + Ber

Bearing on

Bearing on

PRMU20240285

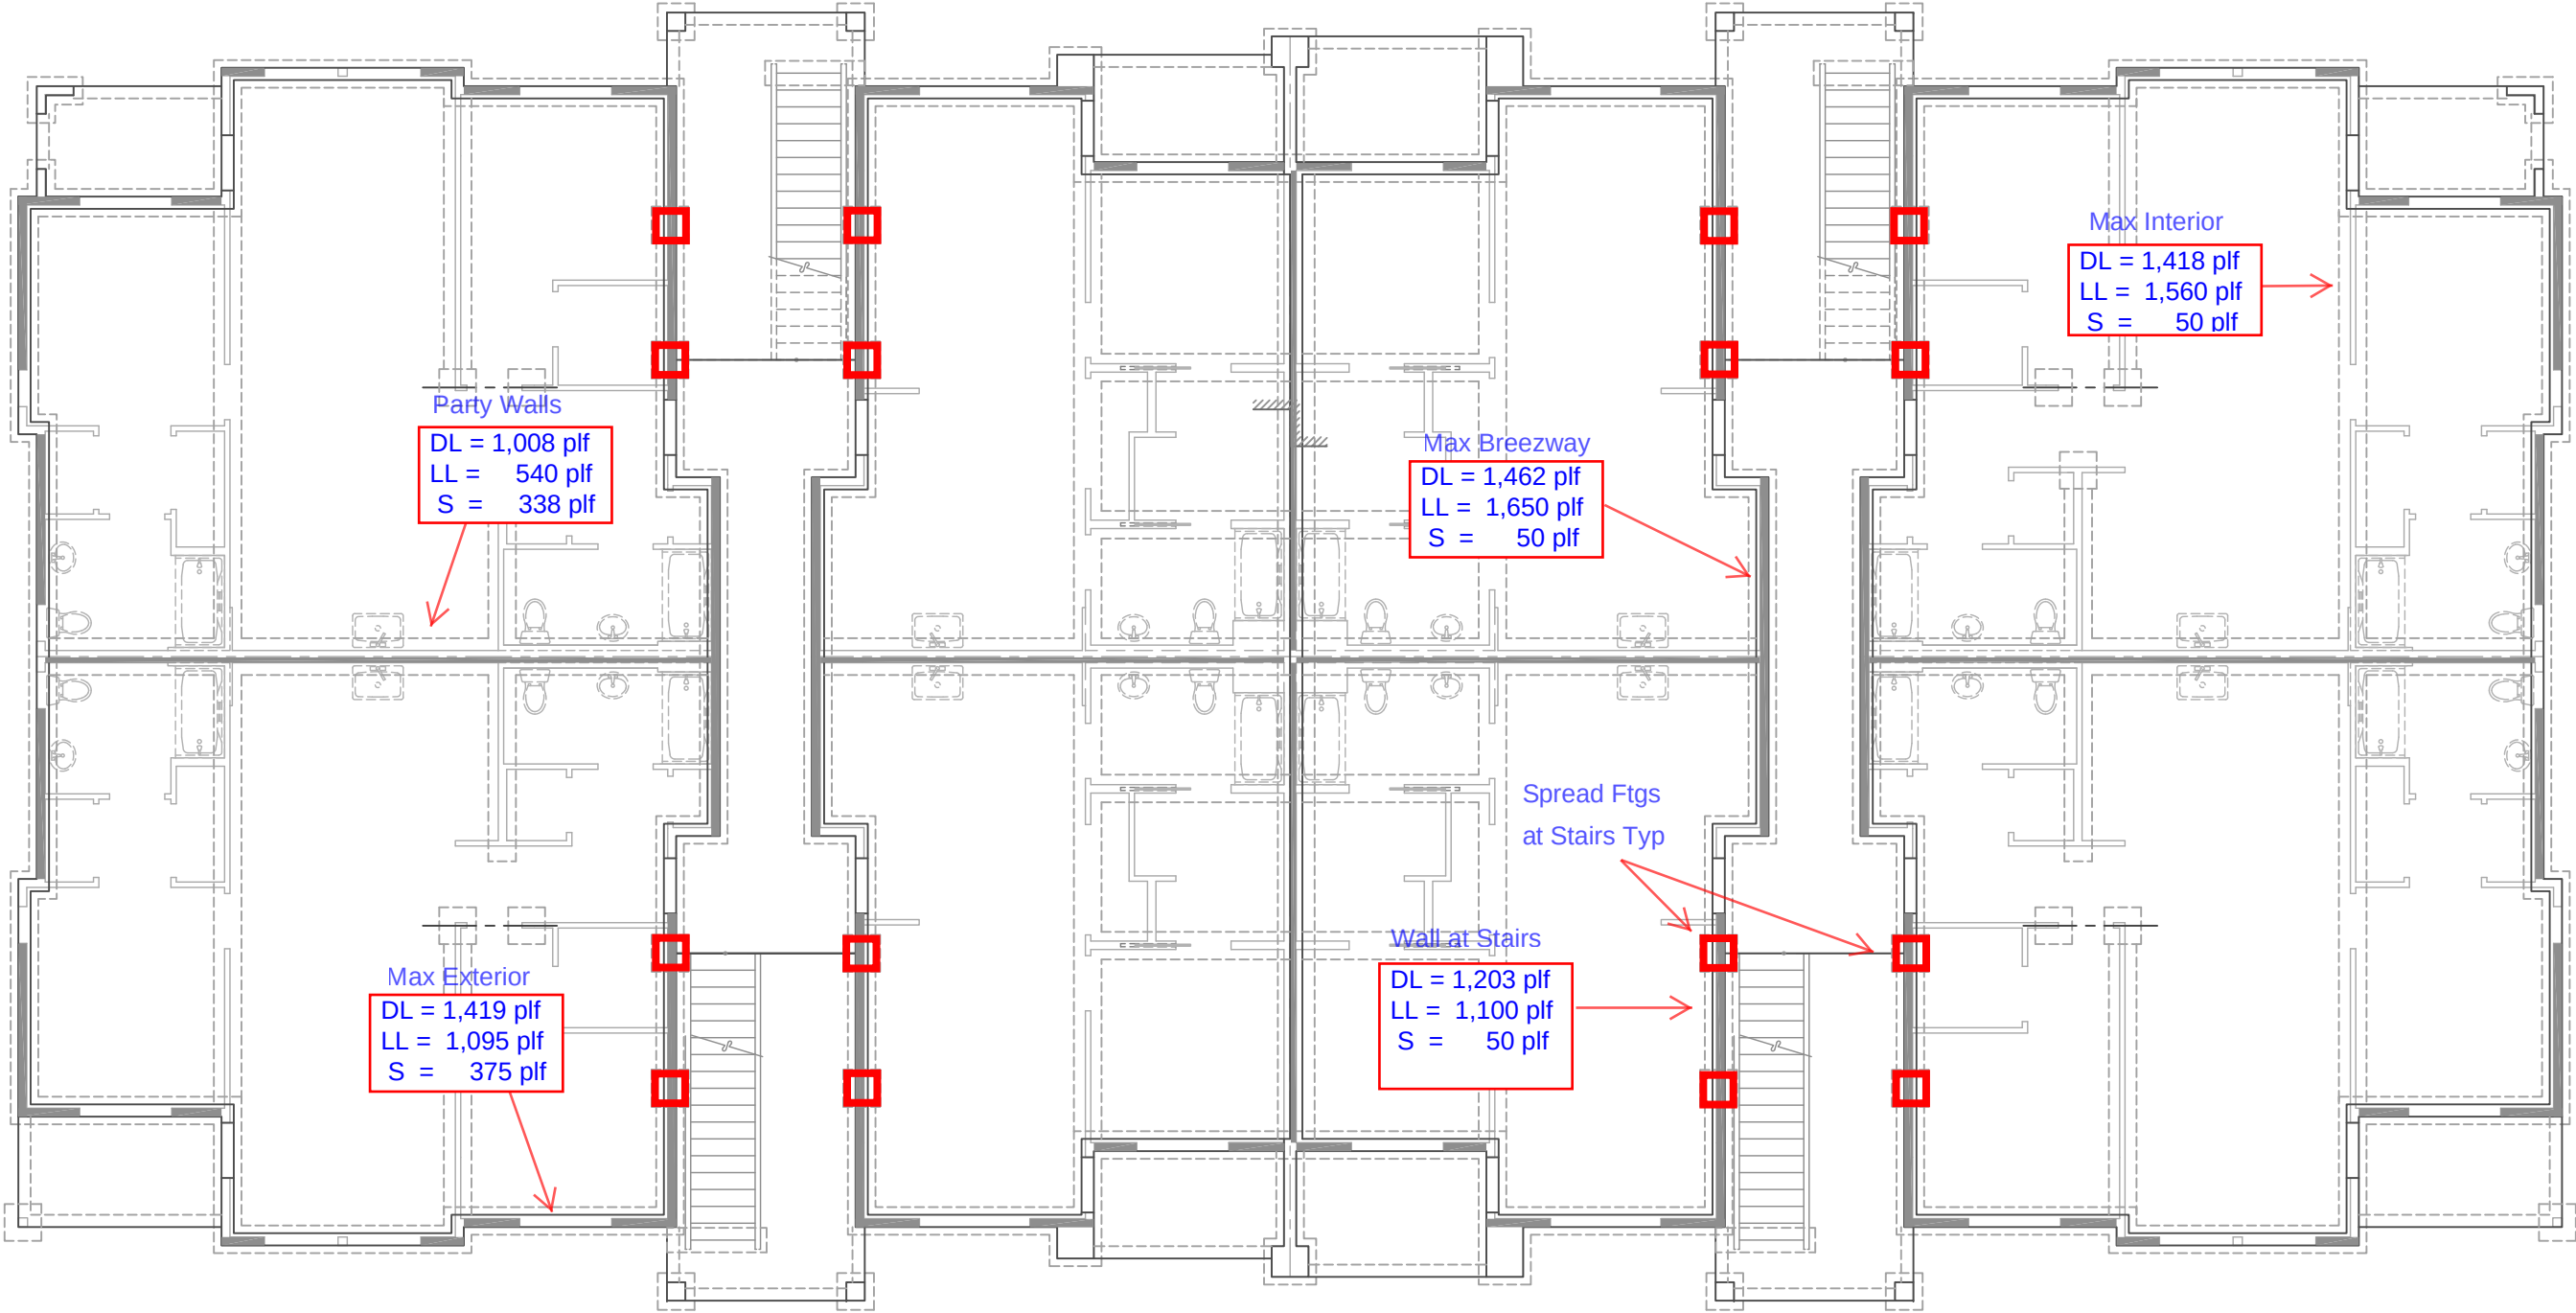

FOUNDATIONS - KEY PLAN

Bradley Heights Apartments

S4S Job# 23.007

Foundation Load Summary

Spread Ftgs	Beams	Σ DL	Σ LL	Σ S	D+L	D + 0.75(L+S)
Breezway (3 story)	(2) FB19	3.2	6.8		9.9 k	8.3 k
Breezway (3 story)	RB6 + (2) FB19	4.8	6.8	1.83	11.6 k	11.2 k
Breezway (4 story)	(3) FB19	4.8	10.1		14.9 k	12.4 k
Breezway (4 story)	RB6 + (3) FB19	6.4	10.1	1.83	16.5 k	15.4 k

Wall Footings	Building Levels	Σ DL	Σ LL	Σ S	D+L	D + 0.75(L+S)
Max Exterior	3 story	1,096	730	375	1,826 plf	1,925 plf
Max Exterior	4 story	1,419	1,095	375	2,514 plf	2,522 plf
Max Breezeway	3 story	1,029	1,100	50	2,129 plf	1,892 plf
Max Breezeway	4 story	1,462	1,650	50	3,112 plf	2,737 plf
Max Interior	3 story	990	1,040	50	2,030 plf	1,808 plf
Max Interior	4 story	1,418	1,560	50	2,978 plf	2,626 plf
Party Walls	3 story	801	360	338	1,161 plf	1,325 plf
Party Walls	4 story	1,008	540	338	1,548 plf	1,667 plf

SOLUTIONS 4 STRUCTURES Inc.

JOB # 23.007


PRMU20240285

DESIGNED MRO

DATE 5-31-23

PROJECT: BRADLEY HEIGHTS - APTS

COMBINED FOOTINGS AT STAIRS

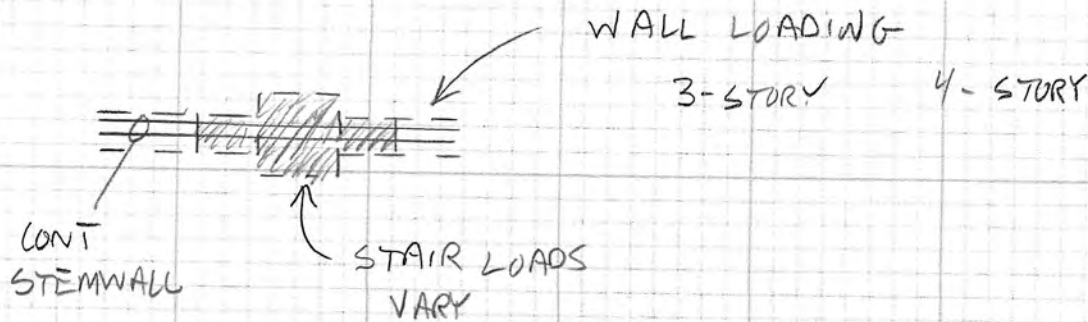

EXAMPLE (3) STORY @ RB16

$$\text{WALL LOADING} = [2.5 + 2(2.0)] (1590) = 10,335$$

$$\text{LANDING LOAD} = 11,600$$

$$\hline 21,935 \text{ lbs}$$

$$\text{COMBINED AREA} = 2(2 \times 1.5) = 6.0$$

$$+ (2.5 \times 2.5)$$

$$\hline 12.25 \text{ ft}^2$$

Soil Pressure =

$$\text{SOIL PRESSURE} = 21,935 / 12.25 = 1,791 \text{ PSF} (< \text{ASBP} = 2,000)$$


	POINT LD	WALL LD	FTG	SP
3-STORY	9,900	9,540	F2.0	1,944 PSF
3-STORY @ RB16	11,600	10,335	F2.5	1,791 PSF
4-STORY	14,900	16,121	F3.0	2,068 PSF (WITHIN 3%)
4-STORY @ RB16	16,500	17,273	F3.5	1,851 PSF

TYPICAL WALL FOOTING

$$A = 18 \times 8 = 144 \text{ in}^2$$

$$A_{s \min} = 0.0018 (144) = 0.26 \text{ in}^2$$

$$(2) \#4 \text{ PROVIDED} = 0.40 \text{ in}^2 \checkmark$$



$$w_u = 1.2(1462) + 1.6(1650) = 4,394 \text{ PSF}$$

DESIGN TOE USING STRUCTURAL PLAIN CONCRETE

$$TOE = \frac{18 - 6}{2} = 6 \text{ in}$$

$$V_u = 4.394(6/12) = 2.20 \text{ K}$$

$$\phi V_c = 0.75(2) \sqrt{2500} (12)(4.75) = 4.28 \text{ K} \checkmark$$

$$M_u = 4.394(6/12)^2/2 = 0.55 \text{ Kft}$$

$$S = \frac{1}{6} (12)(8)^2 = 128 \text{ in}^3$$

$$\phi M_n = 0.75(5) \sqrt{2500} (128/12) = 2.00 \text{ Kft} \checkmark$$

PRMU20240285

PROJECT NAME: **Bradley Heights Apts**
 PROJECT NUMBER: **23.007**
 SOLUTIONS 4 STRUCTURES
 STRUCTURAL ENGINEERING CONSULTANTS

SHEET OF
 DATE: 4/15/2022
 DESIGN BY: **MRO**

SINGLE FOOTING DESIGN TABLE

2.00 ft x 2.00 ft x 10 inches thick
(3)-#4 BOT EA. WAY

2.0'x2.0'x10 " .2ksf

					FOOTING SIZE	
LOADS	D	L	Hs			
	4 k	4 k	0 k			
Ftg Self	0.5 k					
LOAD COMBINATIONS						
	D	L	Hs	AXIAL		
ASD	1	1	1	8 k	Service	
ULT	1.2	1.6	1	11 k	Factored	
φ (shear)	0.75					
φ (flexure)	0.9					
include ftg self weight	no		SW =	0.5 k		
					COLUMN DATA	
					LENGTH: 4 IN	
					WIDTH: 4 IN	

CONCRETE SPECS

F'c: **2,500** PSI
 Fy: **60,000** PSI
 d: (DEPTH-3.5"):
 Conc Density **150** PCF
 Conc Ftg Weight **0.5** kips

SOIL

ALLOW. BEARING: **2.00** KSF
 ACTUAL BEARING: 2.00 KSF
 ULT BEARING: 2.80 KSF
OK

CONCRETE BEAM; SHEAR

Vu2l: 2 KIPS
 Vu2w: 2 IN
 Vu2(max): 2 IN²
 $\phi Vc2$: 12 KIPS
 $SR_2 = Vu_2(max) / Vc_2 =$ 0.140
OK

CONCRETE PUNCHING SHEAR

Vu1: 9 KIPS
 bo: 42 IN
 bo * d 273 IN²
 $\phi Vc1$: 41 KIPS
 $SR_1 = Vu_1 / Vc_1 =$ 0.221
OK

WIDTH**CONCRETE BEAM; BENDING**

Muw: 1.94 K-FT
 $A_{s(req)}$: 0.09 IN²@ d=6.50 "
 $A_{s(req)}/FT$: 0.04 IN²/FT
 Mcr 12.50 K-FT
 Ms 1.39 K-FT

LENGTH**CONCRETE BEAM; BENDING**

Mul: 1.94 K-FT
 $A_{s(req)}$: 0.09 IN²@ d=6.50 "
 $A_{s(req)}/FT$: 0.04 IN²/FT
 Mcr 12.50 K-FT
 Ms 1.39 K-FT

number of bars

bar size

3
4
 As **0.60** in²
 d **6.5** inches
 ϕMn 17 K-FT @ d=6.50 "
 $\phi Mn / Mu1$ 8.54
 Mcr/Ms = 9.00
 $\phi Mn / Mcr =$ 1.33

PRMU20240285

PROJECT NAME: **Bradley Heights Apts**
 PROJECT NUMBER: **23.007**
 SOLUTIONS 4 STRUCTURES
 STRUCTURAL ENGINEERING CONSULTANTS

SHEET OF
 DATE: 4/15/2022
 DESIGN BY: **MRO**

SINGLE FOOTING DESIGN TABLE

2.50 ft x 2.50 ft x 10 inches thick
(3)-#4 BOT EA. WAY

2.5'x2.5'x10 " .2ksf

					FOOTING SIZE	
LOADS	D	L	Hs			
	6 k	6 k	0 k			
Ftg Self	0.8 k					
LOAD COMBINATIONS						
	D	L	Hs	AXIAL		
ASD	1	1	1	13 k	Service	
ULT	1.2	1.6	1	18 k	Factored	
φ (shear)	0.75					
φ (flexure)	0.9					
include ftg self weight	no		SW =	0.8 k		
					COLUMN DATA	
					LENGTH:	4 IN
					WIDTH:	4 IN

CONCRETE SPECS

F'c: **2,500** PSI
 Fy: **60,000** PSI
 d: (DEPTH-3.5"):
 Conc Density **150** PCF
 Conc Ftg Weight **0.78125** kips

SOIL

ALLOW. BEARING: **2.00** KSF
 ACTUAL BEARING: 2.00 KSF
 ULT BEARING: 2.80 KSF
OK

CONCRETE BEAM; SHEAR

Vu2l: 4 KIPS
 Vu2w: 4 IN
 Vu2(max): 4 IN²
 $\phi Vc2$: 15 KIPS
 $SR_2 = Vu_2(max) / Vc_2 =$ 0.259
OK

CONCRETE PUNCHING SHEAR

Vu1: 15 KIPS
 bo: 42 IN
 bo * d 273 IN²
 $\phi Vc1$: 41 KIPS
 $SR_1 = Vu_1 / Vc_1 =$ 0.375
OK

WIDTH**CONCRETE BEAM; BENDING**

Muw: 4.11 K-FT
 $A_{s(req)}$: 0.19 IN²@ d=6.50 "
 $A_{s(req)}/FT$: 0.08 IN²/FT
 Mcr 15.63 K-FT
 Ms 2.93 K-FT

LENGTH**CONCRETE BEAM; BENDING**

Mul: 4.11 K-FT
 $A_{s(req)}$: 0.19 IN²@ d=6.50 "
 $A_{s(req)}/FT$: 0.08 IN²/FT
 Mcr 15.63 K-FT
 Ms 2.93 K-FT

number of bars

bar size

3
4
 As **0.60** in²
 d **6.5** inches
 ϕMn 17 K-FT @ d=6.50 "
 $\phi Mn / Mu1$ 4.09
 Mcr/Ms = 5.33
 $\phi Mn / Mcr =$ 1.07

PRMU20240285

PROJECT NAME: **Bradley Heights Apts**
 PROJECT NUMBER: **23.007**
 SOLUTIONS 4 STRUCTURES
 STRUCTURAL ENGINEERING CONSULTANTS

SHEET OF
 DATE: 4/15/2022
 DESIGN BY: **MRO**

SINGLE FOOTING DESIGN TABLE

3.00 ft x 3.00 ft x 12 inches thick
(3)-#4 BOT EA. WAY

3.0'x3.0'x12 " ..2ksf

					FOOTING SIZE	
LOADS	D	L	Hs			
	9 k	9 k	0 k			
Ftg Self	1.4 k					
LOAD COMBINATIONS						
	D	L	Hs	AXIAL		
ASD	1	1	1	18 k	Service	
ULT	1.2	1.6	1	25 k	Factored	
φ (shear)	0.75					
φ (flexure)	0.9					
include ftg self weight	no		SW =	1.4 k		
LENGTH: 3.00 FT						
WIDTH: 3.00 FT						
DEPTH: 12 IN						
AREA: 9.00 SF						
COLUMN DATA						
LENGTH: 4 IN						
WIDTH: 4 IN						

CONCRETE SPECS

F'c: **2,500** PSI
 Fy: **60,000** PSI
 d: (DEPTH-3.5"):
 Conc Density **150** PCF
 Conc Ftg Weight **1.35** kips

SOIL

ALLOW. BEARING: **2.00** KSF
 ACTUAL BEARING: 2.00 KSF
 ULT BEARING: 2.80 KSF
OK

CONCRETE BEAM; SHEAR

Vu2l: 5 KIPS
 Vu2w: 5 IN
 Vu2(max): 5 IN²
 $\phi Vc2$: 23 KIPS
 $SR_2 = Vu_2(max) / Vc_2 =$ 0.229
OK

CONCRETE PUNCHING SHEAR

Vu1: 22 KIPS
 bo: 50 IN
 bo * d 425 IN²
 $\phi Vc1$: 64 KIPS
 $SR_1 = Vu_1 / Vc_1 =$ 0.348
OK

WIDTH**CONCRETE BEAM; BENDING**

Muw: 7.47 K-FT
 $A_{s(req)}$: 0.26 IN²@ d=8.50 "
 $A_{s(req)}/FT$: 0.09 IN²/FT
 Mcr 27.00 K-FT
 Ms 5.33 K-FT

LENGTH**CONCRETE BEAM; BENDING**

Mul: 7.47 K-FT
 $A_{s(req)}$: 0.26 IN²@ d=8.50 "
 $A_{s(req)}/FT$: 0.09 IN²/FT
 Mcr 27.00 K-FT
 Ms 5.33 K-FT

number of bars

3

bar size

4**As** **0.60** in²**d** **8.5** inches **ϕMn** 22 K-FT @ d=8.50 " **$\phi Mn / Mu1$** 2.99

Mcr/Ms = 5.06

 $\phi Mn/Mcr =$ 0.83

PRMU20240285

PROJECT NAME: **Bradley Heights Apts**
 PROJECT NUMBER: **23.007**
 SOLUTIONS 4 STRUCTURES
 STRUCTURAL ENGINEERING CONSULTANTS

SHEET OF
 DATE: 4/15/2022
 DESIGN BY: **MRO**

SINGLE FOOTING DESIGN TABLE

3.50 ft x 3.50 ft x 12 inches thick
(4)-#4 BOT EA. WAY

3.5'x3.5'x12 " ..2ksf

					FOOTING SIZE	
LOADS	D	L	Hs			
	12 k	12 k	0 k			
Ftg Self	1.8 k					
LOAD COMBINATIONS						
	D	L	Hs	AXIAL		
ASD	1	1	1	25 k	Service	
ULT	1.2	1.6	1	34 k	Factored	
φ (shear)	0.75					
φ (flexure)	0.9					
include ftg self weight	no		SW =	1.8 k		
					COLUMN DATA	
					LENGTH:	4 IN
					WIDTH:	4 IN

CONCRETE SPECS

F'c: **2,500** PSI
 Fy: **60,000** PSI
 d: (DEPTH-3.5"):
 Conc Density **150** PCF
 Conc Ftg Weight **1.8375** kips

SOIL

ALLOW. BEARING: **2.00** KSF
 ACTUAL BEARING: 2.00 KSF
 ULT BEARING: 2.80 KSF
OK

CONCRETE BEAM; SHEAR

Vu2l: 9 KIPS
 Vu2w: 9 IN
 Vu2(max): 9 IN²
 $\phi Vc2$: 27 KIPS
 $SR_2 = Vu_2(max) / Vc_2 =$ 0.320
OK

CONCRETE PUNCHING SHEAR

Vu1: 31 KIPS
 bo: 50 IN
 bo * d 425 IN²
 $\phi Vc1$: 64 KIPS
 $SR_1 = Vu_1 / Vc_1 =$ 0.490
OK

WIDTH**CONCRETE BEAM; BENDING**

Muw: 12.28 K-FT
 $A_{s(req)}$: 0.43 IN²@ d=8.50 "
 $A_{s(req)}/FT$: 0.12 IN²/FT
 Mcr 31.50 K-FT
 Ms 8.77 K-FT

LENGTH**CONCRETE BEAM; BENDING**

Mul: 12.28 K-FT
 $A_{s(req)}$: 0.43 IN²@ d=8.50 "
 $A_{s(req)}/FT$: 0.12 IN²/FT
 Mcr 31.50 K-FT
 Ms 8.77 K-FT

number of bars

4

bar size

4

As **0.80** in²d **8.5** inches ϕMn 30 K-FT @ d=8.50 " $\phi Mn / Mu1$ 2.41

Mcr/Ms = 3.59

 $\phi Mn / Mcr =$ 0.94

SOLUTIONS 4 STRUCTURES Inc.

JOB # 23.007


PRMU20240285

DESIGNED MRO

DATE 5-29-23

PROJECT: BRADLEY HEIGHTS APTS

BASEMENT RETAINING WALL

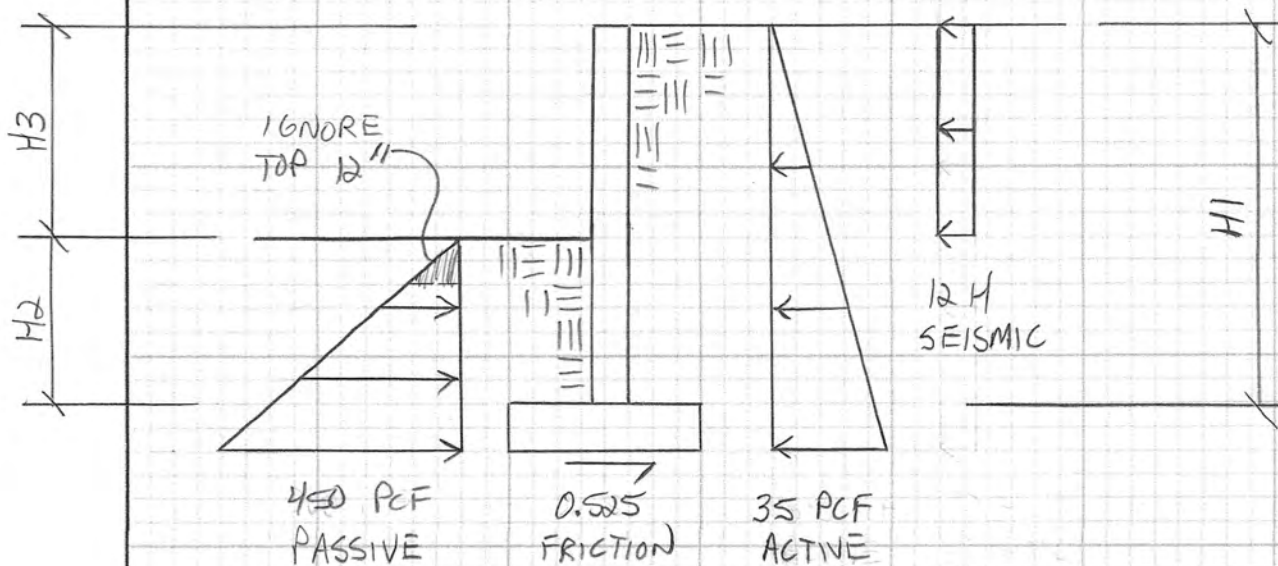

TOTAL HT H1	EXTERIOR HT H2	WALL DESIGN HT H3
10'-0"	3'-6"	6'-6" ← CONTROLS
8'-0"	3'-0"	5'-0"
6'-0"	2'-0"	4'-0"
4'-0"	1'-0"	3'-0"
2'-0"	0'-8"	1'-4"

SITE RETAINING WALLS

PRMU20240285

Project Bradley Heights
 S4S Job# 23.007
 Date 5-19-23

SOIL PROPERTIES

Active Pressure	$P_A =$	35 pcf
Seismic Surcharge	$P_E =$	0 H
Passive Pressure	$P_P =$	450 pcf
Friction	$\mu =$	0.525
Soil Weight	$\gamma =$	120 pcf
Allowable Bearing	ASBP =	2,000 psf
Allowable 1/3 Increase?		yes
Add'l Wall Loading	D+L =	0 plf
Live Load Surcharge	LL =	0.00 ft

WALL DESIGN

Base Design Shear	$V_u =$	1.7 k	
Shear Strength	$\phi V_c =$	5.6 k	OK!
Base Design Moment	$M_u =$	7.9 kft	
Bending Strength	$\phi M_n =$	8.9 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	Ductile
Bar A	#	5	
Spacing A	s =	10 in o.c.	
As provided	$A_s =$	0.37 in ²	OK!
As min	$A_{s \min} =$	0.23 in ²	
Development	Ldh =	10 in	OK!

WALL & FOOTING DIMENSIONS

Concrete Strength	$f_c =$	3,000 psi
Wall thickness	t =	8 in
Footing thickness	t _f =	14 in
Wall Height	H =	10.0 ft
Toe Length	b _t =	2.67 ft
Heel Length	b _h =	1.67 ft
Footing Length	b _f =	5.00 ft

1/3 height Moment	$M_u =$	2.02 kft	
Bending Strength	$\phi M_n =$	4.07 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	>> M_u
Bar B	#	4	
Spacing B	s =	10 in o.c.	

STABILITY CHECKS

Wall wt	$W_w =$	1.000 k
Add'l D+L	$W_{D+L} =$	0.000 k
Footing wt	$W_f =$	0.875 k
Soil wt	$W_s =$	2.000 k
Surcharge	$W =$	0.000 k
Total wt	$W =$	3.875 k

FOOTING DESIGN

Heel Shear	$V_u =$	1.2 k	
Heel Shear Strength	$\phi V_c =$	11.6 k	OK!
Heel Design Moment	$M_u =$	2.3 kft	
Heel Bending Strength	$\phi M_n =$	12.4 kft	OK!
Bar C	#	4	
Spacing C	s =	10 in o.c.	
As provided	$A_s =$	0.24 in ²	OK!
As min	$A_{s \min} =$	0.24 in ²	

Construction

Overturning M	OTM =	8.12 kft
Resisting M	RM =	13.5 kft
Sliding Force	V =	2.182 k
Friction	R =	2.187 k
Sliding FS	SF =	See hand Calcs
Soil Pressure	SP =	1,854 psf OK!

SITE RETAINING WALLS

Project Bradley Heights
 S4S Job# 23.007
 Date 5-19-23

SOIL PROPERTIES

Active Pressure	$P_A =$	35 pcf
Seismic Surcharge	$P_E =$	0 H
Passive Pressure	$P_P =$	450 pcf
Friction	$\mu =$	0.525
Soil Weight	$\gamma =$	120 pcf
Allowable Bearing	ASBP =	2,000 psf
Allowable 1/3 Increase?		yes
Add'l Wall Loading	D+L =	0 plf
Live Load Surcharge	LL =	0.00 ft

WALL DESIGN

Base Design Shear	$V_u =$	1.0 k	
Shear Strength	$\phi V_c =$	5.6 k	OK!
Base Design Moment	$M_u =$	3.6 kft	
Bending Strength	$\phi M_n =$	7.5 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	Ductile
Bar A	#	5	
Spacing A	s =	12 in o.c.	
As provided	$A_s =$	0.31 in ²	OK!
As min	$A_s \text{ min} =$	0.21 in ²	
Development	Ldh =	6 in	OK!

WALL & FOOTING DIMENSIONS

Concrete Strength	$f_c =$	3,000 psi
Wall thickness	t =	8 in
Footing thickness	t _f =	12 in
Wall Height	H =	8.0 ft
Toe Length	b _t =	2.00 ft
Heel Length	b _h =	1.33 ft
Footing Length	b _f =	4.00 ft

1/3 height Moment	$M_u =$	1.03 kft	
Bending Strength	$\phi M_n =$	3.42 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	>> M_u
Bar B	#	4	
Spacing B	s =	12 in o.c.	

STABILITY CHECKS

Wall wt	$W_w =$	0.800 k
Add'l D+L	$W_{D+L} =$	0.000 k
Footing wt	$W_f =$	0.600 k
Soil wt	$W_s =$	1.280 k
Surcharge	$W =$	0.000 k
Total wt	$W =$	2.680 k

FOOTING DESIGN

Heel Shear	$V_u =$	0.7 k	
Heel Shear Strength	$\phi V_c =$	9.6 k	OK!
Heel Design Moment	$M_u =$	1.2 kft	
Heel Bending Strength	$\phi M_n =$	8.6 kft	OK!
Bar C	#	4	
Spacing C	s =	12 in o.c.	
As provided	$A_s =$	0.20 in ²	OK!
As min	$A_s \text{ min} =$	0.20 in ²	

Construction

Overturning M	OTM =	4.25 kft
Resisting M	RM =	7.3 kft
Sliding Force	V =	1.418 k
Friction	R =	1.519 k
Sliding FS	SF =	See hand Calcs
Soil Pressure	SP =	1,555 psf OK!

SITE RETAINING WALLS

PRMU20240285

Project Bradley Heights
 S4S Job# 23.007
 Date 5-19-23

SOIL PROPERTIES

Active Pressure	$P_A =$	35 pcf
Seismic Surcharge	$P_E =$	0 H
Passive Pressure	$P_P =$	450 pcf
Friction	$\mu =$	0.525
Soil Weight	$\gamma =$	120 pcf
Allowable Bearing	ASBP =	2,000 psf
Allowable 1/3 Increase?		yes
Add'l Wall Loading	D+L =	0 plf
Live Load Surcharge	LL =	0.00 ft

WALL DESIGN

Base Design Shear	$V_u =$	0.6 k	
Shear Strength	$\phi V_c =$	3.9 k	OK!
Base Design Moment	$M_u =$	1.9 kft	
Bending Strength	$\phi M_n =$	3.4 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	>> M_u
Bar A	#	4	
Spacing A	s =	12 in o.c.	
As provided	$A_s =$	0.20 in ²	OK!
As min	$A_{s \min} =$	0.17 in ²	
Development	L _{dh} =	6 in	OK!

WALL & FOOTING DIMENSIONS

Concrete Strength	$f_c =$	3,000 psi
Wall thickness	t =	8 in
Footing thickness	t _f =	12 in
Wall Height	H =	6.0 ft
Toe Length	b _t =	1.33 ft
Heel Length	b _h =	1.00 ft
Footing Length	b _f =	3.00 ft

1/3 height Moment	$M_u =$	0.44 kft	
Bending Strength	$\phi M_n =$	3.42 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	>> M_u
Bar B	#	4	
Spacing B	s =	12 in o.c.	
			Full ht bai

STABILITY CHECKS

Wall wt	$W_w =$	0.600 k
Add'l D+L	$W_{D+L} =$	0.000 k
Footing wt	$W_f =$	0.450 k
Soil wt	$W_s =$	0.720 k
Surcharge	$W =$	0.000 k
Total wt	$W =$	1.770 k

FOOTING DESIGN

Heel Shear	$V_u =$	0.2 k	
Heel Shear Strength	$\phi V_c =$	9.6 k	OK!
Heel Design Moment	$M_u =$	0.5 kft	
Heel Bending Strength	$\phi M_n =$	8.6 kft	OK!
Bar C	#	4	
Spacing C	s =	12 in o.c.	
As provided	$A_s =$	0.20 in ²	OK!
As min	$A_{s \min} =$	0.20 in ²	

Construction

Overturning M	OTM =	2.00 kft
Resisting M	RM =	3.5 kft
Sliding Force	V =	0.858 k
Friction	R =	1.042 k
Sliding FS	SF =	See hand Calcs
Soil Pressure	SP =	1,417 psf OK!

SITE RETAINING WALLS

PRMU20240285

Project Bradley Heights
 S4S Job# 23.007
 Date 5-19-23

SOIL PROPERTIES

Active Pressure	$P_A =$	35 pcf
Seismic Surcharge	$P_E =$	0 H
Passive Pressure	$P_P =$	450 pcf
Friction	$\mu =$	0.525
Soil Weight	$\gamma =$	120 pcf
Allowable Bearing	ASBP =	2,000 psf
Allowable 1/3 Increase?		yes
Add'l Wall Loading	D+L =	0 plf
Live Load Surcharge	LL =	0.00 ft

WALL DESIGN

Base Design Shear	$V_u =$	0.4 k	
Shear Strength	$\phi V_c =$	3.9 k	OK!
Base Design Moment	$M_u =$	0.8 kft	
Bending Strength	$\phi M_n =$	2.6 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	>> M_u
Bar A	#	4	
Spacing A	s =	16 in o.c.	
As provided	$A_s =$	0.15 in ²	OK!
As min	$A_{s \min} =$	0.17 in ²	
Development	L _{dh} =	6 in	OK!

WALL & FOOTING DIMENSIONS

Concrete Strength	$f_c =$	3,000 psi
Wall thickness	t =	8 in
Footing thickness	t _f =	10 in
Wall Height	H =	4.0 ft
Toe Length	b _t =	0.67 ft
Heel Length	b _h =	0.67 ft
Footing Length	b _f =	2.00 ft

1/3 height Moment	$M_u =$	0.13 kft	
Bending Strength	$\phi M_n =$	2.60 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	>> M_u
Bar B	#	4	
Spacing B	s =	16 in o.c.	

Full ht bal

STABILITY CHECKS

Wall wt	$W_w =$	0.400 k
Add'l D+L	$W_{D+L} =$	0.000 k
Footing wt	$W_f =$	0.250 k
Soil wt	$W_s =$	0.320 k
Surcharge	$W =$	0.000 k
Total wt	$W =$	0.970 k

FOOTING DESIGN

Heel Shear	$V_u =$	0.0 k	
Heel Shear Strength	$\phi V_c =$	7.6 k	OK!
Heel Design Moment	$M_u =$	0.2 kft	
Heel Bending Strength	$\phi M_n =$	5.1 kft	OK!
Bar C	#	4	
Spacing C	s =	16 in o.c.	
As provided	$A_s =$	0.15 in ²	OK!
As min	$A_{s \min} =$	0.17 in ²	

Construction

Overturning M	OTM =	0.66 kft
Resisting M	RM =	1.2 kft
Sliding Force	V =	0.409 k
Friction	R =	0.587 k
Sliding FS	SF =	See hand Calcs
Soil Pressure	SP =	1,196 psf OK!

SOLUTIONS 4

STRUCTURES Inc.

JOB # 23.007

PRMU20240285

DESIGNED MRODATE 5-29-23PROJECT: BRADLEY HEIGHTS APTS

WALL DESIGN

MAX FREE HT (ABOVE EXTERIOR GRADE = 6'-6")

DEPTH TO ZERO SHEAR (ie MAX MOMENT)


$$(1.6) \frac{450x^2}{2} = (1.6) \frac{35(x+6.5)^2}{2} + 12(6.5)^2$$

$$x = 2.87 \text{ ft}$$

$$\therefore \text{DESIGN } H = 6.5 + 2.87 = 9.37 \text{ ft}$$

$$\text{MAX } V_u = 1.6(35)(6.5)^2/2 + 12(6.5)^2 = 1.69 \text{ K}$$

$$\phi V_c = 0.75(2) \sqrt{3000}(12)(4.0) = 3.94 \text{ K} \checkmark$$

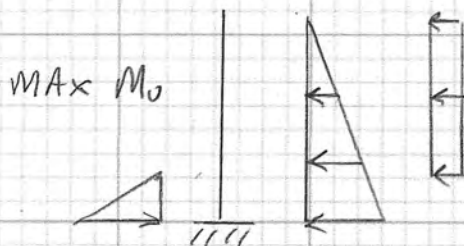

$$M_u = 1.6(35)(9.37)^3/6 = 7.68$$

$$+ 12(6.5)^2(6.12) = 3.10$$

$$- 1.6(450)(2.87)^3/6 = -2.84$$

$$7.94 \text{ K-ft}$$

$$A_s = \#5 @ 10" = 0.372$$

$$a = \frac{.372(60)}{.85(3)(12)} = 0.729 \text{ in}$$

$$\phi M_n = 0.9(.372)(60)\left(5.69 - \frac{.729}{2}\right)/12 = 8.91 \text{ K-ft}$$

JOB # 23.007

PRMU20240285

DESIGNED MRODATE 5-29-23PROJECT: BRADLEY HEIGHTS APTSSLIDING CHECKS

HI	ACTIVE	SEISMIC	FRICTION	PASSIVE	SF
10'-0"	2,182	355	2,623	4,675	2.88
8'-0"	1,418	210	1,785	3,375	3.17
6'-0"	858	134	1,097	1,800	2.92
4'-0"	409	76	594	531	2.32
2'-0"	140	15	274	281	3.58

EXAMPLE : 10'-0" WALL

$$\text{ACTIVE} = 35(10 + 14/12)^2 / 2 = 2,182$$

$$\text{SEISMIC} = 12(6.5)(6.5) \times 0.7 = 355$$

$$\underline{\underline{2,537 \text{ lbs}}}$$

$$\Sigma W = 5(175) + 10(100) + 3.5(2.67 \times 120) + 10(1.67 \times 120) = 4,995 \text{ lbs}$$

$$\text{FRICTION} = 0.525(4,995) = 2,623 \text{ lbs} = 2,623$$

$$\text{PASSIVE} = 450(4.83)^2 / 2 - 450(1)^2 / 2 = 4,675$$

$$\underline{\underline{7,298 \text{ lbs}}}$$

$$\text{SF} = 7,298 / 2,537 = 2.88$$

JOB # 23.007


PRMU20240285

DESIGNED MRO


DATE 5-29-23

PROJECT: BRADLEY HEIGHTS APTS

3-4 SPLIT LEVEL BASEMENT WALL

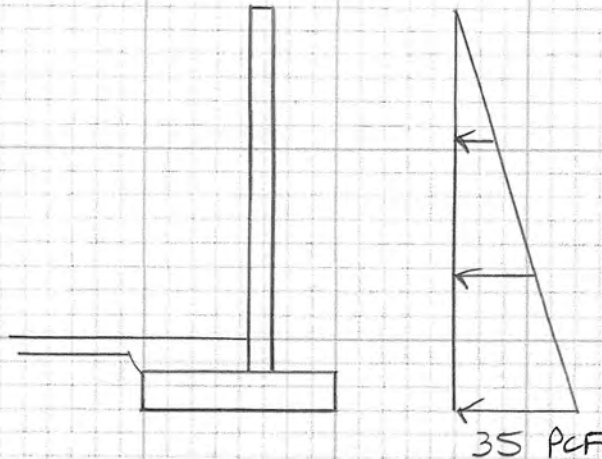

CONDITION 1 = TEMP CANTILEVER DURING CONSTRUCTION
(SEE SPREADSHEET OUTPUT)

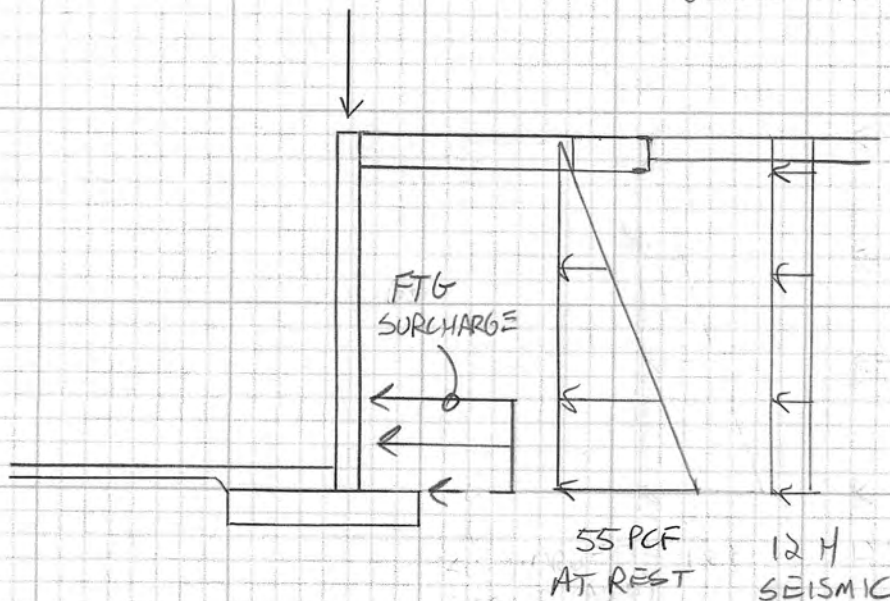

CONDITION 2 = FINAL AT REST CONDITION

SITE RETAINING WALLS

PRMU20240285

Project Bradley Heights
 S4S Job# 23.007
 Date 5-19-23

SOIL PROPERTIES

Active Pressure	$P_A =$	35 pcf
Seismic Surcharge	$P_E =$	0 H
Passive Pressure	$P_P =$	450 pcf
Friction	$\mu =$	0.525
Soil Weight	$\gamma =$	120 pcf
Allowable Bearing	ASBP =	2,000 psf
Allowable 1/3 Increase?		yes
Add'l Wall Loading	D+L =	0 plf
Live Load Surcharge	LL =	0.00 ft

WALL DESIGN

Base Design Shear	$V_u =$	2.8 k	
Shear Strength	$\phi V_c =$	5.6 k	OK!
Base Design Moment	$M_u =$	9.3 kft	
Bending Strength	$\phi M_n =$	9.9 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	Ductile
Bar A	#	5	
Spacing A	s =	8 in o.c.	
As provided	$A_s =$	0.47 in ²	OK!
As min	$A_{s \min} =$	0.23 in ²	
Development	L _{dh} =	10 in	OK!

WALL & FOOTING DIMENSIONS

Concrete Strength	$f_c =$	3,000 psi
Wall thickness	t =	8 in
Footing thickness	t _f =	14 in
Wall Height	H =	10.0 ft
Toe Length	b _t =	2.67 ft
Heel Length	b _h =	1.67 ft
Footing Length	b _f =	5.00 ft

1/3 height Moment	$M_u =$	2.02 kft	
Bending Strength	$\phi M_n =$	5.00 kft	OK!
Cracking Moment	$M_{cr} =$	4.38 kft	>> M_u
Bar B	#	4	
Spacing B	s =	8 in o.c.	

STABILITY CHECKS

Wall wt	$W_w =$	1.000 k
Add'l D+L	$W_{D+L} =$	0.000 k
Footing wt	$W_f =$	0.875 k
Soil wt	$W_s =$	2.000 k
Surcharge	$W =$	0.000 k
Total wt	$W =$	3.875 k

FOOTING DESIGN

Heel Shear	$V_u =$	1.2 k	
Heel Shear Strength	$\phi V_c =$	11.6 k	OK!
Heel Design Moment	$M_u =$	2.3 kft	
Heel Bending Strength	$\phi M_n =$	15.5 kft	OK!
Bar C	#	4	
Spacing C	s =	8 in o.c.	
As provided	$A_s =$	0.30 in ²	OK!
As min	$A_{s \min} =$	0.24 in ²	

Construction

Overturning M	OTM =	8.12 kft	
Resisting M	RM =	13.5 kft	
Sliding Force	V =	2.182 k	
Friction	R =	2.187 k	
Sliding FS	SF =	1.00	Add Key !!
Soil Pressure	SP =	1,855 psf	OK!

JOB # _____

PRMU20240285


DESIGNED _____

DATE _____

PROJECT: _____

3-4 STORY SPLIT LEVEL BASEMENT WALL

DESIGN GRADE BEAM TO SPAN BEARING WALL AT BACKFILL

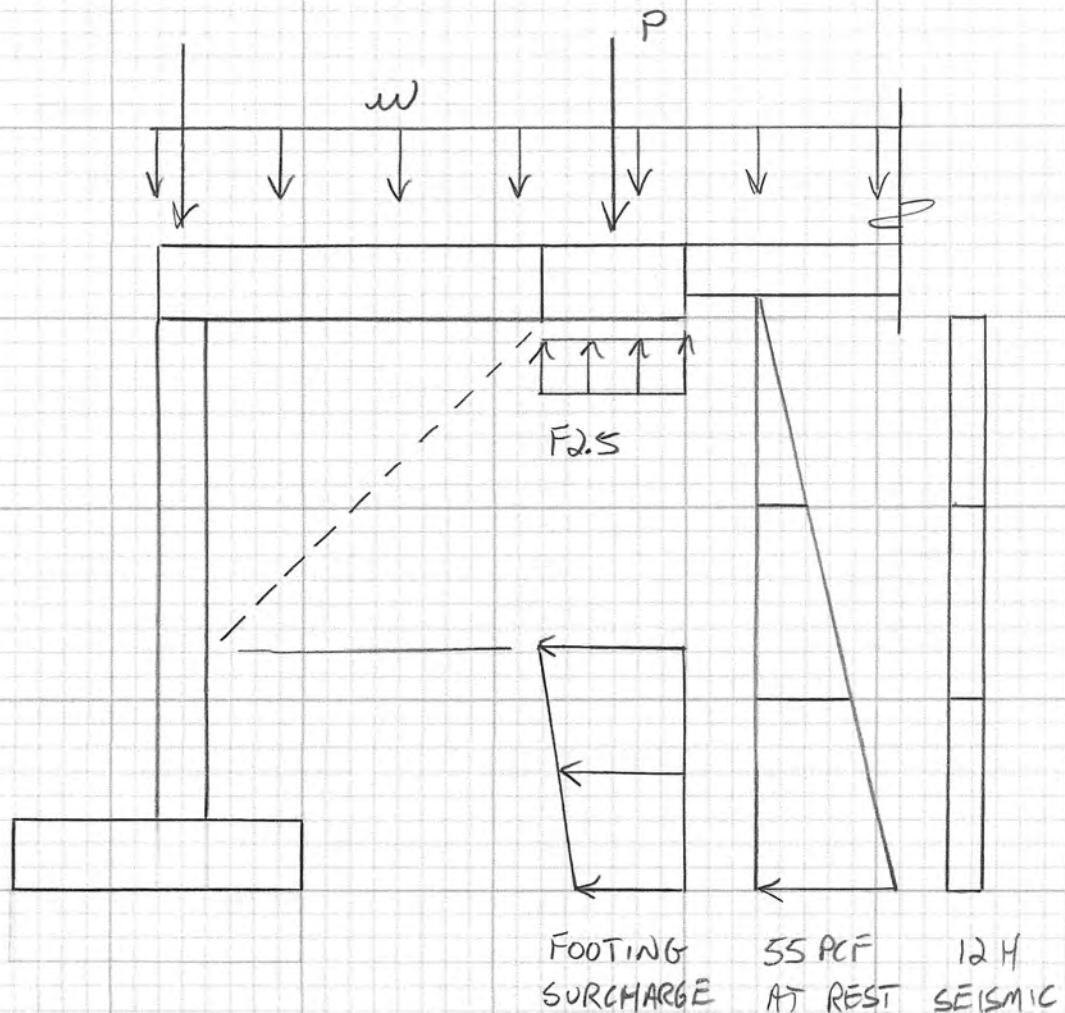

$$w_{u, \max} = 3,066 \text{ plf (SEE GRADE BM DESIGN)}$$

$$P_u = 3,066 (8/2) = 12.2 \text{ K}$$

SURCHARGE VARIES w/ DEPTH

$$d = 8 \text{ ft} \quad w_u = 12.2 (55/120) / (2(8) + 2.5) = 302 \text{ PSF}$$

$$d = 10 \text{ ft} \quad w_u = 12.2 (55/120) / (2(10) + 2.5) = 249 \text{ PSF}$$

Description:

Bradley Heights Apts
S4S Job# 23.007

PRMU20240285

Split Level Basement Wall

Units: English

Properties - X = feet, E = ksi, I = in⁴
X = 0; E = 3122; I = 512;


Moment Releases - X = feet

Supports - X = feet, Displacement = inches, Rotation = radians
X = 0; Disp = 0;
X = 10; Disp = 0;


Springs - X = feet, VSpring = kip/inch, RSpring = kip in/rad

Point Loads - X = feet, PLoad = kips, Moment = kip ft

Uniform Loads - XStart & XEnd = feet, UStart & UEnd = kip/ft
XStart = 0; XEnd = 10; UStart = -0.120; UEnd = -0.120;
/Seismic Surcharge
XStart = 0; XEnd = 10; UStart = 0; UEnd = -0.880;
/At Rest Pressure
XStart = 8; XEnd = 10; UStart = -0.302; UEnd = -0.249;
/Surcharge Pressure

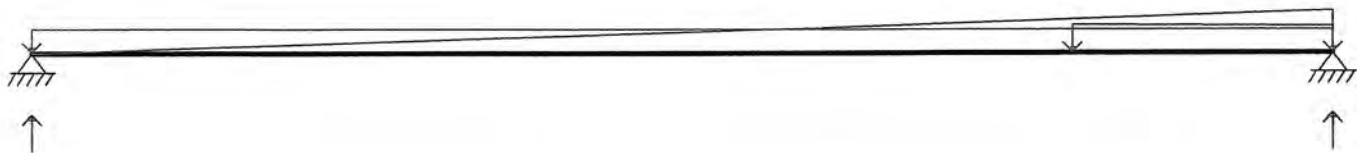


Shear - kips

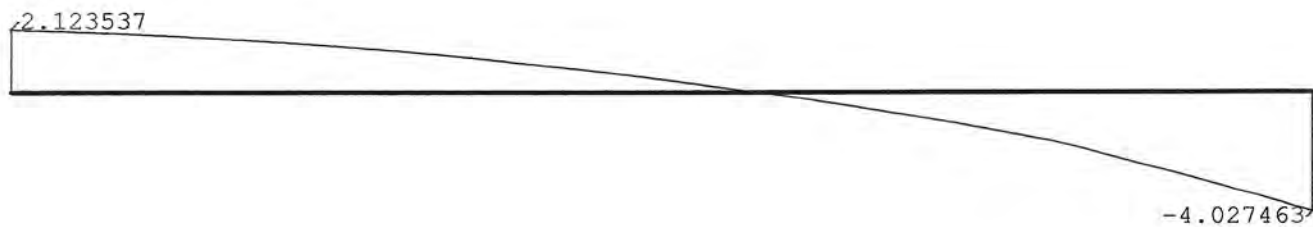


Moment - kip ft



Rotation - radians

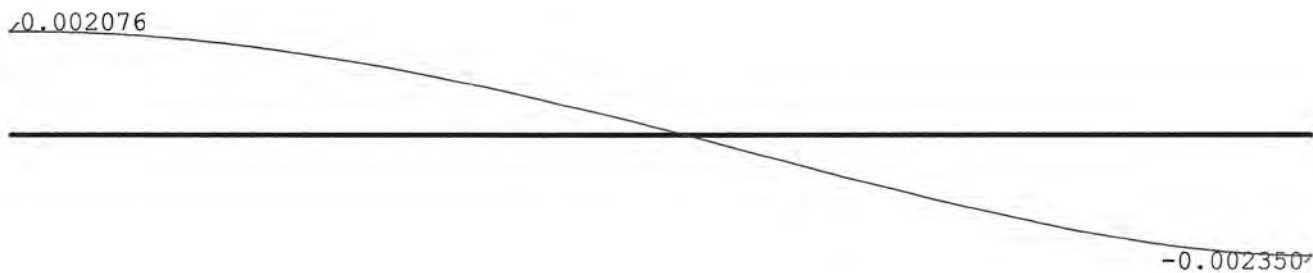

Deflection - inches

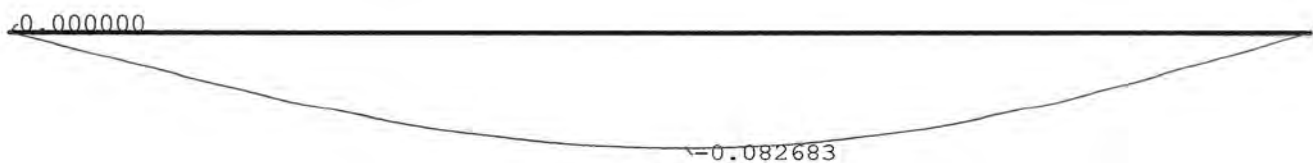

Analysis Data:

Beam Length = 10. feet
 Number of Nodes = 201
 Number of Elements = 200
 Number of Degrees of Freedom = 402

Reactions:

X feet	Vert kips	Rot kip ft
0	2.124	
10.000	4.027	

Equilibrium:

	Force	Reaction	Diff
Vert	-6.151	6.151	0.000 kips
Rot	40.275	-40.275	0.000 kip ft

Min & Max values:

Min Shear	=	-4.027 kips	at	10.000 feet
Max Shear	=	2.124 kips	at	0 feet
Min Moment	=	-2.634e-013 kip ft	at	10.000 feet
Max Moment	=	7.439 kip ft	at	5.700 feet
Min Rotation	=	-0.00235 radians	at	10.000 feet
Max Rotation	=	0.002076 radians	at	0 feet
Min Deflection	=	-0.082683 in	at	5.200 feet
Max Deflection	=	0 in	at	0 feet

JOB # 23.007

PRMU20240285

DESIGNED MRODATE 5-29-23PROJECT: BRADLEY HEIGHTS APTS

FINAL BASEMENT WALL DESIGN

$$\left. \begin{array}{l} V_{u\max} = 4.03 \text{ K} \\ M_{u\max} = 7.43 \text{ Kft} \end{array} \right\} \text{SEE OUTPUT}$$

$$\phi V_c = 0.75(2)\sqrt{3000}(12)(5.69) = 5.61 \text{ K} \checkmark$$

$$\begin{aligned} A_s &= \#5 @ 8" \text{ (mid-Ht)} \\ &= 0.465 \text{ in}^2 \end{aligned}$$

$$a = \frac{.465(60)}{.85(3)(12)} = 0.912 \text{ in}$$

$$\phi M_n = 0.9(0.465)(60)\left(4.0 - \frac{.912}{2}\right)/12 = 7.42 \text{ Kft} \checkmark$$

SOLUTIONS 4

STRUCTURES Inc.

JOB # 23.007

PRMU20240285

DESIGNED MRODATE 5-29-23PROJECT: BRADLEY HEIGHTS APTS

GRADE BEAM DESIGN (18" x 14")

$$\text{SELF WT} = 1.5(1.7)(150) = 263$$

$$\text{SDL} = \frac{825}{1,088} \quad (\text{MAX PERP BRG WALL})$$

$$\text{LL} = 1,100$$

$$w = 1088 + 1100 = 2,188 \text{ plf}$$

F25 R

$$= 2,188 (8/2)$$

$$w_u = 1.2(1088) + 1.6(1100) = 3,066 \text{ plf}$$

$$= 8,752 \text{ lbs (1400 PSF)}$$

$$V_u = 3.066 (8/2) = 12.2 \text{ K (9.6 K @ dist d)}$$

$$\phi V_c = 0.75(2) \sqrt{2500} (18)(10.25) = 13.9 \text{ K} < 2V_u \quad \left(\begin{array}{l} \text{PROVIDE} \\ \text{MIN REINF} \\ \text{@ } d/2 \end{array} \right)$$

$$\text{MIN REINF AREA} = \frac{12.2 - 13.9/2}{12.2} (4.0) = 1.72 \text{ ft}^2$$

$$M_u = 3.066 (8)^2 / 8 = 24.5 \text{ Kft}$$

$$A_s = (2) \#5 = 0.62 \text{ in}^2$$

$$a = \frac{0.62(60)}{0.85(2.5)(18)} = 0.972 \text{ in}$$

$$\phi M_n = 0.9(0.62)(60)(10.25 - \frac{0.972}{2}) / 12 = 27.2 \text{ Kft} \checkmark$$

Lateral

Building B

Job # 23.007

Sheet

PRMU20240285



Designed: MRO

Date: 5/29/23

Checked:

Date:

Project: Bradley Heights Apartments

SEISMIC ANALYSIS:

IBC 2018 / ASCE 7-16

Site Class:Site Class: **C** (IBC 1613.3.2, ASCE Table 20.3-1)**Site Location:**

Latitude: 47.1652 Longitude: -122.2921

Site Coefficients: (USGS Open-File Report 01-437)

$$\begin{aligned}
 S_S &= \mathbf{1.263} & F_a &= 1.20 \\
 S_1 &= \mathbf{0.435} & F_v &= 1.50 \\
 S_{MS} &= F_a * S_S = 1.516 \text{ (IBC Eq.16-37)} \\
 S_{M1} &= F_v * S_1 = 0.653 \text{ (IBC Eq.16-38)}
 \end{aligned}$$

Spectral Response Parameters:

$$\begin{aligned}
 S_{DS} &= 2/3 * S_{MS} = 1.010 \text{ (IBC Eq.16-39)} \\
 S_{D1} &= 2/3 * S_{M1} = 0.435 \text{ (IBC Eq.16-40)}
 \end{aligned}$$

Structure Period:

$$\begin{aligned}
 T_a &= C_t * (h_n)^x = 0.3817 \text{ (ASCE Eq. 12.8-7)} \\
 h_n &= \mathbf{51} \text{ Ft.} & \text{Structural Height Section 11.2} \\
 C_t &= 0.02 \text{ (ASCE Table 12.8-2)} \\
 x &= 0.75 \text{ (ASCE Table 12.8-2)} \\
 C_u &= 1.4 \text{ (ASCE Table 12.8-1)} \\
 T_{(MAX)} &= C_u * T_a = 0.5344 \text{ (ASCE 12.8.2)}
 \end{aligned}$$

All other structural system

Seismic Use Group:Risk Category: I or II, III, IV (ASCE7 11.5.1) I = 1.00 (ASCE Table 1.5-2)**Seismic Design Category:**

Seismic Design Category: D (IBC 1613.3.5, ASCE 11.6)

Seismic Design Category (S_{DS}): D IBC Table 1613.3.5(1), ASCE Table 11.6-1 Short Period (S_{DS})

Seismic Design Category (S_{D1}): D IBC Table 1613.3.5(2), ASCE Table 11.6-2 1 Second Period (S_{D1})

Seismic Response Coefficients

$$\begin{aligned}
 C_S &= S_{DS} / (R / I_E) = 0.155 \text{ (ASCE Eq 12.8-2)} \\
 R &= \mathbf{6.5} \text{ (ASCE 7 Table 12.2-1) wood shear wall} \\
 I_E &= \mathbf{1.00} \text{ (ASCE Table 1.5-2)} \\
 CS(Max) &= 0.175 \\
 S_{D1} / ((R / I_E) * T_a) &= 0.175 \text{ (ASCE Eq 12.8-3) for } T \leq T_L \text{ OK} & T_L = \mathbf{4} \\
 S_{D1} * T_L / ((R / I_E) * T_a^2) &= 1.837 \text{ (ASCE Eq 12.8-4) for } T > T_L \text{ OK} & \text{ASCE Section 12.8 \& 11.4.6} \\
 CS(Min) &= 0.044 & \text{(ASCE fig. 22-14 thru 22-17)} \\
 0.044 S_{DS} I \geq 0.01 &= 0.044 \text{ (ASCE Eq 12.8-5)} \\
 \text{Not Required } S_1 \leq 0.6g & \text{ (ASCE Eq 12.8-6)} \\
 V &= C_S * W = 0.1554 W \text{ (Ultimate Strength)} \\
 V_a &= C_S / 1.4 * W = 0.1110 W \text{ (Allowable Stress)}
 \end{aligned}$$

⚠ This is a beta release of the new ATC Hazards by Location website. Please [contact us](#) with feedback.

🔗 The ATC Hazards by Location website will not be updated to support ASCE 7-22. [Find out why.](#)

ATC Hazards by Location

Search Information

Coordinates: 47.16516801120486, -122.2920663220895

Elevation: 386 ft



Timestamp: 2023-05-11T15:08:01.436Z

Hazard Type: Seismic

Reference Document: ASCE7-16

Risk Category: II

Site Class: C

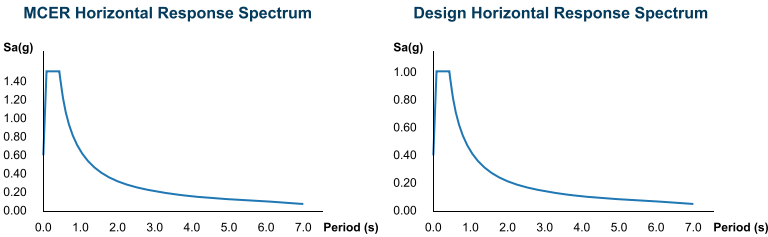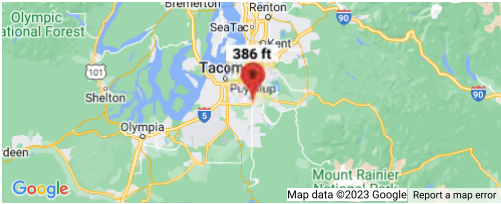

Basic Parameters

Name	Value	Description
S _S	1.264	MCE _R ground motion (period=0.2s)
S ₁	0.436	MCE _R ground motion (period=1.0s)
S _{MS}	1.516	Site-modified spectral acceleration value
S _{M1}	0.654	Site-modified spectral acceleration value
S _{DS}	1.011	Numeric seismic design value at 0.2s SA
S _{D1}	0.436	Numeric seismic design value at 1.0s SA

Additional Information

Name	Value	Description
SDC	D	Seismic design category
F _a	1.2	Site amplification factor at 0.2s
F _v	1.5	Site amplification factor at 1.0s
CR _S	0.914	Coefficient of risk (0.2s)
CR ₁	0.898	Coefficient of risk (1.0s)
PGA	0.5	MCE _G peak ground acceleration
F _{PGA}	1.2	Site amplification factor at PGA
PGA _M	0.6	Site modified peak ground acceleration
T _L	6	Long-period transition period (s)
SsRT	1.264	Probabilistic risk-targeted ground motion (0.2s)
SsUH	1.383	Factored uniform-hazard spectral acceleration (2% probability of exceedance in 50 years)
SsD	1.5	Factored deterministic acceleration value (0.2s)
S1RT	0.436	Probabilistic risk-targeted ground motion (1.0s)
S1UH	0.485	Factored uniform-hazard spectral acceleration (2% probability of exceedance in 50 years)
S1D	0.6	Factored deterministic acceleration value (1.0s)
PGAd	0.5	Factored deterministic acceleration value (PGA)

The results indicated here DO NOT reflect any state or local amendments to the values or any delineation lines made during the building code adoption process. Users should confirm any output obtained from this tool with the local Authority Having Jurisdiction before proceeding with design.

Please note that the ATC Hazards by Location website will not be updated to support ASCE 7-22. [Find out why.](#)

Disclaimer

Hazard loads are provided by the U.S. Geological Survey [Seismic Design Web Services](#).

While the information presented on this website is believed to be correct, ATC and its sponsors and contributors assume no responsibility or liability for its accuracy. The material presented in the report should not be used or relied upon for any specific application without competent examination and verification of its accuracy, suitability and applicability by engineers or other licensed professionals. ATC does not intend that the use of this information replace the sound judgment of such competent professionals, having experience and knowledge in the field of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the results of the report provided by this website. Users of the information from this website assume all liability arising from such use. Use of the output of this website does not imply approval by the governing building code bodies responsible for building code approval and interpretation for the building site described by latitude/longitude location in the report.



Job # 23.007

Sheet:

PRMU20240285

Designed: TLC

Date: 5/29/23

Checked:

Date:

Project: Bradley Heights Apartments 3 story

WIND ANALYSIS:

IBC 2018 / ASCE 7-16

Risk Category

II

I, II, III or IV Figure 26.5-1B

 $I_w = 1.00$ (ASCE Table 1.5-2)

100 Typical

Basic Wind Speed, $V = 97$ mph Section 26.5.1

Exposure Category: B Section 26.7.2

Mean Roof Height, $h = 35.32$ feet

Alpha = 7

Parapet Height above roof, $p = -$ feet $Z_g = 1200$ Building Width, $B = 60.00$ feetBuilding Length, $L = 158.00$ feet

Enclosed Building

Ground Elevation factor: 386 Elev. (ft) Section 26.9

 $G C_{pi} = +/- 0.18$ Table 26.13-1 $G = 0.8500$ gust effect factor defined in section 26.11.1 $K_z = 2.01 (z/z_g)^{2/\alpha}$ (ASCE 7-16 Table 27.3-1) Section 26.10.1 $K_{zt} = (1 + K_1 K_2 K_3)^2 = 1.00$ (ASCE 7-16 Eq. 26.8-1) Section 26.8.2 $K_e = 0.99$ (ASCE 7-16 Table 26.9-1) Section 26.9 $K_d = 0.85$ (ASCE 7-16 Table 26-1) Section 26.6 $I = 1.00$ (ASCE 7-16 Table 1.5-2)Windward: $P = q G C_p - q_i (G C_{pi})$ (ASCE 7-16) (Eq. 27.3-1) $C_p = 0.8$ (windward) Figure 27.3-1

Table 27.3-1 Eq. 27.3-1 Eq. 27.4-1a Eq. 27.4-1b Eq. 27.4-1 Eq. 27.4-1

h	Sec. 27.3.1	Sec. 27.3.2	External	Internal	Total	Total
feet	K_z	q_z (psf)	$q_z G C_p$	$- q_i (G C_{pi})$	$q G C_p + q_i (G C_{pi})$	$q G C_p - q_i (G C_{pi})$
10	0.51	10.33	7.03	2.67	9.69	4.36
20	0.62	12.60	8.57	2.67	11.23	5.90
30	0.70	14.14	9.62	2.67	12.29	6.95
35	0.73	14.78	10.05	2.67	12.72	7.38
35.32	0.73	14.82	10.08	2.67	12.75	7.41
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
35.32	$q=q_h=q_i$	14.82	10.08	2.67	12.75	7.41
0	$q=q_p$	0.00	-	-	-	Parapet

Totals

Windward + Leeward		h
Along B	Along L	feet
10.4 (6.2)	13.3 (8.0)	10
11.9 (7.2)	14.9 (8.9)	20
13.0 (7.8)	15.9 (9.6)	30
13.4 (8.1)	16.4 (9.8)	35
13.5 (8.1)	16.4 (9.8)	35.32
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
13.5 (8.1)	16.4 (9.8)	35.32
0.0 (0.0)	0.0 (0.0)	Parapet

() values are ASD = ULT x 0.6

Figure 27.3-1

 $C_p = -0.5$ (Leeward along L) $C_p = -0.27$ (Leeward along B)Leeward: $P = q G C_p - q_i (G C_{pi})$ (ASCE 7-16) (Eq. 27.3-1)

	External	Internal	Total	Total	
q_h (psf)	$q_h G C_p$	$- q_i (G C_{pi})$	$q G C_p - q_i (G C_{pi})$	$q G C_p + q_i (G C_{pi})$	
14.82	-6.30	2.67	-3.63	-8.97	Along L
14.82	-3.38	2.67	-0.71	-6.05	Along B

Parapet: $P_p = q_p G C_{pn}$ (ASCE 7-16) (Eq. 27.3-3)

	Windward	Leeward
q_p (psf)	$q_p G C_{pn}$	$q_p G C_{pn}$
0.00	0.00	0.00

Section 27.3.4

 $G C_{pn} = 1.5$ (Windward Parapet) $G C_{pn} = -1.0$ (Leeward Parapet)Walls: $P = q_h [(G C_p) - (G C_{pi})]$ (ASCE 7-16) (Eq. 30.3-1) $h \leq 60$ ft

Table 26.13-1

Area (ft ²)	$G C_p$ (4&5)	Windward	$G C_{pi}$ (4)	Leeward	$G C_p$ (5)	Leeward	$G C_{pi}$	
10	1.00	17.5 (10.5)	-1.10	-19.0 (-11.4)	-1.40	-23.4 (-14.0)	0.18	(Windward)
25	0.93	16.4 (9.9)	-1.03	-17.9 (-10.8)	-1.26	-21.3 (-12.8)	-0.18	(Leeward)
50	0.88	15.7 (9.4)	-0.98	-17.1 (-10.3)	-1.15	-19.8 (-11.9)		
200	0.77	14.1 (8.4)	-0.87	-15.6 (-9.3)	-0.94	-16.6 (-10.0)	q_h (psf) = 14.82	



Job # 23.007

Sheet:

PRMU20240285

Designed: TLC

Date: 5/29/23

Checked:

Date:

Project: Bradley Heights Apartments 3 story

WIND ANALYSIS:

IBC 2018 / ASCE 7-16

Risk Category

II

I, II, III or IV Figure 26.5-1B

 $I_w = 1.00$ (ASCE Table 1.5-2)

100 Typical

Basic Wind Speed, $V = 97$ mph Section 26.5.1

Exposure Category: B Section 26.7.2

Mean Roof Height, $h = 44.50$ feet

Alpha = 7

Parapet Height above roof, $p = -$ feet $Z_g = 1200$ Building Width, $B = 60.00$ feetBuilding Length, $L = 158.00$ feet

Enclosed Building

Ground Elevation factor: 386 Elev. (ft) Section 26.9

 $G C_{pi} = +/- 0.18$ Table 26.13-1 $G = 0.8500$ gust effect factor defined in section 26.11.1 $K_z = 2.01 (z/Z_g)^{2/\alpha}$ (ASCE 7-16 Table 27.3-1) Section 26.10.1 $K_{zt} = (1 + K_1 K_2 K_3)^2 = 1.00$ (ASCE 7-16 Eq. 26.8-1) Section 26.8.2 $K_e = 0.99$ (ASCE 7-16 Table 26.9-1) Section 26.9 $K_d = 0.85$ (ASCE 7-16 Table 26-1) Section 26.6 $I = 1.00$ (ASCE 7-16 Table 1.5-2)Windward: $P = q G C_p - q_i (G C_{pi})$ (ASCE 7-16) (Eq. 27.3-1) $C_p = 0.8$ (windward) Figure 27.3-1

Table 27.3-1 Eq. 27.3-1 Eq. 27.4-1a Eq. 27.4-1b Eq. 27.4-1 Eq. 27.4-1

h	Sec. 27.3.1	Sec. 27.3.2	External	Internal	Total	Total
feet	K_z	q_z (psf)	$q_z G C_p$	$- q_i (G C_{pi})$	$q G C_p + q_i (G C_{pi})$	$q G C_p - q_i (G C_{pi})$
10	0.51	10.33	7.03	2.85	9.88	4.18
20	0.62	12.60	8.57	2.85	11.42	5.72
30	0.70	14.14	9.62	2.85	12.47	6.77
35	0.73	14.78	10.05	2.85	12.90	7.20
40	0.76	15.36	10.44	2.85	13.29	7.59
44.5	0.78	15.83	10.77	2.85	13.62	7.92
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
44.5	$q = q_h = q_i =$	15.83	10.77	2.85	13.62	7.92
0	$q = q_p =$	0.00	-	-	-	Parapet

Totals

Windward + Leeward		h
Along B	Along L	feet
10.6 (6.4)	13.8 (8.3)	10
12.2 (7.3)	15.3 (9.2)	20
13.2 (7.9)	16.3 (9.8)	30
13.7 (8.2)	16.8 (10.1)	35
14.1 (8.4)	17.2 (10.3)	40
14.4 (8.6)	17.5 (10.5)	44.5
-	-	-
-	-	-
-	-	-
-	-	-
14.4 (8.6)	17.5 (10.5)	44.5
0.0 (0.0)	0.0 (0.0)	Parapet

() values are ASD = ULT x 0.6

Figure 27.3-1

 $C_p = -0.5$ (Leeward along L) $C_p = -0.27$ (Leeward along B)Leeward: $P = q G C_p - q_i (G C_{pi})$ (ASCE 7-16) (Eq. 27.3-1)

	External	Internal	Total	Total	
q_h (psf)	$q_h G C_p$	$- q_i (G C_{pi})$	$q G C_p - q_i (G C_{pi})$	$q G C_p + q_i (G C_{pi})$	
15.83	-6.73	2.85	-3.88	-9.58	Along L
15.83	-3.61	2.85	-0.76	-6.46	Along B

Parapet: $P_p = q_p G C_{pn}$ (ASCE 7-16) (Eq. 27.3-3)

	Windward	Leeward
q_p (psf)	$q_p G C_{pn}$	$q_p G C_{pn}$
0.00	0.00	0.00

Section 27.3.4

 $G C_{pn} = 1.5$ (Windward Parapet) $G C_{pn} = -1.0$ (Leeward Parapet)Walls: $P = q_h [(G C_p) - (G C_{pi})]$ (ASCE 7-16) (Eq. 30.3-1) $h \leq 60$ ft

Table 26.13-1

Area (ft ²)	$G C_p$ (4&5)	Windward	$G C_{pi}$ (4)	Leeward	$G C_p$ (5)	Leeward	$G C_{pi}$	
10	1.00	18.7 (11.2)	-1.10	-20.3 (-12.2)	-1.40	-25.0 (-15.0)	0.18	(Windward)
25	0.93	17.6 (10.5)	-1.03	-19.2 (-11.5)	-1.26	-22.8 (-13.7)	-0.18	(Leeward)
50	0.88	16.7 (10.0)	-0.98	-18.3 (-11.0)	-1.15	-21.1 (-12.7)		
200	0.77	15.0 (9.0)	-0.87	-16.6 (-10.0)	-0.94	-17.7 (-10.6)	q_h (psf) = 15.83	

⚠ This is a beta release of the new ATC Hazards by Location website. Please [contact us](#) with feedback.

🔗 The ATC Hazards by Location website will not be updated to support ASCE 7-22. [Find out why.](#)

ATC Hazards by Location


Search Information

Coordinates: 47.16516801120486, -122.2920663220895

Elevation: 386 ft

Timestamp: 2023-05-11T15:05:14.182Z

Hazard Type: Wind

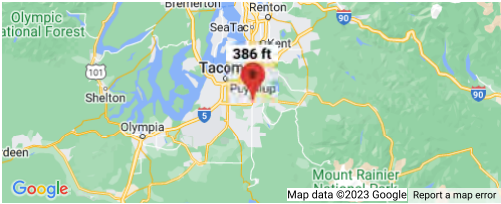

ASCE 7-16		ASCE 7-10		ASCE 7-05	
MRI 10-Year	67 mph	MRI 10-Year	72 mph	ASCE 7-05 Wind Speed	85 mph
MRI 25-Year	73 mph	MRI 25-Year	79 mph		
MRI 50-Year	78 mph	MRI 50-Year	85 mph		
MRI 100-Year	82 mph	MRI 100-Year	91 mph		
Risk Category I	92 mph	Risk Category I	100 mph		
Risk Category II	97 mph	Risk Category II	110 mph		
Risk Category III	104 mph	Risk Category III-IV	115 mph		
Risk Category IV	108 mph				

The results indicated here DO NOT reflect any state or local amendments to the values or any delineation lines made during the building code adoption process. Users should confirm any output obtained from this tool with the local Authority Having Jurisdiction before proceeding with design.

Please note that the ATC Hazards by Location website will not be updated to support ASCE 7-22. [Find out why.](#)

Disclaimer

Hazard loads are interpolated from data provided in ASCE 7 and rounded up to the nearest whole integer. Per ASCE 7, islands and coastal areas outside the last contour should use the last wind speed contour of the coastal area – in some cases, this website will extrapolate past the last wind speed contour and therefore, provide a wind speed that is slightly higher. NOTE: For queries near wind-borne debris region boundaries, the resulting determination is sensitive to rounding which may affect whether or not it is considered to be within a wind-borne debris region.

Mountainous terrain, gorges, ocean promontories, and special wind regions shall be examined for unusual wind conditions.

While the information presented on this website is believed to be correct, ATC and its sponsors and contributors assume no responsibility or liability for its accuracy. The material presented in the report should not be used or relied upon for any specific application without competent examination and verification of its accuracy, suitability and applicability by engineers or other licensed professionals. ATC does not intend that the use of this information replace the sound judgment of such competent professionals, having experience and knowledge in the field of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the results of the report provided by this website. Users of the information from this website assume all liability arising from such use. Use of the output of this website does not imply approval by the governing building code bodies responsible for building code approval and interpretation for the building site described by latitude/longitude location in the report.

202 27th Ave SE, Puyallup, WA 98374



Restaurants

Hotels

Things to do

Transit

Parking

Pharmacies

ATMs



202 27th Ave SE

Building



Directions



Save



Nearby



Send to
phone



Share


202 27th Ave SE, Puyallup, WA 98374


Suggest an edit on 202 27th Ave SE

Add a missing place

Add your business

Photos

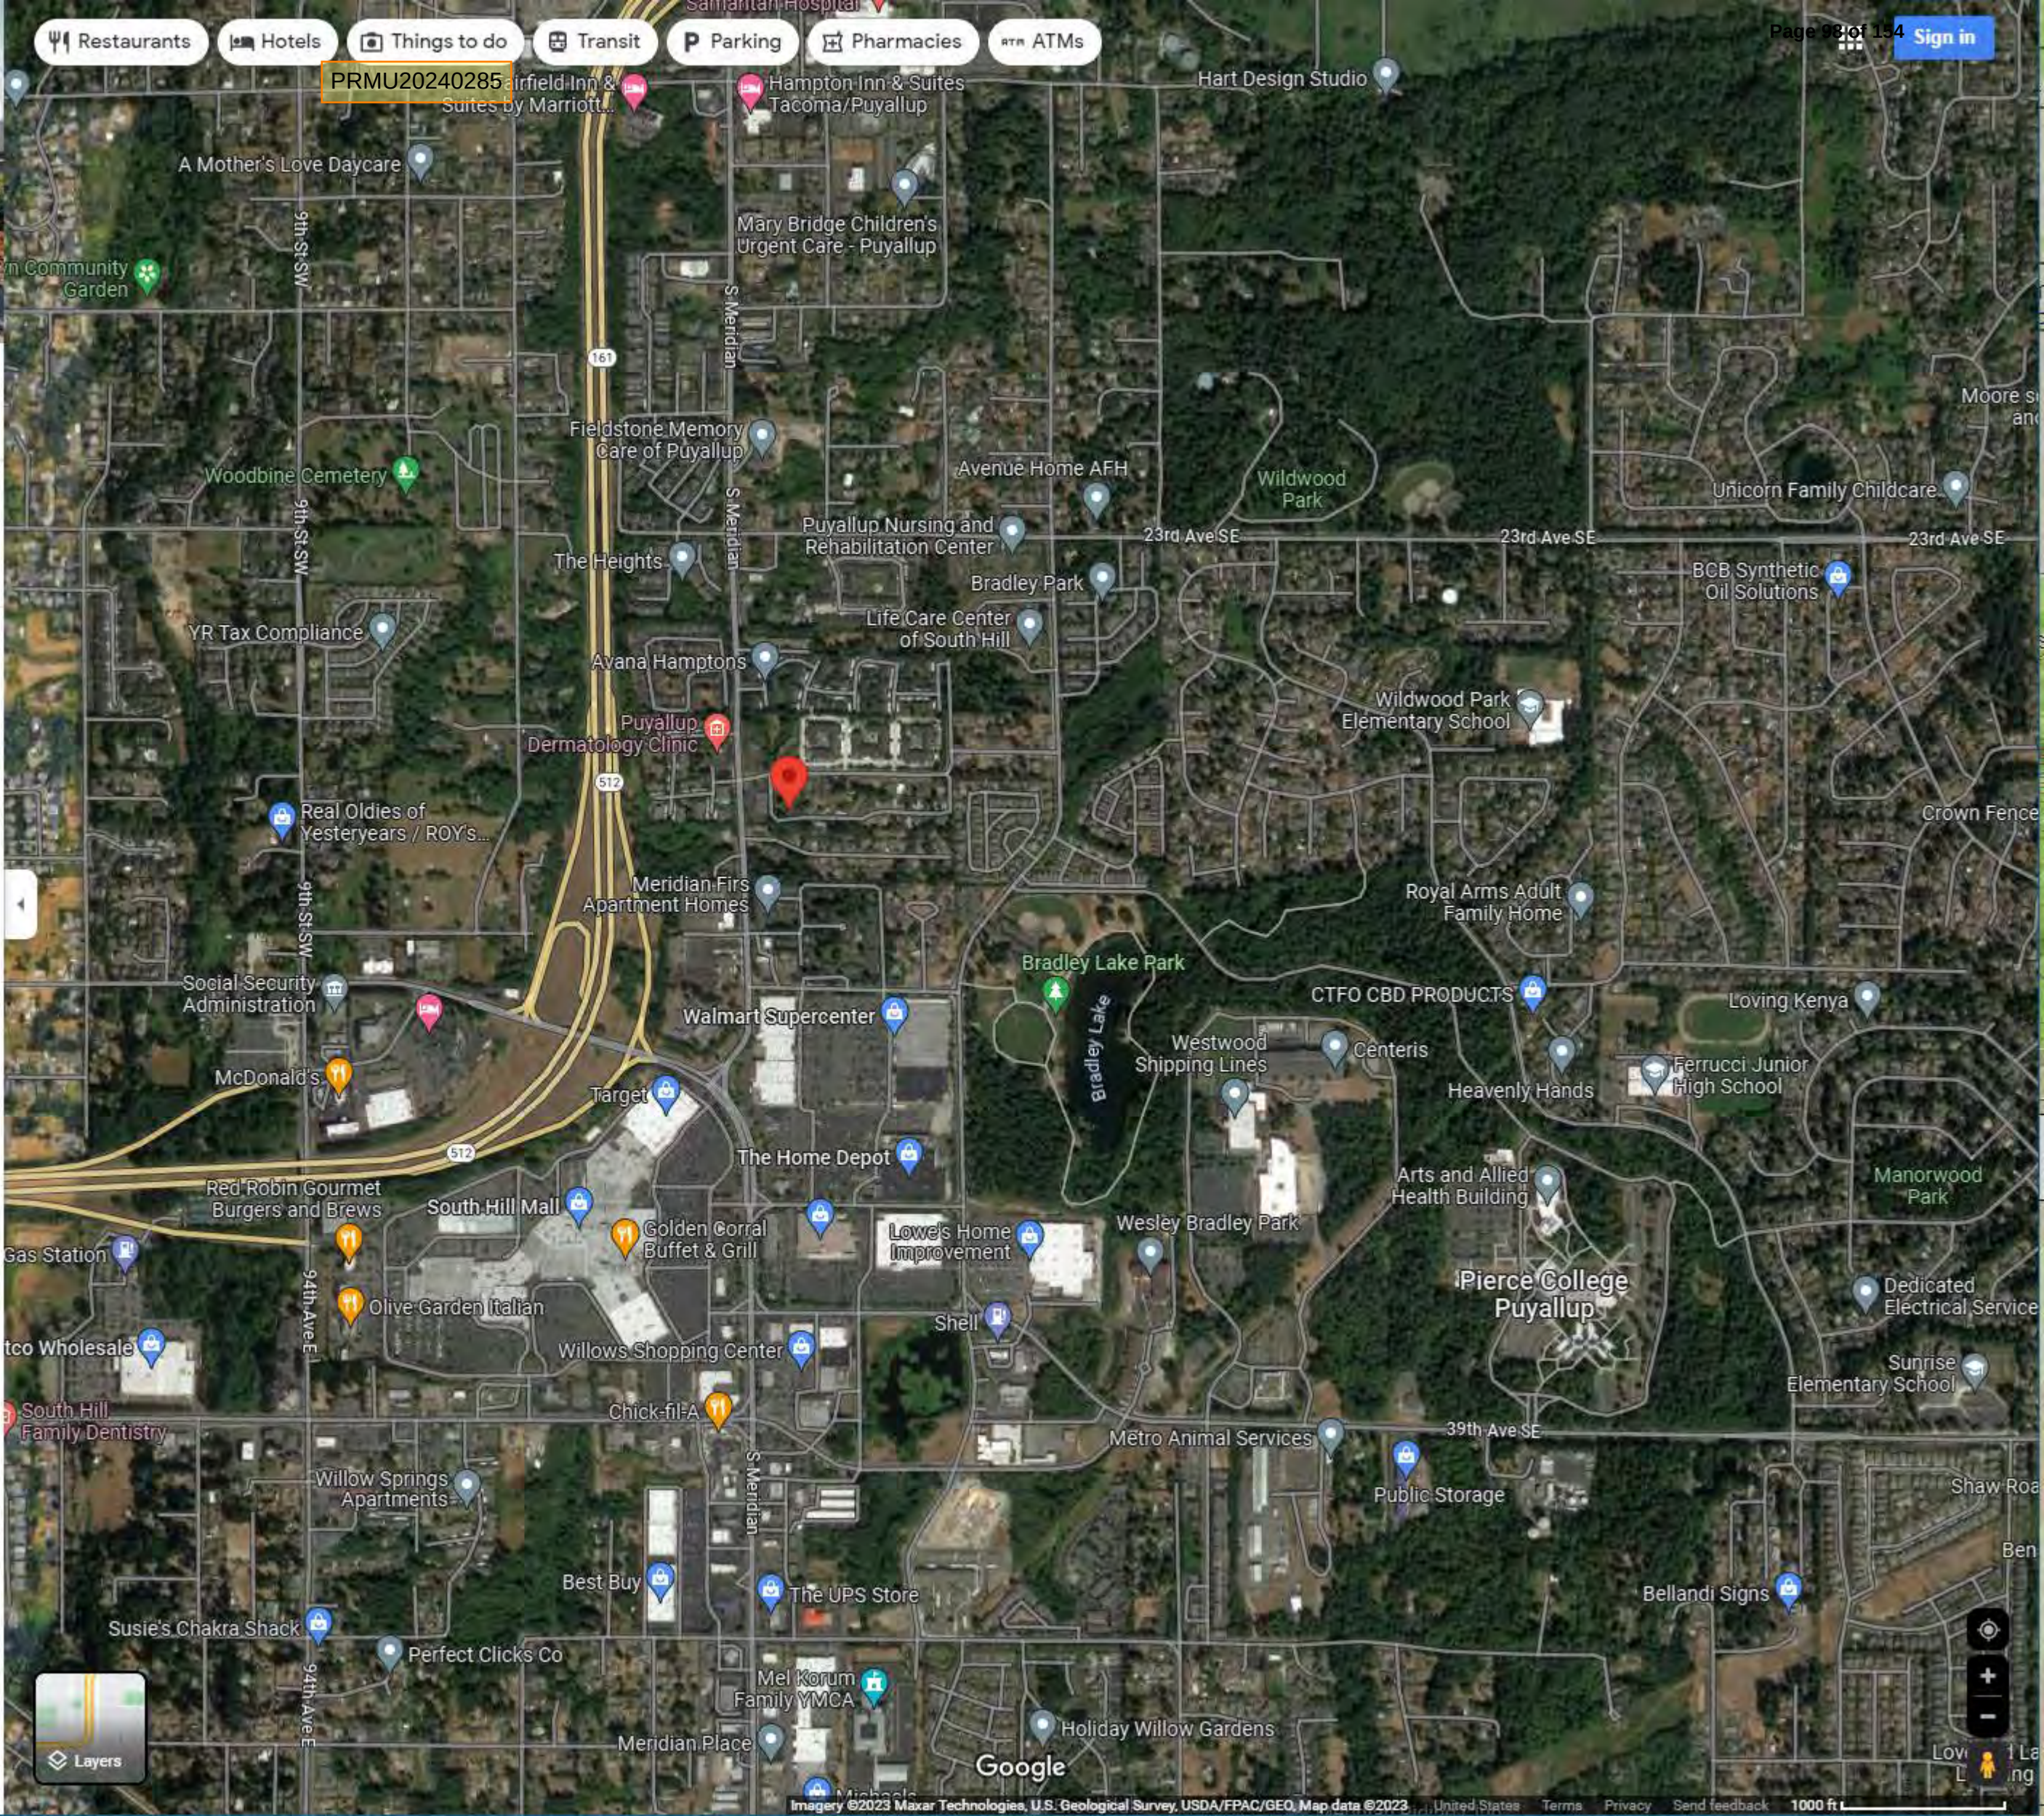

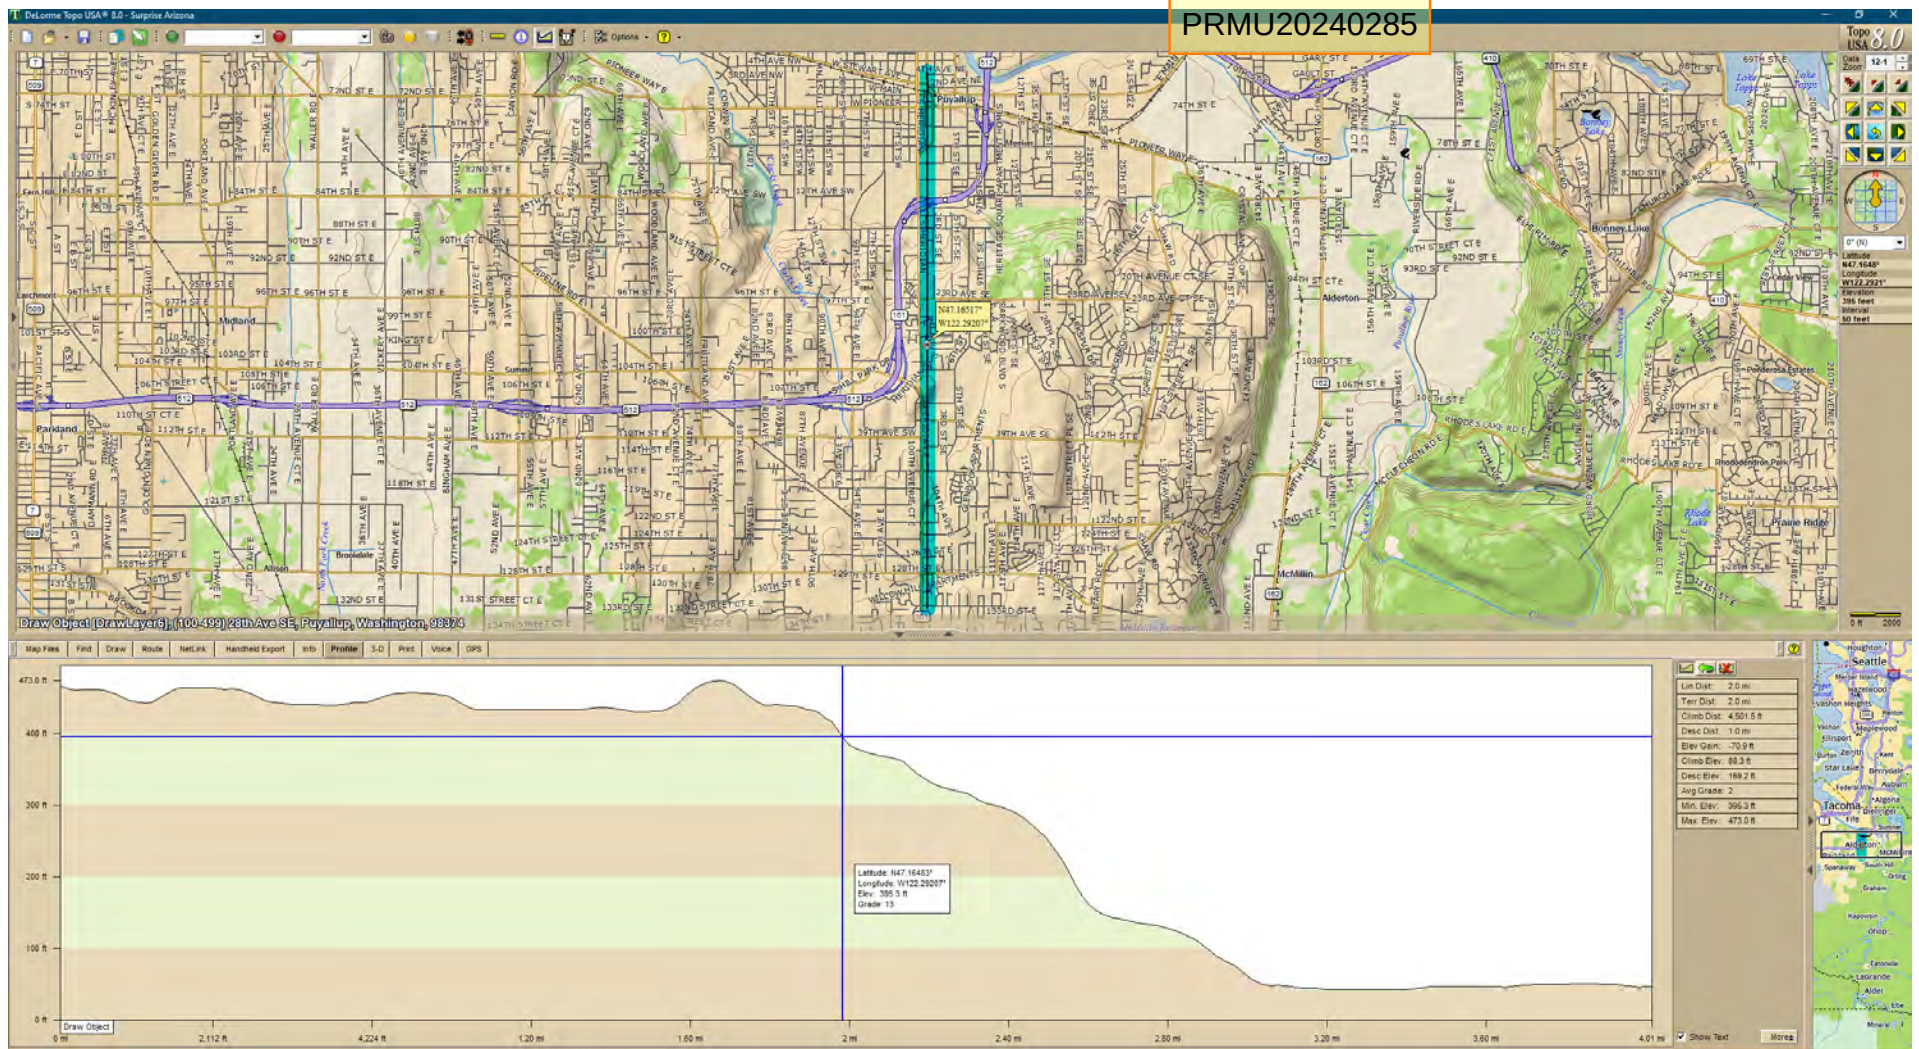

Kzt = 1.0


26.8 TOPOGRAPHIC EFFECTS

 K_{ZT}


1

Exposure Category: B

Hill Shape: 2D Escarpment

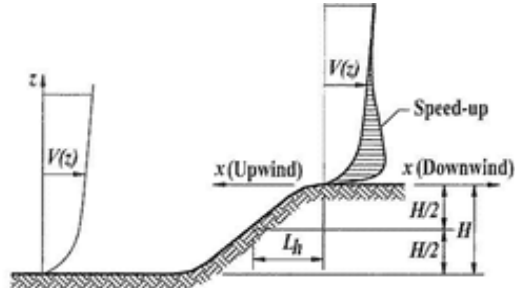

ESCARPMENT

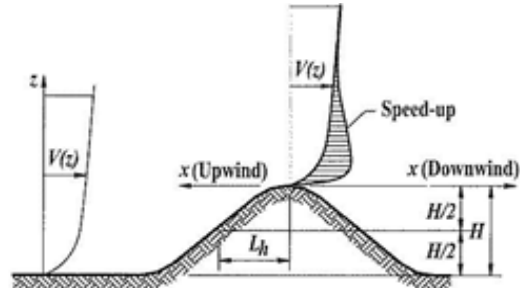

2-D RIDGE OR 3-D AXISYMMETRICAL HILL

$$EL_{top} = 473 \text{ ft}$$

Elevation at crest of 2D Escarpment

$$EL_{Bot} = 142.1 \text{ ft}$$

Elevation at base of 2D Escarpment

$$H = 330.9 \text{ ft}$$

307.55

$$H/2 = 165.45 \text{ ft}$$

$$L_h = 3541 \text{ ft}$$

$$H/L_h = 0.0934$$

Kzt Calc Not Required

$$K_1 = 0.75H/L_h = 0.070086$$

$$K_1/(H/L_h) = 0.75$$

(Figure 26.8-1)

$$K_2 = (1 - \frac{|x|}{\mu L_h}) = 0.602372$$

$$x = 2112 \text{ ft}$$

5311.5 distance KZT no long affects wind speed

upwind

$$\mu = 1.5$$

(Figure 26.8-1)

$$L_h = 3541 \text{ ft}$$

$$K_3 = e^{-\gamma z/L_h} = 0.989466$$

$$z = 15 \text{ ft}$$

height above ground surface at site

$$\gamma = 2.5$$

(Figure 26.8-1)

$$L_h = 3541 \text{ ft}$$

$$K_{ZT} = (1 + K_1 K_2 K_3)^2 = 1.00 \quad (\text{Eq. 26.8-1})$$


26.8 TOPOGRAPHIC EFFECTS

 K_{ZT}


2

Exposure Category: B

Hill Shape: 2D Escarpment

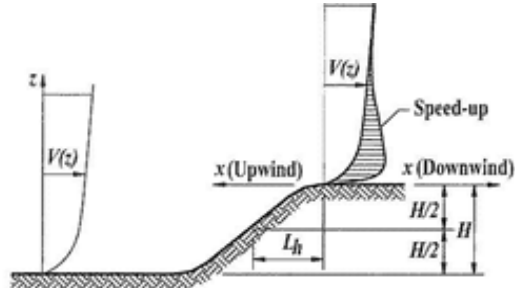

ESCARPMENT

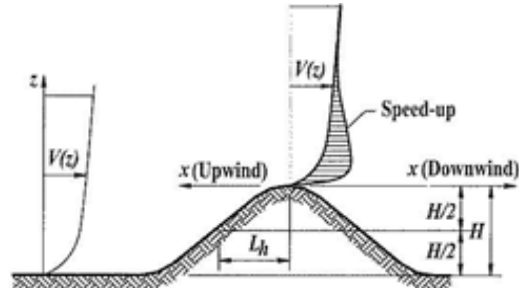 $EL_{top} = 301 \text{ ft}$
 $EL_{Bot} = 142.1 \text{ ft}$
 $H = 158.9 \text{ ft}$
 $H/2 = 79.45 \text{ ft}$
 $L_h = 940 \text{ ft}$
 $H/L_h = 0.1690$


2-D RIDGE OR 3-D AXISYMMETRICAL HILL

Elevation at crest of 2D Escarpment

Elevation at base of 2D Escarpment

221.55

Kzt Calc Not Required

 $K_1 = 0.75H/L_h = 0.126782$
 $K_1/(H/L_h) = 0.75$

(Figure 26.8-1)

 $K_2 = (1 - \frac{|x|}{\mu L_h}) = 0.562234$
 $x = 1646 \text{ ft}$

3760 distance KZT no long affects wind speed

downwind

 $\mu = 4$

(Figure 26.8-1)

 $L_h = 940 \text{ ft}$
 $K_3 = e^{-\gamma z/L_h} = 0.960892$
 $z = 15 \text{ ft}$

height above ground surface at site

 $\gamma = 2.5$

(Figure 26.8-1)

 $L_h = 940 \text{ ft}$
 $K_{ZT} = (1 + K_1 K_2 K_3)^2 = 1.00 \quad (\text{Eq. 26.8-1})$


26.8 TOPOGRAPHIC EFFECTS

 K_{ZT}


3

Exposure Category: B

Hill Shape: 2D Escarpment

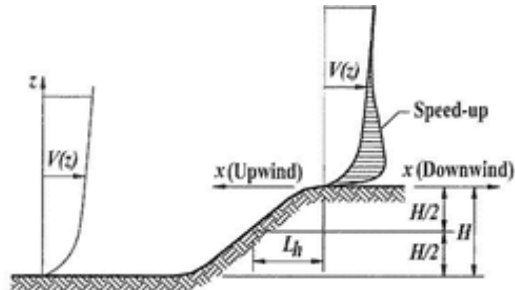

ESCARPMENT

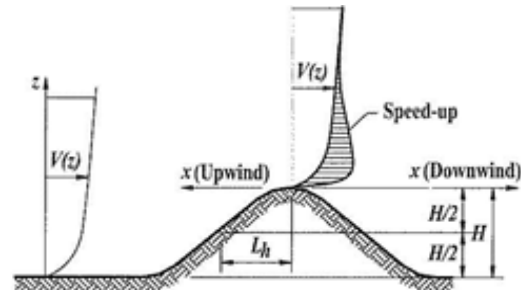

2-D RIDGE OR 3-D AXISYMMETRICAL HILL

$$EL_{top} = 177.4 \text{ ft}$$

Elevation at crest of 2D Escarpment

$$EL_{Bot} = 0 \text{ ft}$$

Elevation at base of 2D Escarpment

$$H = 177.4 \text{ ft}$$

$$H/2 = 88.7 \text{ ft}$$

$$L_h = 1144 \text{ ft}$$

$$H/L_h = 0.1551$$

Kzt Calc Not Required

$$K_1 = 0.75H/L_h = 0.116302$$

$$K_1/(H/L_h) = 0.75$$

(Figure 26.8-1)

$$K_2 = (1 - \frac{|x|}{\mu L_h}) = 0$$

$$x = 6598 \text{ ft}$$

4576 distance KZT no long affects wind speed

downwind

$$\mu = 4$$

(Figure 26.8-1)

$$L_h = 1144 \text{ ft}$$

$$K_3 = e^{-\gamma z/L_h} = 0.967752$$

$$z = 15 \text{ ft}$$

height above ground surface at site

$$\gamma = 2.5$$

(Figure 26.8-1)

$$L_h = 1144 \text{ ft}$$

$$K_{ZT} = (1 + K_1 K_2 K_3)^2 = 1.00 \quad (\text{Eq. 26.8-1})$$

K_{ZT} Check**26.8 TOPOGRAPHIC EFFECTS****26.8.1 Wind Speed-Up over Hills, Ridges, and Escarpments**

Wind speed-up effects at isolated hills, ridges, and escarpments constituting abrupt changes in the general topography, located in any exposure category, shall be included in the determination of the wind loads when buildings and other site conditions and locations of structures meet all of the following conditions:

Y N

☒ ☐

1. The hill, ridge, or escarpment is isolated and unobstructed upwind by other similar topographic features of comparable height for 100 times the height of the topographic feature ($100H$) or 2 mi (3.22 km), whichever is less. This distance shall be measured horizontally from the point at which the height H of the hill, ridge, or escarpment is determined.

☒ ☐

2. The hill, ridge, or escarpment protrudes above the height of upwind terrain features within a 2-mi (3.22-km) radius in any quadrant by a factor of two or more.

☒ ☐

3. The structure is located as shown in Fig. 26.8-1 in the upper one-half of a hill or ridge or near the crest of an escarpment.

☐ ☒

4. $H/L_h \geq 0.2$.

☒ ☐

5. H is greater than or equal to 15 ft (4.5 m) for Exposure C and D and 60 ft (18 m) for Exposure B.

26.8.2 Topographic Factor


The wind speed-up effect shall be included in the calculation of design wind loads by using the factor K_{zt} :

$$K_{zt} = (1 + K_1 K_2 K_3)^2 \quad (26.8-1)$$

where K_1 , K_2 , and K_3 are given in Fig. 26.8-1.

If site conditions and locations of buildings and other structures do not meet all the conditions specified in Section 26.8.1 then $K_{zt} = 1.0$.

$$K_{zt} = 1.0$$

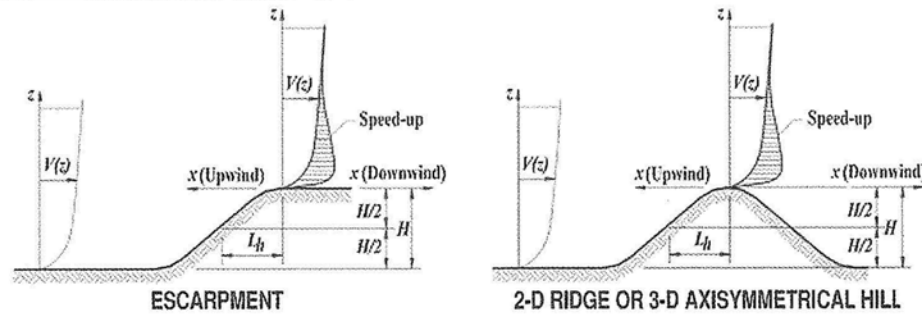Diagrams**Topographic Multipliers for Exposure $C^{a,b,c}$**

H/L_h	K_1 Multiplier			x/L_h	K_2 Multiplier		z/L_h	K_2 Multiplier		
	2D Ridge	2D Escarpment	3D Axisymmetrical Hill		2D Escarpment	All Other Cases		2D Ridge	2D Escarpment	3D Axisymmetrical Hill
0.20	0.29	0.17	0.21	0.00	1.00	1.00	0.00	1.00	1.00	1.00
0.25	0.36	0.21	0.26	0.50	0.88	0.67	0.10	0.74	0.78	0.67
0.30	0.43	0.26	0.32	1.00	0.75	0.33	0.20	0.55	0.61	0.45
0.35	0.51	0.30	0.37	1.50	0.63	0.00	0.30	0.41	0.47	0.30
0.40	0.58	0.34	0.42	2.00	0.50	0.00	0.40	0.30	0.37	0.20
0.45	0.65	0.38	0.47	2.50	0.38	0.00	0.50	0.22	0.29	0.14
0.50	0.72	0.43	0.53	3.00	0.25	0.00	0.60	0.17	0.22	0.09
				3.50	0.13	0.00	0.70	0.12	0.17	0.06
				4.00	0.00	0.00	0.80	0.09	0.14	0.04
							0.90	0.07	0.11	0.03
							1.00	0.05	0.08	0.02
							0.50	0.01	0.02	0.00
							2.00	0.00	0.00	0.00

^aFor values of H/L_h , x/L_h , and z/L_h other than those shown, linear interpolation is permitted.

^bFor $H/L_h > 0.5$, assume that $H/L_h = 0.5$ for evaluating K_1 and substitute $2H$ for L_h for evaluating K_2 and K_3 .

^cMultipliers are based on the assumption that wind approaches the hill or escarpment along the direction of maximum slope.

Notation

H = Height of hill or escarpment relative to the upwind terrain, in ft (m).

K_1 = Factor to account for shape of topographic feature and maximum speed-up effect.

K_2 = Factor to account for reduction in speed-up with distance upwind or downwind of crest.

K_3 = Factor to account for reduction in speed-up with height above local terrain.

L_h = Distance upwind of crest to where the difference in ground elevation is half the height of hill or escarpment, in ft (m).

x = Distance (upwind or downwind) from the crest to the site of the building or other structure, in ft (m).

z = Height above ground surface at the site of the building or other structure, in ft (m).

μ = Horizontal attenuation factor.

γ = Height attenuation factor.

Equations

$$K_{zt} = (1 + K_1 K_2 K_3)^2$$

K_1 = determined from table below

$$K_2 = (1 - |x|/\mu L_h)$$

$$K_3 = e^{-\gamma z/L_h}$$


Parameters for Speed-Up over Hills and Escarpments

Hill Shape	$K_1/(H/L_h)$			γ	μ	
	Exposure				Upwind of Crest	Downwind of Crest
	B	C	D			
2D ridges (or valleys with negative H in $K_1/(H/L_h)$)	1.30	1.45	1.55	3	1.5	1.5
2D escarpments	0.75	0.85	0.95	2.5	1.5	4
3D axisymmetrical hill	0.95	1.05	1.15	4	1.5	1.5

FIGURE 26.8-1 Topographic Factor, K_{zt}

PRMU20240285

wind combined		wind 3 story		wind 3 story + basement		
156	152	10	10.6875	159	10.5	10.6875
		10	9.083333		10.3	9.083333
102	101	10	1.05	103	10	1.05
		10	9.083333		10	9.083333
101	101	10	1.05	101	10	1.05
		10	9.083333		10	9.083333
				101	10	1.05
					10	9.083333

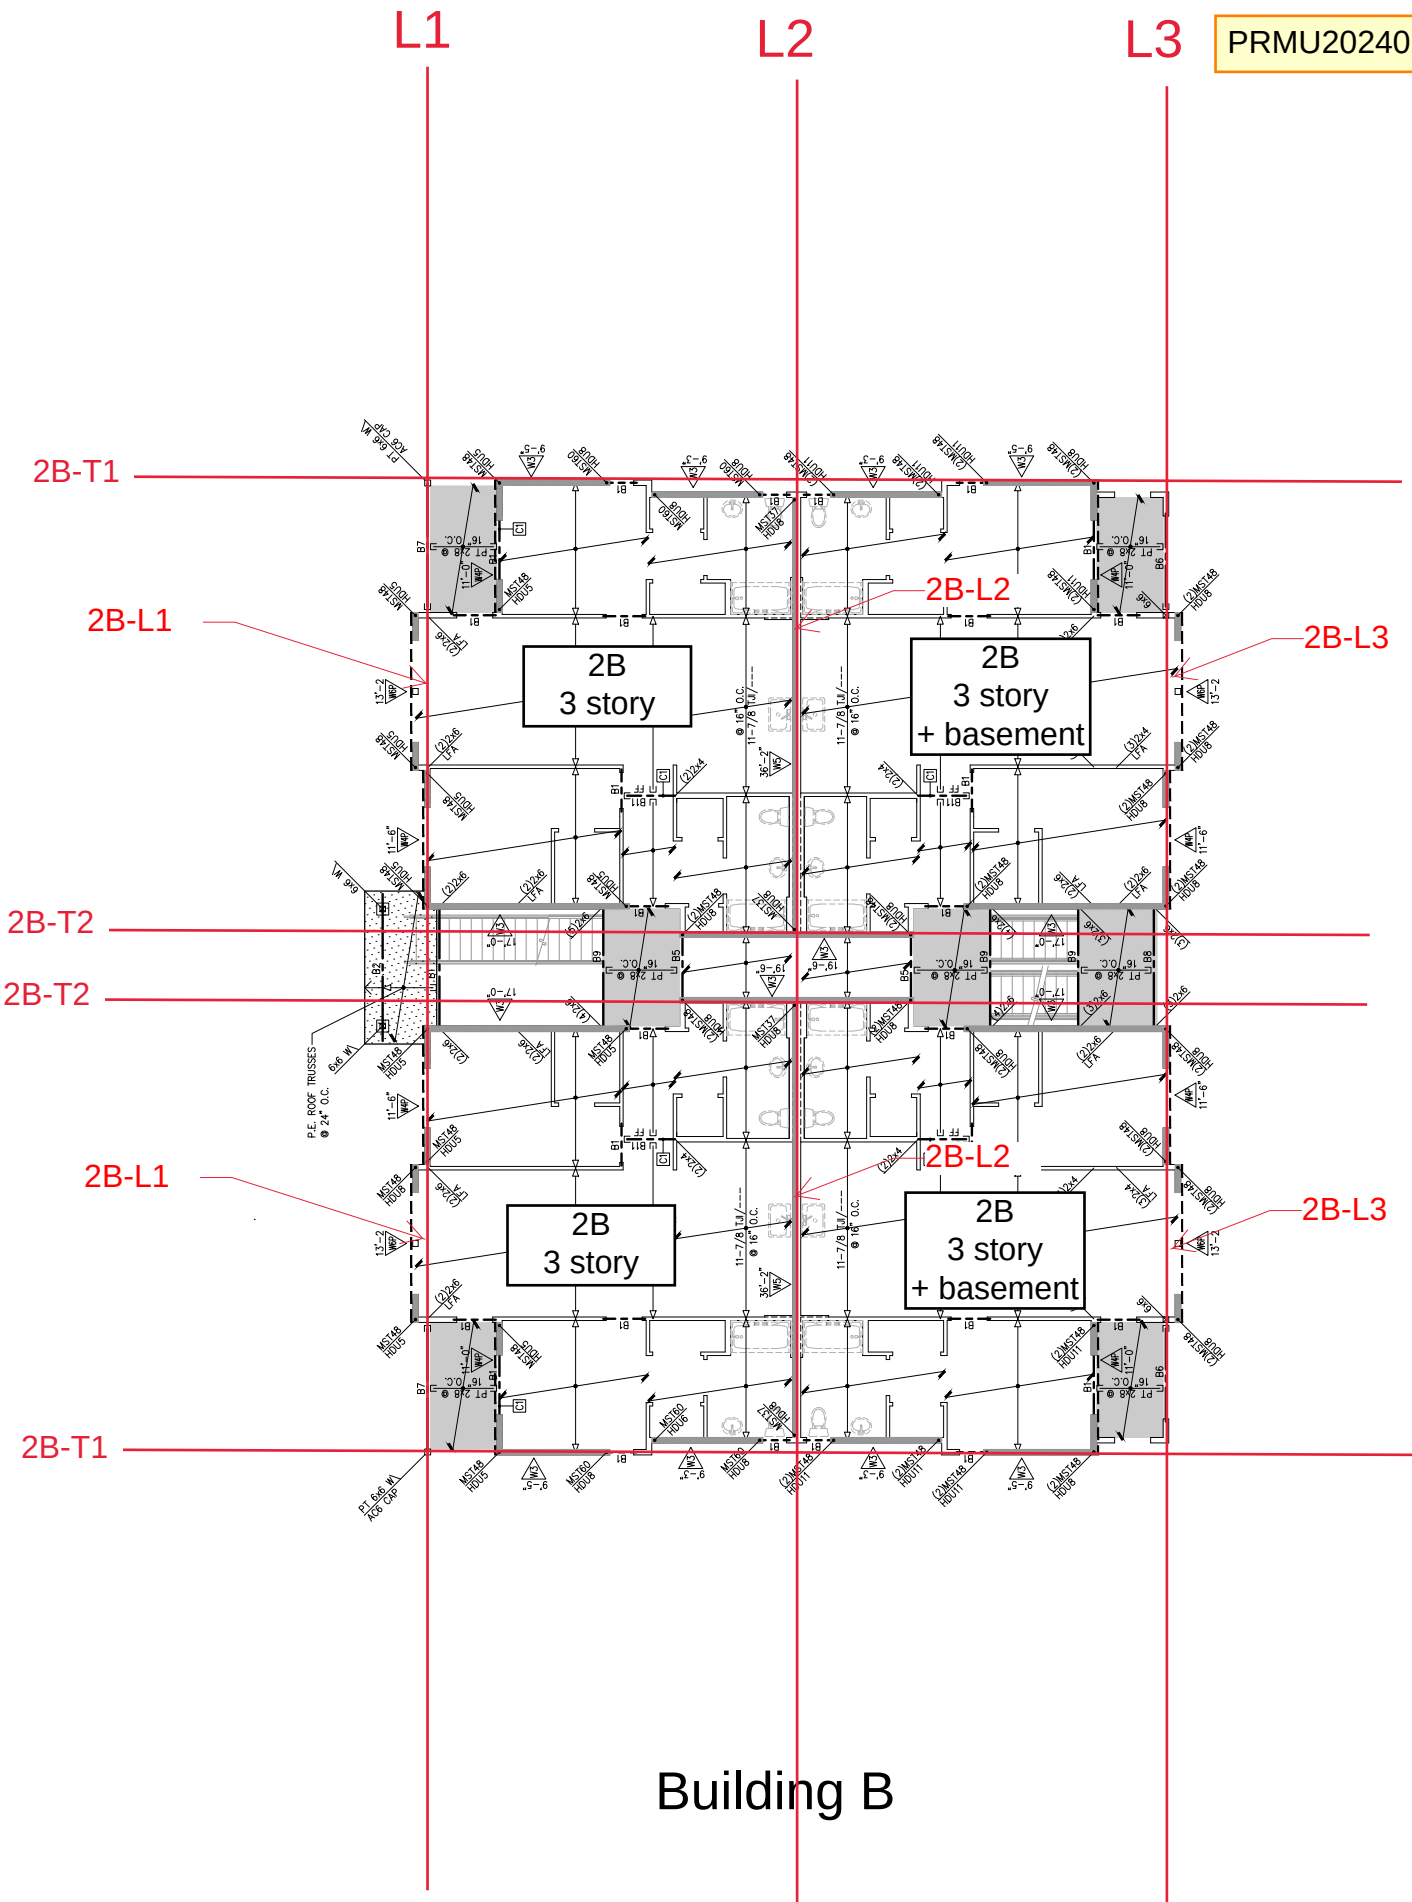

PRMU20240285

Job # 23.002

Sheet:



Designed: TLC

Date: 5/29/23


Checked:

Date:

Project: Bradley Heights - 3 Story & basement Story


Seismic Design: 2 Bedroom units

	Low Flat roof
	Typ Roof/Floor
	Exit 3" Concrete
	not used

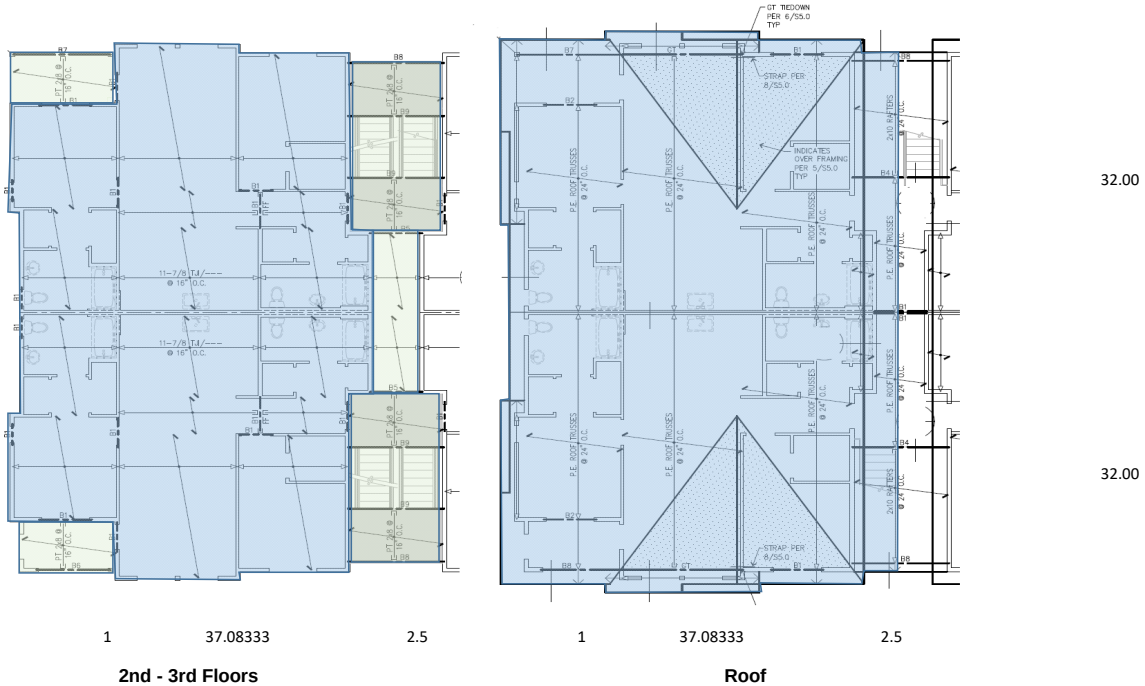

$C_s/1.4 = 0.111$		Typ. Roof (psf) = 22			Typ Floor (psf) = 26			Ext. wall (psf) = 10			Ext. wall (psf) = 20					
		Low Roof (psf) = 22			Other Floor (psf) = 47			Int. wall (psf) = 10			Int. wall (psf) = 13					
								1hr			2hr			Wind:		
2Bx1		Roof			L (ft)	W or h(ft)	psf	0.1110W			With			156 plf		
3 story		Typ Roof			1381	1	22	30382			Vertical Distribution			0.615385 0.384615		
		Low Roof			0	1	22	0						L(ft) windward leeward		
		Ext			64	4.5415	10	2906.56			3856			32.00 3080		
		Int			32	4.5415	10	1453.28			6095			1925		
		Ext			38.17	4.5415	10	1733.491			3757			3906		
		Int			38.17	4.5415	10	1733.491			146.1798			2442		
														3080		
														96		
														3906		
														96		
3rd Floor		L (ft)			W or h(ft)	psf	0.1110W						102 plf			
		Typ Floor			1118	1	26	29068								
		Other Floor			378	1	47	17766						L(ft) windward leeward		
d1, d2		Ext			64	9.083	10	5813.12			968			32.00 2012		
		Int			32	9.083	10	2906.56			6166			1258		
		Ext			38.17	9.083	10	3466.981			6730			2012		
		Int			38.17	9.083	10	3466.981			210.3066			63		
											5968			2552		
											160.3493			1595		
														2552		
														63		
2nd Floor		L (ft)			W or h(ft)	psf	0.1110W						101 plf			
		Typ Floor			1118	1	26	29068								
		Other Floor			378	1	47	17766						L(ft) windward leeward		
d1, d2		Ext			64	9.083	10	5813.12			968			32.00 1996		
		Int			32	9.083	10	2906.56			6166			1247		
		Ext			38.17	9.083	10	3466.981			3365			1996		
		Int			38.17	9.083	10	3466.981			1.83258			62		
											1.83258			2531		
											5968			1582		
											1.834264			2531		
											80.17464			62		

2BEDROOM

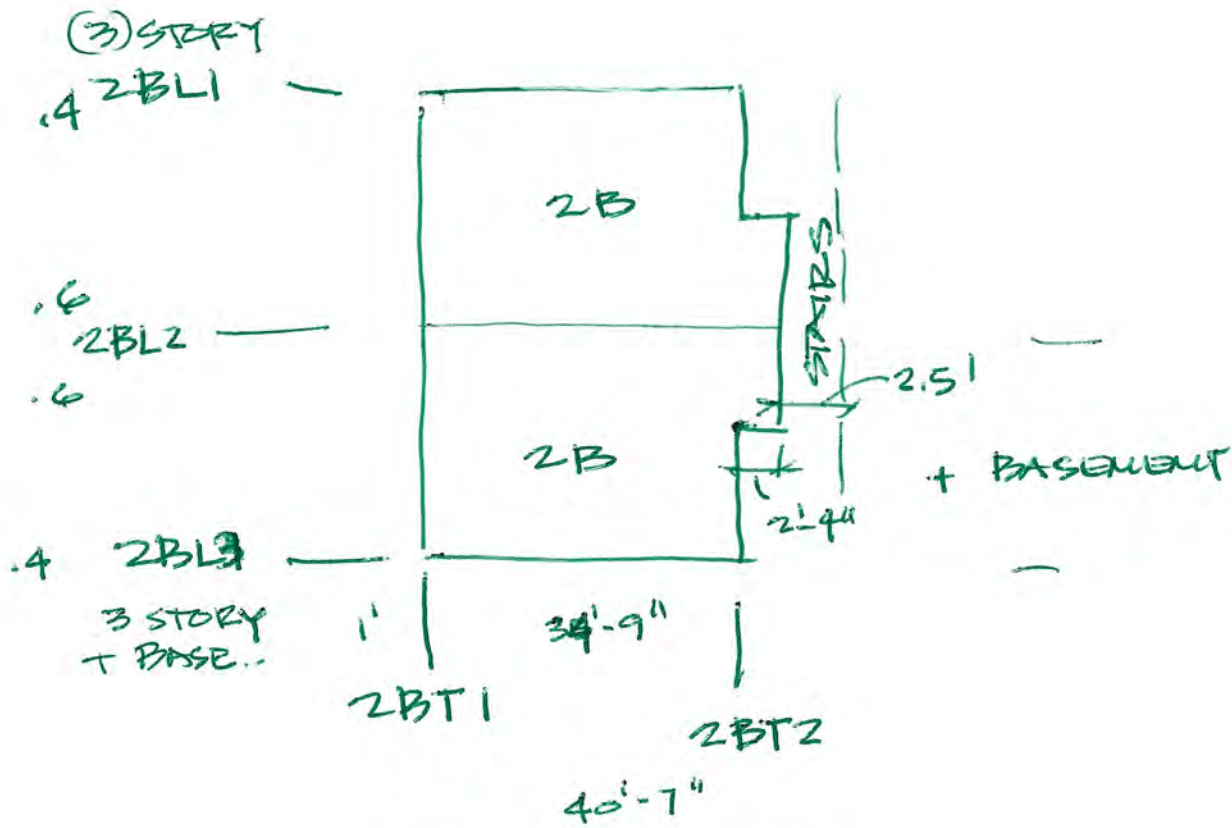

$$\frac{18.375}{40.5833} = 0.45$$

$$\frac{22.205}{40.5833} = 0.55$$

PRMU20240285

3 story + B		Roof	L (ft)	W or h(ft)	psf	W (#)	0.1110W	With	156 plf	
		Typ Roof	1381	1	22	30382	30382	3372	Vertical Distribution	
		Low Roof	0	1	22	0				
		Ext	64	4.5415	10	2906.56	4359.84	484		L(ft) windward leeward
		Int	32	4.5415	10	1453.28				
		Ext	38.17	4.5415	10	1733.491	3466.981	385		
		Int	38.17	4.5415	10	1733.491				
e		3rd Floor	L (ft)	W or h(ft)	psf	W (#)	0.1110W	With	102 plf	
		Typ Floor	1118	1	26	29068	46834	5199	Vertical Distribution	
		Other Floor	378	1	47	17766				
		Ext	64	9.083	10	5813.12	8719.68	968		L(ft) windward leeward
		Int	32	9.083	10	2906.56				
		Ext	38.17	9.083	10	3466.981	6933.962	770		
		Int	38.17	9.083	10	3466.981				
e		2nd Floor	L (ft)	W or h(ft)	psf	W (#)	0.1110W	With	101 plf	
		Typ Floor	1118	1	26	29068	46834	5199	Vertical Distribution	
		Other Floor	378	1	47	17766				
		Ext	64	9.083	10	5813.12	8719.68	968		L(ft) windward leeward
		Int	32	9.083	10	2906.56				
		Ext	38.17	9.083	10	3466.981	6933.962	770		
		Int	38.17	9.083	10	3466.981				
b1, b2		1st Floor	L (ft)	W or h(ft)	psf	W (#)	0.1110W	With	101 plf	
		Typ Floor	1118	1	26	29068	46834	5199	Vertical Distribution	
		Other Floor	378	1	47	17766				
		Ext	64	9.083	10	5813.12	8719.68	968		L(ft) windward leeward
		Int	32	9.083	10	2906.56				
		Ext	38.17	9.083	10	3466.981	6933.962	770		
		Int	38.17	9.083	10	3466.981				

Unit B2				Unit B2			
Roof	3080	Wind	6095	Roof	2442	Roof	3906
		Seismic			5932		5932
3rd	2012	Wind	6730	3rd	1595	3rd	2552
		Seismic			6508		6508
2nd	1996	Wind	3365	2nd	1582	2nd	2531
		Seismic			3254		3254

Unit B2 + Basement				Unit B2 + Basement			
Roof	3080	Wind	6457	Roof	3906	Roof	2442
		Seismic			6286		6286
3rd	2012	Wind	7950	3rd	2552	3rd	1595
		Seismic			7688		7688
2nd	1996	Wind	5300	2nd	2531	2nd	1582
		Seismic			5125		5125
1st	1996	Wind	2650	1st	2531	1st	1582
		Seismic			2563		2563

B2 + B2	B2 + B2	max	
6348	6348	6348	Wind
12218	12218	12218	Seismic
4147	4147	4147	Wind
14196	14196	14196	Seismic
4113	4113	4113	Wind
8379	8379	8379	Seismic
2531	1582	2531	Wind
2563	2563	2563	Seismic

PRMU20240285

Job # 23.002

Sheet:



Designed: TLC

Date: 5/29/23

Checked:

Date:

Project: Bradley Heights - 3 Story & basement Story

Diaphragm Design Forces 2 Bedroom units

$$F_x = C_{vx} V \quad (12.8-11)$$

$$F_{dx} = \frac{\sum_{i=x}^n F_i}{\sum_{i=x}^n w_i} w_{px} \quad (12.10-1)$$

F_{px} = the diaphragm design force at Level x

F_i = the design force applied to level i

w_i = the weight tributary to Level i

w_{px} = the weight tributary to the diaphragm at Level x

$$I_e = 1$$

$$S_{DS} = 0.8787$$

$$\text{Minimum: } F_{px} = 0.2 S_{DS} I_e w_{px}$$

$$\text{Maximum: } F_{px} = 0.4 S_{DS} I_e w_{px}$$

3- story	D								use	
	→	F_i	$\sum_{i=x}^n F_i$	w_{xp}	$\sum_{i=x}^n w_i$	F_{px}	Min	Max	F_{px}	x factor
Roof		6095	6095	34742	34741.84	6095	6106	12211	6106	1.001803
3rd Floor		6730	12824	55554	90295.52	7890	9763	19526	9763	1.237375
2nd Floor		3365	16189	55554	145849.2	6166	9763	19526	9763	1.583243

3- story	D								use	
	↑	F_i	$\sum_{i=x}^n F_i$	w_i	$\sum_{i=x}^n w_i$	F_{px}	Min	Max	F_{px}	x factor
Roof		5932	5932	33849	33848.98	5932	5949	11897	5949	1.002724
3rd Floor		6508	12440	53768	87616.94	7634	9449	18898	9449	1.237768
2nd Floor		3254	15694	53768	141384.9	5968	9449	18898	9449	1.583243

4- story	E								use	
	→	F_i	$\sum_{i=x}^n F_i$	w_{xp}	$\sum_{i=x}^n w_i$	F_{px}	Min	Max	F_{px}	x factor
Roof		6457	6457	34742	34741.84	6457	6106	12211	6457	1
3rd Floor		7950	14406	55554	90295.52	8863	9763	19526	9763	1.101511
2nd Floor		5300	19706	55554	145849.2	7506	9763	19526	9763	1.300706
1st Floor		2650	22356	55554	201402.9	6166	9763	19526	9763	1.583243

4- story									use	
	↑	F_i	$\sum_{i=x}^n F_i$	w_i	$\sum_{i=x}^n w_i$	F_{px}	Min	Max	F_{px}	x factor
Roof		6286	6286	33849	33848.98	6286	5949	11897	6286	1
3rd Floor		7688	13974	53768	87616.94	8575	9449	18898	9449	1.101899
2nd Floor		5125	19099	53768	141384.9	7263	9449	18898	9449	1.300939
1st Floor		2563	21662	53768	195152.9	5968	9449	18898	9449	1.583243

Unit B2 3 story	3 story + Basement	Combined	Line	Line	Line	Line
Unit B2	Unit B2	B2+B2 combined	2B-T1	2B-T2	B2-I1	B2-I2
Roof	Roof	Roof	0.45	0.55	0.4	0.6
Wind	Wind	Wind	3080	3080	3491	3491
Seismic	Seismic	Seismic	6095	6457	7332	7332
3rd Floor	3rd Floor	3rd Floor	2012	2012	2438	2438
Wind	Wind	Wind	6730	7950	805	805
Seismic	Seismic	Seismic	1996	1996	2692	2692
2nd Floor	2nd Floor	2nd Floor	3365	5300	798	798
Wind	Wind	Wind	1996	1996	2395	2395
Seismic	Seismic	Seismic	3365	5300	5199	5199
1st Floor	1st Floor	1st Floor	1139	1392	0	1198
Wind	Wind	Wind	1139	1392	0	1198
Seismic	Seismic	Seismic	1153	1409	0	1590
						to concrete retaining wall

PRMU20240285

Job # 23.007 Sheet:



Designer: TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

2B-L2

0.5 (ft) holdown dist from end

Roof: W1	Wind (ASD): 3.696 kips Seismic (ASD): 7.531 kips				102 #/ft 208 #/ft				102 #/ft 208 #/ft	
					Use W2 					9.083 ft 36.17 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	36.17 ft	0 ft	0 ft	0 ft	0 ft	36.17 ft
$h/b_s =$ DL w (plf) = 0.6M _R (#-ft) = PLF	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0.251 W1 363.1 142477 W E 102 208	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	
M _{ot} (#-ft) = F (#) =	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	33575 68404 -3053 -2077	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	
Holdown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	
	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	

Actual
Distribu

3rd Floor: W3	Wind (ASD): 2.415 kips Seismic (ASD): 8.808 kips				169 #/ft 452 #/ft				169 #/ft 452 #/ft	
					Use W4 					9.083 ft 36.17 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	36.17 ft	0 ft	0 ft	0 ft	0 ft	36.17 ft
$h/b_s =$ DL w (plf) = 0.6M _R (#-ft) = PLF	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0.251 W3 108.2 42446 W E 169 452	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	
M _{ot} (#-ft) = F (#) =	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	55510 148406 -2687 894	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	
Holdown	2335 S2	1000 -	1000 -	1000 -	1256 S1	1000 -	1000 -	1000 -	2335 S2	
	MST48 OK	No Holdown OK	No Holdown OK	No Holdown OK	MST37 OK	No Holdown OK	No Holdown OK	No Holdown OK	MST48 OK	

Actual
Distribu

2nd Floor W4	Wind (ASD): 2.395 kips Seismic (ASD): 5.199 kips				235 #/ft 595 #/ft				235 #/ft 595 #/ft	
					Use W5 					9.083 ft 36.17 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	36.17 ft	0 ft	0 ft	0 ft	0 ft	36.17 ft
$h/b_s =$ DL w (plf) = 0.6M _R (#-ft) = PLF	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0.251 W4 108.2 42446 W E 235 595	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	0 0 W E 0 0	
M _{ot} (#-ft) = F (#) =	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	77265 195628 -1711 5189	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	
Holdown	4065 H3	6970 H4	1000 -	1000 -	4065 H3	1000 -	1000 -	6970 H4	9535 H5	
	1.05 HDU5 OK	HDU8 OK	No Holdown OK	No Holdown OK	HDU5 NG	No Holdown OK	No Holdown OK	HDU8 OK	HDU11 OK	


Actual
Distribu

1st Floor W4		Wind (ASD): 0.798 kips				212 #/ft				225 #/ft			
		Seismic (ASD): 1.06 kips				521 #/ft				554 #/ft			
	use W5P	SW 2B-L3 -1			use W6P	SW 2B-L3 -2				use W5P	SW 2B-L3 -3		
													
	3.333 ft	2.667 ft	0 ft		2.333 ft	2.333 ft	0 ft	0 ft		3 ft	3.5 ft	17.17 ft	
Distribution L	3.333 ft	2.667 ft	0 ft		1.815 ft	1.815 ft	0 ft	0 ft		3 ft	3.5 ft	16.13	
$h/b_c =$	1.5 W4	1.875 W4			2.571 W4	2.571 W4				1.667 W4	1.429 W4		
DL w (plf) =	108.2	108.2	0		108.2	108.2	0	0		108.2	108.2		
0.6M _R (#-ft) =	361	231	0		177	177	0	0		292	398		
	W E	W E	W E		W E	W E	W E	W E		W E	W E		
PLF	225 554	225 554	0 0		175 431	175 431	0 0	0 0		225 554	225 554		
M _{tot} (#-ft) =	6821 16786	5457 13429	0 0		3714 9139	3714 9139	0 0	0 0		6139 15107	7162 17625		
F (H) =	5567 15791	6009 16705	0 0		4980 13583	4980 13583	0 0	0 0		5767 16195	5475 15613		
Holdown	6970 H4	6970 H4	1000 -		6970 H4	6970 H4	1000 -	1000 -		6970 H4	6970 H4		
1.05	HDU8 NG	HDU8 NG	No Holdown OK		HDU8 NG	HDU8 NG	No Holdown OK	No Holdown OK		HDU8 NG	HDU8 NG		
	(see calc next pp OK)				(see calc next pp OK)					(see calc next pp OK)			


Shear Wall Line 2B-L3-1 1st

W Designation

P= 3.324 Kips
554 plf
554 plf




CS16

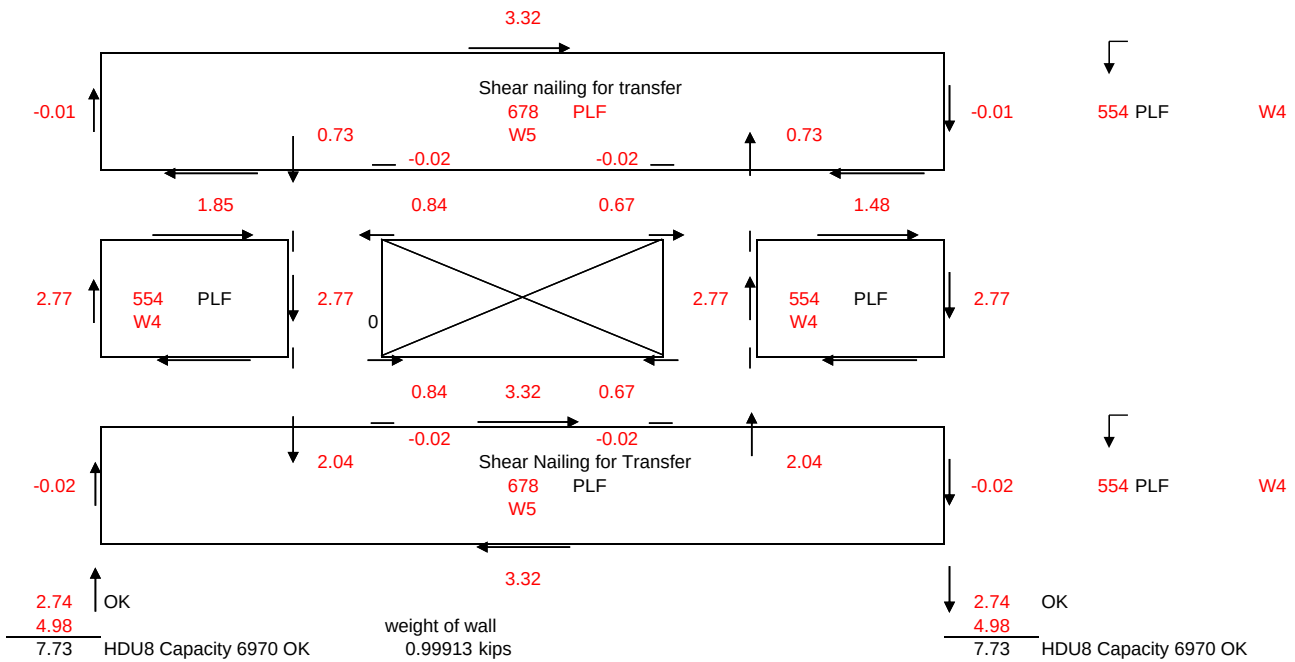h₁= 1.083333h₀= 5 h= 9.083333h₂= 3


Shear Wall Line 2B-L3-1 2nd

W Designation

P= 2.934 Kips
489 plf
489 plf





CS16

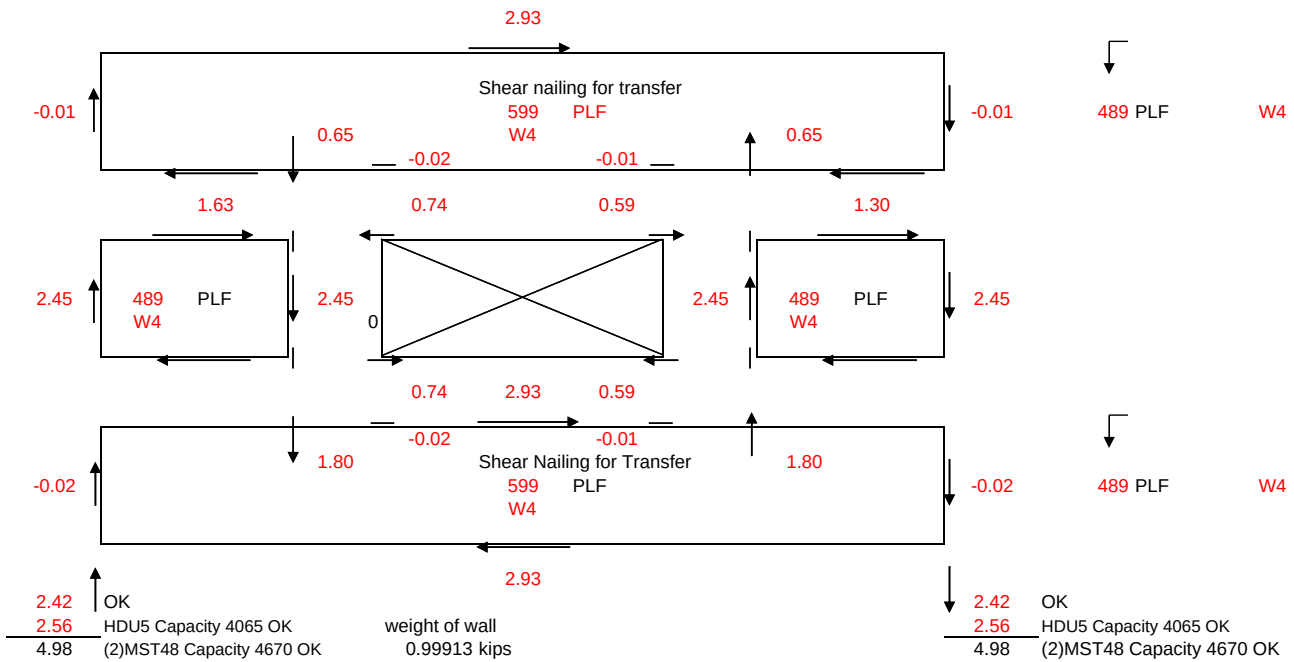h₁= 1.083333h₀= 5 h= 9.083333h₂= 3



Shear Wall Line 2B-L3-1 3rd

W Designation

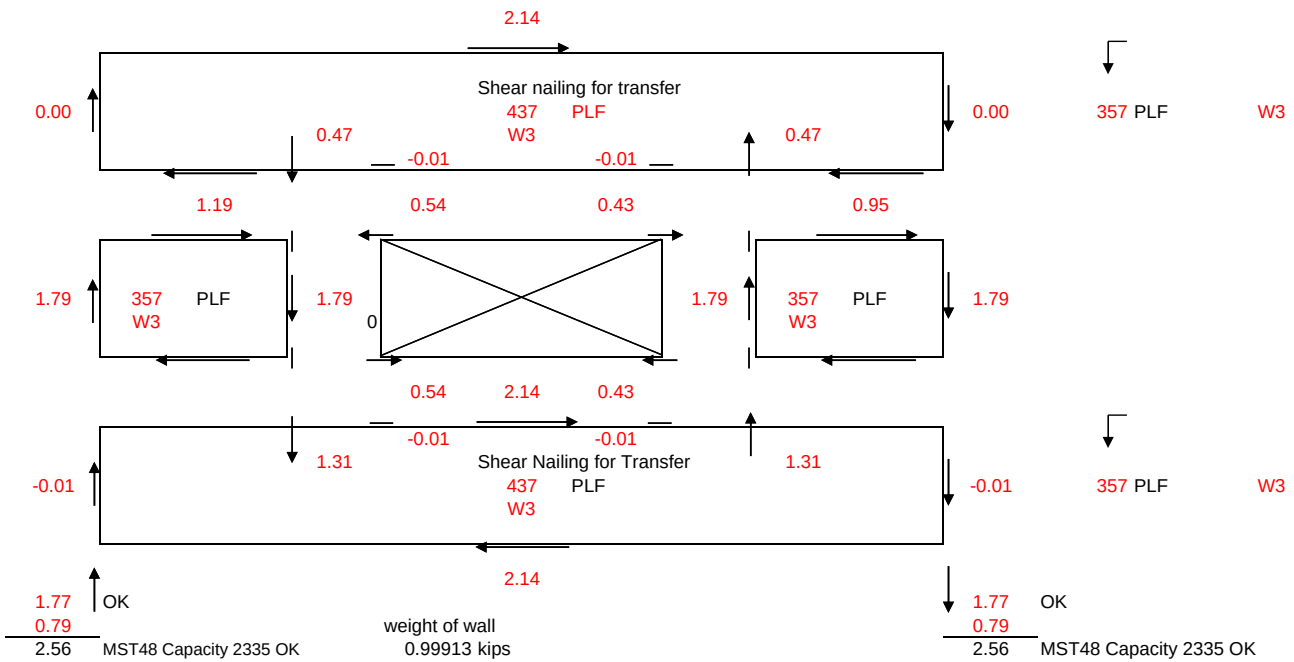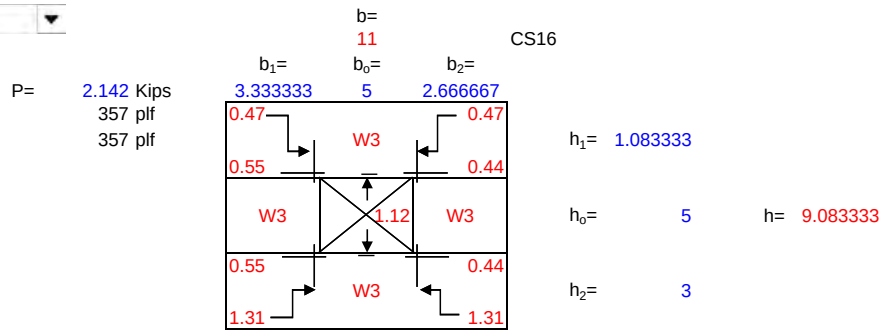

Shear Wall Line 2B-L3-1 roof



W Designation

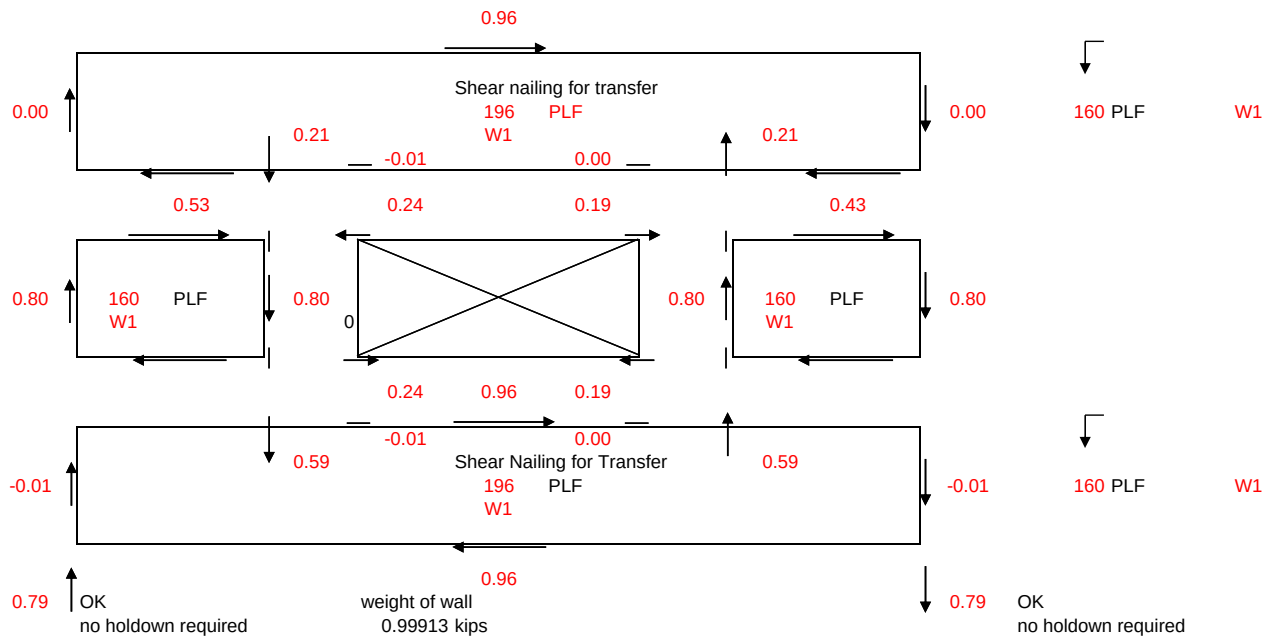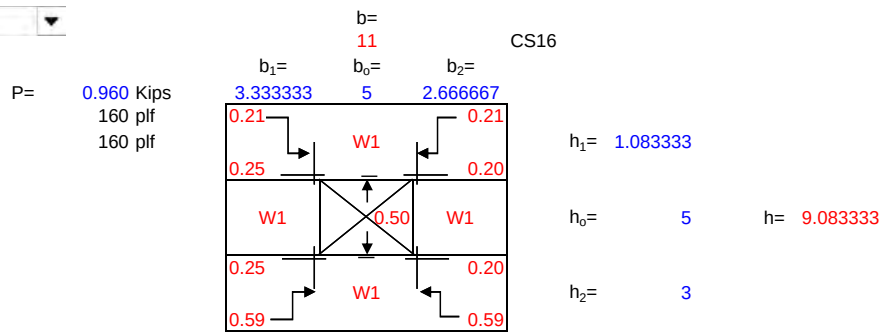

Shear Wall Line 2B-L3-2 1st

W Designation


P= 2.011 Kips
431 plf
431 plf

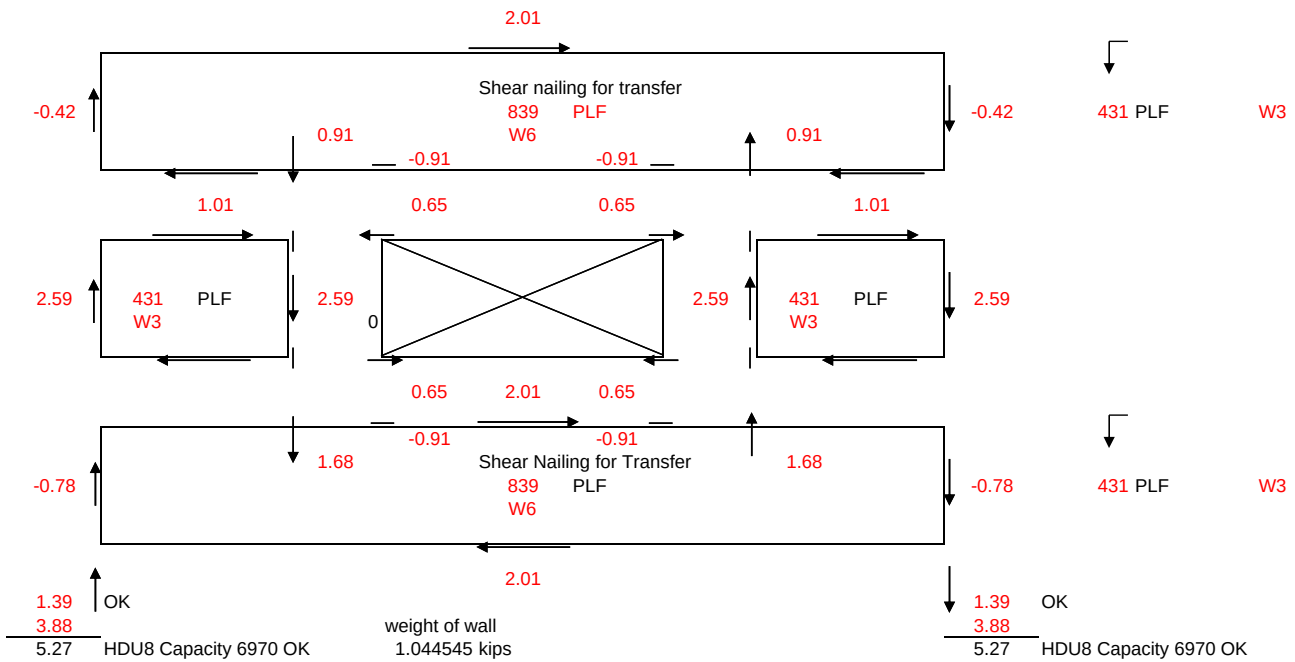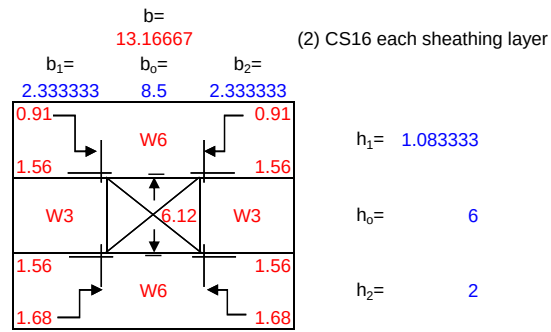


Shear Wall Line 2B-L3-2 2nd

W Designation

P= 1.773 Kips
380 plf
380 plf




(2) CS16 each sheathing layer

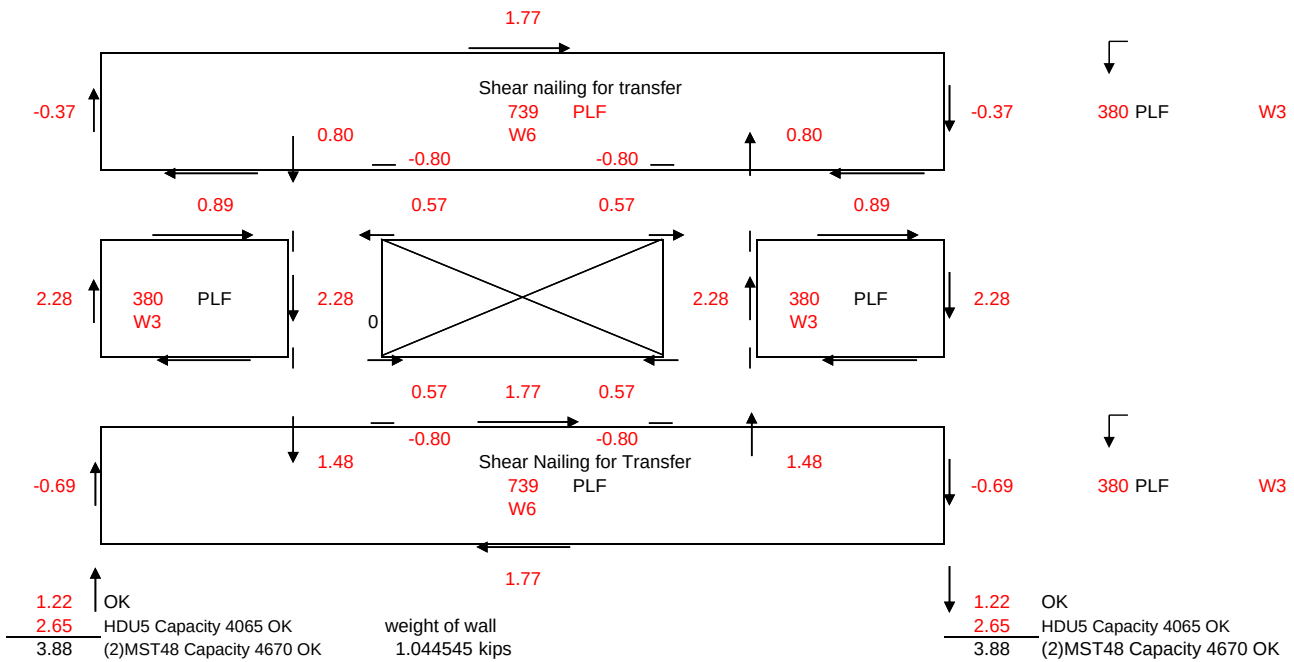



W Designation

Diagram of a three-stage interconnection network with 3 inputs and 3 outputs. The network consists of three stages of 2x2 sub-networks. The first stage has inputs 0.59, 1.00, 1.00 and outputs 1.00, 1.00, 1.08. The second stage has inputs 1.00, 1.00, 1.00 and outputs 1.00, 1.00, 1.00. The third stage has inputs 1.00, 1.00, 1.00 and outputs 1.00, 1.00, 1.08. The network is labeled with $b_1 = 2.333333$, $b_0 = 8.5$, and $b_2 = 2.333333$ at the top. The central output is labeled 3.95.
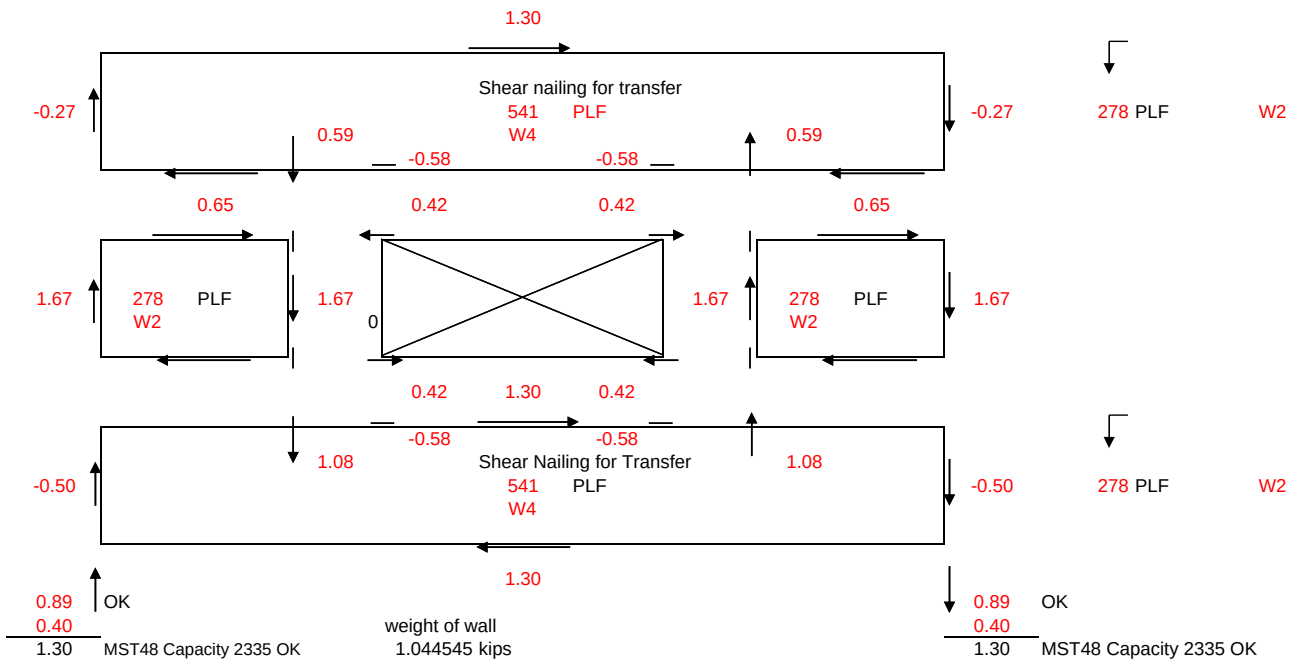
$$h_2 = 2$$


Shear Wall Line 2B-L3-2 roof


W Designation

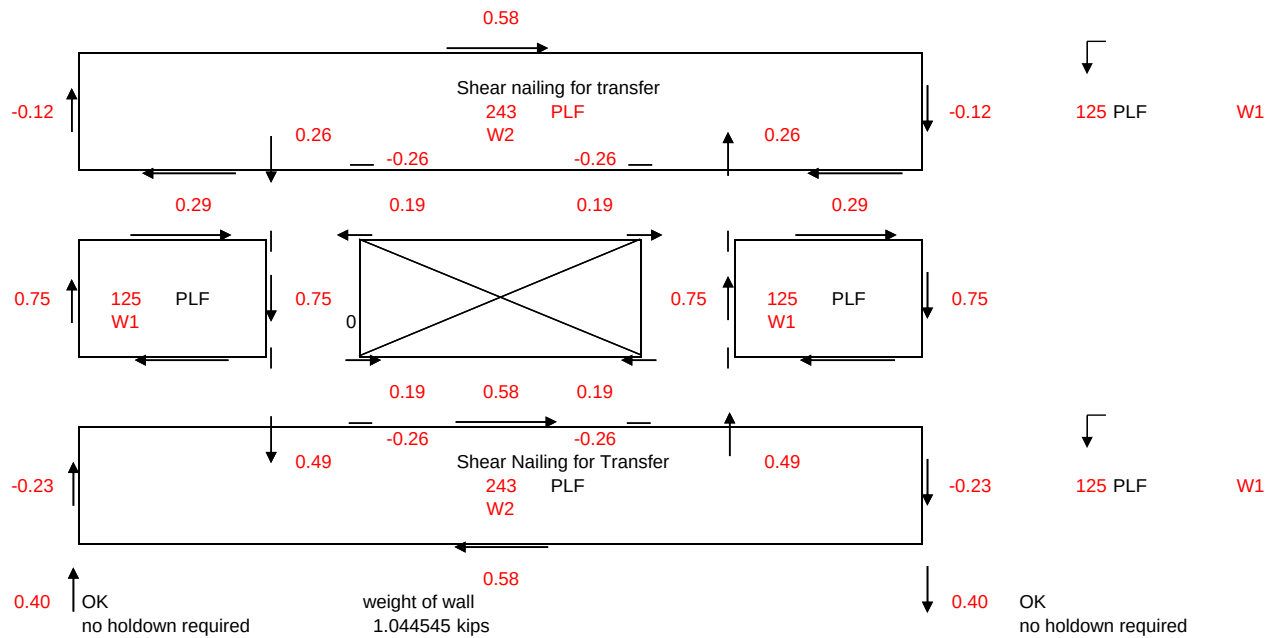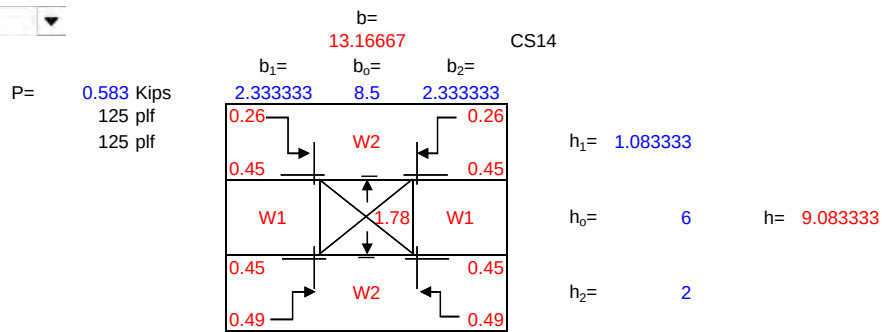


Shear Wall Line 2B-L3-3 1st

W Designation

P= 3.601 Kips
554 plf
554 plf




CS16

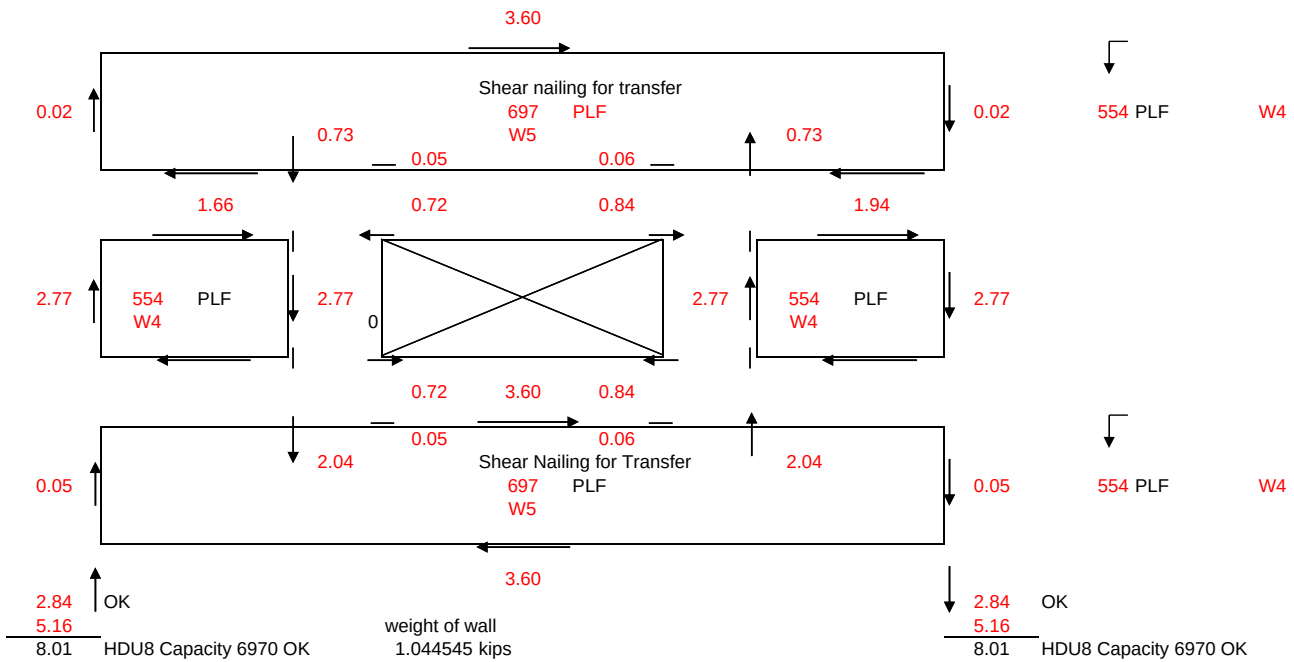h₁= 1.083333h₀= 5 h= 9.083333h₂= 3

Shear Wall Line 2B-L3-3 2nd


W Designation

P= 3.179 Kips
489 plf
489 plf





CS16

Use W4

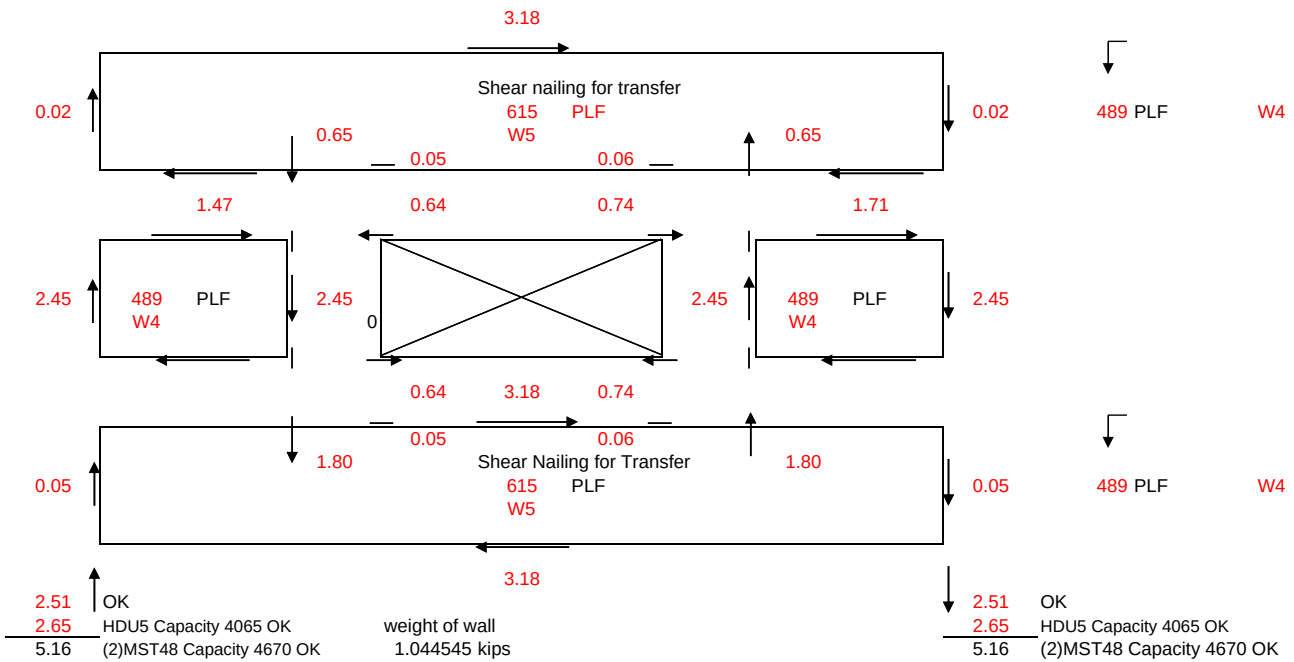h₁= 1.083333h₀= 5 h= 9.083333h₂= 3



Shear Wall Line 2B-L3-3 3rd


W Designation

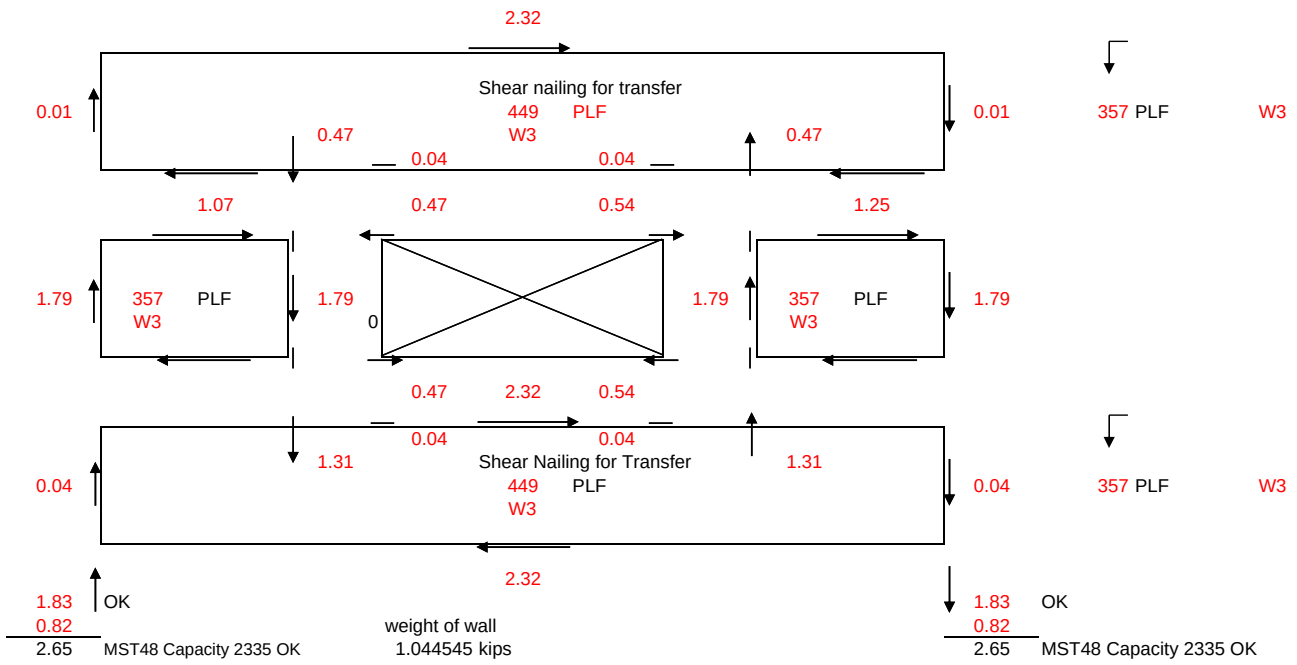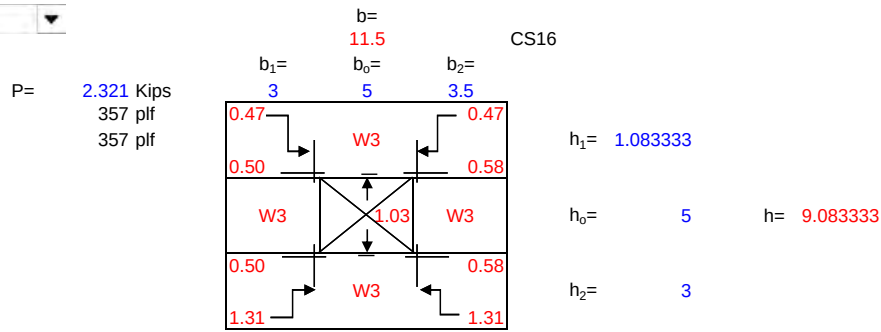

Shear Wall Line 2B-L3-3 roof

W Designation

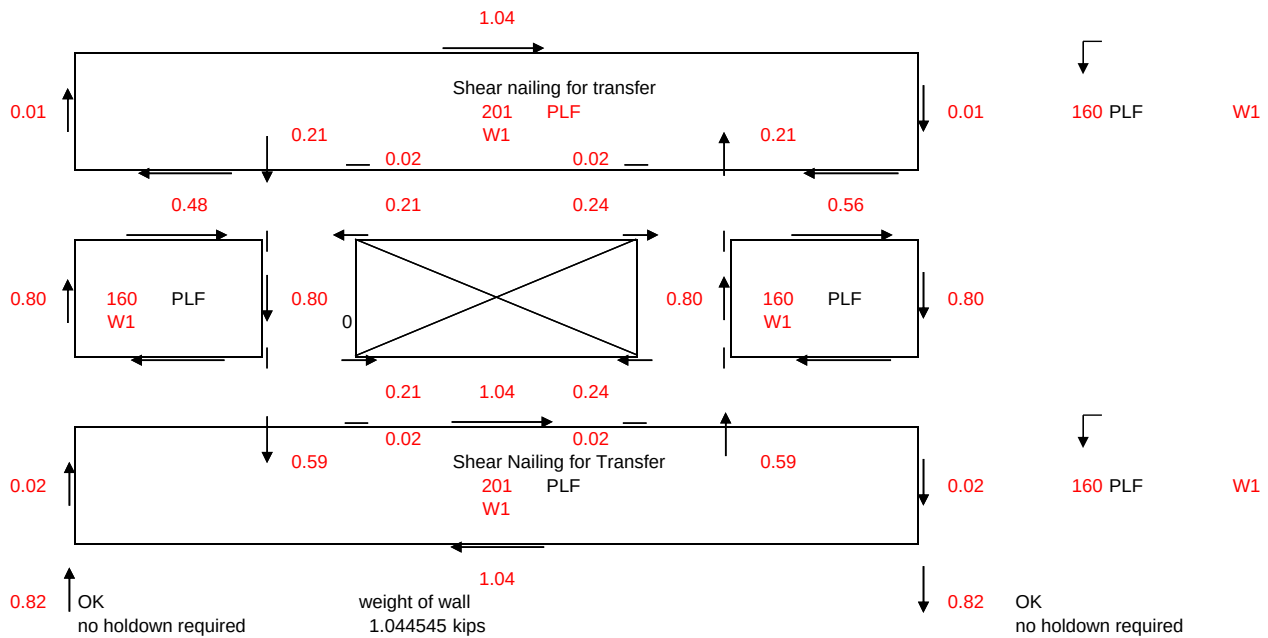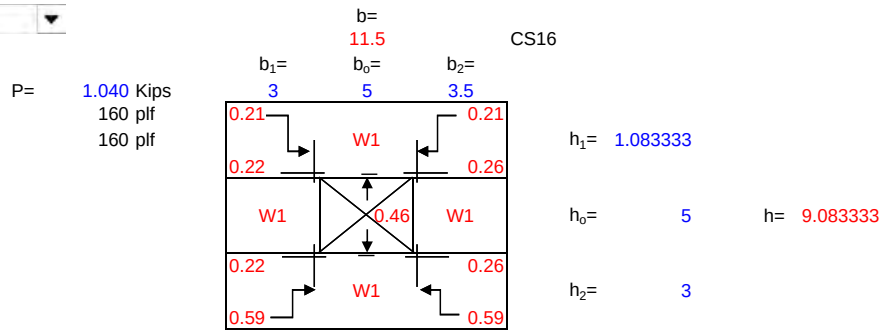

[illegible]

3rd Floor: W2	Wind (ASD): 1.866 kips 127 #/ft Seismic (ASD): 6.388 kips 318 #/ft										127 #/ft 318 #/ft
											9.083 ft
Distribution L	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	37.33
h/b _s = 0.965 W2 DL w (plf) = 234.9 0.6M _R (#-ft) = 6249	0.982 W2 221.9 5696	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0.982 W2 221.9 5696	0.965 W2 234.9 6249		
PLF	W E 127 318	W E 127 318	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 127 318	W E 127 318		
M _{at} (#-ft) = 10821 27233 F (#) = 713 3233	10629 26751 774 3296	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	10629 26751 774 3296	10821 27233 713 3233		
Holdown	3356 S3	3356 S3	1000 -	1000 -	1000 -	1000 -	1000 -	3356 S3	3356 S3		
	MST60 OK	MST60 OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	MST60 OK	MST60 OK		

with point load ok by inspection

2nd Floor W3	Wind (ASD): 1.851 kips		176 #/ft		Wind (ASD): 1.851 kips		176 #/ft		Wind (ASD): 1.851 kips		176 #/ft		Wind (ASD): 1.851 kips		176 #/ft		Wind (ASD): 1.851 kips		176 #/ft		Wind (ASD): 1.851 kips		176 #/ft	
	Seismic (ASD): 3.771 kips		419 #/ft		Seismic (ASD): 3.771 kips		419 #/ft		Seismic (ASD): 3.771 kips		419 #/ft		Seismic (ASD): 3.771 kips		419 #/ft		Seismic (ASD): 3.771 kips		419 #/ft		Seismic (ASD): 3.771 kips		419 #/ft	
																								
	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	9.083 ft													
Distribution L	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	37.33													
h/b _s =	0.965 W3	0.982 W3							0.982 W3	0.965 W3														
DL w (plf) =	234.9	221.9	0	0	0	0	0	0	221.9	234.9														
0.6M _R (#-ft) =	6249	5696	0	0	0	0	0	0	5696	6249														
PLF	W E 176 419	W E 176 419	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 176 419	W E 176 419														
M _{or} (#-ft) =	15061 35872	14795 35237	0 0	0 0	0 0	0 0	0 0	0 0	14795 35237	15061 35872														
F (#) =	1701 6555	1814 6672	0 0	0 0	0 0	0 0	0 0	0 0	1814 6672	1701 6555														
Holdown	6970 H4	6970 H4	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	6712 S5	6712 S5														
	HDU8 OK	HDU8 OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	(2) M576 OK	(2) M576 OK														
	Load above to foundation										above													

1st Floor W4	Wind (ASD): -2.148 kips		237 #/ft		6.574		237 #/ft	
	Seismic (ASD): -6.675 kips		481 #/ft		15.657		481 #/ft	
								
	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft
h/b _s =							0.982 W4	0.965 W4
DL w (plf) =	0	0	0	0	0	0	221.9	234.9
0.6M _R (#-ft) =	0	0	0	0	0	0	5696	6249
PLF	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 237 481	W E 237 481
M _{int} (#-ft) =	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	19922 40427	20281 41156
F (#) =	1701 6555	1814 6672	0 0	0 0	0 0	0 0	3440 10641	3275 10469
Holdown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	9535 H5	9535 H5
1.05	No Holdown NG	No Holdown NG	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	HDU11 NG	HDU11 NG
	concrete foundation OK					OK By Inspection OK By Inspection		
	2 Bedroom Unit 3 story					2 Bedroom Unit 3 story + Basement		

PRMU20240285

Job # 23.007 Sheet:



Designer: TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

2B-T1 end (3 story)

0.5 (ft) holdown dist from end

Roof: W1	Wind (ASD): 2.857 kips		77 #/ft		77 #/ft		77 #/ft		77 #/ft	
	Seismic (ASD): 5.498 kips		147 #/ft		147 #/ft		147 #/ft		147 #/ft	
										9.083 ft
	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	37.33
Distribution L	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	37.33
h/b _s =	0.965 W1	0.982 W1						0.982 W1	0.965 W1	
DL w (plf) =	178.8	178.8	0	0	0	0	0	178.8	178.8	
0.6M _R (#-ft) =	4757	4590	0	0	0	0	0	4590	4757	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	77 147	77 147	0 0	0 0	0 0	0 0	0 0	77 147	77 147	
M _{ot} (#-ft) =	6545 12597	6429 12374	0 0	0 0	0 0	0 0	0 0	6429 12374	6545 12597	
F (#) =	200 879	210 890	0 0	0 0	0 0	0 0	0 0	210 890	200 879	
Holdown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	
	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	

Actual
Distribu

3rd Floor: W2	Wind (ASD): 1.866 kips		127 #/ft		127 #/ft		127 #/ft		127 #/ft	
	Seismic (ASD): 6.388 kips		318 #/ft		318 #/ft		318 #/ft		318 #/ft	
										9.083 ft
	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	37.33
Distribution L	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	37.33
h/b _s =	0.965 W2	0.982 W2						0.982 W2	0.965 W2	
DL w (plf) =	234.9	221.9	0	0	0	0	0	221.9	234.9	
0.6M _R (#-ft) =	6249	5696	0	0	0	0	0	5696	6249	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	127 318	127 318	0 0	0 0	0 0	0 0	0 0	127 318	127 318	
M _{ot} (#-ft) =	10821 27233	10629 26751	0 0	0 0	0 0	0 0	0 0	10629 26751	10821 27233	
F (#) =	713 3233	774 3296	0 0	0 0	0 0	0 0	0 0	774 3296	713 3233	
Holdown	3356 S3	3356 S3	1000 -	1000 -	2335 S2	1000 -	1000 -	3356 S3	3356 S3	
	MST60 OK	MST60 OK	No Holdown OK	No Holdown OK	MST48 OK	No Holdown OK	No Holdown OK	MST60 OK	MST60 OK	

Actual
Distribu

2nd Floor W3	Wind (ASD): 1.851 kips		176 #/ft		176 #/ft		176 #/ft		176 #/ft	
	Seismic (ASD): 3.771 kips		419 #/ft		419 #/ft		419 #/ft		419 #/ft	
										9.083 ft
	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	37.33
Distribution L	9.417 ft	9.25 ft	0 ft	0 ft	0 ft	0 ft	0 ft	9.25 ft	9.417 ft	37.33
h/b _s =	0.965 W3	0.982 W3						0.982 W3	0.965 W3	
DL w (plf) =	234.9	221.9	0	0	0	0	0	221.9	234.9	
0.6M _R (#-ft) =	6249	5696	0	0	0	0	0	5696	6249	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	176 419	176 419	0 0	0 0	0 0	0 0	0 0	176 419	176 419	
M _{ot} (#-ft) =	15061 35872	14795 35237	0 0	0 0	0 0	0 0	0 0	14795 35237	15061 35872	
F (#) =	1701 6555	1814 6672	0 0	0 0	0 0	0 0	0 0	1814 6672	1701 6555	
Holdown	6970 H4	6970 H4	1000 -	1000 -	1000 -	1000 -	1000 -	6970 H4	6970 H4	
	1.05 HDU8 OK	HDU8 OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	HDU8 OK	HDU8 OK	

Actual
Distribu

PRMU20240285



Job # 23.007 Sheet:

Designed TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

2B-T2 stairs (3 story + Base)

0.5 (ft) holdown dist from end

Roof: W1	Wind (ASD): 3.491 kips Seismic (ASD): 6.720 kips				65 #/ft 126 #/ft				65 #/ft 126 #/ft	
										9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W1 DL w (plf) = 178.8 0.6M _R (#-ft) = 15505					0.466 W1 178.8 20400				0.534 W1 178.8 15505	
PLF	W E 65 126	W E 0 0	W E 0 0	W E 0 0	W E 65 126	W E 0 0	W E 0 0	W E 0 0	W E 65 126	
M _{tot} (#-ft) = 10077 19396	0 0	0 0	0 0	0 0	11559 22248	0 0	0 0	0 0	10077 19396	
F (#) = -329 236	0 0	0 0	0 0	0 0	-465 97	0 0	0 0	0 0	-329 236	
Holdown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	
	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	

Actual
Distribu

3rd Floor: W2	Wind (ASD): 2.281 kips Seismic (ASD): 7.808 kips				108 #/ft 272 #/ft				108 #/ft 272 #/ft	
										9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W2 DL w (plf) = 241.4 0.6M _R (#-ft) = 20931					0.466 W2 242.5 27668				0.534 W2 241.4 20931	
PLF	W E 108 272	W E 0 0	W E 0 0	W E 0 0	W E 108 272	W E 0 0	W E 0 0	W E 0 0	W E 108 272	
M _{tot} (#-ft) = 16661 41931	0 0	0 0	0 0	0 0	19111 48097	0 0	0 0	0 0	16661 41931	
F (#) = -588 1509	0 0	0 0	0 0	0 0	-916 1172	0 0	0 0	0 0	-588 1509	
Holdown	2335 S2	1000 -	1000 -	1000 -	2335 S2	1000 -	1000 -	1000 -	2335 S2	
	MST48 OK	No Holdown OK	No Holdown OK	No Holdown OK	MST48 OK	No Holdown OK	No Holdown OK	No Holdown OK	MST48 OK	
with point load ok by inspection										

Actual
Distribu

2nd Floor W2	Wind (ASD): 2.262 kips Seismic (ASD): 4.609 kips				150 #/ft 358 #/ft				150 #/ft 358 #/ft	
	use W3 				use W3 				use W3 	9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W2 DL w (plf) = 241.4 0.6M _R (#-ft) = 20931					0.466 W2 242.5 27668				0.534 W2 241.4 20931	
PLF	W E 150 358	W E 0 0	W E 0 0	W E 0 0	W E 150 358	W E 0 0	W E 0 0	W E 0 0	W E 150 358	
M _{tot} (#-ft) = 23191 55233	0 0	0 0	0 0	0 0	26601 63355	0 0	0 0	0 0	23191 55233	
F (#) = -451 3587	0 0	0 0	0 0	0 0	-972 3051	0 0	0 0	0 0	-451 3587	
Holdown	4065 H3	1000 -	1000 -	1000 -	4670 S4	1000 -	1000 -	1000 -	4670 S4	
	HDU5 OK	No Holdown OK	No Holdown OK	No Holdown OK	(2) MST48 OK	No Holdown OK	No Holdown OK	No Holdown OK	(2) MST48 OK	
Load above to foundation										

Actual
Distribu

1st Floor W3	Wind (ASD): -2.625 kips Seismic (ASD): -8.159 kips				202 #/ft 410 #/ft				202 #/ft 410 #/ft	
					use W4 				use W4 	9.083 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	9.75 ft	0 ft	0 ft	0 ft	17 ft	26.75
h/b _s = 0.534 W3 DL w (plf) = 241.4 0.6M _R (#-ft) = 20931					0.932 W3 242.5 6917				0.534 W3 241.4 20931	
PLF	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 202 410	W E 0 0	W E 0 0	W E 0 0	W E 202 410	
M _{tot} (#-ft) = 17910 36344	0 0	0 0	0 0	0 0	217 6232	0 0	0 0	0 0	31227 63369	
F (#) = -451 3587	0 0	0 0	0 0	0 0	173 6159	0 0	0 0	0 0	173 6159	
Holdown	14445 H6	1000 -	1000 -	1000 -	6970 H4	1000 -	1000 -	1000 -	6970 H4	
	1.05 HDU14 OK	No Holdown OK	No Holdown OK	No Holdown OK	HDU8 OK	No Holdown OK	No Holdown OK	No Holdown OK	HDU8 OK	
concrete foundation										
2 Bedroom Unit 3 story					2 Bedroom Unit 3 story + Basement					

Actual
Distribu

PRMU20240285

Job # 23.007 Sheet:



Designer: TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

2B-T2 stairs (3 story)

0.5 (ft) holddown dist from end

Roof: W1	Wind (ASD): 3.491 kips		65 #/ft		65 #/ft		65 #/ft		65 #/ft	
	Seismic (ASD): 6.720 kips		126 #/ft		126 #/ft		126 #/ft		126 #/ft	
										9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W1	DL w (plf) = 178.8		0		0		0		0.534 W1	
0.6M _R (#-ft) = 15505	W E		W E		W E		W E		W E	
PLF	65 126	0 0	0 0	0 0	65 126	0 0	0 0	0 0	65 126	
M _{ot} (#-ft) = 10077 19396	0 0		0 0		11559 22248		0 0		10077 19396	
F (#) = -329 236	0 0		0 0		-465 97		0 0		-329 236	
Holddown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	
	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	

Actual
Distribu

3rd Floor: W2	Wind (ASD): 2.281 kips		108 #/ft		108 #/ft		108 #/ft		108 #/ft	
	Seismic (ASD): 7.808 kips		272 #/ft		272 #/ft		272 #/ft		272 #/ft	
										9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W2	DL w (plf) = 241.4		0		0		0		0.534 W2	
0.6M _R (#-ft) = 20931	W E		W E		W E		W E		W E	
PLF	108 272	0 0	0 0	0 0	108 272	0 0	0 0	0 0	108 272	
M _{ot} (#-ft) = 16661 41931	0 0		0 0		19111 48097		0 0		16661 41931	
F (#) = -588 1509	0 0		0 0		-916 1172		0 0		-588 1509	
Holddown	2335 S2	1000 -	1000 -	1000 -	2335 S2	1000 -	1000 -	1000 -	2335 S2	
	MST48 OK	No Holddown OK	No Holddown OK	No Holddown OK	MST48 OK	No Holddown OK	No Holddown OK	No Holddown OK	MST48 OK	

Actual
Distribu

2nd Floor W2	Wind (ASD): 2.262 kips		150 #/ft		150 #/ft		150 #/ft		150 #/ft	
	Seismic (ASD): 4.609 kips		358 #/ft		358 #/ft		358 #/ft		358 #/ft	
										9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W2	DL w (plf) = 241.4		0		0		0		0.534 W2	
0.6M _R (#-ft) = 20931	W E		W E		W E		W E		W E	
PLF	150 358	0 0	0 0	0 0	150 358	0 0	0 0	0 0	150 358	
M _{ot} (#-ft) = 23191 55233	0 0		0 0		26601 63355		0 0		23191 55233	
F (#) = -451 3587	0 0		0 0		-972 3051		0 0		-451 3587	
Holddown	4065 H3	6970 H4	1000 -	1000 -	9535 H5	1000 -	1000 -	6970 H4	9535 H5	
	1.05 HDU5 OK	HDU8 OK	No Holddown OK	No Holddown OK	HDU11 OK	No Holddown OK	No Holddown OK	HDU8 OK	HDU11 OK	

Actual
Distribu

PRMU20240285

Job # 23.002

Sheet:



Designed: TLC

Date: 5/29/23

Checked:

Date:

Project: Bradley Heights - 3 Story & basement Story

Vertical Distribution 2 Bedroom units

$$F_x = C_{vx} V \quad (12.8-11)$$

$$C_{vx} = \frac{w_x h_x^k}{\sum w_i h_i^k}$$

$$T_a = C_t h_n^x = 0.3240544 \quad (12.8-7)$$

$$C_t = 0.02 \quad \text{Table 12.8-2}$$

$$x = 0.75 \quad \text{Table 12.8-2}$$

$$H_n = 41 \text{ ft} \quad \text{Structural Height defined in 11.2}$$

k = 1 if period is .5s or less

k = 2 if period is 2.5s or more

k = 1-2 if between

k = 1

2Bx1	→	w_x	h_x	$w_x h_x^k$	C_{vx}	V	F_x
3-story	Roof	34742	29.35417	1019818	0.376456	3856	6095
	3rd Floor	55554	20.27083	1126119	0.415696	6166	6730
	2nd Floor	55554	10.13542	563059.7	0.207848	6166	3365
			Σ	2708997	Σ	16189	

2Bx1	↑	w_x	h_x	$w_x h_x^k$	C_{vx}	V	F_x
3-story	Roof	33849	29.35417	993608.6	0.378015	3757	5932
	3rd Floor	53768	20.27083	1089921	0.414657	5968	6508
	2nd Floor	53768	10.13542	544960.7	0.207328	5968	3254
			Σ	2628491	Σ	15694	

2Bx1	→	w_x	h_x	$w_x h_x^k$	C_{vx}	V	F_x
3-story	Roof	34742	39.48958	1371941	0.288811	3856	6457
+ Basement	3rd Floor	55554	30.40625	1689179	0.355594	6166	7950
	2nd Floor	55554	20.27083	1126119	0.237063	6166	5300
	1st floor	55554	10.13542	563059.7	0.118531	6166	2650
			Σ	4750299	Σ	22356	

2Bx1	↑	w_x	h_x	$w_x h_x^k$	C_{vx}	V	F_x
3-story	Roof	33849	39.48958	1336682	0.290176	3757	6286
+ Basement	3rd Floor	53768	30.40625	1634882	0.354912	5968	7688
	2nd Floor	53768	20.27083	1089921	0.236608	5968	5125
	1st Floor	53768	10.13542	544960.7	0.118304	5968	2563
			Σ	4606446	Σ	21662	

PRMU20240285

Job # 23.002

Sheet:

SOLUTIONS 4 STRUCTURES Inc.

Designed: TLC

Date: 5/29/23


Checked:

Date:

Project: Bradley Heights - 3 Story & basement Story

Seismic Design: 1 Bedroom units

	Low Flat roof
	Typ Roof/Floor
	Exit 3" Concrete
	not used

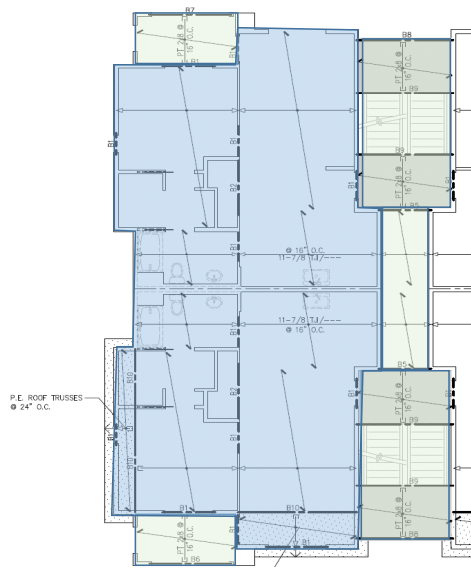


2.083

26

2.5

2nd - 3rd Floors

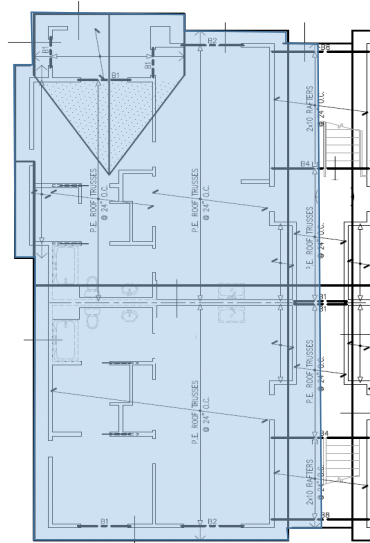

2.083

26

2.5

Roof

31.00

31.00

 $C_s/1.4 = 0.111$

Typ. Roof (psf) = 22

Low Roof (psf) = 22

Typ Floor (psf) = 26

Other Floor (psf) = 47

Ext. wall (psf) = 10

Int. wall (psf) = 10

1hr

Ext. wall (psf) = 20

Int. wall (psf) = 13

2hr

Wind:

1Bx1

Roof

L (ft) W or h (ft) psf

W (#)

0.1110W

Vertical Distribution

156 plf

3 story

Typ Roof

949 1 22

20878

20878

2317

With

0.615385 0.384615

Low Roof

0 1 22

0

0

145.5968

L(ft) windward leeward

Ext

64 4.5415 10

2906.56

4359.84

484

2801

31.00

2984

1865

2984

Int

32 4.5415 10

1453.28

1733.491

385

2702

30.58

2944

1840

1840

2944

Ext

38.17 4.5415 10

1733.491

1733.491

142.304

142.304

30.58

2944

1840

1840

2944

Int

38.17 4.5415 10

1733.491

1733.491

142.304

142.304

30.58

2944

1840

1840

2944

3rd Floor

Typ Floor

755 1 26

19630

37866

4203

102 plf

Other Floor

388 1 47

18236

18236

968

5171

5753

31.00

1950

1218

1950

Ext

64 9.083 10

5813.12

8719.68

968

5171

5753

31.00

1950

1218

1950

Int

32 9.083 10

2906.56

6933.962

770

4973

5531

30.58

1923

1202

1923

Ext

38.17 9.083 10

3466.981

6933.962

770

4973

5531

30.58

1923

1202

1923

Int

38.17 9.083 10

3466.981

6933.962

770

4973

5531

30.58

1923

1202

1923

2nd Floor

Typ Floor

755 1 26

19630

37866

4203

101 plf

Other Floor

388 1 47

18236

18236

968

5171

2877

31.00

1934

1208

1934

Ext

64 9.083 10

5813.12

8719.68

968

5171

2877

31.00

1934

1208

1934

Int

32 9.083 10

2906.56

6933.962

770

1.797587

92.79485

30.58

1908

1192

1908

Ext

38.17 9.083 10

3466.981

6933.962

770

4973

2765

30.58

1908

1192

1908

Int

38.17 9.083 10

3466.981

6933.962

770

1.798306

90.41845

30.58

1908


1192

1908

2hr

Wind:

1 BEDROOM

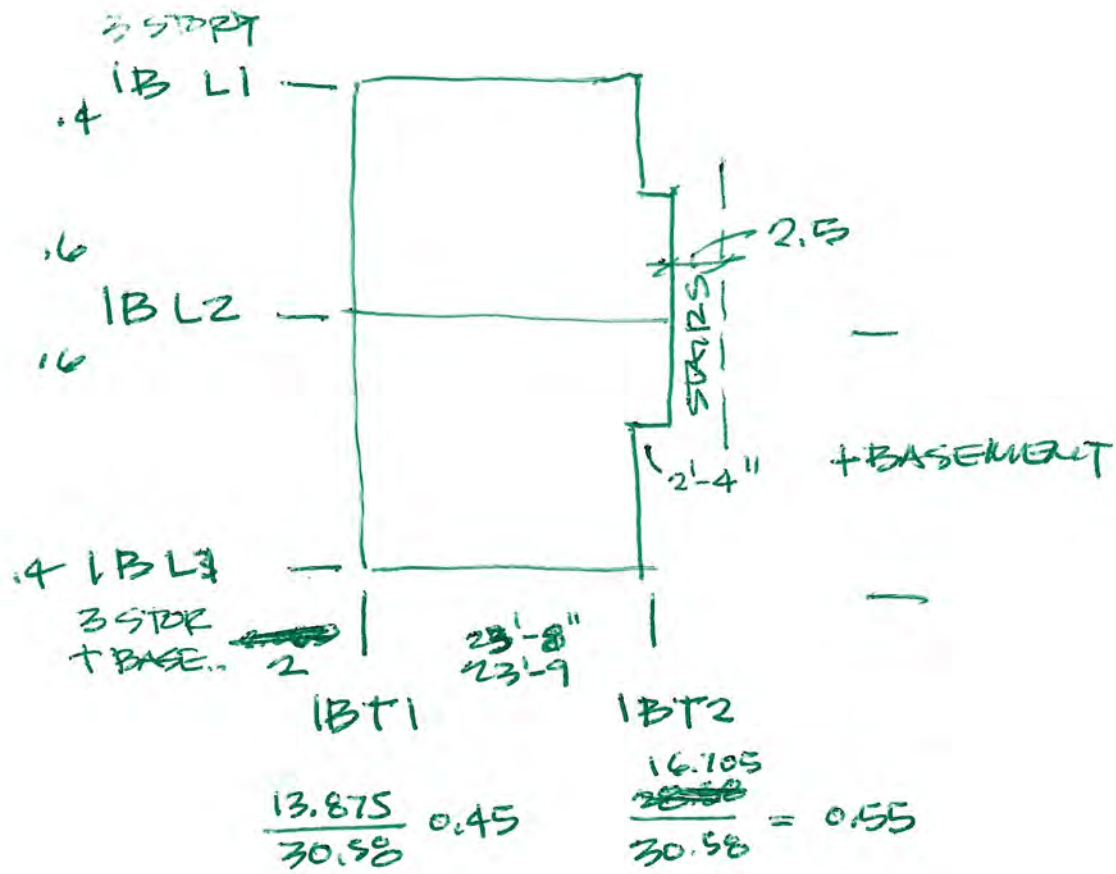

PRMU20240285

1Bx1		Roof	L (ft)	W or h(ft)	psf	W (#)	0.1110W	With	156 plf
3 story + B1		Typ Roof	949	1	22	20878	20878	2317	Vertical Distribution
		Low Roof	0	1	22	0			
		Ext	64	4.5415	10	2906.56	4359.84	484	L(ft) windward leeward
		Int	32	4.5415	10	1453.28			31.00 2984 1865 2984
		Ext	38.17	4.5415	10	1733.491	3466.981	385	2702 4596 30.58 2944 1840 2944
		Int	38.17	4.5415	10	1733.491			150.2818
		3rd Floor	L (ft)	W or h(ft)	psf	W (#)	0.1110W		102 plf
e		Typ Floor	755	1	26	19630	37866	4203	L(ft) windward leeward
		Other Floor	388	1	47	18236			31.00 1950 1218 1950
		Ext	64	9.083	10	5813.12	8719.68	968	5171 6774 31.00 1950 1218 1950
		Int	32	9.083	10	2906.56			218.5199
		Ext	38.17	9.083	10	3466.981	6933.962	770	4973 6512 30.58 1923 1202 1923
		Int	38.17	9.083	10	3466.981			212.9388
		2nd Floor	L (ft)	W or h(ft)	psf	W (#)	0.1110W		101 plf
e		Typ Floor	755	1	26	19630	37866	4203	L(ft) windward leeward
		Other Floor	388	1	47	18236			31.00 1934 1208 1934
		Ext	64	9.083	10	5813.12	8719.68	968	5171 4516 31.00 1934 1208 1934
		Int	32	9.083	10	2906.56			145.6799
		Ext	38.17	9.083	10	3466.981	6933.962	770	4973 4342 30.58 1908 1192 1908
		Int	38.17	9.083	10	3466.981			141.9592
		1st Floor	L (ft)	W or h(ft)	psf	W (#)	0.1110W		101 plf
b1, b2		Typ Floor	755	1	26	19630	37866	4203	L(ft) windward leeward
		Other Floor	388	1	47	18236			31.00 1934 1208 1934
		Ext	64	9.083	10	5813.12	8719.68	968	5171 2258 31.00 1934 1208 1934
		Int	32	9.083	10	2906.56			72.83996
		Ext	38.17	9.083	10	3466.981	6933.962	770	4973 2171 30.58 1908 1192 1908
		Int	38.17	9.083	10	3466.981			70.97959

Unit B1							
Roof	2984	Wind	Roof	1840	Roof	2944	Wind
	4514	Seismic		4352		4352	Seismic
3rd	1950	Wind	3rd	1202	3rd	1923	Wind
	5753	Seismic		5531		5531	Seismic
2nd	1934	Wind	2nd	1192	2nd	1908	Wind
	2877	Seismic		2765		2765	Seismic

Unit B1							
Roof	2984	Wind	Roof	2944	Roof	1840	Wind
	4766	Seismic		4596		4596	Seismic
3rd	1950	Wind	3rd	1923	3rd	1202	Wind
	6774	Seismic		6512		6512	Seismic
2nd	1934	Wind	2nd	1908	2nd	1192	Wind
	4516	Seismic		4342		4342	Seismic
1st	1934	Wind	2nd	1908	2nd	1192	Wind
	2258	Seismic		2171		2171	Seismic

B1 + B1	B1 + B1	max	
4784	4784	4784	Wind
8948	8948	8948	Seismic
3125	3125	3125	Wind
12043	12043	12043	Seismic
3100	3100	3100	Wind
7107	7107	7107	Seismic
1908	1192	1908	Wind
2171	2171	2171	Seismic

Job # 23.002

Sheet:



Designed: TLC

Date: 5/29/23

Checked:

Date:

Project: Bradley Heights - 3 Story & basement Story

Diaphragm Design Forces 1 Bedroom units

$$F_x = C_{vx} V \quad (12.8-11)$$

$$F_{dx} = \frac{\sum_{i=x}^n F_i}{\sum_{i=x}^n w_i} w_{px} \quad (12.10-1)$$

F_{px} = the diaphragm design force at Level x

F_i = the design force applied to level i

w_i = the weight tributary to Level i

w_{px} = the weight tributary to the diaphragm at Level x

$$I_e = 1$$

$$S_{DS} = 0.8787$$

$$\text{Minimum: } F_{px} = 0.2 S_{DS} I_e w_{px}$$

$$\text{Maximum: } F_{px} = 0.4 S_{DS} I_e w_{px}$$

3- story	B1								use	
	→	F_i	$\sum_{i=x}^n F_i$	w_{xp}	$\sum_{i=x}^n w_i$	F_{px}	Min	Max	F_{px}	x factor
Roof		4514	4514	25238	25237.84	4514	4435	8871	4514	1
3rd Floor		5753	10267	46586	71823.52	6659	8187	16374	8187	1.229428
2nd Floor		2877	13143	46586	118409.2	5171	8187	16374	8187	1.583243

3- story	B1								use	
	↑	F_i	$\sum_{i=x}^n F_i$	w_i	$\sum_{i=x}^n w_i$	F_{px}	Min	Max	F_{px}	x factor
Roof		4352	4352	24345	24344.98	4352	4278	8557	4352	1
3rd Floor		5531	9883	44800	69144.94	6403	7873	15746	7873	1.229586
2nd Floor		2765	12648	44800	113944.9	4973	7873	15746	7873	1.583243

3- story + EB1									use	
	→	F_i	$\sum_{i=x}^n F_i$	w_{xp}	$\sum_{i=x}^n w_i$	F_{px}	Min	Max	F_{px}	x factor
Roof		4766	4766	25238	25237.84	4766	4435	8871	4766	1
3rd Floor		6774	11540	46586	71823.52	7485	8187	16374	8187	1.093754
2nd Floor		4516	16056	46586	118409.2	6317	8187	16374	8187	1.296009
1st Floor		2258	18314	46586	164994.9	5171	8187	16374	8187	1.583243

3- story + EB1									use	
	↑	F_i	$\sum_{i=x}^n F_i$	w_i	$\sum_{i=x}^n w_i$	F_{px}	Min	Max	F_{px}	x factor
Roof		4596	4596	24345	24344.98	4596	4278	8557	4596	1
3rd Floor		6512	11108	44800	69144.94	7197	7873	15746	7873	1.093907
2nd Floor		4342	15450	44800	113944.9	6074	7873	15746	7873	1.296103
1st Floor		2171	17621	44800	158744.9	4973	7873	15746	7873	1.583243

[illegible]

PRMU20240285



Job # 23.007 Sheet:

Designed TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

1B-11

0.5 (ft) holdown dist from end

Roof:	Wind (ASD): 1.194 kips		173 #/ft		173 #/ft		173 #/ft		173 #/ft		173 #/ft	
W2	Seismic (ASD): 1.906 kips		276 #/ft		276 #/ft		276 #/ft		276 #/ft		276 #/ft	
	use W1P	SW 1B-L3 -1		use W2P	SW 1B-L3 -2				not used			
	0 ft	0 ft	0 ft	3.417 ft	3.5 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft
Distribution L	0 ft	0 ft	0 ft	3.417 ft	3.5 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft
h/b _s =				1.756 W2	1.714 W2							
DL w (plf) =	427.2	427.2	0	382.3	382.3	0	0	429.1	429.1	0	0	0
0.6M _R (#-ft) =	0	0	0	1339	1405	0	0	0	0	0	0	0
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E
M _{or} (#-ft) =	0	0	0	173	276	173	276	0	0	0	0	0
F (#) =	0	0	0	1377	2474	1360	2453	0	0	0	0	0
Holdown	1000	-	1000	-	1000	-	1000	-	1000	-	1000	-
	No Holdown OK	No Holdown OK	No Holdown OK	MST37 NG	MST37 NG	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK
	(see calc next pp OK)											
3rd Floor:	Wind (ASD): 0.780 kips		161 #/ft		163 #/ft		163 #/ft		163 #/ft		163 #/ft	
W3	Seismic (ASD): 2.71 kips		377 #/ft		377 #/ft		377 #/ft		377 #/ft		377 #/ft	
	use W3P	SW 2B-L3 -1		use W4P	SW 2B-L3 -2				not used			
	3 ft	2.333 ft	0 ft	3.417 ft	3.5 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft
Distribution L	3 ft	2.178 ft	0 ft	3.417 ft	3.5 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft
h/b _s =	1.667 W3	2.143 W3		1.756 W3	1.714 W3							
DL w (plf) =	108.2	108.2	0	108.2	108.2	0	0	108.2	108.2	0	0	0
0.6M _R (#-ft) =	292	177	0	379	398	0	0	0	0	0	0	0
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E
M _{or} (#-ft) =	163	382	152	356	0	0	163	382	163	382	0	0
F (#) =	4446	10401	3228	7550	0	0	5064	11845	5187	12134	0	0
Holdown	2335	S2	2335	S2	1000	-	2335	S2	2335	S2	1000	-
	MST48 NG	MST48 NG	No Holdown OK	MST48 NG	MST48 NG	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK
	(see calc next pp OK)											
2nd Floor	Wind (ASD): 0.773 kips		224 #/ft		227 #/ft		227 #/ft		227 #/ft		227 #/ft	
W4	Seismic (ASD): 1.806 kips		524 #/ft		524 #/ft		524 #/ft		524 #/ft		524 #/ft	
	use W4P	SW 2B-L3 -1		use W6P	SW 2B-L3 -2				not used			
	3 ft	2.333 ft	0 ft	3.417 ft	3.5 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft
Distribution L	3 ft	2.178 ft	0 ft	3.417 ft	3.5 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft
h/b _s =	1.667 W4	2.143 W4		1.756 W4	1.714 W4							
DL w (plf) =	108.2	108.2	0	108.2	108.2	0	0	108.2	108.2	0	0	0
0.6M _R (#-ft) =	292	177	0	379	398	0	0	0	0	0	0	0
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E
M _{or} (#-ft) =	227	531	212	496	0	0	227	531	227	531	0	0
F (#) =	6189	14471	4493	10505	0	0	7048	16480	7220	16882	0	0
Holdown	4020	9715	4018	9655	0	0	5270	11926	5231	11860	0	0
	4065	H3	4065	H3	1000	-	4065	H3	4065	H3	1000	-
	HDU5 NG	HDU5 NG	No Holdown OK	HDU5 NG	HDU5 NG	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK
	(see calc next pp OK)											
1st Floor	Wind (ASD): 0.773 kips		287 #/ft		291 #/ft		291 #/ft		291 #/ft		291 #/ft	
W4	Seismic (ASD): 0.903 kips		598 #/ft		598 #/ft		598 #/ft		598 #/ft		598 #/ft	
	use W5P	SW 2B-L3 -1		use W6P	SW 2B-L3 -2				not used			
	3 ft	2.333 ft	0 ft	3.417 ft	3.5 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft
Distribution L	3 ft	2.178 ft	0 ft	3.417 ft	3.5 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft
h/b _s =	1.667 W4	2.143 W4		1.756 W4	1.714 W4							
DL w (plf) =	108.2	108.2	0	108.2	108.2	0	0	108.2	108.2	0	0	0
0.6M _R (#-ft) =	292	177	0	379	398	0	0	0	0	0	0	0
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E	W E
M _{or} (#-ft) =	291	606	272	565	0	0	291	606	291	606	0	0
F (#) =	7931	16506	5758	11982	0	0	9033	18798	9253	19257	0	0
Holdown	7076	16200	7062	16095	0	0	8237	18241	8183	18146	0	0
	6970	H4	6970	H4	1000	-	6970	H4	6970	H4	1000	-
	HDU8 NG	HDU8 NG	No Holdown OK	HDU8 NG	HDU8 NG	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK
	(see calc next pp OK)											

1.05

PRMU20240285

Job # 23.007 Sheet:



Designer: TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments
1B-L2

0.5 (ft) holddown dist from end

Roof: W1	Wind (ASD): 3.581 kips 142 #/ft				Seismic (ASD): 5.568 kips 221 #/ft				142 #/ft 221 #/ft	
					Use W2 					9.083 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	25.17 ft	0 ft	0 ft	0 ft	0 ft	25.17 ft
$h/b_s =$	0.361 W1				384.2	0				
DL w (plf) =	73002				384.2	0				
0.6M _R (#-ft) =	W E				W E	W E				
PLF	0 0	0 0	0 0	0 0	142 221	0 0	0 0	0 0	0 0	
M _{ot} (#-ft) =	0 0	0 0	0 0	0 0	32525 50574	0 0	0 0	0 0	0 0	
F (#) =	0 0	0 0	0 0	0 0	-1641 -909	0 0	0 0	0 0	0 0	
Holddown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	
	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	


Actual
Distribu

3rd Floor: W4	Wind (ASD): 2.339 kips 235 #/ft				Seismic (ASD): 7.516 kips 520 #/ft				235 #/ft 520 #/ft	
										9.083 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	25.17 ft	0 ft	0 ft	0 ft	0 ft	25.17 ft
$h/b_s =$	0.361 W4				108.2	184				
DL w (plf) =	0				108.2	0				
0.6M _R (#-ft) =	W E				W E	W E				
PLF	0 0	0 0	0 0	0 0	235 520	0 0	0 0	0 0	0 0	
M _{ot} (#-ft) =	0 0	0 0	0 0	0 0	53775 118849	0 0	0 0	0 0	0 0	
F (#) =	0 0	0 0	0 0	0 0	-404 2966	0 0	0 0	0 0	0 0	
Holddown	2335 S2	1000 -	1000 -	1000 -	3356 S3	1000 -	1000 -	1000 -	2335 S2	
	MST48 OK	No Holddown OK	No Holddown OK	No Holddown OK	MST60 OK	No Holddown OK	No Holddown OK	No Holddown OK	MST48 OK	

Actual
Distribu


2nd Floor W5	Wind (ASD): 2.320 kips 327 #/ft				Seismic (ASD): 4.436 kips 696 #/ft				327 #/ft 696 #/ft	
										9.083 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	25.17 ft	0 ft	0 ft	0 ft	0 ft	25.17 ft
$h/b_s =$	0.361 W5				108.2	0				
DL w (plf) =	0				108.2	0				
0.6M _R (#-ft) =	W E				W E	W E				
PLF	0 0	0 0	0 0	0 0	327 696	0 0	0 0	0 0	0 0	
M _{ot} (#-ft) =	0 0	0 0	0 0	0 0	74851 159139	0 0	0 0	0 0	0 0	
F (#) =	0 0	0 0	0 0	0 0	1687 8474	0 0	0 0	0 0	0 0	
Holddown	4065 H3	6970 H4	1000 -	1000 -	9535 H5	1000 -	1000 -	6970 H4	9535 H5	
	1.05 HDU5 OK	HDU8 OK	No Holddown OK	No Holddown OK	HDU11 OK	No Holddown OK	No Holddown OK	HDU8 OK	HDU11 OK	


Actual
Distribu




1B-L3

0.5 (ft) holdown dist from end

Roof: W2		Wind (ASD): 1.194 kips Seismic (ASD): 1.906 kips				173 #/ft 276 #/ft				173 #/ft 276 #/ft											
		use W1P SW 1B-L3 -1		5		use W2P SW 1B-L3 -2		6		not used		6		9.083 ft							
																					
Distribution L		0 ft		0 ft		0 ft		3.417 ft		3.5 ft		0 ft			0 ft		0 ft		6.917		Actual Distribution
h/b _s =								1.756 W2		1.714 W2											
DL w (plf) =		427.2		427.2		0		382.3		382.3		0			0		429.1		429.1		
0.6M _R (#-ft) =		0		0		0		1339		1405		0		0		0		0			
PLF		W E		W E		W E		W E		W E		W E		W E		W E		W E			
M ₀₁ (#-ft) =		0 0		0 0		0 0		5356 8554		5486 8763		0 0		0 0		0 0		0 0			
F (#) =		0 0		0 0		0 0		1377 2474		1360 2453		0 0		0 0		0 0		0 0			
Holdown		1000 -		1000 -		1000 -		1256 S1		1256 S1		1000 -		1000 -		1000 -		1000 -			
		No Holdown OK		No Holdown OK		No Holdown OK		MST37 NG		MST37 NG		No Holdown OK		No Holdown OK		No Holdown OK		No Holdown OK			
		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		No Holdown OK		No Holdown OK		No Holdown OK		No Holdown OK			

3rd Floor: W3		Wind (ASD): 0.780 kips Seismic (ASD): 2.71 kips				161 #/ft 377 #/ft				163 #/ft 382 #/ft													
		use W3P SW 2B-L3 -1		5		use W4P SW 2B-L3 -2		6		not used		5		9.083 ft									
																							
Distribution L		3 ft		2.178 ft		0 ft		3.417 ft		3.5 ft		0 ft			0 ft		0 ft		0 ft		12.25		Actual Distribution
h/b _s =		1.667 W3		2.143 W3				1.756 W3		1.714 W3													
DL w (plf) =		108.2		108.2		0		108.2		108.2		0			0		108.2		108.2				
0.6M _R (#-ft) =		292		177		0		379		398		0		0		0		0					
PLF		W E		W E		W E		W E		W E		W E		W E		W E		W E					
M ₀₁ (#-ft) =		4446 10401		3228 7550		0 0		5064 11845		5187 12134		0 0		0 0		0 0		0 0					
F (#) =		1662 4043		1664 4022		0 0		2983 6405		2957 6365		0 0		0 0		0 0		0 0					
Holdown		2335 S2		2335 S2		1000 -		2335 S2		2335 S2		1000 -		1000 -		1000 -		1000 -					
		MST48 NG		MST48 NG		No Holdown OK		MST48 NG		MST48 NG		No Holdown OK		No Holdown OK		No Holdown OK		No Holdown OK					
		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		No Holdown OK		No Holdown OK		No Holdown OK		No Holdown OK					


2nd Floor W4		Wind (ASD): 0.773 kips Seismic (ASD): 1.806 kips				224 #/ft 524 #/ft				227 #/ft 531 #/ft													
		use W4P SW 2B-L3 -1		5		use W6P SW 2B-L3 -2		6		not used		5		9.083 ft									
																							
Distribution L		3 ft		2.178 ft		0 ft		3.417 ft		3.5 ft		0 ft			0 ft		0 ft		0 ft		12.25		Actual Distribution
h/b _s =		1.667 W4		2.143 W4				1.756 W4		1.714 W4													
DL w (plf) =		108.2		108.2		0		108.2		108.2		0			0		108.2		108.2				
0.6M _R (#-ft) =		292		177		0		379		398		0		0		0		0					
PLF		W E		W E		W E		W E		W E		W E		W E		W E		W E					
M ₀₁ (#-ft) =		6189 14471		4493 10505		0 0		7048 16480		7220 16882		0 0		0 0		0 0		0 0					
F (#) =		4020 9715		4018 9655		0 0		5270 11926		5231 11860		0 0		0 0		0 0		0 0					
Holdown		4670 S4		4670 S4		1000 -		4670 S4		4670 S4		1000 -		1000 -		1000 -		1000 -					
		(2) MST48 NG		(2) MST48 NG		No Holdown OK		(2) MST48 NG		(2) MST48 NG		No Holdown OK		No Holdown OK		No Holdown OK		No Holdown OK					
		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		No Holdown OK		No Holdown OK		No Holdown OK		No Holdown OK					

1st Floor W4		Wind (ASD): 0.773 kips Seismic (ASD): 0.903 kips				287 #/ft 598 #/ft				291 #/ft 606 #/ft													
		use W5P SW 2B-L3 -1		5		use W6P SW 2B-L3 -2		6		not used		5		9.083 ft									
																							
Distribution L		3 ft		2.178 ft		0 ft		3.417 ft		3.5 ft		0 ft			0 ft		0 ft		0 ft		12.25		Actual Distribution
h/b _s =		1.667 W4		2.143 W4				1.756 W4		1.714 W4													
DL w (plf) =		108.2		108.2		0		108.2		108.2		0			0		108.2		108.2				
0.6M _R (#-ft) =		292		177		0		379		398		0		0		0		0					
PLF		W E		W E		W E		W E		W E		W E		W E		W E		W E					
M ₀₁ (#-ft) =		7931 16506		7568 11982		0 0		9033 18798		9253 19257		0 0		0 0		0 0		0 0					
F (#) =		7076 16200		7072 16095		0 0		8237 18241		8183 18146		0 0		0 0		0 0		0 0					
Holdown		6970 H4		6970 H4		1000 -		6970 H4		6970 H4		1000 -		1000 -		1000 -		1000 -					
		HDU8 NG		HDU8 NG		No Holdown OK		HDU8 NG		HDU8 NG		No Holdown OK		No Holdown OK		No Holdown OK		No Holdown OK					
		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		(see calc next pp OK)		No Holdown OK		No Holdown OK		No Holdown OK		No Holdown OK					

W Designation


Diagram of a 3x3 crossbar switch with 3 inputs and 3 outputs. The switch is controlled by a 3x3 weight matrix W . The inputs are labeled $b_1=3$, $b_0=5$, and $b_2=2$. The outputs are labeled $b_1=3$, $b_0=5$, and $b_2=2$. The weights are: $W_{11}=1.02$, $W_{12}=1.02$, $W_{13}=2.23$, $W_{21}=1.02$, $W_{22}=2.11$, $W_{23}=0.79$, $W_{31}=0.80$, $W_{32}=0.79$, $W_{33}=0.80$. The diagram shows the internal connections and the resulting output values.

h₂= 3

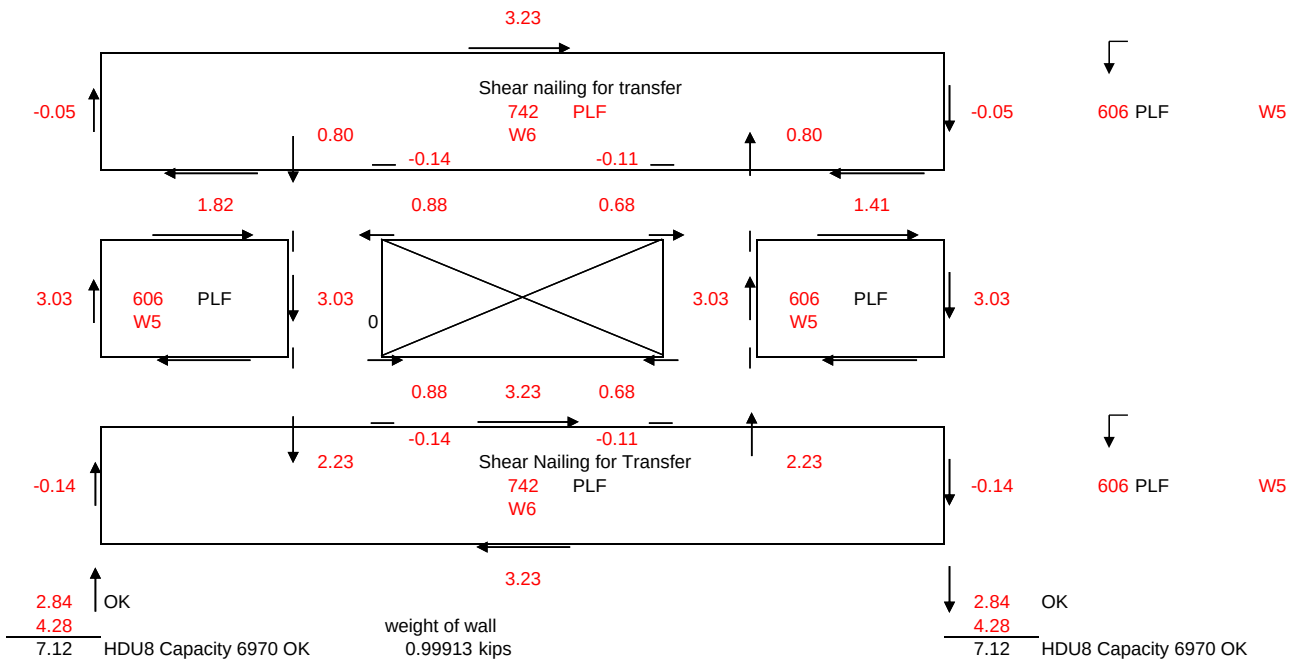

W Designation


Diagram of a 3x3 crossbar switch with 3 inputs and 3 outputs. The switch is controlled by a 3x3 weight matrix W . The inputs are labeled $b_1=3$, $b_0=5$, and $b_2=2$. The outputs are labeled $b_1=3$, $b_0=5$, and $b_2=2$. The weights are: $W_{11}=0.70$, $W_{12}=0.89$, $W_{13}=0.70$, $W_{21}=0.89$, $W_{22}=1.85$, $W_{23}=0.69$, $W_{31}=0.89$, $W_{32}=0.69$, $W_{33}=1.95$. The diagram shows the internal connections and the resulting output values.
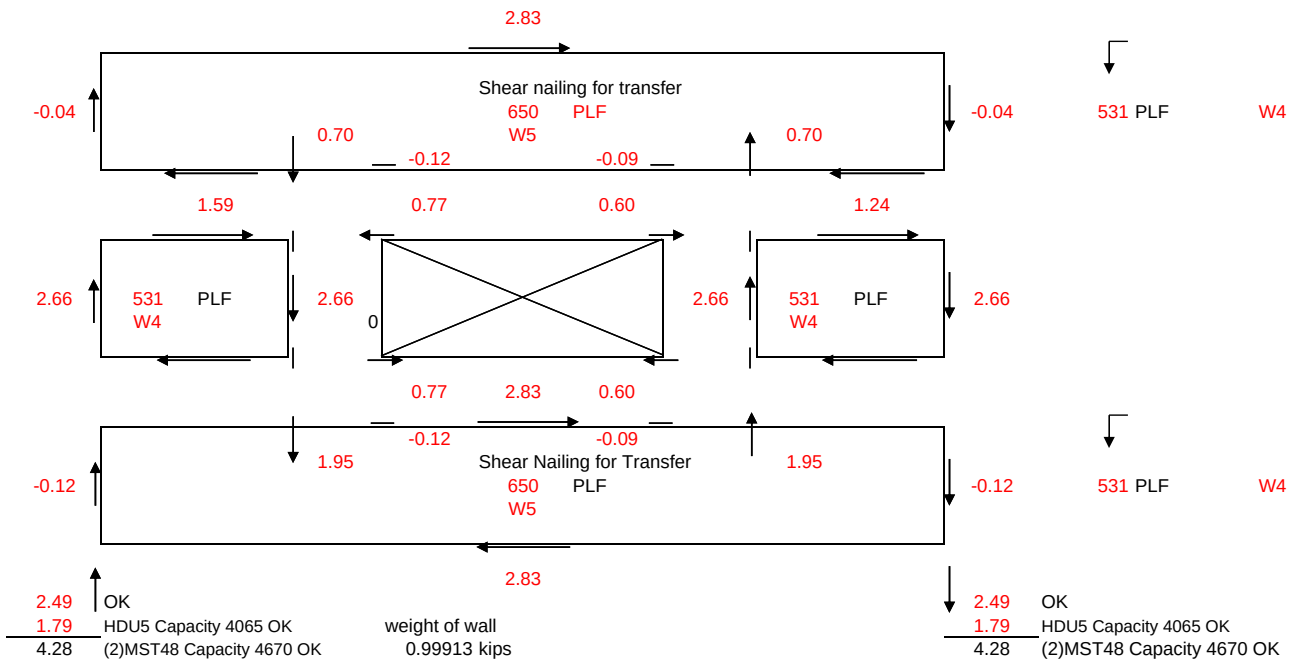
$$h_2 = 3$$


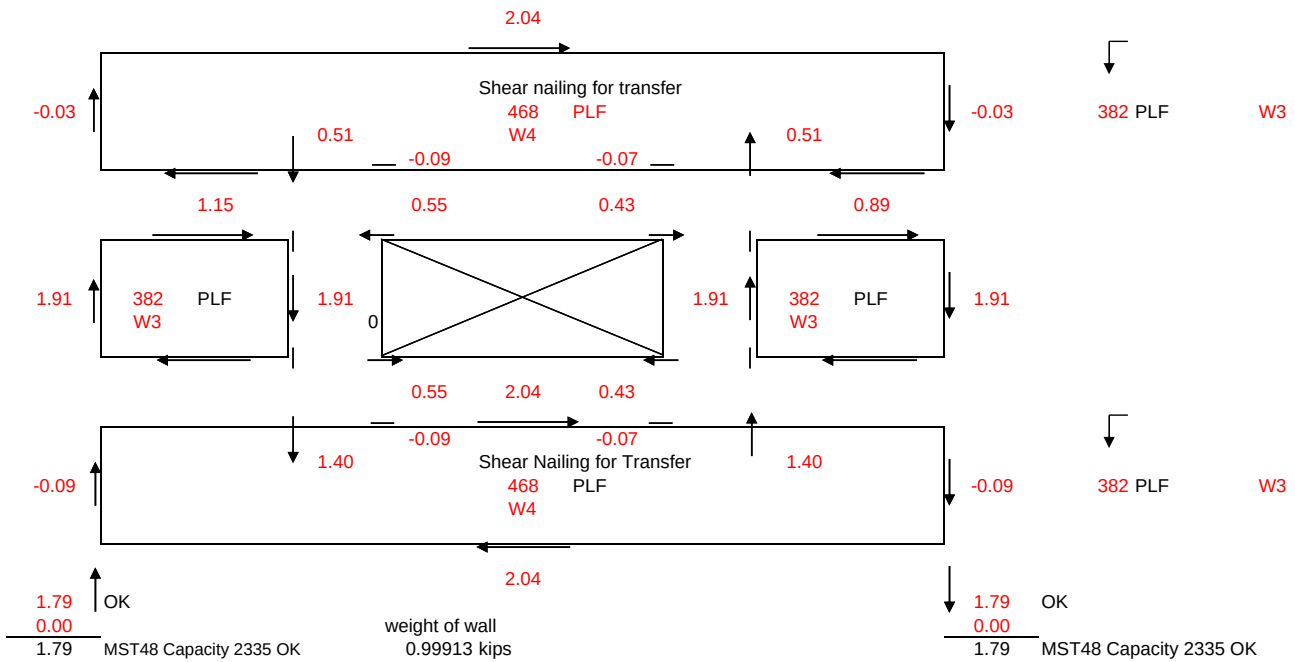
Shear Wall Line 1B-L3-1 3rd

W Designation


P= 2.037 Kips
382 plf
382 plf



CS16



h₁= 1.083333h₀= 5 h= 9.083333h₂= 3

W Designation
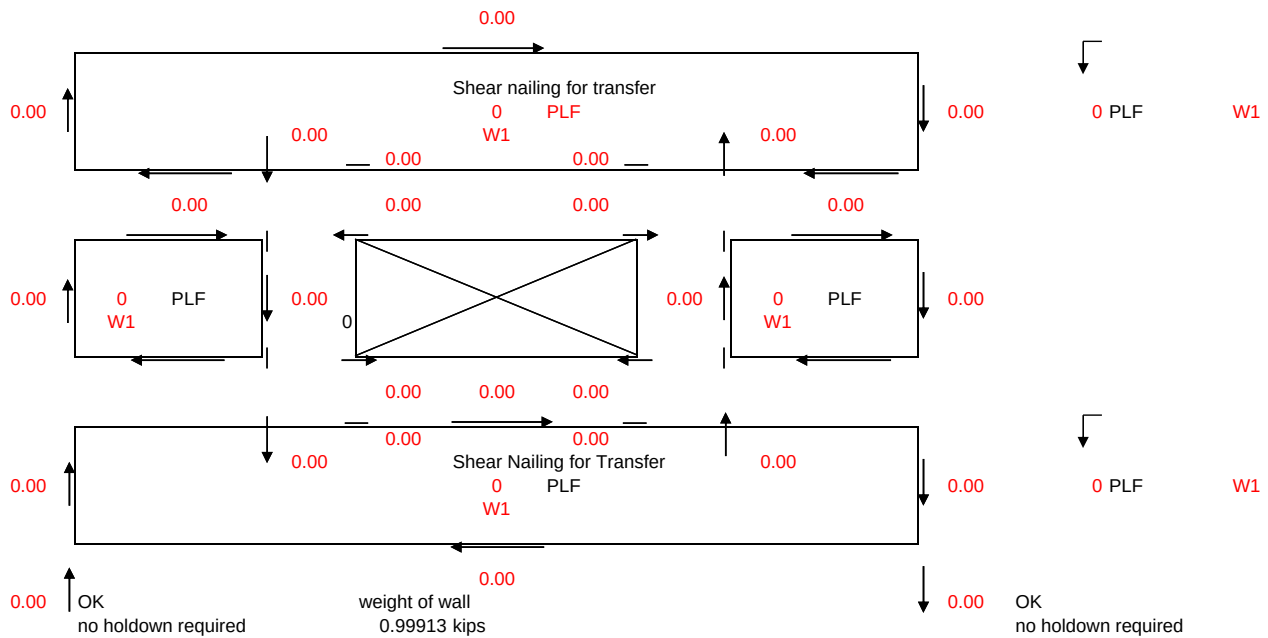
$$h_2 = 3$$


Shear Wall Line 1B-L3-2 1st



W Designation

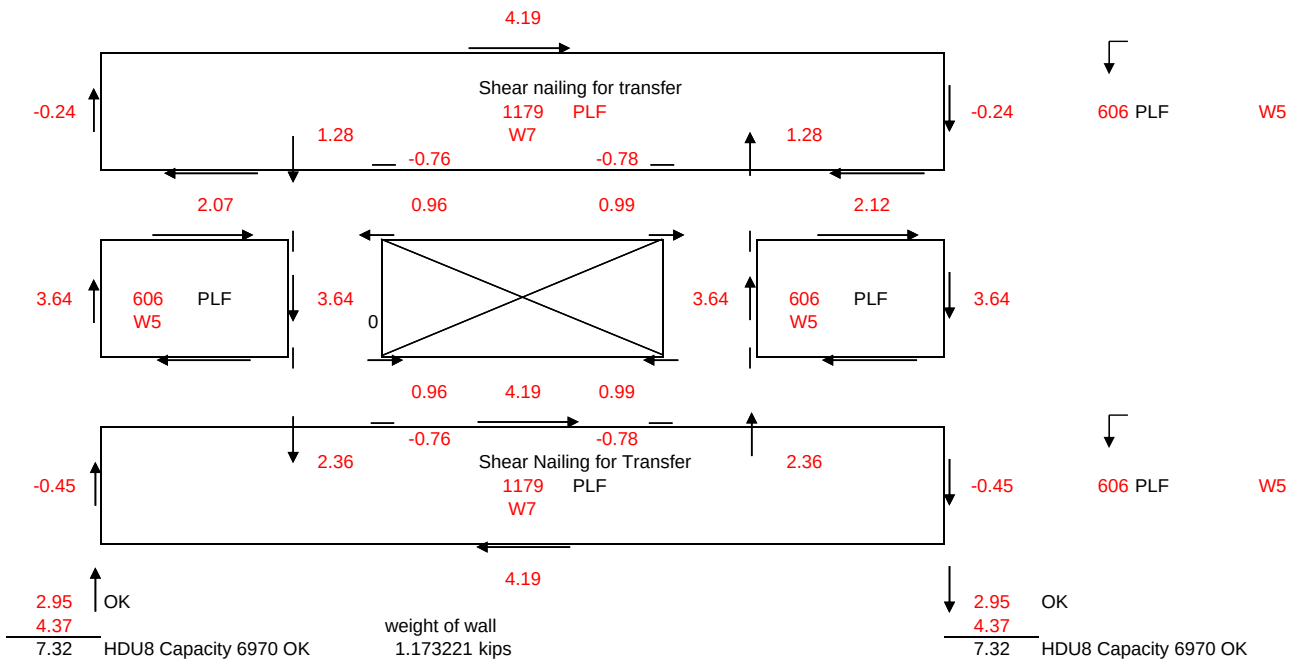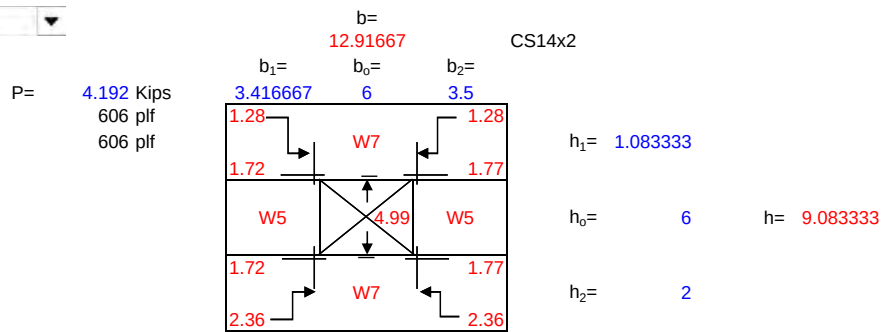

Shear Wall Line 1B-L3-2 2nd

W Designation



P= 3.673 Kips
531 plf
531 plf

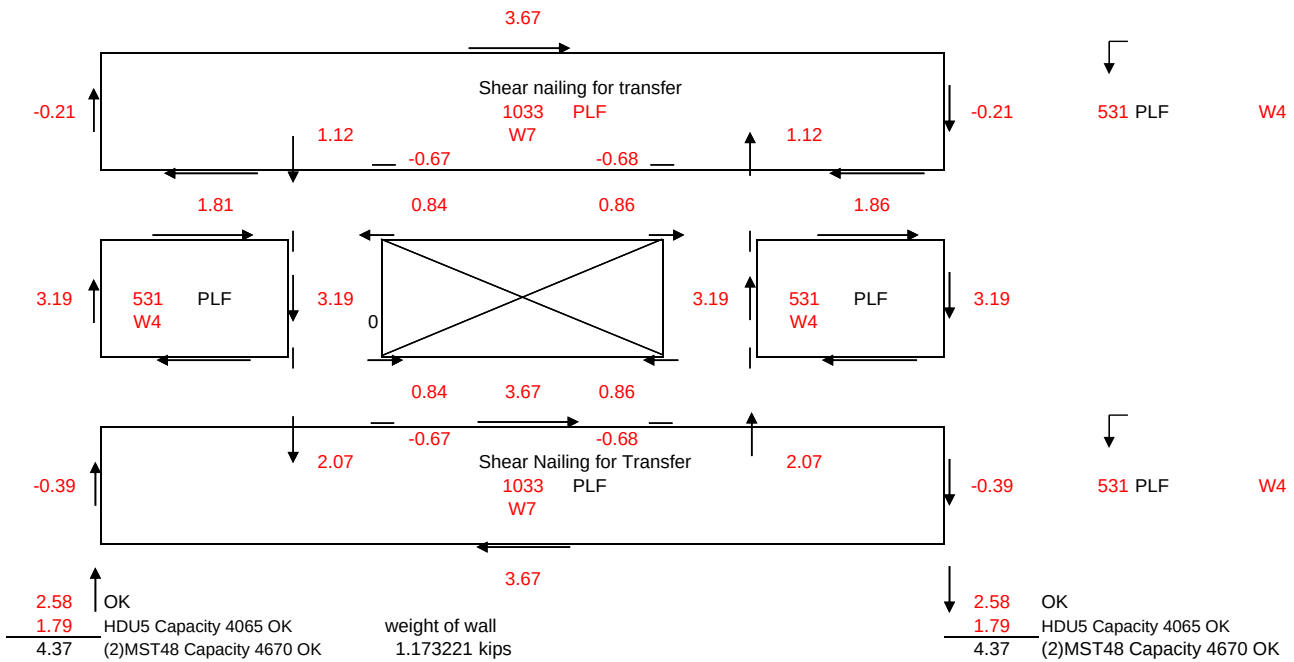

Shear Wall Line 1B-L3-2 3rd



W Designation

P= 2.642 Kips
382 plf
382 plf

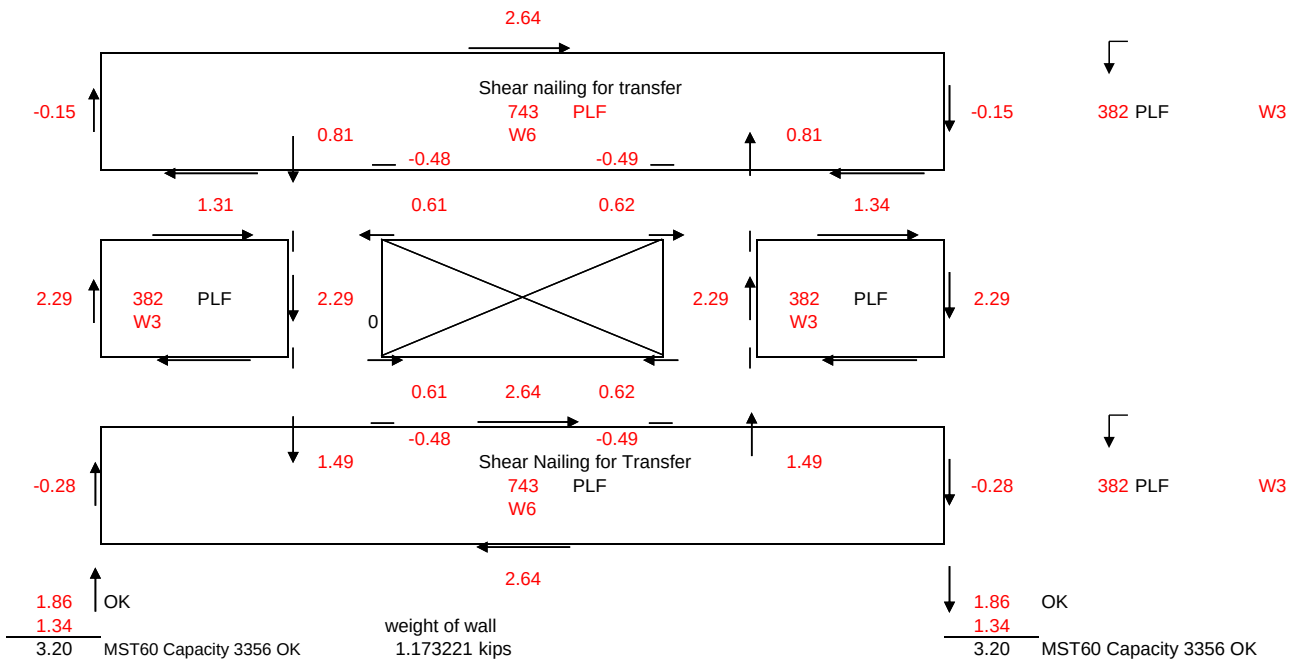h₁= 1.083333h₀= 6 h= 9.083333h₂= 2

Shear Wall Line 1B-L3-2 roof

W Designation

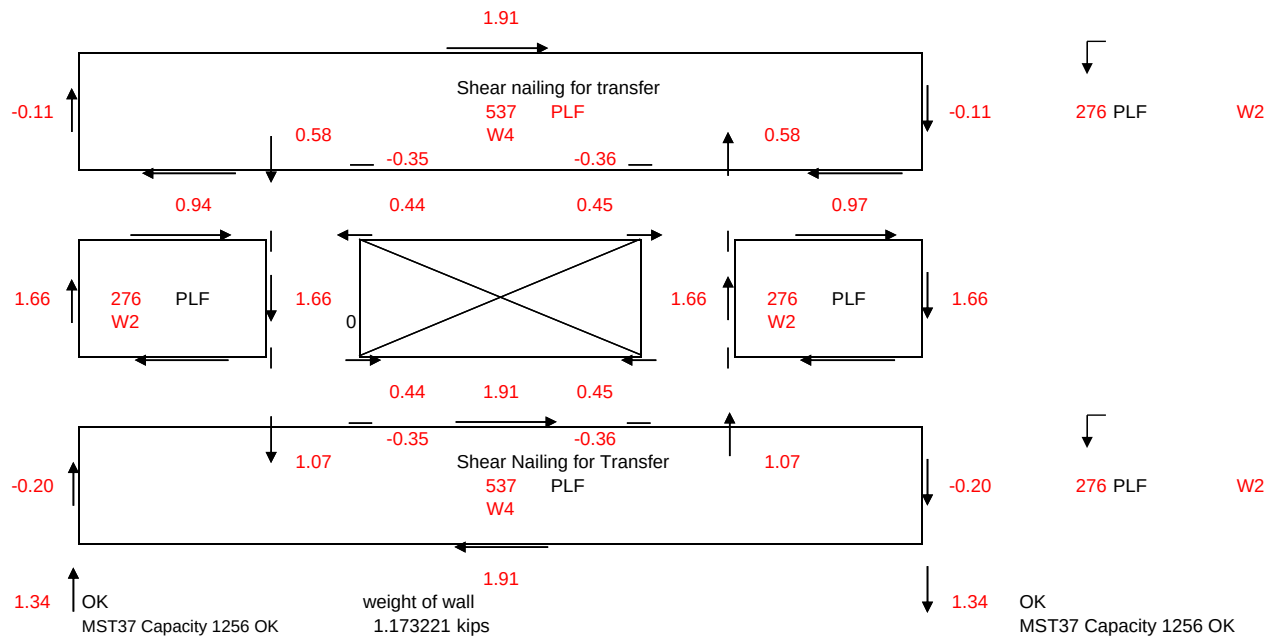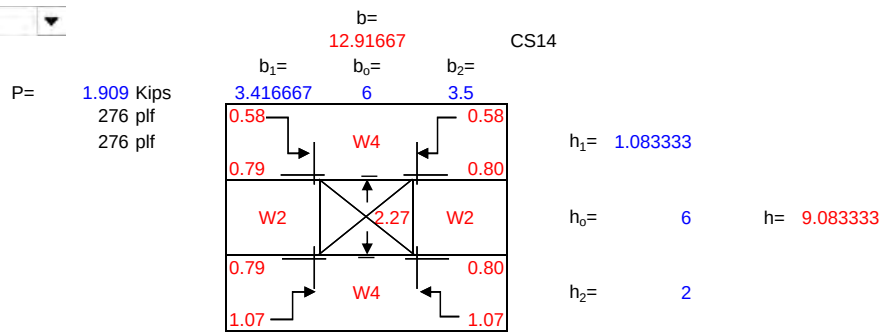

PRMU20240285



Job # 23.007 Sheet:

Designed TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

B-T1 end (3 story + Basement)


0.5 (ft) holdown dist from end

Roof: W1	Wind (ASD): 2.153 kips		43 #/ft		43 #/ft		43 #/ft		43 #/ft		43 #/ft	
	Seismic (ASD): 4.027 kips		81 #/ft		81 #/ft		81 #/ft		81 #/ft		81 #/ft	
											9.083 ft	
	8.417 ft	9.417 ft	0 ft	0 ft	13.92 ft	0 ft	0 ft	9.417 ft	8.417 ft	49.58	Actual	
Distribution L	8.417 ft	9.417 ft	0 ft	0 ft	13.92 ft	0 ft	0 ft	9.417 ft	8.417 ft	49.58	Distribu	
h/b _s =	1.079 W1	0.965 W1			0.653 W1			0.965 W1	1.079 W1			
DL w (plf) =	178.8	178.8	0	0	178.8	0	0	178.8	178.8			
0.6M _R (#-ft) =	3801	4757	0	0	10391	0	0	4757	3801			
W E	W E	W E	W E	W E	W E	W E	W E	W E	W E			
PLF	43 81	43 81	0 0	0 0	43 81	0 0	0 0	43 81	43 81			
M _{tot} (#-ft) =	3319 6209	3714 6946	0 0	0 0	5488 10266	0 0	0 0	3714 6946	3319 6209			
F (#) =	-61 304	-117 245	0 0	0 0	-365 -9	0 0	0 0	-117 245	-61 304			
Holdown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -			
	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK			

3rd Floor: W1	Wind (ASD): 1.406 kips		72 #/ft		72 #/ft		72 #/ft		72 #/ft		72 #/ft	
	Seismic (ASD): 5.419 kips		191 #/ft		191 #/ft		191 #/ft		191 #/ft		191 #/ft	
Use W2											9.083 ft	
	8.417 ft	9.417 ft	0 ft	0 ft	13.92 ft	0 ft	0 ft	9.417 ft	8.417 ft	49.58	Actual	
Distribution L	8.417 ft	9.417 ft	0 ft	0 ft	13.92 ft	0 ft	0 ft	9.417 ft	8.417 ft	49.58	Distribu	
h/b _s =	1.079 W1	0.965 W1			0.653 W1			0.965 W1	1.079 W1			
DL w (plf) =	255.5	255.5	0	0	231.6	0	0	255.5	255.5			
0.6M _R (#-ft) =	5431	6798	0	0	13458	0	0	6798	5431			
W E	W E	W E	W E	W E	W E	W E	W E	W E	W E			
PLF	72 191	72 191	0 0	0 0	72 191	0 0	0 0	72 191	72 191			
M _{tot} (#-ft) =	5488 14564	6140 16295	0 0	0 0	9074 24082	0 0	0 0	6140 16295	5488 14564			
F (#) =	-54 1458	-191 1311	0 0	0 0	-692 783	0 0	0 0	-191 1311	-54 1458			
Holdown	2335 S2	2335 S2	1000 -	1000 -	2335 S2	1000 -	1000 -	2335 S2	2335 S2			
	MST48 OK	MST48 OK	No Holdown OK	No Holdown OK	MST48 OK	No Holdown OK	No Holdown OK	MST48 OK	MST48 OK			
	with point load ok by inspection											

2nd Floor W2	Wind (ASD): 1.395 kips		100 #/ft		100 #/ft		100 #/ft		100 #/ft		100 #/ft	
	Seismic (ASD): 3.198 kips		255 #/ft		255 #/ft		255 #/ft		255 #/ft		255 #/ft	
Use W3											9.083 ft	
	8.417 ft	9.417 ft	0 ft	0 ft	13.92 ft	0 ft	0 ft	9.417 ft	8.417 ft	49.58	Actual	
Distribution L	8.417 ft	9.417 ft	0 ft	0 ft	13.92 ft	0 ft	0 ft	9.417 ft	8.417 ft	49.58	Distribu	
h/b _s =	1.079 W2	0.965 W2			0.653 W2			0.965 W2	1.079 W2			
DL w (plf) =	255.5	255.5	0	0	231.6	0	0	255.5	255.5			
0.6M _R (#-ft) =	5431	6798	0	0	13458	0	0	6798	5431			
W E	W E	W E	W E	W E	W E	W E	W E	W E	W E			
PLF	100 255	100 255	0 0	0 0	100 255	0 0	0 0	100 255	100 255			
M _{tot} (#-ft) =	7638 19496	8546 21812	0 0	0 0	12630 32235	0 0	0 0	8546 21812	7638 19496			
F (#) =	225 3234	5 2994	0 0	0 0	-754 2182	0 0	0 0	5 2994	225 3234			
Holdown	4065 H3	4065 H3	1000 -	1000 -	1000 -	1000 -	1000 -	3356 S3	3356 S3			
	HDUS OK	HDUS OK	No Holdown OK	No Holdown OK	No Holdown NG	No Holdown OK	No Holdown OK	MST60 OK	MST60 OK			
	Load above to foundation above											

1st Floor W2	Wind (ASD): -1.619 kips		135 #/ft		135 #/ft		135 #/ft		135 #/ft		135 #/ft	
	Seismic (ASD): -5.345 kips		294 #/ft		294 #/ft		294 #/ft		294 #/ft		294 #/ft	
											9.083 ft	
	0 ft	0 ft	0 ft	0 ft	6.958 ft	0 ft	0 ft	9.417 ft	8.417 ft	24.79	Actual	
Distribution L	0 ft	0 ft	0 ft	0 ft	6.958 ft	0 ft	0 ft	9.417 ft	8.417 ft	24.79	Distribu	
h/b _s =					1.305 W2			0.965 W2	1.079 W2			
DL w (plf) =	0	0	0	0	0	0	0	221.9	234.9			
0.6M _R (#-ft) =	0	0	0	0	0	0	0	5903	4992			
W E	W E	W E	W E	W E	W E	W E	W E	W E	W E			
PLF	0 0	0 0	0 0	0 0	135 294	0 0	0 0	135 294	135 294			
M _{tot} (#-ft) =	0 0	0 0	0 0	0 0	8503 18608	0 0	0 0	11507 25182	10285 22508			
F (#) =	225 3234	5 2994	0 0	0 0	563 5063	0 0	0 0	634 5156	894 5447			
Holdown	1000 -	1000 -	1000 -	1000 -	6970 H4	1000 -	1000 -	6970 H4	6970 H4			
	1.05	No Holdown NG	No Holdown NG	No Holdown NG	HDUS OK	No Holdown OK	No Holdown OK	HDUS OK	HDUS OK			
	concrete foundation OK											
	OK By Inspection OK By Inspection											
	2 Bedroom Unit 3 story						2 Bedroom Unit 3 story + Basement					

[illegible]

3rd Floor: W2	Wind (ASD): 2.813 kips Seismic (ASD): 10.839 kips								136 #/ft 362 #/ft
									9.083 ft
Distribution L	26.08 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft
h/b _s = 0.348 W2 DL w (plf) = 108.2 0.6M _R (#-ft) = 22077	0	0	0	0	0	0	0	0.348 W2 108.2 22077	
PLF	W E 136 362	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 136 362
M _{at} (#-ft) = 32328 85801 F (#) = 265 3020	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	32328 85801 265 3020	
Holdown	3356 S3	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	3356 S3	3356 S3
MST60 OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	MST60 OK	MST60 OK

with point load ok by inspection

2nd Floor W4												Wind (ASD): 2.790 kips Seismic (ASD): 6.396 kips		190 #/ft 485 #/ft		190 #/ft 485 #/ft	
										9.083 ft							
Distribution L	26.08 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft	52.17						
h/b _s = 0.348 W4 DL w (plf) = 108.2 0.6M _u (#-ft) = 22077	0	0	0	0	0	0	0	0	0	0.348 W4 108.2 22077							
PLF	W E 190 485	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 190 485							
M _u (#-ft) = 44999 114850 F (#) = 1161 6647	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	44999 114850 1161 6647							
Holdown	6970 H4	6970 H4	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	6712 S5	6712 S5							
	HDU8 OK	HDU8 OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	(2) MST60 OK	(2) MST60 OK							
Load above to foundation																	
above																	

1st Floor W4	Wind (ASD): -3.237 kips		256 #/ft		9.908		256 #/ft		
	Seismic (ASD): -10.690 kips		560 #/ft		25.288		560 #/ft		
									9.083 ft
	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft
$h/b_s =$	0.348 W4								
DL w (plf) =	108.2								
0.6M _R (#-ft) =	22077								
	W	E	W	E	W	E	W	E	W
PLF	0	0	0	0	0	0	0	0	256
	0	0	0	0	0	0	0	0	560
M ₀₁ (#-ft) =	0	0	0	0	0	0	0	0	60593
F (#) =	1161	6647	0	0	0	0	0	0	132596
	2666	10967							14445
Holdown	1000	-	1000	-	1000	-	1000	-	1000
	1000	-	1000	-	1000	-	1000	-	14445
1.05	No Holdown NG	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	HDU14 OK
	concrete foundation OK				OK By Inspection				
	2 Bedroom Unit 3 story				2 Bedroom Unit 3 story + Basement				

PRMU20240285

Job # 23.007 Sheet:



Designer: TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

T1 x 2 backs (3 story)

0.5 (ft) holddown dist from end

Roof: W1	Wind (ASD): 4.305 kips		83 #/ft		83 #/ft		83 #/ft		83 #/ft	
	Seismic (ASD): 8.053 kips		154 #/ft		154 #/ft		154 #/ft		154 #/ft	
										9.083 ft
	26.08 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft	52.17
Distribution L	26.08 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft	52.17
h/b _s = 0.348 W1	DL w (plf) = 112.8		0		0		0		0.348 W1	
0.6M _R (#-ft) = 23030	0		0		0		0		112.8	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	83 154	0 0	0 0	0 0	0 0	0 0	0 0	0 0	83 154	
M _{ot} (#-ft) = 19554 36576	0 0		0 0		0 0		0 0		19554 36576	
F (#) = -136 529	0 0		0 0		0 0		0 0		-136 529	
Holddown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	
	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	

Actual
Distribu

3rd Floor: W2	Wind (ASD): 2.813 kips		136 #/ft		136 #/ft		136 #/ft		136 #/ft	
	Seismic (ASD): 10.839 kips		362 #/ft		362 #/ft		362 #/ft		362 #/ft	
	use W2 				use W2 				use W2 	9.083 ft
	26.08 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft	52.17
Distribution L	26.08 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft	52.17
h/b _s = 0.348 W2	DL w (plf) = 108.2		0		0		0		0.348 W2	
0.6M _R (#-ft) = 22077	0		0		0		0		108.2	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	136 362	0 0	0 0	0 0	0 0	0 0	0 0	0 0	136 362	
M _{ot} (#-ft) = 32328 85801	0 0		0 0		0 0		0 0		32328 85801	
F (#) = 265 3020	0 0		0 0		0 0		0 0		265 3020	
Holddown	3356 S3	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	3356 S3	
	MST60 OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	MST60 OK	

Actual
Distribu

2nd Floor W4	Wind (ASD): 2.790 kips		190 #/ft		190 #/ft		190 #/ft		190 #/ft	
	Seismic (ASD): 6.396 kips		485 #/ft		485 #/ft		485 #/ft		485 #/ft	
	use W3 				use W3 				use W3 	9.083 ft
	26.08 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft	52.17
Distribution L	26.08 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	0 ft	26.08 ft	52.17
h/b _s = 0.348 W4	DL w (plf) = 108.2		0		0		0		0.348 W4	
0.6M _R (#-ft) = 22077	0		0		0		0		108.2	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	190 485	0 0	0 0	0 0	0 0	0 0	0 0	0 0	190 485	
M _{ot} (#-ft) = 44999 114850	0 0		0 0		0 0		0 0		44999 114850	
F (#) = 1161 6647	0 0		0 0		0 0		0 0		1161 6647	
Holddown	6970 H4	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	6970 H4	
	1.05 HDU8 OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	HDU8 OK	

Actual
Distribu

PRMU20240285



Job # 23.007 Sheet:

Designed TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

1B-T2 stairs (3 story + Base)

0.5 (ft) holdown dist from end

Roof: W1	Wind (ASD): 2.631 kips Seismic (ASD): 4.921 kips				49 #/ft 92 #/ft				49 #/ft 92 #/ft	
										9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W1 DL w (plf) = 178.8 0.6M _R (#-ft) = 15505					0.466 W1 178.8 20400				0.534 W1 178.8 15505	
PLF	W E 49 92	W E 0 0	W E 0 0	W E 0 0	W E 49 92	W E 0 0	W E 0 0	W E 0 0	W E 49 92	
M _{tot} (#-ft) = 7594 14205 F (#) = -479 -79	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	8711 16294 -615 -216	0 0 0 0	0 0 0 0	0 0 0 0	7594 14205 -479 -79	
Holdown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	
	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	No Holdown OK	

Actual
Distribu

3rd Floor: W1	Wind (ASD): 1.719 kips Seismic (ASD): 6.624 kips				81 #/ft 216 #/ft				81 #/ft 216 #/ft	
										9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W1 DL w (plf) = 252.3 0.6M _R (#-ft) = 21870					0.466 W1 282.6 32236				0.534 W1 252.3 21870	
PLF	W E 81 216	W E 0 0	W E 0 0	W E 0 0	W E 81 216	W E 0 0	W E 0 0	W E 0 0	W E 81 216	
M _{tot} (#-ft) = 12555 33322 F (#) = -1044 615	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	14402 38223 -1554 99	0 0 0 0	0 0 0 0	0 0 0 0	12555 33322 -1044 615	
Holdown	2335 S2	1000 -	1000 -	1000 -	2335 S2	1000 -	1000 -	1000 -	2335 S2	
	MST48 OK	No Holdown OK	No Holdown OK	No Holdown OK	MST48 OK	No Holdown OK	No Holdown OK	No Holdown OK	MST48 OK	

Actual
Distribu

with point load ok by inspection

2nd Floor W2	Wind (ASD): 1.705 kips Seismic (ASD): 3.909 kips				113 #/ft 289 #/ft				113 #/ft 289 #/ft	
										9.083 ft
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W2 DL w (plf) = 252.3 0.6M _R (#-ft) = 21870					0.466 W2 282.6 32236				0.534 W2 252.3 21870	
PLF	W E 113 289	W E 0 0	W E 0 0	W E 0 0	W E 113 289	W E 0 0	W E 0 0	W E 0 0	W E 113 289	
M _{tot} (#-ft) = 17476 44604 F (#) = -1310 1993	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	20046 51164 -2195 1095	0 0 0 0	0 0 0 0	0 0 0 0	17476 44604 -1310 1993	
Holdown	4065 H3	1000 -	1000 -	1000 -	4670 S4	1000 -	1000 -	1000 -	4670 S4	
	HDU5 OK	No Holdown OK	No Holdown OK	No Holdown OK	(2) MST48 OK	No Holdown OK	No Holdown OK	No Holdown OK	(2) MST48 OK	

Actual
Distribu

Load above to foundation

HDU5 above

1st Floor W2	Wind (ASD): -1.978 kips Seismic (ASD): -6.533 kips				152 #/ft 333 #/ft				152 #/ft 333 #/ft	
										9.083 ft
Distribution L	0 ft	0 ft	0 ft	0 ft	9.75 ft	0 ft	0 ft	0 ft	17 ft	26.75
h/b _s = 0.932 W2 DL w (plf) = 282.6 0.6M _R (#-ft) = 8059					0.534 W2 252.3 21870				0.534 W2 252.3 21870	
PLF	W E 0 0	W E 0 0	W E 0 0	W E 0 0	W E 152 333	W E 0 0	W E 0 0	W E 0 0	W E 152 333	
M _{tot} (#-ft) = 13496 29535 F (#) = -1310 1993	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	1608 3417	0 0 0 0	0 0 0 0	0 0 0 0	23532 51496 -1210 3789	
Holdown	14445 H6	1000 -	1000 -	1000 -	6970 H4	1000 -	1000 -	1000 -	6970 H4	
	1.05 HDU14 OK	No Holdown OK	No Holdown OK	No Holdown OK	HDU8 OK	No Holdown OK	No Holdown OK	No Holdown OK	HDU8 OK	

Actual
Distribu

concrete foundation

2 Bedroom Unit 3 story

2 Bedroom Unit 3 story + Basement

PRMU20240285

Job # 23.007 Sheet:



Designer: TLC Date: 5/26

Checked: Date:

Project: Bradley Height Apartments

1B-T2 stairs (3 story)

0.5 (ft) holddown dist from end

Roof: W1	Wind (ASD): 2.631 kips		49 #/ft		49 #/ft		49 #/ft		49 #/ft	
	Seismic (ASD): 4.921 kips		92 #/ft							
										9.083 ft
	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W1					0.466 W1				0.534 W1	
DL w (plf) = 178.8	0		0		178.8		0		178.8	
0.6M _R (#-ft) = 15505	0		0		20400		0		15505	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	49 92	0 0	0 0	0 0	49 92	0 0	0 0	0 0	49 92	
M _{ot} (#-ft) = 7594 14205	0 0		0 0		8711 16294		0 0		7594 14205	
F (#) = -479 -79	0 0		0 0		-615 -216		0 0		-479 -79	
Holddown	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	1000 -	
	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	No Holddown OK	

Actual
Distribu

3rd Floor: W1	Wind (ASD): 1.719 kips		81 #/ft		81 #/ft		81 #/ft		81 #/ft	
	Seismic (ASD): 6.624 kips		216 #/ft							
	use W2 				use W2 				use W2 	9.083 ft
	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W1					0.466 W1				0.534 W1	
DL w (plf) = 252.3	0		0		282.6		0		252.3	
0.6M _R (#-ft) = 21870	0		0		32236		0		21870	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	81 216	0 0	0 0	0 0	81 216	0 0	0 0	0 0	81 216	
M _{ot} (#-ft) = 12555 33322	0 0		0 0		14402 38223		0 0		12555 33322	
F (#) = -1044 615	0 0		0 0		-1554 99		0 0		-1044 615	
Holddown	2335 S2	1000 -	1000 -	1000 -	2335 S2	1000 -	1000 -	1000 -	2335 S2	
	MST48 OK	No Holddown OK	No Holddown OK	No Holddown OK	MST48 OK	No Holddown OK	No Holddown OK	No Holddown OK	MST48 OK	

Actual
Distribu

2nd Floor W2	Wind (ASD): 1.705 kips		113 #/ft		113 #/ft		113 #/ft		113 #/ft	
	Seismic (ASD): 3.909 kips		289 #/ft							
	use W3 				use W3 				use W3 	9.083 ft
	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
Distribution L	17 ft	0 ft	0 ft	0 ft	19.5 ft	0 ft	0 ft	0 ft	17 ft	53.5
h/b _s = 0.534 W2					0.466 W2				0.534 W2	
DL w (plf) = 252.3	0		0		282.6		0		252.3	
0.6M _R (#-ft) = 21870	0		0		32236		0		21870	
PLF	W E	W E	W E	W E	W E	W E	W E	W E	W E	
	113 289	0 0	0 0	0 0	113 289	0 0	0 0	0 0	113 289	
M _{ot} (#-ft) = 17476 44604	0 0		0 0		20046 51164		0 0		17476 44604	
F (#) = -1310 1993	0 0		0 0		-2195 1095		0 0		-1310 1993	
Holddown	4065 H3	6970 H4	1000 -	1000 -	4065 H3	1000 -	1000 -	6970 H4	4065 H3	
	1.05 HDU5 OK	HDU8 OK	No Holddown OK	No Holddown OK	HDU5 OK	No Holddown OK	No Holddown OK	HDU8 OK	HDU5 OK	

Actual
Distribu

PRMU20240285

Job # 23.002

Sheet:



Designed: TLC

Date: 5/29/23

Checked:

Date:

Project: Bradley Heights - 3 Story & basement Story

Vertical Distribution 1 Bedroom units

$$F_x = C_{vx} V \quad (12.8-11)$$

$$C_{vx} = \frac{w_x h_x^k}{\sum w_i h_i^k}$$

$$T_a = C_t h_n^x = 0.3240544 \quad (12.8-7)$$

$$C_t = 0.02 \quad \text{Table 12.8-2}$$

$$x = 0.75 \quad \text{Table 12.8-2}$$

$$H_n = 41 \text{ ft} \quad \text{Structural Height defined in 11.2}$$

k = 1 if period is .5s or less

k = 2 if period is 2.5s or more

k = 1-2 if between

k = 1

1Bx1	→	w_x	h_x	$w_x h_x^k$	C_{vx}	V	F_x
3-story	Roof	25238	29.35417	740835.8	0.343404	2801	4514
	3rd Floor	46586	20.27083	944330.6	0.437731	5171	5753
	2nd Floor	46586	10.13542	472165.3	0.218865	5171	2877
			Σ	2157332		Σ	13143
1Bx1	↑	w_x	h_x	$w_x h_x^k$	C_{vx}	V	F_x
3-story	Roof	24345	29.35417	714626.6	0.344096	2702	4352
	3rd Floor	44800	20.27083	908132.6	0.43727	4973	5531
	2nd Floor	44800	10.13542	454066.3	0.218635	4973	2765
			Σ	2076825		Σ	12648
1Bx1	→	w_x	h_x	$w_x h_x^k$	C_{vx}	V	F_x
3-story	Roof	25238	39.48958	996631.8	0.260243	2801	4766
+ Basement	3rd Floor	46586	30.40625	1416496	0.369879	5171	6774
	2nd Floor	46586	20.27083	944330.6	0.246586	5171	4516
	1st floor	46586	10.13542	472165.3	0.123293	5171	2258
			Σ	3829623		Σ	18314
1Bx1	↑	w_x	h_x	$w_x h_x^k$	C_{vx}	V	F_x
3-story	Roof	24345	39.48958	961373.2	0.260834	2702	4596
+ Basement	3rd Floor	44800	30.40625	1362199	0.369583	4973	6512
	2nd Floor	44800	20.27083	908132.6	0.246389	4973	4342
	1st Floor	44800	10.13542	454066.3	0.123194	4973	2171
			Σ	3685771		Σ	17621

PRMU20240285

No Holdow	1000	-	
MST37	1256	S1	MSTC48B3
MST48	2335	S2	MSTC48B3
MST60	3356	S3	MSTC66B3
(2) MST48	4670	S4	S8
(2) MST60	6712	S5	S9
MSTC66B3	3875	S6	
2)MSTC66B	13424	S7	
NA	7750	S8	
NA	26848	S9	

No Holdow	1000	-
H DU2	2215	H1
H DU4	3285	H2
H DU5	4065	H3
H DU8	6970	H4
H DU11	9535	H5
H DU14	14445	H6
(2) H DU11	19070	H7
(2) H DU14	28890	H8