

PRSG20251114

Illuminated Ellipse Sign  
mounted flush to fascia.



S02 Paint Note:  
Paint and Patch signband to  
Existing color. (Color TBD)

Center on THIS  
Reveal



**PROPOSED ELEVATION**  
Scale: 3/16" - 1'-0"

**EXISTING ELEVATION**

- S01 (1) Illuminated Letterset on Oval Background
- S02 Patch and Paint Sign Band to Existing Color

**Note:**  
Elevation shown is preliminary, field survey required prior  
to fabrication of signs.



Separate Electrical Permit is required with the Washington State Department of  
Labor & Industries.  
<https://lni.wa.gov/licensing-permits/electrical/electrical-permits-fees-and-inspections>  
or call for Licensing Information: 1-800-647-0982

Revisions:
NR 06.09.2025 Re-centered Sign
SD 06.27.2025 Updated to reface; removed 'patch' note from S02
SD 07.21.2025 Updated to new sign
...
...


LL Signature:	_____
Printed Name:	_____
Company:	_____
Date:	_____

<b>Store #1032</b>
--------------------

PM:	Address: 3500 Meridian
Drawn By: SO	City State: Puyallup, WA 98373
Date: 04.10.2025	Drawing Number: 213922-ELE1
	Page: 2

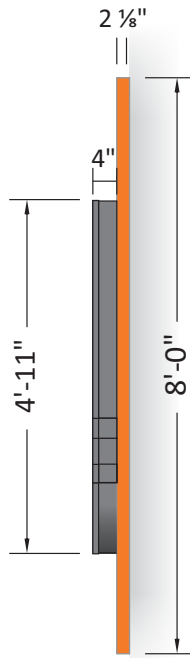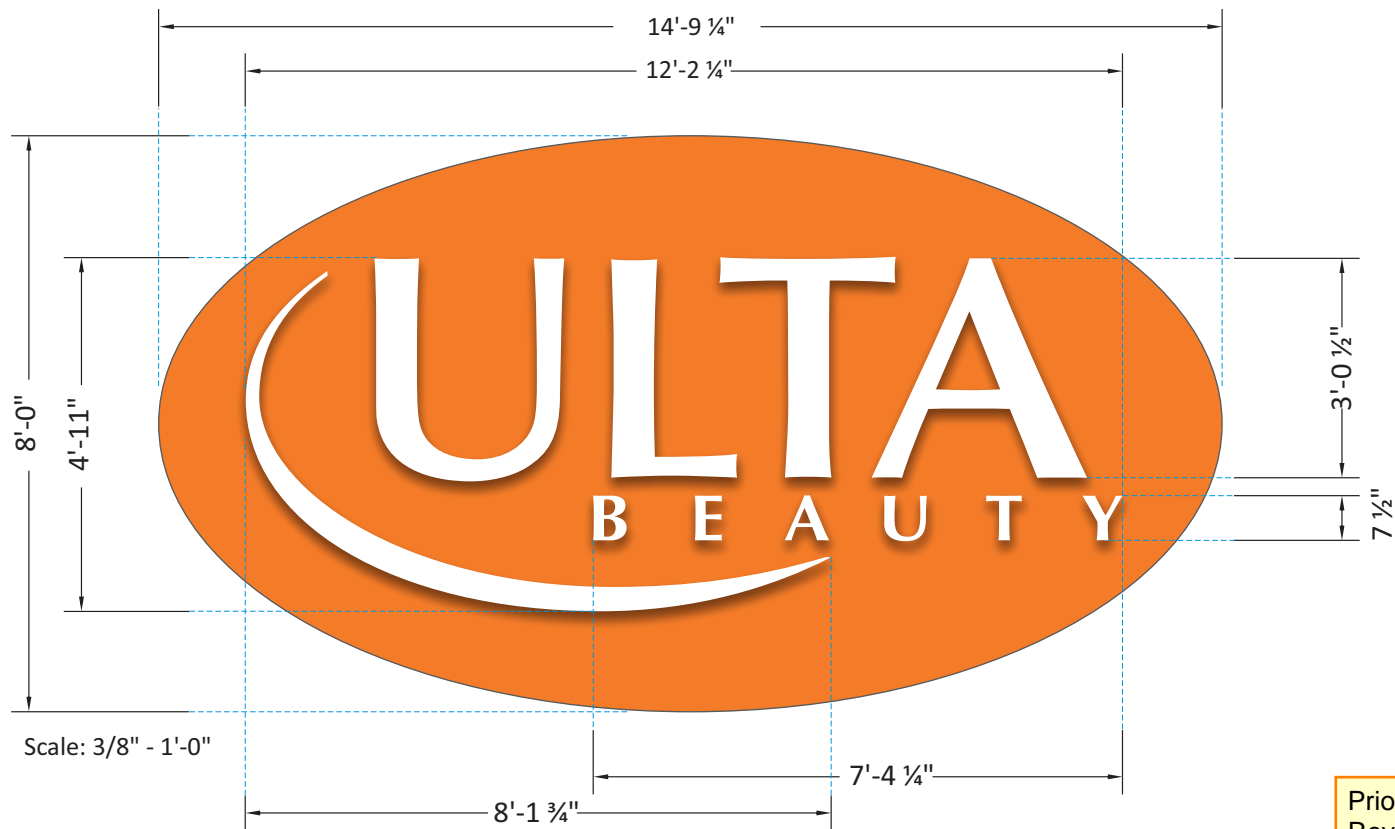

Remote Wired with  
Controlled Background Panel

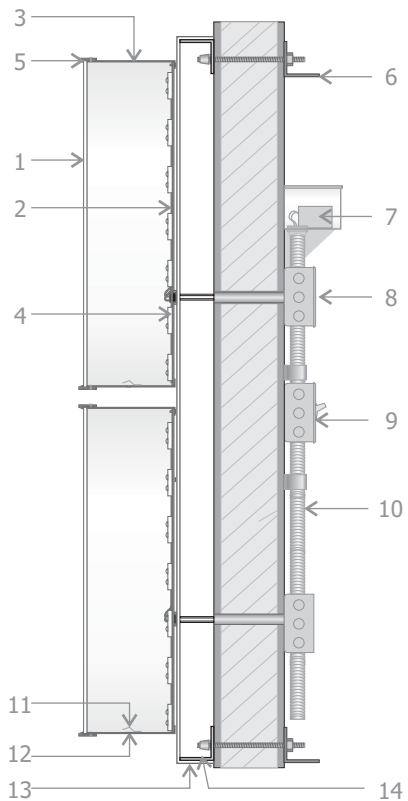

Prior to installation:  
Review anchor and/or epoxy product's ICC-ES Report and install the product per the report(s). If the report states special inspection(s) are required - the final special inspection report must be on site during City inspections.

SCOPE

- Manufacture & install (1) new channel-letter on background 2 1/8" background panel sign.





GENERAL DESCRIPTION

- Illuminated channel letters (4" depth)  
Letter returns are of aluminum, painted PMS 431C Gray.
- Faces of (7328) white acrylic
- Faces secured with Dove Gray trimcap
- Letters are internally illuminated by white LED modules
- Power supplies are installed remotely behind fascia.
- Letters installed onto 2 1/8" deep .100" alum. BG panel, painted Orange
- Sign installed onto fascia with angle clips & non-corrosive fasteners

SQUARE FOOTAGE

- 8'-0" x 14'-9 1/4" = 118.16 Sq. Ft.

COLOR SCHEDULE

-  **ALL FACES:** .177" 7328 White acrylic
-  **LTR RETURNS:** Painted PMS 431C Gray
-  **TRIMCAP:** Dove Gray
-  **PANEL FACE & RETURNS:** PMS 158 Orange (Semi-gloss)

Please include the weight  
of the sign on the plan set.

Plans sets are required to have the structural information included.  
Please specify the fastener type, fastener size, fastener spacing (or minimum number required), and the existing structural member(s) the fasteners will attach to (wood studs, CMU, etc.).

1	.177" acrylic face
2	3mm ACM aluminum back
3	4" returns to be .040 aluminum
4	illumination to be provided by LED.
5	trimcap "Dove Gray"
6	mounting varies upon location and wall material
7	power supply remote
8	junction box
9	listed disconnect switch
10	primary power source
11	weep hole cover to be white pre-finished aluminum
12	weep hole
13	2 1/8" deep flanged .100" aluminum panel
14	aluminum mounting angle (all four sides)

ELECTRICAL NOTES

1. All materials and fasteners meet 3004.4
2. All electrical components are UL listed, labeled and approved.
3. Sign grounded according to NEC 6007.7
4. Signs manufactured and listed NEC 600.3 and marked per NEC 600.4.
5. All branch circuits per NEC 600 .5(B).1 or (B).2.
6. All Signs controlled by photocell or time clock per FBC 13-415. (ABC).1.4.
7. One visible 20 amp disconnect per sign per circuit per NEC 600.6(A).1