


PRCTI20251445

FEATURES

- 6070 watts; 240 volts; 60 hz.
- Integral thermostat controller provides automatically close heating when up to the set temperature to avoid over heat. Built in control system for quick installation. Easily set design.
- Steel finned metal sheath electric heating elements with low sheath temperatures provide uniform heat and long service life.
- Closely spaced grille bars discourage insertion of foreign objects and direct air frontward and upward to effectively distribute heat...keep the whole room of unit warm and even heated. Keep body no touch of heater surface.
- Thermal overheat protector in the power box disconnects power in case of overheating due to accidental blockage.
- 26 feet long power cord, for easy installation.
- The combination of pure ceramic heaters and Carbon Fiber heaters provide best benefits of infrared rays to the body. Ceramic heaters for strong and quick heat and Carbon fiber heaters for huge infrared emission area.



ASSEMBLY LIMITATIONS


- Installation and repair should be assisted by a qualified electrician!
- Check power supply rating and make sure the grounded outlet is correctly connected before installation.
- Locate your cabin indoors and on a flat level and dry surface. Be sure to keep it away from the bath or the steamer or something moist.
- Use original parts only. Do not share the outlet with any other appliances.
- Please make sure the side wall with no heater for the users to lean will be located closely to the solid wall.

ACCESSORIES

CATALOG NO.	Qty	DESCRIPTION
CH-200 (Ceramic Heater)	20	The Specification 240V,200W.
CFH-10060 (Carbon Fiber Heater)	1	The Specification 39.4 "X23.6 ",240V,420W. Heat control switch and extra over heat thermostat for double protection.

CFH-10040 (Carbon Fiber Heater)	4	The Specification 39.4 "X15.7 ",240V,280W. Heat control switch and extra over heat thermostat for double protection.
CFH-7650 (Carbon Fiber Heater)	2	The Specification 29.9 "X19.7 ",240V,266W. Heat control switch and extra over heat thermostat for double protection.
Integral thermostat controller	1	Automatically close heating when up to the set temperature to avoid over heat.The temperature set range is from 65 F to 150 F.
Power supply metal box	1	Central power and control system. To ensure the Hotworx unit working safely and easy maintenance. 40A Circuit Breaker, Power supply,control board, wiring terminals.
Luxury Stereo Speaker	2	Two Built in 6 " speakers provide surrounding stereo effect for clear and better sounds. Volume adjustable.
Sliding Door system	1	Tempered Glass Door with titanium alloy steel track.
Power Cord	1	26 feet long power cord, for easy installation.

CATALOG NO.	VOLTS	PH.	AMPS	WATTS	BTU/HR
	240	1	25.29166667	6070	20713.875

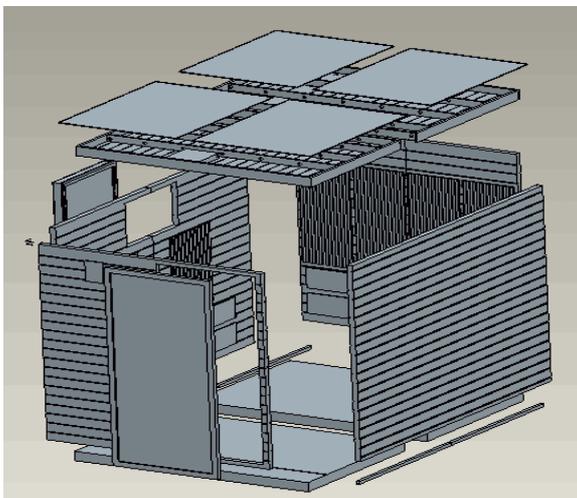

Length	109.50 inches
Width(depth)	83.90 inches
Height	84.30 inches