

EXHIBIT B

SIGNET
CONTRACT



JM PVC WALKPAD


Features and Components

Use: Provides a safe, stable and maintenance-free walkway for quick and easy access to rooftop equipment in high traffic areas.

Material: 72 mil (1.83 mm) thick, textured, reinforced, UV-resistant PVC (polyvinyl chloride) with Elvaloy® KEE (Ketone Ethylene Ester).

Color: Grey

* Elvaloy is a registered trademark of Dow.

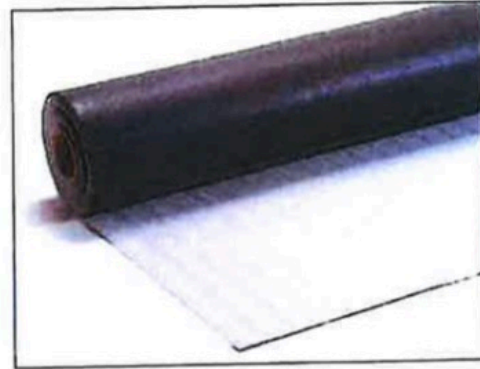

Component

A
Accessory
Single Ply

Type
PT
Protection

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	TSLS	ATSP	SSS
	CA	HW	SA

Do not use in multi-ply systems

Single Ply	TPG	PVC	SPOM
	MF	AD	IW

Compatible with the selected single ply systems above

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

City of Puyallup Development & Permitting Services ISSUED PERMIT	
Building	Planning
Engineering	Public Works
Fire	Traffic

Installation/Application



Hot Air Weld

When installing JM PVC Walkpads be sure to:

- Achieve full weld around perimeter of the material
- Install textured side up
- Minimize installing over seams and membrane splices whenever possible
- On mechanically fastened systems, avoid installing over the disc
- Refer to JM PVC applicator guides or detail drawings for instructions

Packaging and Dimensions

Roll Size (width x length)	36" x 60' (91.44 cm x 18.29 m)
Nominal Thickness	0.072" (1.83 mm)
Coverage per Roll (gross)	180 ft ² (16.72 m ²)
Weight per Roll	78 lb (35.4 kg)

Storage

Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application.
--------------------	---

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

PRRF20260554

RS 8315 7-23 (Replaces 3-23)