



EXHIBIT B

All Purpose Fasteners

Roof Membrane and Insulation Fastener

Features and Components

All Purpose Fasteners are #14 case-hardened steel fasteners with a #3 Phillips head. The point is designed for quick installation in new or re-roof applications.

Use: Membranes and Insulation

Material: Case-hardened steel


Gauge: #14

Head: #3 Phillips head

Color: Black

Deck Types: Wood, Concrete, and 18 - 24 gauge (1.25 mm - 0.56 mm) Metal.

Coating: CR-10 corrosion resistant factory applied coating passes the corrosion requirements of FM 4470 and ETAG 006

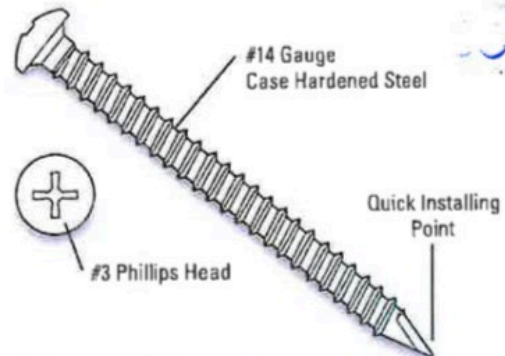


SIGNATURE CONTROL

Component **F** Fastening

Type **I** Insulation

M Membrane

Multi-Ply Single Ply



System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS			
	HA	CA	HW	HA	CA	HW	SA	MF	
Use to fasten insulation in all multi-ply systems									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Use to fasten membranes and insulation in single ply systems										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight.
------------------	--

Peak Advantage® Guarantee Information

Systems	Approved to use with any Peak Advantage Guarantee
---------	---

Codes and Approvals*



*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Plate Compatibility*

- UltraFast® Locking Plastic Plates
- UltraFast® Metal Plates
- High Load Plates (not pictured)
- APB Plates (not pictured)
- RhinoPlate (concrete decks)

* See corresponding data sheets for information regarding UltraFast, High Load, and APB Plates.

Installation/Application

Steel deck: minimum 3/4" penetration


Wood deck: minimum 1" penetration

Concrete deck: Pilot hole @ 3/16" diameter, 1-1/2" depth, minimum 1" embedment

Packaging and Dimensions

Fastener Sizes	Quantity per Container
1 1/4" to 4" (31.75 mm to 101.6 mm)	1,000/pail
5" to 11" (127 mm to 279.4 mm)	500/pail
12" to 24" (304.8 mm to 609.6 mm)	250/box
Producing Locations*	Agawam, MA & Itasca, IL

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.



PRRF20260554

RS-7174 10-25 (Replaces 9-25)