


ALL BLACK

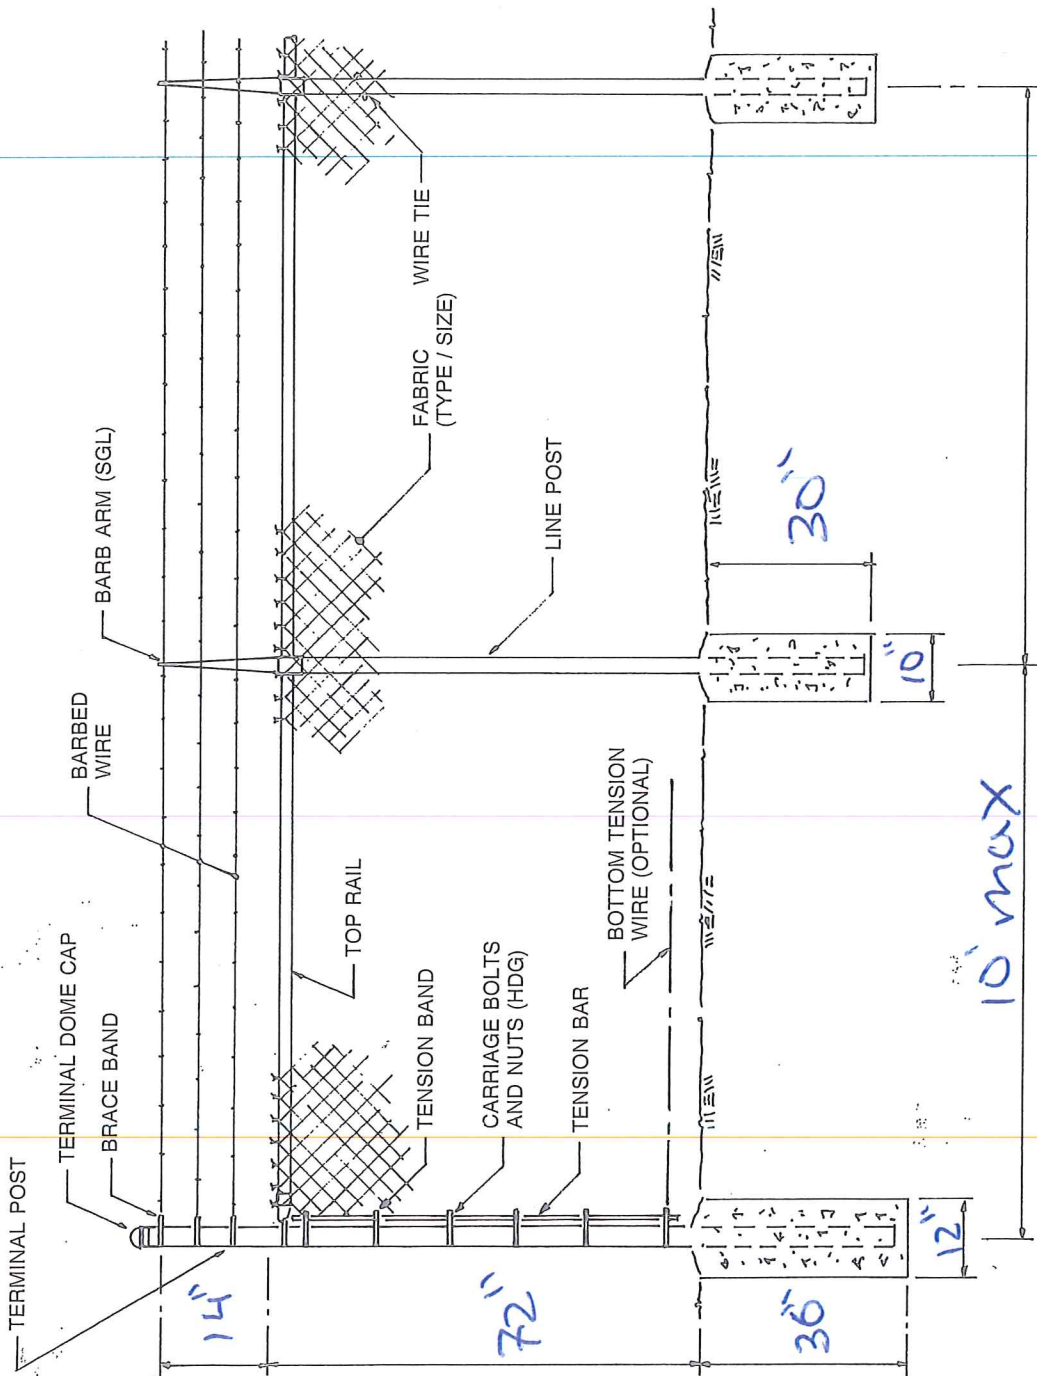

JOB SPECIFICATIONS

FABRIC	MESH	GAUGE	SERVAGE
72" 2"	8	KT	
TENSION WIRE	GA. 799 TW	BOTT. 6 STR.	
BARBED WIRE	TYPE 3 STR. 6 STR.		
FRMWK.	O.D. WALL	LBS / LF	
TOP RAIL	1 5/8 .85	1.43	
LINE POSTS	2 3/8 .130	3.12	
BRACE RAIL			
CORNER POSTS	2 7/8 .160	4.64	
END POSTS	2 7/8 .160	4.64	
GATE POSTS	6 5/8 .322	18.97	
GATE FRAME	1 7/8 .145	2.73	
GATE TYPE	Double Swing		

NOTES:

- Walk gates at side walls
- Access 15/8 frame.
- Same post as End post

CONTRACTOR

TYPICAL FENCE ELEVATION
TOP RAIL / NO BRACE RAIL
3 STRANDS BARBED WIRE

SUBMITTED TO

CITY OF Puyallup

SUBMITTED BY

Secoma Fence

STANDARD
DETAIL

COMPILED BY: ETC


DWG. NO. SD-136

DATE: 8/1/22

SHT. OF

ALL BLACK

2"-4" pending Access needed

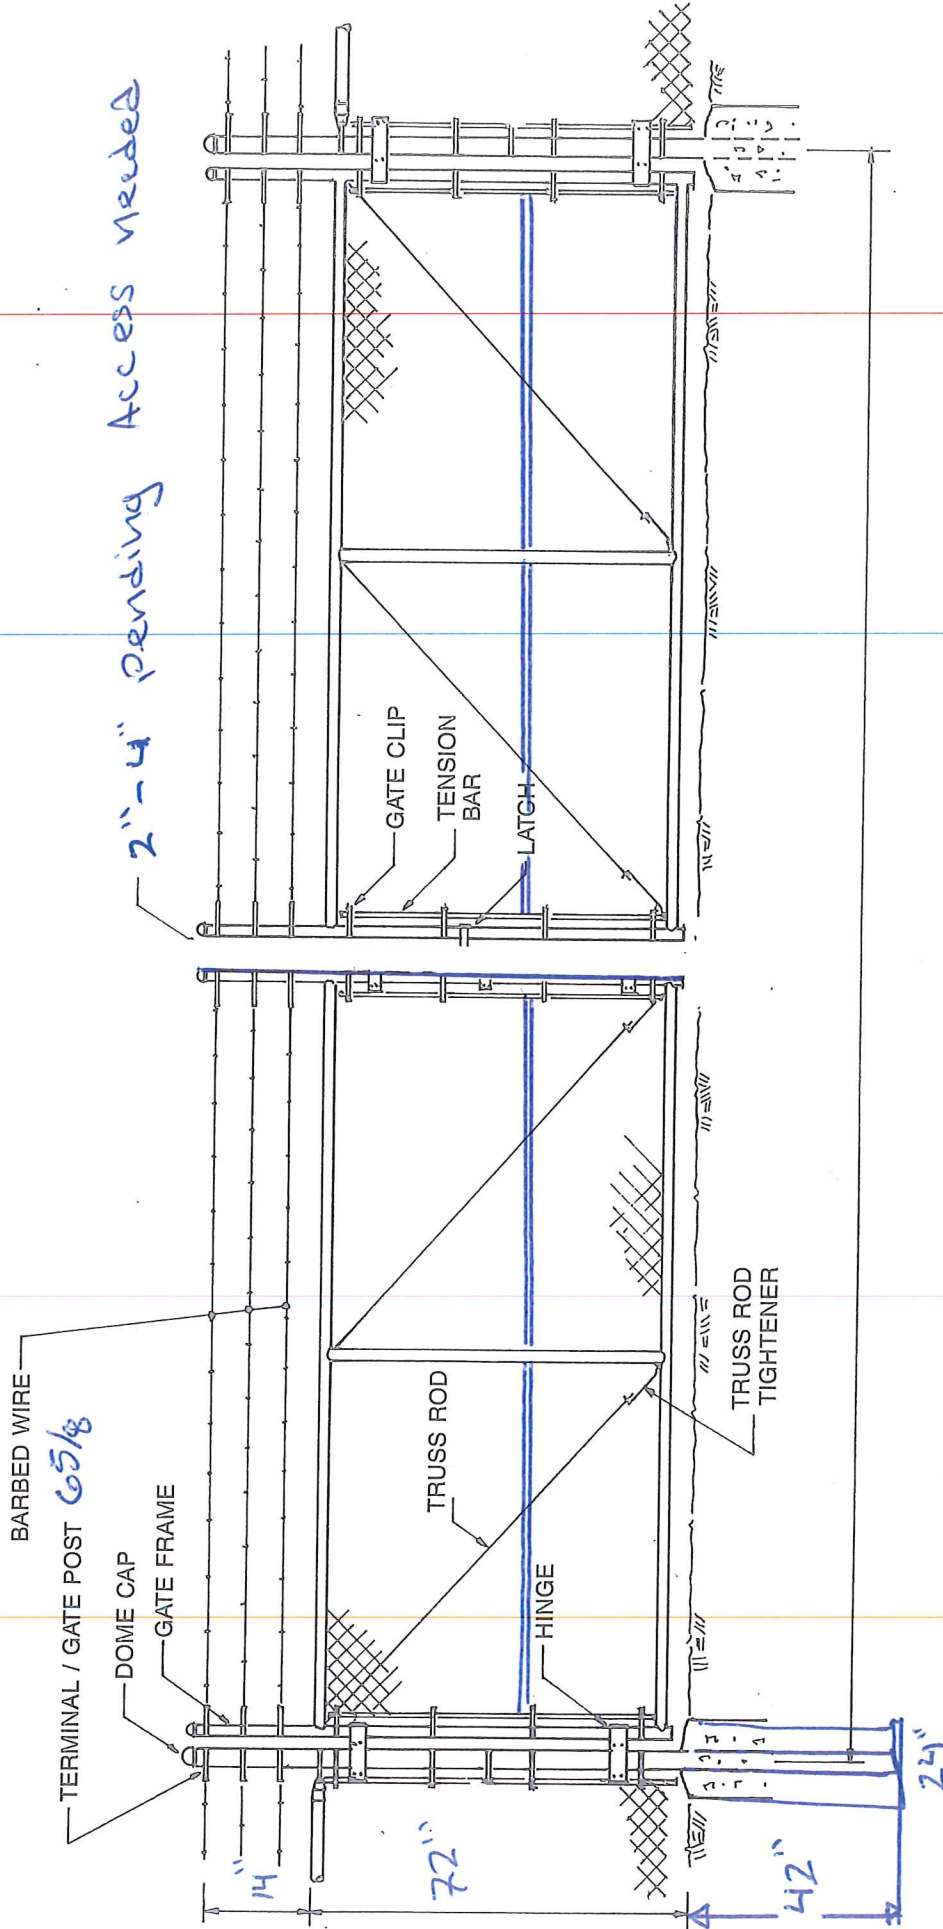

SUBMITTED BY Secoma Fence	SUBMITTED TO City of Puyallup	TYPICAL DOUBLE SWING GATE DOUBLE PANELS WITH 3 STRANDS BARBED WIRE SERTA	CONTRACTOR Secoma Fence Edgar Construction DATE 6/11/22	STANDARD DETAIL COMPILED BY EXC DWG. NO. SD-420 SHT. OF
-------------------------------------	---	--	--	---



stage for gates to
open.

stage for gates to
open

16th St NW

16th St NW

