

14th Ave SE

# Untitled Map

Write a description for your map.

PRRF20260671

## Legend

- Good Samaritan Hospital Heliport
- MultiCare Good Samaritan Hospital?
- Polygon Measure

Approval of submitted plans is not an approval of omissions or oversights by this office or non compliance with any applicable regulations of local government. The contractor is responsible for making sure that the building complies with all applicable codes and regulations of the local government.

The approved construction plans, documents, and all engineering must be posted on the job at all inspections in a visible and readily accessible location.

**Full sized legible color plans** are required to be provided by the permittee on site for inspection.

Separate Electrical Permit is required with the Washington State Department of Labor & Industries. <https://lni.wa.gov/licensing-permits/electrical/electrical-permits-fees-and-inspections> or call for Licensing Information: 1-800-647-0982

MultiCare Good Samaritan Hospital...

Good Samaritan Hospital Heliport

13th Ave SE

13th Ave SE

13th Ave SE

City of Puyallup  
Development & Permitting Services  
ISSUED PERMIT

Building	Planning
Engineering	Public Works
Fire	Traffic

**City of Puyallup**  
**Building**  
**REVIEWED**  
**FOR**  
**COMPLIANCE**

SKInnear  
05/15/2026  
08:49 PM



Google Earth

100 ft


City of Puyallup  
Development & Permitting Services  
ISSUED PERMIT

Building	Planning
Engineering	Public Works
Fire	Traffic

Legend **PRRF20260671**

📍 MultiCare Good Samaritan Hospital?

Write a description for your map.

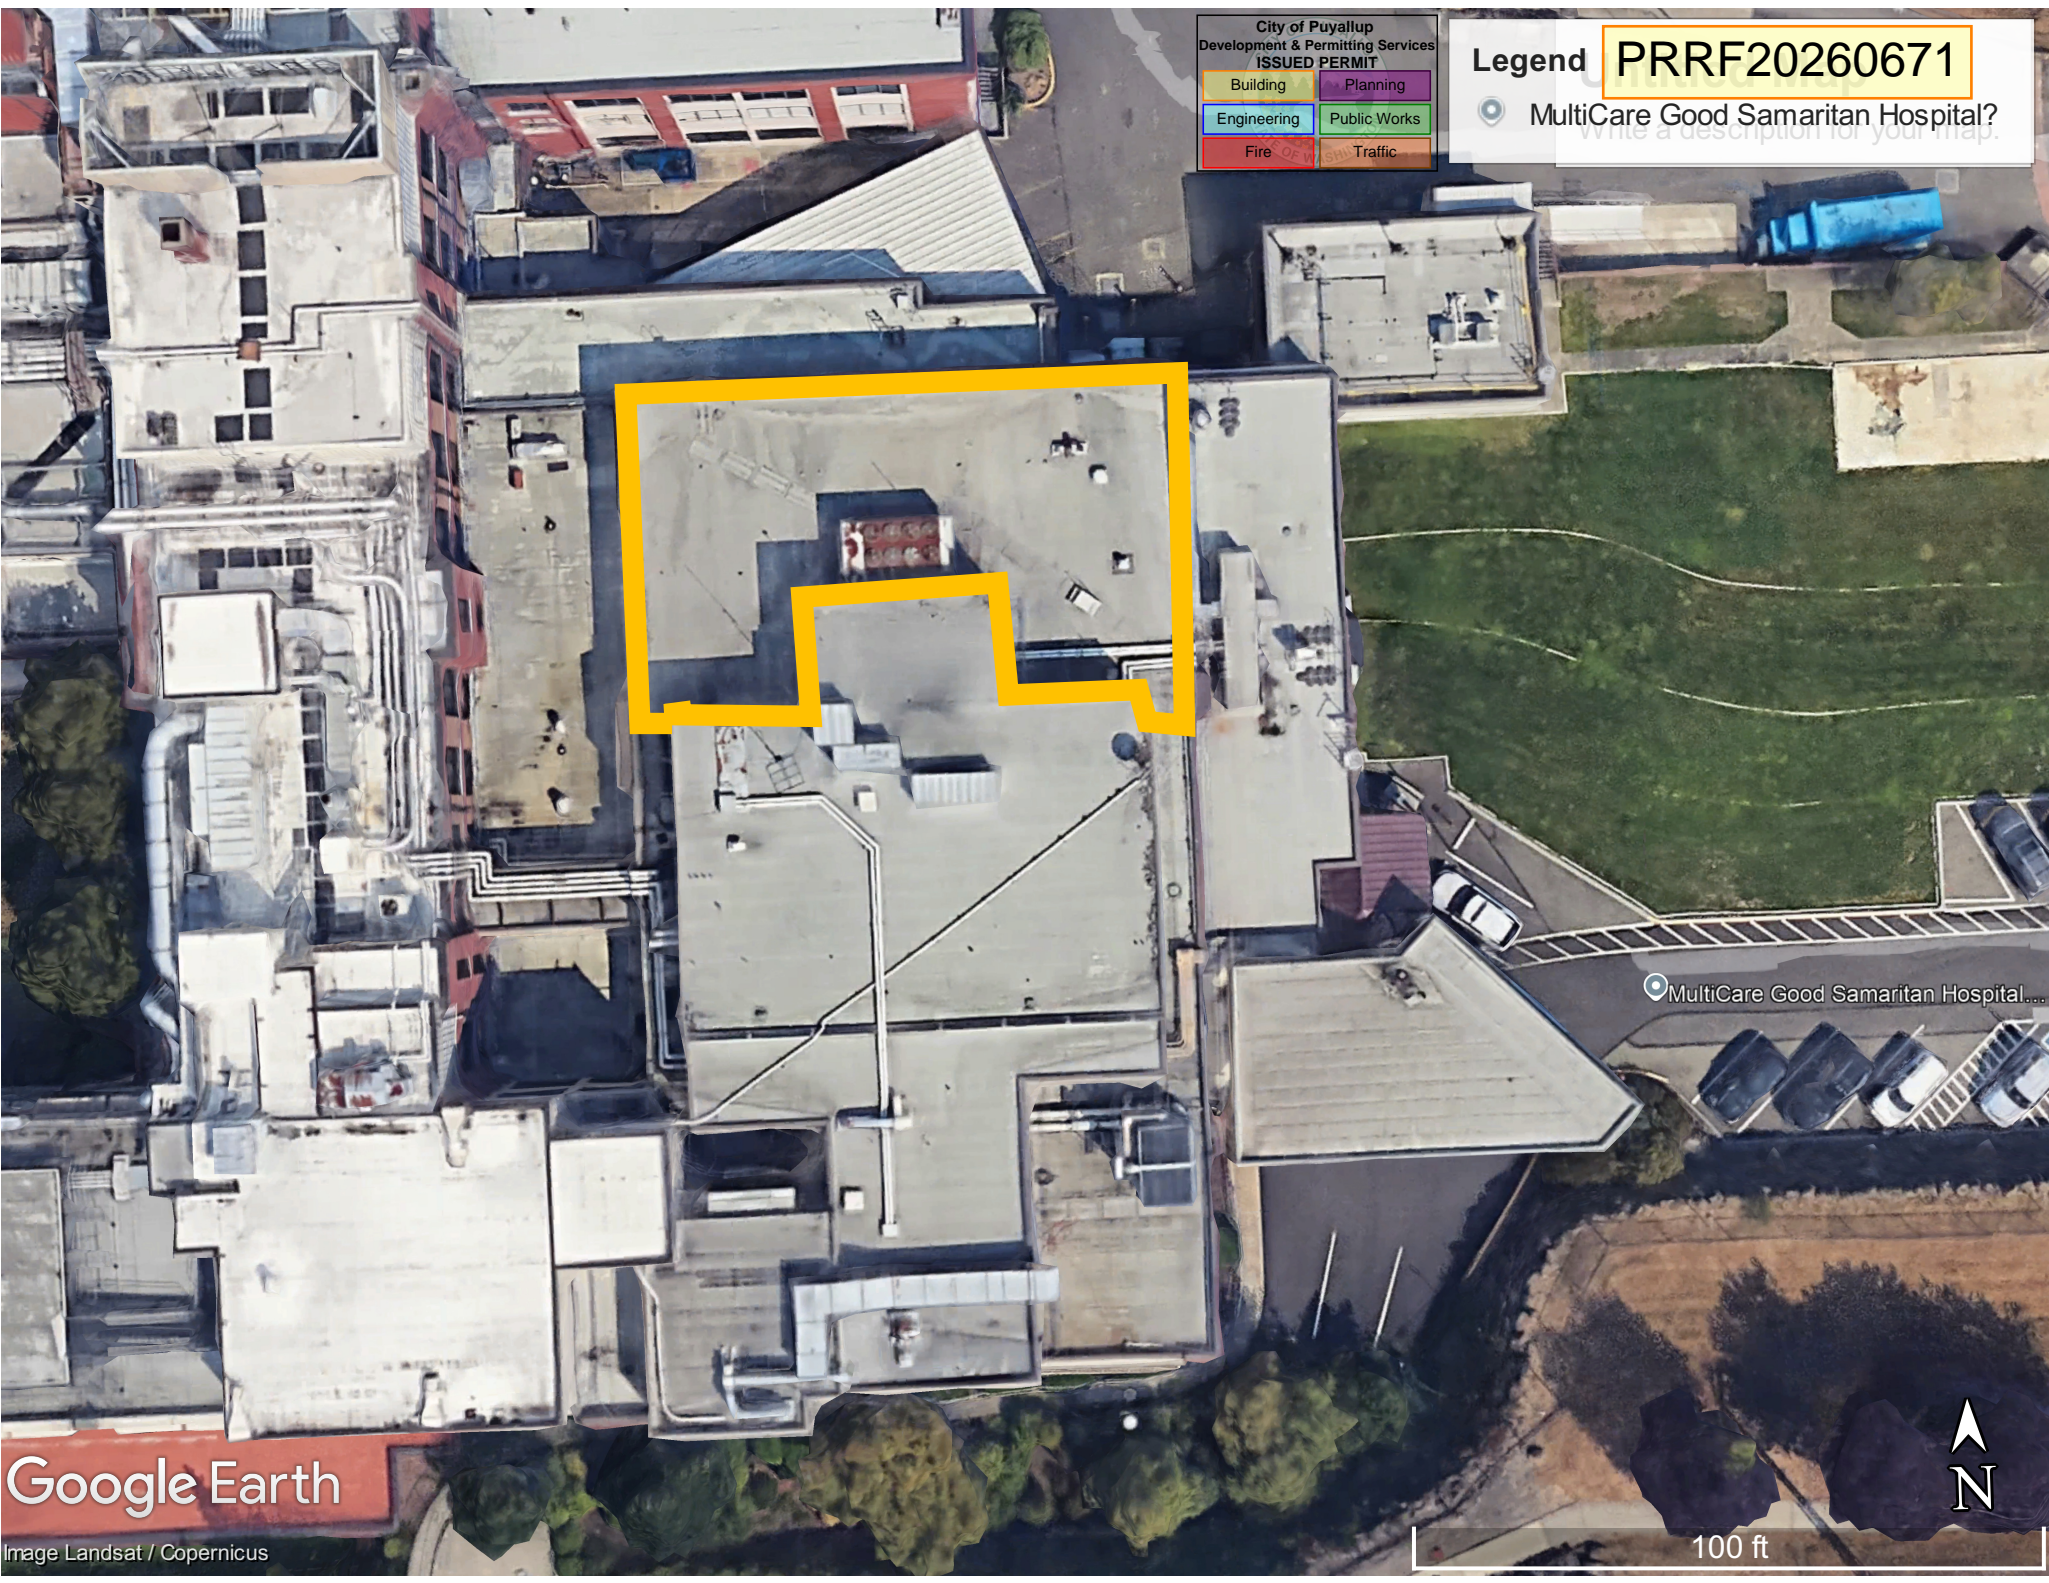

Google Earth

Image Landsat / Copernicus

📍 MultiCare Good Samaritan Hospital...



100 ft

Good Sam - GSK 468 Puyallup  
PRRF20260671

Legend



Google Earth

30 ft



November 14, 2025

**PRRF20260671**

Matt McKeeby  
Project Executive  
Abbott Construction

Re: Reroof at Good Samaritan Hospital – GSK 468 Roof

Matt,

The following is our proposal to perform work at the above referenced project. If you have any questions or concerns regarding this estimate, don't hesitate to reach out.

- Tear off existing roofing system from the building and dispose of properly.
- Mechanically fasten R-38 insulation over the existing metal deck.
- Install tapered insulation between drains to aid in the flow of water.
- Fully adhere a ¼" Densdeck coverboard over the insulation.
- Install Siplast's Paradiene 20 EG TG mid-ply sheet over the coverboard, and the Paradiene 20 SA over the wall substrate.
- Install Siplast's Paradiene 30 FR TG granulated cap sheet over the mid ply, and Parafor 30 TG at all wall conditions.
- Wrap units and flash penetrations per manufacturer's specifications.
- Furnish, fabricate and install new scupper and drains as needed.
- Install 24-gauge coping metal/counterflashing at perimeter locations within scope.
- Install walkpad to the unit and the access door, as well as to the other side of the building.
- Dispose of all garbage produced by the project.
- Provide a manufacturer's 30-year NDL warranty.
- Provide annual inspections for the life of the warranty.

**Total Price: \$247,568.00 + Tax**

EXCLUSIONS: Sales Tax, Mechanical, Electrical, Plumbing, Structural, Asbestos Testing and Abatement, Rot Replacement, Sheet Metal Roofing, Siding, Painting

Thank you for the opportunity,

Marshall Whisler  
VP of Sales

Accepted by: \_\_\_\_\_ Date: \_\_\_\_\_