

Approval of submitted plans is not an approval of omissions or oversights by this office or non compliance with any applicable regulations of local government. The contractor is responsible for making sure that the building complies with all applicable codes and regulations of the local government.

The approved construction plans, documents, and all engineering must be posted on the job at all inspections in a visible and readily accessible location.

Full sized legible color plans are required to be provided by the permittee on site for inspection.

Separate Electrical Permit is required with the Washington State Department of Labor & Industries.
<https://lni.wa.gov/licensing-permits/electrical/electrical-permits-fees-and-inspections>
 or call for Licensing Information:
 1-800-647-0982

**City of Puyallup
 Building
 REVIEWED
 FOR
 COMPLIANCE**

SKinnear
 05/08/2026
 3:01:49 PM


City of Puyallup
 Development & Permitting Services
ISSUED PERMIT

Building	Planning
Engineering	Public Works
Fire	Traffic

PRSG20260528


These plans are the exclusive property of Design Team Sign Company and are the result of the original work of its employees. They are submitted to your company for the sole purpose of your consideration of whether to purchase these plans or to purchase from Design Team Sign Company a product manufactured according to these plans. Distribution or exhibition of the plans to anyone other than employees of your company, or use of these plans to construct a product similar to one embodied herein, is expressly forbidden. In the event that such exhibition or construction occurs, Design Team Sign Company expects to be reimbursed \$200 in compensation for time and effort in creating these plans.

Revision/Review 1 JOB NO. XXXXX			350 Pinhook Drive Savannah, TN 38372		1-800-953-3744 www.designteam.net	
	Tolerances: All Dimensions are in inches .XX = ±0.05 .XXX = ±0.015 Angles = ±1°		Client: APPLEBEE'S		Description: 34" APPLE	
	Drwn By BTH	Job No. XXXXXX	Appv By	Date 4/8/26	Dwg. No. XXXXX	Sheet No. 1 OF 2

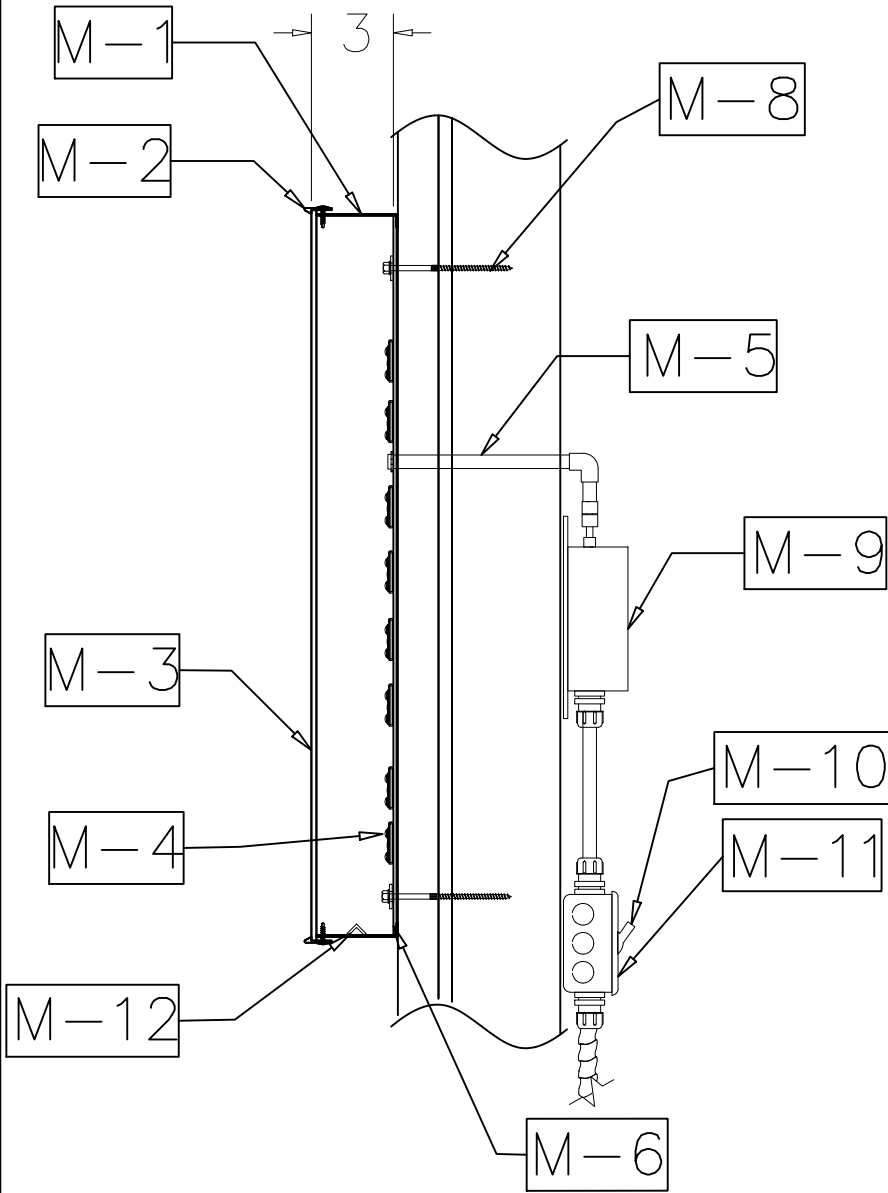

MATERIAL DESCRIPTION:

- M1 .040 ALUM. RETURNS,
- M2 1" JEWELITE TRIMCAP.
- M3 $\frac{3}{16}$ " ACRYLIC FACE
- M4 LED MODULES MOUNTED TO CHANNEL LETTER BACK WITH 3M VHB TAPE OR SILICONE.
- M5 FLEX CONDUIT OR PASS THRU-SYSTEM WITH 6FT WHIP
- M6 .080 ALUM BACKS
- M8 MOUNTING HARDWARE: 4.5" SDS SCREWS
- M9 (120 VOLT) LED POWER SUPPLY BEHIND WALL
- M10 DISCONNECT SWITCH
- M11 J-BOX AND PRIMARY ELECTRICAL. POWER TO SIGN BY OTHERS.
- M12 $\frac{1}{4}$ " WEEP HOLE



PRSG20260528

These plans are the exclusive property of Design Team Sign Company and are the result of the original work of its employees. They are submitted to your company for the sole purpose of your consideration of whether to purchase these plans or to purchase from Design Team Sign Company a product manufactured according to these plans. Distribution or exhibition of the plans to anyone other than employees of your company, or use of these plans to construct a product similar to one embodied herein, is expressly forbidden. In the event that such exhibition or construction occurs, Design Team Sign Company expects to be reimbursed \$200 in compensation for time and effort in creating these plans.


Revision/Review	1 JOB NO. XXXXX	
-----------------	-------------------	--

Design
TEAM SIGN COMPANY LLC

350 Pinhook Drive
Savannah, TN 38372


1-800-953-3744
www.designteam.net

Client: APPLEBEE'S		Description: 34" APPLE	
Drwn By BTH	Job No. 181770	Appv By	Date 5-1-24
Dwg. No.		SIZE A	Sheet No. 2 OF 2

 <p>3490 Venture Dr. San Angelo, Tx. 76905 Ph. 1-325-227-4577 FAX 1-325-227-6841 www.p-led.com</p>		<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE CONFIDENTIAL PROPERTY OF PRINCIPAL LED, LLC. ANY REPRODUCTION OR USE WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED.</p>			
APPLEBEES					
DATE: 08 Apr 2026	DRAWN BY : Tyler Hughes	FACE MATERIAL: N/A	LED TOTAL FT 12.51 feet	WATTS: 22.20	
TRIMCAP/RETURN 9.16 feet	SIGN DEPTH: 3 in	ILLUMINATION N/A	AMP DRAW: 1.83 A	CLB FILE CLB/APPLEBEES/CL/2024/APPLE ONLY/34CLAB1	



Load: 22.2 %
Modules: 25.0
Watts: 22.2 of 100.0
PS: Energizer Series Universal 100W (24V)

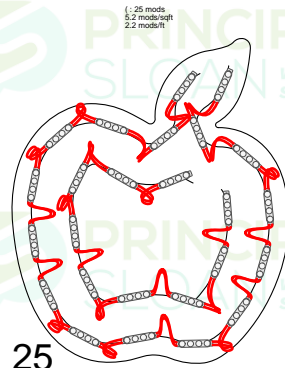


INTERIOR	EXTERIOR X
----------	---------------

ESTIMATED PRODUCT PER SIGN
Prism Synergy Spec Whites

(25) Prism Synergy Spec 6500K (PL-SY4-SP2-P (65))

POWER SUPPLIES
(1) Energizer Series Universal 100W (24V) (P-OH100-24-EC)





SIGN MUST BE GROUNDED IN COMPLIANCE WITH ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE

CAUTION: THIS LAYOUT IS ONLY AN ESTIMATE.

Sign cabinet depth, face color, material, and thickness can vary which may affect the number of modules required. To ensure accuracy, it is recommended that you test light in a darkened environment prior to installing or shipping to the site to ensure the light output is commercially acceptable. Final material estimates are the responsibility of the sign manufacturer. Unless noted in header, layout is based on the use of acrylic face material.

PRSG20260528

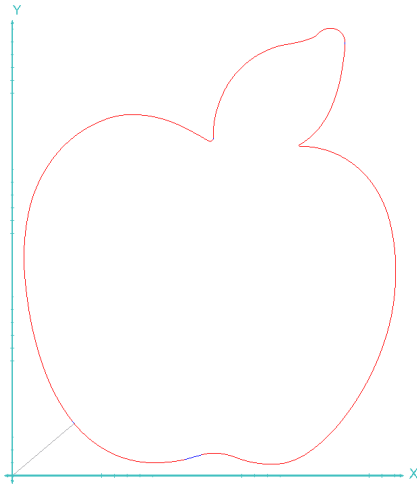

PRSG20260528

N:\DncFiles\APPLEBEES\CL\2024\34CLAC1.cnc

Material: ACRYLIC
Thickness: .188
X,Y: 31,36

Tool 1: .188 END MILL BIT Tool 5: Tool 9:
Tool 2: Tool 6: Tool 10:
Tool 3: Tool 7: Drill 1:
Tool 4: Tool 8: Drill 2:

Author: APPLEBEES 34IN DMCL APPLE
Notes: CUT 1 TIME