

February 20, 2023

Purity Medical Spa of Washington, LLC C/O Imad Bahbah imad@ihbarchitects.com

RE: Geotechnical Evaluation

Proposed Six Story Building 1617 S. Meridian Avenue Puyallup, Washington At the time of civil permit, if infiltration is to be used via a permeable sidewalk, the geotech will need to support the use of infiltration in this area, as well as provide the seasonal groundwater table, and provide a firm infiltration rate.
[Geotechnical Report, pg 1]

In accordance with your authorization, Cobalt Geosciences, LLC has prepared this letter to discuss the results of our geotechnical evaluation at the referenced site.

The purpose of our evaluation was to provide recommendations for foundation design, grading, and earthwork.

Site Description

The site is located at 1617 S. Meridian Avenue in Puyallup, Washington. The site consists of one nearly rectangular shaped parcel (No. 7790000140) with a total area of 0.79 acres.

The property is undeveloped and vegetated with trees, grasses, blackberry vines, other understory, and sparse trees. There is evidence of historic grading based on our observations.

Most of the site slopes downward from east to west and northwest at magnitudes of 0 to 20 percent and relief of about 20 feet. There is an apparent cut slope in the eastern quarter of the site sloping downward to the west. This slope is about 5 feet in height with magnitudes of 100 to 150 percent. There are local areas of standing water west of the slope along with an exposed 4-inch diameter pipe. There is a short modular block wall near the northeast property corner facing into the property. The wall is about 2 feet tall.

The site is bordered to the east and south by commercial developments, to the north by 17th Avenue SE, and to the west by S. Meridian Avenue.

The proposed development includes a six-story wood-framed structure with at-grade or slightly below grade parking areas. We anticipate that the building will encompass much of the site area.

Stormwater will include infiltration or other systems depending on feasibility. Site grading may include cuts and fills of 6 feet or less and foundation loads are expected to be light to moderate. We should be provided with the final plans to verify that our recommendations remain valid and do not require updating.

Area Geology

The site lies within the Puget Lowland. The lowland is part of a regional north-south trending trough that extends from southwestern British Columbia to near Eugene, Oregon. North of Olympia, Washington, this lowland is glacially carved, with a depositional and erosional history including at least four separate glacial advances/retreats.

February 20, 2023 Page 2 of 14 Geotechnical Evaluation

The Puget Lowland is bounded to the west by the Olympic Mountains and to the east by the Cascade Range. The lowland is filled with glacial and non-glacial sediments consisting of interbedded gravel, sand, silt, till, and peat lenses.

The <u>Geologic Map of Washington – Southwest Quadrant</u>, indicates that the site is underlain by Lacustrine Deposits (Drift). These materials include silts and fine grained sands with minor amounts of gravel. These deposits become denser with depth below a weathered zone.

Soil & Groundwater Conditions

The geotechnical field investigation program was completed in February 2023 and included excavation of three test pits, where accessible.

The soils encountered were logged in the field and are described in accordance with the Unified Soil Classification System (USCS).

A Cobalt Geosciences field representative conducted the explorations, collected disturbed soil samples, classified the encountered soils, kept a detailed log of the explorations, and observed and recorded pertinent site features.

Test Pits TP-1 and TP-3 encountered approximately 6 inches of topsoil and vegetation underlain by about 1.5 to 3.5 feet of loose to medium dense, silty-fine to fine grained sand (Weathered Drift). This layer was underlain by dense to very dense, silty-fine to fine grained sand (Drift) which continued to the termination depths of the test pit.

Test Pit TP-2encountered approximately 6 inches of topsoil and vegetation underlain by about 3.5 feet of loose to medium dense, silty-fine to fine grained sand trace gravel (Fill). This layer was underlain by approximately 3 feet of loose to medium dense, silty-fine to fine grained sand (Weathered Drift). This layer was underlain by dense to very dense, silty-fine to fine grained sand (Drift) which continued to the termination depths of the test pit.

Groundwater was encountered in TP-2 at about 6 inches below grade. Groundwater was not encountered in the other test pits; however, the shallow soils were locally mottled. Light volumes of groundwater could be present at multiple depths during the wet season.

Water table elevations often fluctuate over time. The groundwater level will depend on a variety of factors that may include seasonal precipitation, irrigation, land use, climatic conditions and soil permeability. Water levels at the time of the field investigation may be different from those encountered during the construction phase of the project.

Erosion Hazard

The <u>Natural Resources Conservation Services</u> (NRCS) maps for Pierce County indicate that the site is underlain by Kapowsin gravelly ashy loam (15 to 30 percent slopes) and Kitsap silt loam (8 to 30 percent slopes). These soils would have a slight to severe erosion potential in a disturbed state depending on the slope magnitude.

It is our opinion that soil erosion potential at this project site can be reduced through landscaping and surface water runoff control. Typically, erosion of exposed soils will be most noticeable during periods of rainfall and may be controlled by the use of normal temporary erosion control measures, such as silt fences, hay bales, mulching, control ditches and diversion trenches. The typical wet weather season, with regard to site grading, is from October 31st to April 1st. Erosion control measures should be in place before the onset of wet weather.

Seismic Hazard

The overall subsurface profile corresponds to a Site Class *D* as defined by Table 1613.5.2 of the International Building Code (IBC). A Site Class *D* applies to an overall profile consisting of medium dense to very dense soils within the upper 100 feet.

We referenced the U.S. Geological Survey (USGS) Earthquake Hazards Program Website to obtain values for S_S , S_I , F_a , and F_v . The USGS website includes the most updated published data on seismic conditions. The following tables provide seismic parameters from the USGS web site with referenced parameters from ASCE 7-16.

Seismic Design Parameters (ASCE 7-16)

Site Class	Spectral Spectral Acceleration at 0.2 sec. (g) at 1.0 sec. (g)		Si Coeffi	te cients	Design Response	Design PGA	
			Fa	F_{v}	$\mathbf{S}_{ ext{DS}}$	S_{D_1}	
D	1.276 0.439		1.0 Null		o.85 Null		0.5

Additional seismic considerations include liquefaction potential and amplification of ground motions by soft/loose soil deposits. The liquefaction potential is highest for loose sand with a high groundwater table. The site has a low likelihood of liquefaction. For items listed as "Null" see Section 11.4.8 of the ASCE.

Conclusions and Recommendations

General

The site area is underlain by areas of fill and at depth by weathered to unweathered fine grained glacial drift which become generally becomes denser with depth. The proposed commercial structure may be supported on a shallow foundation system bearing on medium dense or firmer native soils or on structural fill placed on the native soils. Fill and loose soils below new foundation elements must be removed and replaced with structural fill.

Note that this could include significant depths of overexcavation due to the presence of fill (7 feet or more). The fill appears to be mostly prevalent in the western half of the site. Please notify us if you would like us to provide deep foundation options for the structure.

Infiltration of stormwater runoff is not feasible due to the presence of an aquitard and presence of seasonal groundwater at shallow depths. We anticipate that stormwater will be routed to detention systems and/or to City infrastructure.

Local permeable pavements may be feasible for light duty drive and parking areas depending on their locations and elevations. We can provide additional input upon request and once civil plans have been prepared. These would be suitable for flow control only.

February 20, 2023 Page 4 of 14 Geotechnical Evaluation

Site Preparation

Based on observations from the site investigation program, it is anticipated that the stripping depth will be 6 to 18 inches. Deeper excavations will be necessary in any areas underlain by undocumented fill.

The native soil consists of sandy silt trace gravel. Some of the native soils may be used as structural fill provided, they achieve compaction requirements and are within 3 percent of the optimum moisture. This soil will likely only be suitable for use as fill during the summer months, as it will be above the optimum moisture levels in their current state. These soils are HIGHLY moisture sensitive and will degrade during periods of wet weather and under equipment traffic. The use of imported granular fill should be anticipated.

Imported structural fill should consist of a sand and gravel mixture with a maximum grain size of 3 inches and less than 5 percent fines (material passing the U.S. Standard No. 200 Sieve). Structural fill should be placed in maximum lift thicknesses of 12 inches and should be compacted to a minimum of 95 percent of the modified proctor maximum dry density, as determined by the ASTM D 1557 test method.

Temporary Excavations

Based on our understanding of the project, we anticipate that the grading could include local cuts on the order of approximately 6 feet or less for foundation and most of the utility placement. Temporary excavations should be sloped no steeper than 1.5H:1V (Horizontal:Vertical) in loose native soils and fill and 1H:1V in medium dense/stiff native soils.

Local steeper temporary cuts could be feasible in the denser soils at depth; however, we recommend site verification by the geotechnical engineer. If an excavation is subject to heavy vibration or surcharge loads, we recommend that the excavations be sloped no steeper than 2H:1V, where room permits.

Temporary cuts should be in accordance with the Washington Administrative Code (WAC) Part N, Excavation, Trenching, and Shoring. Temporary slopes should be visually inspected daily by a qualified person during construction activities and the inspections should be documented in daily reports. The contractor is responsible for maintaining the stability of the temporary cut slopes and reducing slope erosion during construction.

Temporary cut slopes should be covered with visqueen to help reduce erosion during wet weather, and the slopes should be closely monitored until the permanent retaining systems or slope configurations are complete. Materials should not be stored or equipment operated within 10 feet of the top of any temporary cut slope.

Soil conditions may not be completely known from the geotechnical investigation. In the case of temporary cuts, the existing soil conditions may not be completely revealed until the excavation work exposes the soil. Typically, as excavation work progresses the maximum inclination of temporary slopes will need to be re-evaluated by the geotechnical engineer so that supplemental recommendations can be made. Soil and groundwater conditions can be highly variable. Scheduling for soil work will need to be adjustable, to deal with unanticipated conditions, so that the project can proceed and required deadlines can be met.

February 20, 2023 Page 5 of 14 Geotechnical Evaluation

If any variations or undesirable conditions are encountered during construction, we should be notified so that supplemental recommendations can be made. If room constraints or groundwater conditions do not permit temporary slopes to be cut to the maximum angles allowed by the WAC, temporary shoring systems may be required. The contractor should be responsible for developing temporary shoring systems, if needed. We recommend that Cobalt Geosciences and the project structural engineer review temporary shoring designs prior to installation, to verify the suitability of the proposed systems.

Temporary Shoring

Soldier Piles

Depending on the location and elevations of new finish floor areas, temporary shoring and/or permanent retaining walls may be required along some sides of the new building and/or any deeper detention system.

Soldier piles typically consist of steel W or H-beams inserted into oversized drilled shafts, which are backfilled with structural concrete, lean mix {Controlled Density Fill (CDF)}, or a combination of lean mix to the base of the excavation and structural concrete below the excavation to anchor the soldier piles.

Due to the potential for local caving during drilling operations for the soldier pile holes due to soft soil conditions and shallow groundwater, consideration should be given to using slurry or drilling fluid to reduce the risk of caving of the pile holes during installation. If water is present within the pile hole at the time of soldier pile concrete placement, the concrete should be placed starting at the bottom of the hole with a tremie pipe and the column of concrete should be raised slowly to displace the water.

We recommend that soldier piles have a maximum spacing of eight feet on center. To account for arching effects, lateral loading on the lagging can be reduced by 50 percent. Unlagged excavation heights should not exceed three feet. No portion of the excavation should remain unsupported overnight. Lagging sections may be up to 6 feet in height depending on stability.

Cantilever soldier pile walls for this site may be designed based on an active lateral earth pressure of 35 pcf for level backslope conditions, provided the wall is unrestrained (not fixed; permitted to move at least 0.2 percent of the wall height). If the wall is restrained, we recommend a lateral earth pressure of 55 pcf. The pressure will act on the soldier pile width below the base of the excavation as well. All applicable surcharge pressures should be included, where anticipated or shown (buildings, construction traffic). An increase in the above pressures is necessary if sloping backslope conditions will be present. This increase can be calculated using an increase of 0.75 pcf per degree of slope.

A lateral uniform seismic pressure of 7H is recommended for seismic conditions (active). An atrest pressure of 14H may be used if the wall is restrained. Note that seismic conditions may not be required for a temporary system.

In front of the soldier piles, resistive pressure can be estimated using an allowable passive earth pressure of 300 pcf acting over 2 times the soldier pile diameter, neglecting the upper 2 feet below the base of the excavation. A factor of safety of 1.5 has been incorporated into the passive pressure value. We can provide updated pressures once a site plan with elevations has been prepared.

February 20, 2023 Page 6 of 14 Geotechnical Evaluation

A lateral pressure reduction of 50 percent may be used for design of the lagging for a pile spacing of three diameters. Lagging should be backfilled with 5/8 inch clean angular rock to minimize void spaces.

Block Shoring

There may be adequate space to place Ultra blocks or ecology block walls for temporary shoring as single walls. The following are general recommendations for temporary block shoring placement. We should review the final plans to determine if these recommendations remain valid or require updating.

For the temporary cuts during shoring placement, cuts may be near vertical provided blocks are on site and will be placed immediately (same day).

We must be on site to verify the excavation stability, block wall placement, backfill of the temporary wall, and periodically during construction until the basement walls are in place and in process of being backfilled. Note that this is a temporary system and is not designed under seismic conditions.

Ecology blocks are interlocking concrete blocks with dimensions of 2 feet tall, 2 feet deep, and 6 feet long.

Walls may be up to 8.75 feet tall for Ultra blocks and 6 feet for ecology blocks. Any wall should have a batter of 6 to 9 degrees. This assumes a backslope of 3 feet or less and a magnitude of 3H:1V or less. This also assumes a stable cut is created in glacial till.

Based course rock and embedment are not required for the temporary condition; however, the keyway must be medium dense or firmer.

Blocks to be used only in a typical alternating brick pattern. No vertical seams. Voids behind the blocks should be filled with 5/8 inch clean angular rock.

Any cut of 5 feet or taller must be faced with the block shoring on the same day. We recommend a maximum 10 feet length of area to be excavated provided blocks can be placed on the same day or within the time frame above.

We should be on site during temporary excavation work, block placement, shoring backfill placement and daily if workers will be located within a 1H:1V zone from the toe of the wall. Weekly visits until blocks are removed and wall backfill is placed

Foundation Design

The proposed structure may be supported on a shallow spread footing foundation system bearing on undisturbed medium dense or firmer native soils or on properly compacted structural fill placed on the suitable native soils. Any undocumented fill and/or loose native soils should be removed and replaced with structural fill below foundation elements. Structural fill below footings should consist of clean angular rock 5/8 to 4 inches in size. We should verify soil conditions during foundation excavation work.

Note that bearing soils may be more than 7 feet below existing elevations, mostly within the western half of the property. All of these soils will need to be removed unless a deep foundation system is utilized. We can provide additional input once a site plan with elevations has been prepared.

For shallow foundation support, we recommend widths of at least 16 and 24 inches, respectively, for continuous wall and isolated column footings supporting the proposed structure. Provided that the footings are supported as recommended above, a net allowable bearing pressure of 3,000 pounds per square foot (psf) may be used for design. If detention vaults are required, they may be designed using a bearing pressure of 5,000 psf if they are set at least 8 feet below site elevations and in dense soils.

A 1/3 increase in the above value may be used for short duration loads, such as those imposed by wind and seismic events. Structural fill placed on bearing, native subgrade should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Footing excavations should be inspected to verify that the foundations will bear on suitable material.

Exterior footings should have a minimum depth of 18 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower. Interior footings should have a minimum depth of 12 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower.

If constructed as recommended, the total foundation settlement is not expected to exceed 1 inch. Differential settlement, along a 25-foot exterior wall footing, or between adjoining column footings, should be less than ½ inch. This translates to an angular distortion of 0.002. Most settlement is expected to occur during construction, as the loads are applied. However, additional post-construction settlement may occur if the foundation soils are flooded or saturated. All footing excavations should be observed by a qualified geotechnical consultant.

Resistance to lateral footing displacement can be determined using an allowable friction factor of 0.30 acting between the base of foundations and the supporting subgrades. Lateral resistance for footings can also be developed using an allowable equivalent fluid passive pressure of 250 pounds per cubic foot (pcf) acting against the appropriate vertical footing faces (neglect the upper 12 inches below grade in exterior areas). The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance.

Care should be taken to prevent wetting or drying of the bearing materials during construction. Any extremely wet or dry materials, or any loose or disturbed materials at the bottom of the footing excavations, should be removed prior to placing concrete. The potential for wetting or drying of the bearing materials can be reduced by pouring concrete as soon as possible after completing the footing excavation and evaluating the bearing surface by the geotechnical engineer or his representative.

Concrete Retaining Walls

The following table, titled **Wall Design Criteria**, presents the recommended soil related design parameters for retaining walls with a level backslope. Contact Cobalt if an alternate retaining wall system is used. This has been included for new cast in place walls, if proposed.

Wall Design Criteria								
"At-rest" Conditions (Lateral Earth Pressure – EFD+) 60 pcf (Equivalent Fluid Density)								
"Active" Conditions (Lateral Earth Pressure – EFD+)	40 pcf (Equivalent Fluid Density)							
Seismic Increase for "At-rest" Conditions (Lateral Earth Pressure)	14H* (Uniform Distribution)							

Seismic Increase for "Active" Conditions (Lateral Earth Pressure)	7H* (Uniform Distribution)
Passive Earth Pressure on Low Side of Wall (Allowable, includes F.S. = 1.5)	Neglect upper 2 feet, then 275 pcf EFD+
Soil-Footing Coefficient of Sliding Friction (Allowable; includes F.S. = 1.5)	0.30

*H is the height of the wall; Increase based on one in 500 year seismic event (10 percent probability of being exceeded in years),

+EFD - Equivalent Fluid Density

The stated lateral earth pressures do not include the effects of hydrostatic pressure generated by water accumulation behind the retaining walls. Uniform horizontal lateral active and at-rest pressures on the retaining walls from vertical surcharges behind the wall may be calculated using active and at-rest lateral earth pressure coefficients of 0.3 and 0.5, respectively. A soil unit weight of 125 pcf may be used to calculate vertical earth surcharges.

To reduce the potential for the buildup of water pressure against the walls, continuous footing drains (with cleanouts) should be provided at the bases of the walls. The footing drains should consist of a minimum 4-inch diameter perforated pipe, sloped to drain, with perforations placed down and enveloped by a minimum 6 inches of pea gravel in all directions.

The backfill adjacent to and extending a lateral distance behind the walls at least 2 feet should consist of free-draining granular material. All free draining backfill should contain less than 3 percent fines (passing the U.S. Standard No. 200 Sieve) based upon the fraction passing the U.S. Standard No. 4 Sieve with at least 30 percent of the material being retained on the U.S. Standard No. 4 Sieve. The primary purpose of the free-draining material is the reduction of hydrostatic pressure. Some potential for the moisture to contact the back face of the wall may exist, even with treatment, which may require that more extensive waterproofing be specified for walls, which require interior moisture sensitive finishes.

We recommend that the backfill be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. In place density tests should be performed to verify adequate compaction. Soil compactors place transient surcharges on the backfill. Consequently, only light hand operated equipment is recommended within 3 feet of walls so that excessive stress is not imposed on the walls.

Stormwater Management Feasibility

The site is underlain by fill and very fine grained glacially consolidated soils. These soils were mottled and act as an aquitard, restricting vertical infiltration of runoff. We observed groundwater 6 inches below grade in TP-1 and anticipate that shallow groundwater will develop throughout the site during a typical wet season.

Infiltration is not feasible due to the presence of very fine grained, glacially consolidated soils which are mottled as well as shallow groundwater.

In general, permeable pavements are feasible for use in the upper, weathered glacial soils, only for flow control. We recommend that these systems be located in areas with cuts of 1.5 feet or less. Areas should be stripped of topsoils and fill, verified by the geotechnical engineer to be stable, and then prepared with clean angular rock and finished pavements.

February 20, 2023 Page 9 of 14 Geotechnical Evaluation

These areas must not be compacted by traffic, equipment, or surcharge loads. These areas should be left natural until ready for completion. A typical infiltration rate (factored) for the weathered native soils ranges from 0.2 to 0.3 inches per hour. We must review a site plan to verify if these systems are feasible and suitable for use.

We anticipate that most of the runoff will be routed to one or more detention systems with overflow to City infrastructure. We can provide additional input once a civil plan has been prepared.

We should be provided with final plans for review to determine if the intent of our recommendations has been incorporated or if additional modifications are needed.

Slab-on-Grade

We recommend that the upper 12 inches of the native soils within slab areas be re-compacted to at least 95 percent of the modified proctor (ASTM D1557 Test Method). If this is not feasible/possible, the upper 12 inches of soil below new slab on grade areas should consist of clean angular rock or other specific structural fill confirmed to be suitable by the geotechnical engineer.

Often, a vapor barrier is considered below concrete slab areas. However, the usage of a vapor barrier could result in curling of the concrete slab at joints. Floor covers sensitive to moisture typically requires the usage of a vapor barrier. A materials or structural engineer should be consulted regarding the detailing of the vapor barrier below concrete slabs. Exterior slabs typically do not utilize vapor barriers.

The American Concrete Institutes ACI 360R-06 Design of Slabs on Grade and ACI 302.1R-04 Guide for Concrete Floor and Slab Construction are recommended references for vapor barrier selection and floor slab detailing.

Slabs on grade may be designed using a coefficient of subgrade reaction of 180 pounds per cubic inch (pci) assuming the slab-on-grade base course is underlain by structural fill placed and compacted as outlined above. A 4- to 6-inch-thick capillary break layer should be placed over the prepared subgrade. This material should consist of pea gravel or 5/8 inch clean angular rock.

A perimeter drainage system is recommended unless interior slab areas are elevated a minimum of 12 inches above adjacent exterior grades. If installed, a perimeter drainage system should consist of a 4-inch diameter perforated drain pipe surrounded by a minimum 6 inches of drain rock wrapped in a non-woven geosynthetic filter fabric to reduce migration of soil particles into the drainage system. The perimeter drainage system should discharge by gravity flow to a suitable stormwater system.

Exterior grades surrounding buildings should be sloped at a minimum of one percent to facilitate surface water flow away from the building and preferably with a relatively impermeable surface cover immediately adjacent to the building.

Erosion and Sediment Control

Erosion and sediment control (ESC) is used to reduce the transportation of eroded sediment to wetlands, streams, lakes, drainage systems, and adjacent properties. Erosion and sediment control measures should be implemented, and these measures should be in general accordance with local regulations. At a minimum, the following basic recommendations should be incorporated into the design of the erosion and sediment control features for the site:

- Schedule the soil, foundation, utility, and other work requiring excavation or the disturbance of the site soils, to take place during the dry season (generally May through September). However, provided precautions are taken using Best Management Practices (BMP's), grading activities can be completed during the wet season (generally October through April).
- All site work should be completed and stabilized as quickly as possible.
- Additional perimeter erosion and sediment control features may be required to reduce the possibility of sediment entering the surface water. This may include additional silt fences, silt fences with a higher Apparent Opening Size (AOS), construction of a berm, or other filtration systems.
- Any runoff generated by dewatering discharge should be treated through construction of a sediment trap if there is sufficient space. If space is limited other filtration methods will need to be incorporated.

Utilities

Utility trenches should be excavated according to accepted engineering practices following OSHA (Occupational Safety and Health Administration) standards, by a contractor experienced in such work. The contractor is responsible for the safety of open trenches. Traffic and vibration adjacent to trench walls should be reduced; cyclic wetting and drying of excavation side slopes should be avoided. Depending upon the location and depth of some utility trenches, groundwater flow into open excavations could be experienced, especially during or shortly following periods of precipitation.

In general, silty soils were encountered at shallow depths in the explorations at this site. These soils have low cohesion and density and will have a tendency to cave or slough in excavations. Shoring or sloping back trench sidewalls is required within these soils in excavations greater than 4 feet deep.

All utility trench backfill should consist of imported structural fill or suitable on site soils. Utility trench backfill placed in or adjacent to buildings and exterior slabs should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. The upper 5 feet of utility trench backfill placed in pavement areas should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Below 5 feet, utility trench backfill in pavement areas should be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. Pipe bedding should be in accordance with the pipe manufacturer's recommendations.

The contractor is responsible for removing all water-sensitive soils from the trenches regardless of the backfill location and compaction requirements. Depending on the depth and location of the proposed utilities, we anticipate the need to re-compact existing fill soils below the utility structures and pipes. The contractor should use appropriate equipment and methods to avoid damage to the utilities and/or structures during fill placement and compaction procedures.

Pavements

The near surface subgrade soils generally consist of silt with fine grained sand. These soils are rated as fair to good for pavement subgrade material (depending on silt content and moisture conditions). We estimate that the subgrade will have a California Bearing Ratio (CBR) value of 10 and a modulus of subgrade reaction value of k = 200 pci, provided the subgrade is prepared in general accordance with our recommendations.

We recommend that at a minimum, 12 inches of the existing subgrade material be moisture conditioned (as necessary) and re-compacted to prepare for the construction of pavement sections. Deeper levels of recompaction or overexcavation and replacement may be necessary in areas where fill and/or very poor (soft/loose) soils are present.

We note that the surface soils are very fine grained and will severely degrade if exposed to wet weather. Additional overexcavation will likely be required if work occurs outside of the dry season.

The subgrade should be compacted to at least 95 percent of the maximum dry density as determined by ASTM Test Method D1557. In place density tests should be performed to verify proper moisture content and adequate compaction.

The recommended flexible and rigid pavement sections are based on design CBR and modulus of subgrade reaction (k) values that are achieved, only following proper subgrade preparation. It should be noted that subgrade soils that have relatively high silt contents will likely be highly sensitive to moisture conditions. The subgrade strength and performance characteristics of a silty subgrade material may be dramatically reduced if this material becomes wet.

Based on our knowledge of the proposed project, we expect the traffic to range from light duty (passenger automobiles) to heavy duty (delivery trucks). The following tables show the recommended pavement sections for light duty and heavy duty use.

ASPHALTIC CONCRETE (FLEXIBLE) PAVEMENT LIGHT DUTY

Asphaltic Concrete	Aggregate Base*	Compacted Subgrade* **				
2.5 in.	6.0 in.	12.0 in.				

HEAVY DUTY

Asphaltic Concrete	Aggregate Base*	Compacted Subgrade* **				
3.5 in.	6.0 in.	12.0 in.				

PORTLAND CEMENT CONCRETE (RIGID) PAVEMENT

Min. PCC Depth	Aggregate Base*	Compacted Subgrade* **					
6.0 in.	6.0 in.	12.0 in.					

^{* 95%} compaction based on ASTM Test Method D1557

^{**} A proof roll may be performed in lieu of in place density tests

February 20, 2023 Page 12 of 14 Geotechnical Evaluation

The asphaltic concrete depth in the flexible pavement tables should be a surface course type asphalt, such as Washington Department of Transportation (WSDOT) ½ inch HMA. The rigid pavement design is based on a Portland Cement Concrete (PCC) mix that has a 28 day compressive strength of 4,000 pounds per square inch (psi). The design is also based on a concrete flexural strength or modulus of rupture of 550 psi.

CONSTRUCTION FIELD REVIEWS

Cobalt Geosciences should be retained to provide part time field review during construction in order to verify that the soil conditions encountered are consistent with our design assumptions and that the intent of our recommendations is being met. This will require field and engineering review to:

- Monitor and test structural fill placement and soil compaction
- Observe bearing capacity at foundation locations
- Verify soil conditions at stormwater system locations, if utilized
- Observe slab-on-grade preparation
- Verify pavement subgrade conditions prior to paving
- Monitor foundation drainage placement
- Observe excavation stability

Geotechnical design services should also be anticipated during the subsequent final design phase to support the structural design and address specific issues arising during this phase. Field and engineering review services will also be required during the construction phase in order to provide a Final Letter for the project.

CLOSURE

This report was prepared for the exclusive use of Purity Medical Spa of Washington, LLC and their appointed consultants. Any use of this report or the material contained herein by third parties, or for other than the intended purpose, should first be approved in writing by Cobalt Geosciences, LLC.

The recommendations contained in this report are based on assumed continuity of soils with those of our test holes and assumed structural loads. Cobalt Geosciences should be provided with final architectural and civil drawings when they become available in order that we may review our design recommendations and advise of any revisions, if necessary.

Use of this report is subject to the Statement of General Conditions provided in Appendix A. It is the responsibility of Purity Medical Spa of Washington, LLC who is identified as "the Client" within the Statement of General Conditions, and its agents to review the conditions and to notify Cobalt Geosciences should any of these not be satisfied.

February 20, 2023 Page 13 of 14 Geotechnical Evaluation

Sincerely,

Cobalt Geosciences, LLC



2/20/2023 Phil Haberman, PE, LG, LEG Principal

<u>www.cobaltgeo.com</u> (206) 331-1097

February 20, 2023 Page 14 of 14 Geotechnical Evaluation

Statement of General Conditions

USE OF THIS REPORT: This report has been prepared for the sole benefit of the Client or its agent and may not be used by any third party without the express written consent of Cobalt Geosciences and the Client. Any use which a third party makes of this report is the responsibility of such third party.


BASIS OF THE REPORT: The information, opinions, and/or recommendations made in this report are in accordance with Cobalt Geosciences present understanding of the site specific project as described by the Client. The applicability of these is restricted to the site conditions encountered at the time of the investigation or study. If the proposed site specific project differs or is modified from what is described in this report or if the site conditions are altered, this report is no longer valid unless Cobalt Geosciences is requested by the Client to review and revise the report to reflect the differing or modified project specifics and/or the altered site conditions.

STANDARD OF CARE: Preparation of this report, and all associated work, was carried out in accordance with the normally accepted standard of care in the state of execution for the specific professional service provided to the Client. No other warranty is made.

INTERPRETATION OF SITE CONDITIONS: Soil, rock, or other material descriptions, and statements regarding their condition, made in this report are based on site conditions encountered by Cobalt Geosciences at the time of the work and at the specific testing and/or sampling locations. Classifications and statements of condition have been made in accordance with normally accepted practices which are judgmental in nature; no specific description should be considered exact, but rather reflective of the anticipated material behavior. Extrapolation of in situ conditions can only be made to some limited extent beyond the sampling or test points. The extent depends on variability of the soil, rock and groundwater conditions as influenced by geological processes, construction activity, and site use.

VARYING OR UNEXPECTED CONDITIONS: Should any site or subsurface conditions be encountered that are different from those described in this report or encountered at the test locations, Cobalt Geosciences must be notified immediately to assess if the varying or unexpected conditions are substantial and if reassessments of the report conclusions or recommendations are required. Cobalt Geosciences will not be responsible to any party for damages incurred as a result of failing to notify Cobalt Geosciences that differing site or sub-surface conditions are present upon becoming aware of such conditions.

PLANNING, DESIGN, OR CONSTRUCTION: Development or design plans and specifications should be reviewed by Cobalt Geosciences, sufficiently ahead of initiating the next project stage (property acquisition, tender, construction, etc), to confirm that this report completely addresses the elaborated project specifics and that the contents of this report have been properly interpreted. Specialty quality assurance services (field observations and testing) during construction are a necessary part of the evaluation of sub-subsurface conditions and site preparation works. Site work relating to the recommendations included in this report should only be carried out in the presence of a qualified geotechnical engineer; Cobalt Geosciences cannot be responsible for site work carried out without being present.

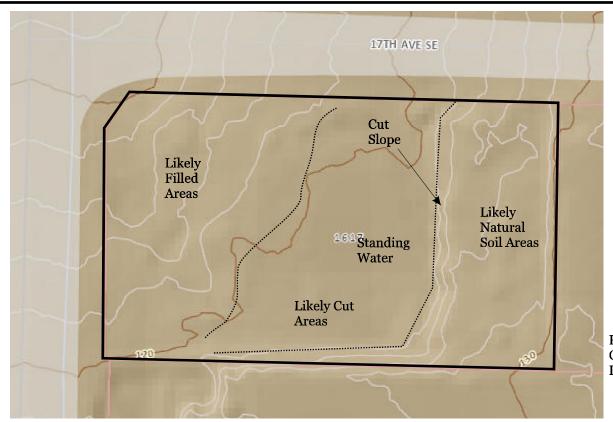

Pierce Co. GIS Image



Pierce County GIS Image Not to Scale


TP-1 Approximate

Test Pit
Location





Proposed Development 1617 S. Meridian Avenue Puyallup, Washington Site Map Figure 1 Cobalt Geosciences, LLC P.O. Box 1792 North Bend, WA 98045 (206) 331-1097 www.cobaltgeo.com cobaltgeo@gmail.com

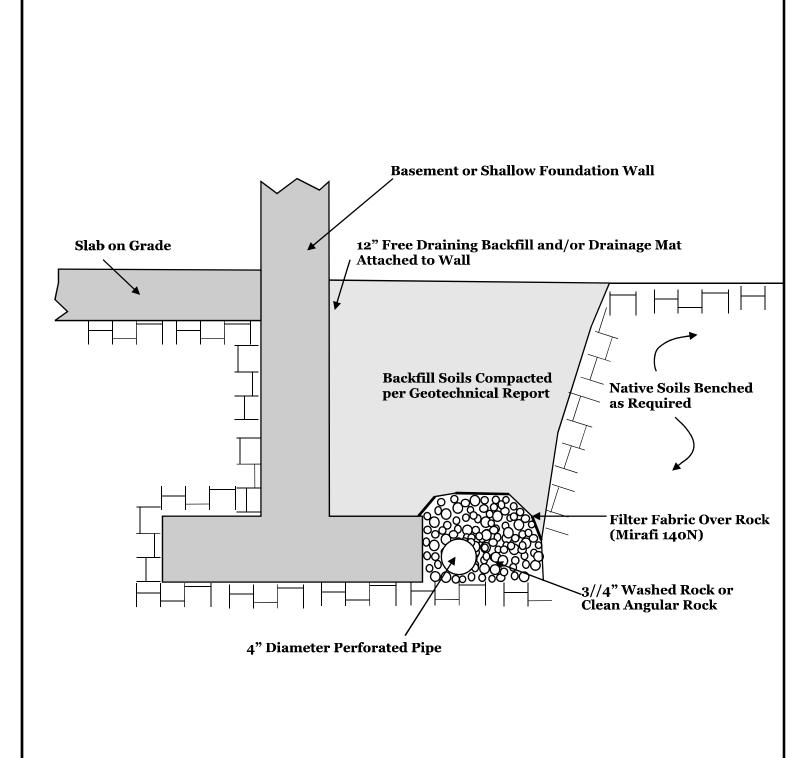

Not to Scale



Unified Soil Classification System (USCS)								
I	MAJOR DIVISIONS		SYMBOL	TYPICAL DESCRIPTION				
		Clean Gravels	GW	Well-graded gravels, gravels, gravel-sand mixtures, little or no fines				
	Gravels (more than 50% of coarse fraction	(less than 5% fines)	GP GP	Poorly graded gravels, gravel-sand mixtures, little or no fines				
COARSE	retained on No. 4 sieve)	Gravels with Fines	GM	Silty gravels, gravel-sand-silt mixtures				
GRAINED SOILS	,	(more than 12% fines)	GC	Clayey gravels, gravel-sand-clay mixtures				
(more than 50% retained on No. 200 sieve)	Sands	Clean Sands (less than 5%	SW	Well-graded sands, gravelly sands, little or no fines				
	(50% or more of coarse fraction passes the No. 4 sieve)	fines)	SP	Poorly graded sand, gravelly sands, little or no fines				
		Sands with Fines	SM	Silty sands, sand-silt mixtures				
		(more than 12% fines)	sc	Clayey sands, sand-clay mixtures				
	g'lı l.gl	Inorganic	ML	Inorganic silts of low to medium plasticity, sandy silts, gravelly silts, or clayey silts with slight plasticity				
FINE GRAINED	Silts and Clays (liquid limit less than 50)	morganic	CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays silty clays, lean clays				
SOILS (50% or more	3	Organic	OL	Organic silts and organic silty clays of low plasticity				
passes the No. 200 sieve)	g'lı lol	Inorganic	МН	Inorganic silts, micaceous or diatomaceous fine sands or silty soils, elastic silt				
	Silts and Clays (liquid limit 50 or more)	morganic	CH	Inorganic clays of medium to high plasticity, sandy fat clay, or gravelly fat clay				
	,	Organic	ОН	Organic clays of medium to high plasticity, organic silts				
HIGHLY ORGANIC SOILS	Primarily organic ma and organic odor	atter, dark in color,	<u>₩</u>	Peat, humus, swamp soils with high organic content (ASTM D4427)				

Classification of Soil Constituents

MAJOR constituents compose more than 50 percent, by weight, of the soil. Major constituents are capitalized (i.e., SAND).

Minor constituents compose 12 to 50 percent of the soil and precede the major constituents (i.e., silty SAND). Minor constituents preceded by "slightly" compose 5 to 12 percent of the soil (i.e., slightly silty SAND).


Trace constituents compose o to 5 percent of the soil (i.e., slightly silty SAND, trace gravel).

Relative Density	Consistency			
(Coarse Grained Soils)	(Fine Grained Soils)			
N, SPT, Relative Blows/FT Density 0 - 4 Very loose 4 - 10 Loose 10 - 30 Medium dense 30 - 50 Dense Over 50 Very dense	N, SPT, Relative Blows/FT Consistency Under 2 Very soft 2 - 4 Soft 4 - 8 Medium stiff 8 - 15 Stiff 15 - 30 Very stiff Over 30 Hard			

Grain Size Definitions							
Description	Sieve Number and/or Size						
Fines	<#200 (0.08 mm)						
Sand -Fine -Medium -Coarse	#200 to #40 (0.08 to 0.4 mm) #40 to #10 (0.4 to 2 mm) #10 to #4 (2 to 5 mm)						
Gravel -Fine -Coarse	#4 to 3/4 inch (5 to 19 mm) 3/4 to 3 inches (19 to 76 mm)						
Cobbles	3 to 12 inches (75 to 305 mm)						
Boulders	>12 inches (305 mm)						

Moisture Content Definitions						
Dry	Absence of moisture, dusty, dry to the touch					
Moist	Damp but no visible water					
Wet	Visible free water, from below water table					



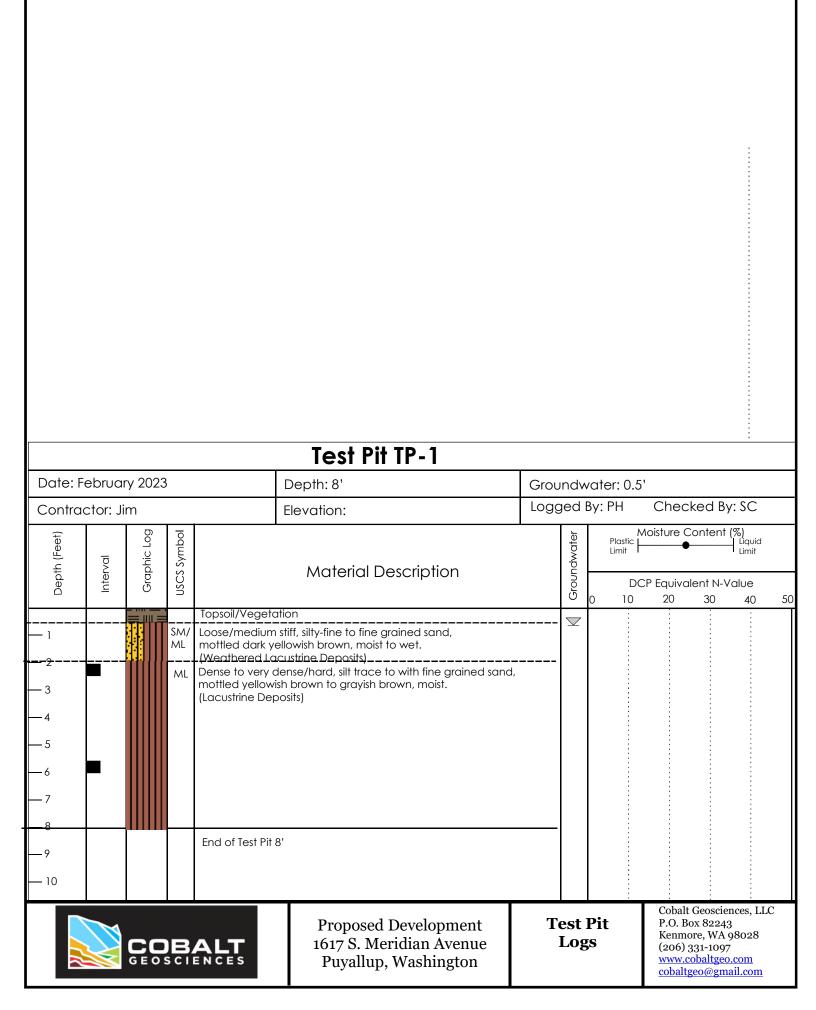

				Tool Dil TD 2								
Data: Fabrus	an / 2023	<u> </u>	1,	Test Pit TP-2		Groundwater: None						
Date: Februa		,		Depth: 8'	Logo					ked By	/: SC	
Depth (Feet)					Groundwater	0	Limit	oisture (P Equivo		Limit	50	
— 1 — 2 — 3 — 4		Topsoil/Vegetation SM/ Loose/medium stiff, silty-fine to fine grained sand, dark yellowish brown, moist to very moist. (Fill) ML Loose/medium stiff to stiff, silty-fine to fine grained sand, mottled dark yellowish brown, moist to wet. (Weathered Lacustrine Deposits)										
—6 —7——8 —9 —10		ML	-Possible perched Dense to very der grayish brown, me	i,								
Proposed Development 1617 S. Meridian Avenue Puyallup, Washington						est Log			P.O. B Kenm (206) www.	Geoscie ox 8224; ore, WA 331-1097 cobaltgeo geo@gm	3 98028 7 9 <u>.com</u>	C

