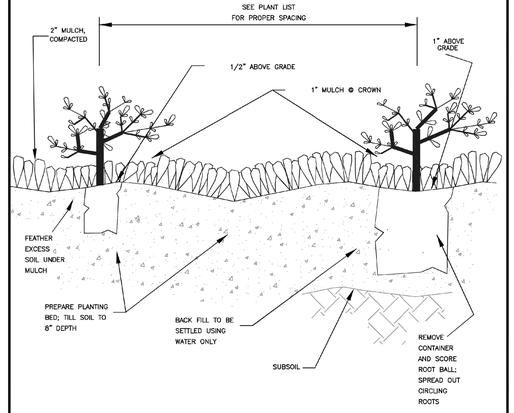

LESS THAN 1 GALLON CONTAINER
(PLANTED AFTER MULCH)

1 GALLON CONTAINER AND LARGER
(PLANTED BEFORE MULCH)

CITY OF PUYALLUP
DEVELOPMENT ENGINEERING and PUBLIC WORKS DEPARTMENTS

GROUND COVER PLANTING DETAIL

DRAWN BY	CHECKED BY	APPROVED BY	REVISED BY	CITY STANDARD
DEVERN SVOBODA	LINDA LIAN	COLLEEN HARRIS	XXXX	
FILE NAME: P:\GWG\COMMON\STDS\CITY\20090107_ST0103.ST0110.02.05		DATE APPROVED: 07/01/2009	DATE REVISED: XX/XX/XX	SCALE: 1:1

01.02.05

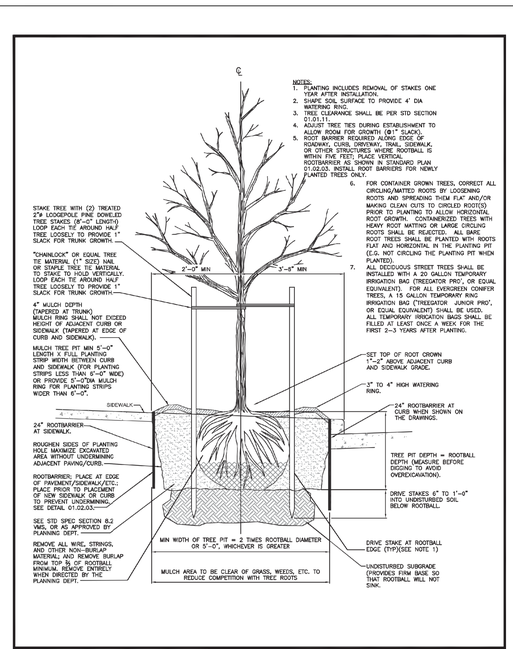

CITY OF PUYALLUP
DEVELOPMENT ENGINEERING and PUBLIC WORKS DEPARTMENTS

STREET TREE PLANTING IN PLANTING STRIP

DRAWN BY	CHECKED BY	APPROVED BY	REVISED BY	CITY STANDARD
LINDA LIAN	CHRIS BYALT	COLLEEN HARRIS	LINDA LIAN	
FILE NAME: P:\PWG\COMMON\STDS\CITY\STD\ST0301.02.07		DATE APPROVED: 08/01/2015	DATE REVISED: 08/01/2015	SCALE: 1:1

01.02.07

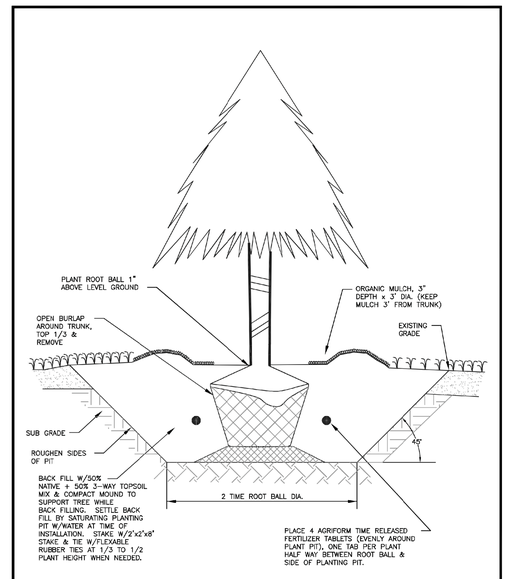

CITY OF PUYALLUP
DEVELOPMENT ENGINEERING and PUBLIC WORKS DEPARTMENTS

BALL AND BURLAP PLANTING DETAIL

DRAWN BY	CHECKED BY	APPROVED BY	REVISED BY	CITY STANDARD
DEVERN SVOBODA	LINDA LIAN	COLLEEN HARRIS	XXXX	
FILE NAME: P:\GWG\COMMON\STDS\CITY\20090107_ST0101.ST0110.02.08		DATE APPROVED: 07/01/2009	DATE REVISED: XX/XX/XX	SCALE: 1:1

01.02.08

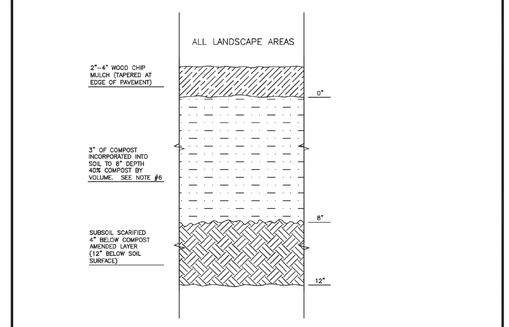

NOTES:
1. ALL SOIL AREAS DISTURBED OR COMPACTED DURING CONSTRUCTION, AND NOT COVERED BY BUILDINGS OR PAVEMENT, SHALL BE AMENDED WITH COMPOST AS DESCRIBED BELOW.
2. SUBSOIL SHOULD BE SCARIFIED (LOOSENED) 4 INCHES BELOW AMENDED LAYER, TO PRODUCE 12–INCH DEPTH OF UN–COMPACTED SOIL, EXCEPT WHERE SCARIFICATION WOULD DAMAGE TREE ROOTS OR AS DETERMINED BY THE ENGINEER. SEE NOTE BELOW REGARDING PLANTING STEPS FOR STREET TREES.
3. COMPOST SHALL BE TILLED IN TO 8 INCH DEPTH INTO EXISTING SOIL, OR PLACE 8 INCHES OF COMPOST–AMENDED SOIL, PER SOIL SPECIFICATION.
4. PLANTING BEDS SHALL RECEIVE 3 INCHES OF COMPOST TILLED IN TO 8–INCH DEPTH, OR MAY SUBSTITUTE 8' OF IMPORTED SOIL CONTAINING 35–40% COMPOST BY VOLUME. MULCH AFTER PLANTING, WITH 4 INCHES OF ARBORIST WOOD CHIP MULCH OR APPROVED EQUAL (6" OF LOOSE WOOD CHIPS AT THE TIME OF PLANTING TO ALLOW SETTLING TO 4").
5. SETBACKS: TO PREVENT UNEVEN SETTLING, DO NOT COMPOST–AMEND SOILS WITHIN 3 FEET OF UTILITY INFRASTRUCTURES (POLES, VAULTS, METERS ETC.), WITHIN ONE FOOT OF PAVEMENT EDGE, CURBS AND SIDEWALKS SOIL SHOULD BE COMPACTED TO APPROXIMATELY 95% PROCTOR TO ENSURE A FIRM SURFACE.
6. SEE SECTION 8.2(B) OF THE VWS FOR SOIL AMENDMENT AND INSTRUCTION PROCEDURES FOR STREET TREE PLANTER STRIPS. ALL STREET TREE PLANTER STRIPS SHALL RECEIVE 40% COMPOST AMENDED SOIL TO THE FULL DEPTH OF THE STREET TREE FOOTBALL.

CITY OF PUYALLUP
DEVELOPMENT ENGINEERING and PUBLIC WORKS DEPARTMENTS

SOIL AMENDMENT AND DEPTH

DRAWN BY	CHECKED BY	APPROVED BY	REVISED BY	CITY STANDARD
LINDA LIAN		COLLEEN HARRIS	XXXX	
FILE NAME: P:\PWG\COMMON\STDS\CITY\STD\ST0301.02.08a		DATE APPROVED: 08/01/2015	DATE REVISED: XX/XX/XX	SCALE: 1:1

01.02.08a

BENNIS DESIGN
Landscape Architecture

STATE OF WASHINGTON
CHRISTOPHER BENNIS
REGISTERED LANDSCAPE ARCHITECT

Christopher Poul Bennis
CERTIFICATE NO. 973

Bennis Design
2105 36th Ave SE Puyallup, WA
Phone: 253–350–5844

Genesee Propane Bulk Plant
412 23RD ST SE Puyallup, WA 98372
Landscape Details

Sheet: L3

Design: CPB
Drawn: CPB
Approved: CPB
Date: July 31, 2022

Scale:
Revised:
Revised:

THIS DOCUMENT, AND THE IDEAS AND DESIGNS INCORPORATED HEREIN, AS INSTRUMENTS OF PROFESSIONAL SERVICE, ARE THE PROPERTY OF BENNIS DESIGN AND ARE NOT TO BE USED OR REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF BENNIS DESIGN.

THIS DRAWING MUST NOT BE SCALED. CONTRACTORS SHALL VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION OR WORK AND ANY DISCREPANCIES OR DISCREPANCIES SHALL BE REPORTED TO THE OWNER REPRESENTATIVE.