

Fire Alarm Cut Sheets

Project: Prologis Puyallup 1
1601 Industrial Park Way
Suite 102
Puyallup, WA 98371

Job #: 16-3041 (PH III)

SK-PHOTO-W SERIES



Addressable Photoelectric Smoke Detectors

The Silent Knight® SK-PHOTO-W Series feature a modern design and expanded color options support a variety of contemporary aesthetic demands. In addition, each detector is constructed for exceptional installation and maintenance efficiency.



The SK-PHOTO-W Series intelligent plug-in smoke detectors are designed for both performance and aesthetics, and are direct replacements for the SK-PHOTO Series detectors. A new modern, sleek, contemporary design and enhanced optical sensing chamber is engineered to sense smoke produced by a wide range of combustion sources in accordance with more stringent code standards. The SK-PHOTO-W Series detector sensitivity can be programmed in the control panel software. Sensitivity is continuously monitored and reported to the panel. Point ID capability allows each detector's address to be set with rotary, decimal address switches, providing exact detector location for selective maintenance when chamber contamination reaches an unacceptable level. Dual electronic thermistors add 135°F (57°C) fixed temperature thermal sensing on the SK-PHOTO-T-W. The SK-PHOTO-R-W is a remote test capable detector for use with DNR Series duct detector housings.

FEATURES AND BENEFITS

- Designed to meet UL 1268 7th Edition
- Sleek and stylish contemporary design
- Stable communication technique with noise immunity
- Addressable by device
- Rotary, decimal addressing (Refer to the Silent Knight panel manuals for device capacity)
- Two-wire SLC connection
- LEDs blink every time the unit is polled
- 360°-field viewing angle of the visual alarm indicators (two bi-color LEDs); LEDs blink green in Normal condition and turn on steady red in Alarm
- Integral communications and built-in device-type identification
- Remote test feature from the panel
- Built-in functional test switch activated by external magnet
- Walk test with address display (an address of 121 will blink the detector LED 12-(pause)-1)
- Low standby current
- Built-in tamper-resistant feature
- Designed for direct-surface or electrical-box mounting
- Sealed against back pressure
- Plugs into separate base for ease of installation and maintenance
- Expanded color options
- SEMS screws for wiring of the separate base
- Optional remote, single-gang LED accessory
- Optional sounder, relay, and isolator bases

Honeywell



INSTALLATION

The SK-PHOTO-W Series plug-in intelligent thermal detectors use a separate base to simplify installation, service, and maintenance. Installation instructions are shipped with each detector.

Mount base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see SK-61045.

Note: Because of the inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class "B") wiring.

Note: When using relay or sounder bases, consult the SK-ISO installation sheet I56-3627 for device limitations between isolator modules and isolator bases.

OPERATION

Each SK-PHOTO-W Series detector uses one of the panel's addresses (total limit is panel dependent) on the Signaling Line Circuit (SLC). It responds to regular polls from the control panel and reports its type and the status. If it receives a test command from the panel (or a local magnet test), it stimulates its electronics and reports an alarm. It blinks its LEDs when polled and turns the LEDs on when commanded by the panel. The SK-PHOTO-W Series offers features and performance that represent the latest in smoke detector technology.

PRODUCT LINE INFORMATION

Note: "-IV" suffix indicates ivory color.

SK-PHOTO-W: White, low-profile photoelectric sensor

SK-PHOTO-T-W: White, same as SK-PHOTO-W but includes a built-in 135°F (57°C) fixed-temperature thermal device

SK-PHOTO-R-W: White, low-profile intelligent photoelectric sensor, remote test capable, for use with DNR/DNRW

B300-6: White, standard flanged low-profile mounting base

B300-6-BP: Bulk pack of B300-6, package contains 10

B300-6-IV: Ivory, standard flanged low-profile mounting base

B501-WHITE: White, standard European flangeless mounting base

B501-BL: Black, standard European flangeless mounting base

B501-IV: Ivory, standard European flangeless mounting base

B501-WHITE-BP: Bulk pack of B501-WHITE, contains 10

B200S-WH: White, Intelligent, programmable sounder base

B200S-IV: Ivory, Intelligent, programmable sounder base

B200SR-WH: White, Intelligent sounder base for retrofit applications

B200SR-IV: Ivory, Intelligent sounder base for retrofit applications

B200S-LF-WH: White, Low Frequency Intelligent, programmable sounder base

B200S-LF-IV: Ivory, Low Frequency Intelligent, programmable sounder base

B200SR-LF-WH: White, Low Frequency Intelligent sounder base for retrofit applications

B200SR-LF-IV: Ivory, Low Frequency Intelligent sounder base for retrofit applications

B224RB-WH: White, plug-in System Sensor® relay base

B224RB-IV: Ivory, plug-in System Sensor relay base

B224BI-WH: White, plug-in System Sensor isolator detector base

B224BI-IV: Ivory, plug-in System Sensor isolator detector base

ACCESSORIES

TR300: White, replacement flange for B210LP or B300-6 bases

TR300-IV: Ivory, replacement flange for B210LP or B300-6 bases

RA100Z(A): Remote 3 – 32 VDC LED annunciator, mounts to a U.S. single-gang electrical box, for use with B501 and B300-6 bases only

M02-04-00: Test magnet

M02-09-00: Test magnet with telescoping handle

CK300: White, detector color kit, pack of 10

CK300-IV: Ivory, detector color kit, pack of 10

CK300-BL: Black, detector color kit, pack of 10

SK-PHOTO-W SERIES TECHNICAL SPECIFICATIONS

PHYSICAL/ENVIRONMENTAL

Sensitivity:

- UL Applications: 0.5% to 4.0% per foot obscuration.
- ULC Applications: 0.5% to 3.5% per foot obscuration

Size: 2.0" (5.3 cm) high; base determines diameter

- **B300-6:** 6.1" (15.6 cm) diameter
- **B501:** 4" (10.2 cm) diameter

For a complete list of detector bases, see SK-61045.

Shipping weight: 3.4 oz. (95 g)

Operating temperature range:

- SK-PHOTO-W: 32°F to 122°F (0°C to 50°C)
- SK-PHOTO-T-W: 32°F to 100°F (0°C to 38°C)
- SK-PHOTO-R-W installed in a DNR/DNRW: -4°F to 158°F (-20°C to 70°C)

UL/ULC Listed Velocity Range: 0-4000 ft/min. (1219.2 m/min.), suitable for installation in ducts

Relative humidity: 10% – 93% non-condensing

Thermal ratings: fixed-temperature set point 135°F (57°C), rate-of-rise detection 15°F (8.3°C) per minute, high temperature heat 190°F (88°C)

ELECTRICAL SPECIFICATIONS

Voltage range: 15 – 32 volts DC peak

Standby current (max. avg.): 200µA @ 24 VDC (one communication every 5 seconds with LED enabled)

Max current: 4.5 mA @ 24 VDC ("ON")

DETECTOR SPACING AND APPLICATIONS

Silent Knight recommends spacing detectors in compliance with NFPA 72. In low airflow applications with smooth ceiling, space detectors 30 feet (9.1m). For specific information regarding detector spacing, placement, and special applications refer to NFPA 72. A *System Smoke Detector Application Guide*, document A05-1003, is available at www.systemsensor.com.

AGENCY LISTINGS AND APPROVALS

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. *Consult factory for latest listing status.*

- **UL Listed:** S6173
- **FM Approved**
- **CSFM:** 7272-0559:0512

Silent Knight® and System Sensor® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Country of origin: Mexico

Honeywell Silent Knight

12 Clintonville Road
Northford, CT 06472-1610
203.484.7161
www.silentknight.com

6815

Signaling Line Circuit Expander

The 6815 is a signaling line circuit (SLC) expander for use with Honeywell Silent Knight® 6820 or 6820EVS fire alarm control panels (FACPs) using System Sensor® (SK) protocol.

The number of 6815 modules that can be used within one system is dependent on maximum available points. The use of 6815 modules provides a powerful way to customize configurations in large or complex installations.

The 6820 and 6820EVS panels support up to 1,110 points maximum and come with one integrated SLC circuit. Each added 6815 can support an additional 159 SK and SWIFT® sensors, and 159 SK and SWIFT modules.


Note: Hochiki® SD Devices use the 5815 XL SLC Expander (refer to datasheet 350098 for additional information).

The 6815 communicates with the FACP via an RS-485 system bus. A green LED on the 6815 board blinks to indicate good communication. If an addressable device on a 6815 SLC circuit fails, it communicates the failure to the FACP and continues to operate normally.

COMPATIBILITY

The 6815 Signaling Line Circuit Expander is compatible with the following Silent Knight FACPs:

- 6820
- 6820EVS

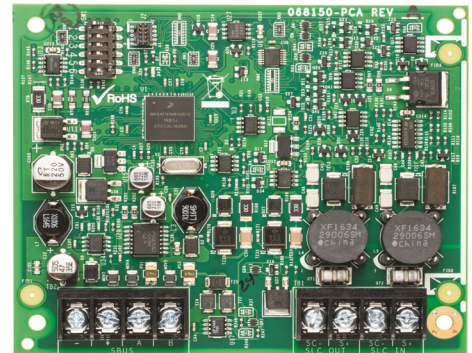

FEATURES AND BENEFITS

- UL listed. Complies with UL 864, 10th Edition; UL 2572, 2nd Edition
- Complies with NFPA standards
- CSFM, FDNY, and FM approved
- Adds support for up to 159 SK sensors and 159 SK modules
- Communicates with the FACP via RS-485 system bus
- LED indicates good communication
- House up to two 6815 modules in the FACP or RPS-1000 cabinet, or in the 5815RMK Remote Mounting Kit
- SLC wiring uses standard wire; twisted pair or shield cable are not required
- Supports IDP or SK, and SWIFT devices

6815 TECHNICAL SPECIFICATIONS

PHYSICAL

Dimensions:

4.2" H x 4.8" W
(10.7 cm x 12.2 cm)

Shipping Weight: 5.6oz (159g)

ENVIRONMENTAL

Operating Temperature: 32° F to 120° F
(0° C to 49° C)

Humidity: 0% to 93% relative humidity
(noncondensing)

ELECTRICAL

Standby & Alarm Current: 78 mA maximum

CAPACITY:

- **FACPs:** The maximum 1,100 point count for the 6820 and 6820EVS limits the number of 6815 modules that can be added to a fire system installation.
- **6815 Module:** 159 SK sensors and 159 SK modules per loop

ORDERING INFORMATION

6815: Signaling Line Circuit Expander

ACCESSORIES

5815RMK: Remote Mounting Kit cabinet holds up to two 6815s. Red cabinet.

SK-NIC-KIT: Remote Mounting Kit cabinet holds one 6815.
10-3/8" W x 10-3/16" H x 3" D

STANDARDS AND CODES

The 6815 complies with the following standards/codes:

- UL 864, 10th Edition: Standard for Control Units for Fire Alarm Systems
- UL 2572, 2nd Edition: Standard for Mass Notification Systems
- NFPA:
 - NFPA 13
 - NFPA 15
 - NFPA 16
 - NFPA 70
 - NFPA 72
 - NFPA 101

AGENCY LISTINGS AND APPROVALS

- UL Listed: S2766
- FDNY: COA # 6017, 6122, 6198, 6296A, 6299, 6302A, 6304
- CSFM Approved
- FM Approved

Honeywell®, Silent Knight®, and SWIFT® are registered trademarks of Honeywell International, Inc.

Hochiki® is a trademark of the Hochiki America Corporation.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Country of origin: U.S.A.

Honeywell Silent Knight

12 Clintonville Road
Northford, CT 06472-1610
203.484.7161
www.silentknight.com